

Temporal Measurement Instability in LLM Benchmarks: A Large-Scale Psychometric Audit of 5,227 Models

Anonymous ACL submission

Abstract

LLM benchmark scores are routinely compared across model generations, yet whether individual items measure the same construct over time is rarely tested—and existing contamination detectors validate against ground truth that conflates global exposure with differential functioning. We develop a semi-synthetic injection framework with cross-subject matching that achieves zero false positive inflation under single-subject contamination ($\Delta\text{FPR} = 0.000$) while preserving detection power under worst-case uniform injection ($\Delta\text{TPR} = +0.508$ at $p = 0.5$), and show that web-overlap contamination labels are near-independent of Mantel-Haenszel Differential Item Functioning (DIF) flags (enrichment ≈ 0.96)—exposing a category error in prevailing validation methodology. Applying MH-DIF with ETS severity classification to six METABENCH benchmarks (5,227 models, 27,125 items), we find 17.9–31.3% of items exhibit large temporal DIF (ETS C) between 2023 and 2024 cohorts, with knowledge/reasoning benchmarks more affected (C% $\geq 26.9\%$) than procedural ones (C% $\leq 18.9\%$). This does not threaten aggregate ranking validity ($\rho \approx 0.997$, $\tau \approx 0.958$), but specific model families show concentrated rank shifts (Llama-3: +53 median positions, Mistral: −35) and 2.0% of pairwise rankings reverse. Item-level decomposition shows 92.4% of the signal is item-specific; DIF-flagged items concentrate discriminative information ($z = -8$ to -49) with a difficulty–direction interaction ($\rho = -0.597$): gains on hard items, erosion on easy ones. LLM benchmarks need psychometric monitoring, not just score reporting.

1 Introduction

When we say “Model B outperforms Model A on MMLU,” we implicitly assume that the benchmark measures the same construct in the same way for both models. This assumption of temporal com-

parability underpins every cross-generation comparison published on leaderboards and in model reports, yet it is rarely tested. We apply Mantel-Haenszel Differential Item Functioning (MH-DIF) analysis (Holland and Thayer, 1988) with Educational Testing Service (ETS) severity classification to the METABENCH response matrix (Kipnis et al., 2024),¹ and find that 31% of MMLU (Hendrycks et al., 2021) items receive ETS Category C classification ($|\Delta_{\text{MH}}| \geq 1.5$, $p < 0.05$), indicating large shifts in item functioning between models released in 2023 and 2024. This is not statistical noise: a random-split control within the 2023 cohort yields only 0.18% ETS C items. This pattern persists across all 57 MMLU subjects (C% range 21–48%, unweighted mean $\approx 30\%$), and item-level regression shows that 92.4% of the DIF signal is unrelated to aggregate domain-level accuracy gains. Nearly one in three MMLU items behaves differently depending on when the evaluated models were trained. Crucially, this measurement instability does not threaten benchmark validity: Spearman rank correlation between model rankings computed on all items versus stable-only items is $\rho \approx 0.997$. The instability is diagnostic, not destructive; it reveals which capability dimensions shift across model generations rather than rendering MMLU scores unreliable.

A growing body of contamination detection research has produced sophisticated item-level methods, from membership inference (Shi et al., 2024) to performance-based detectors (Dekoning et al., 2024; Liang, 2026; Tao et al., 2026). These methods validate detection accuracy primarily against web-overlap labels such as those of Li et al. (2024b), which classify benchmark items as contaminated based on verbatim or near-verbatim matches in publicly accessible training corpora.

¹Analysis code and DIF audit scripts are available at <https://anonymous.4open.science/r/dif-audit>.

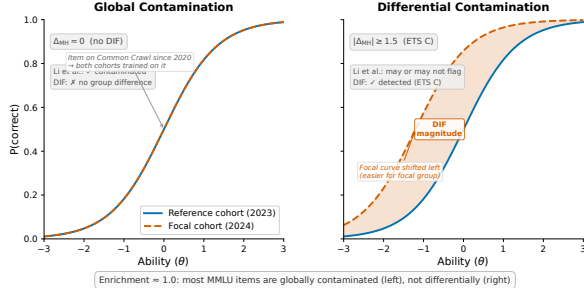


Figure 1: Global vs. differential contamination, illustrated via Item Characteristic Curves (ICCs). **Left:** global contamination produces no DIF; both cohorts encounter the item, and their ICCs overlap. **Right:** differential contamination produces DIF; the focal cohort’s ICC shifts because only that cohort was disproportionately exposed during training. The enrichment ratio of ≈ 1.0 between DIF flags and web-overlap labels is expected because most MMLU items fall into the left category.

Such labels measure *global exposure*: whether an item exists in the data ecosystem that all training pipelines can access. They do not measure *differential item functioning*: whether an item behaves differently across model cohorts that may have had varying degrees of exposure or different training methodologies. Figure 1 illustrates the distinction. Most MMLU items are globally contaminated in the sense that they exist in web-accessible text, so all model cohorts encounter them and no differential signal arises. The items that function differentially are those where exposure or training methodology changed asymmetrically across cohorts. Validating differential detectors against global-exposure labels therefore conflates two phenomena. Direct comparison confirms near-independence between the two flag sets (enrichment = 0.964, Jaccard = 0.206, $\phi = 0.012$), consistent across contamination subtypes.

We apply classical MH-DIF with ETS classification to the full METABENCH response matrix (5,227 models $\times$ 12,508 MMLU items), to our knowledge, the largest-scale DIF analysis on LLM benchmarks. This psychometric approach complements concurrent work on anchor-item calibration for score comparability (Habba et al., 2026) and addresses the fragility of existing contamination detectors under post-training perturbation (Wang et al., 2026). Semi-synthetic injection experiments confirm that MH-DIF is sensitive to differential item behavior when present ($\Delta\text{TPR} = +0.508$ at exploitation rate $p = 0.5$), and our cross-

subject matching protocol eliminates false positive inflation ($\Delta\text{FPR} = 0.000$). Three structural controls (matched-ability quintile analysis, IRT θ -conditioning, and within-subject pre-checks) confirm that the approximately 31% temporal DIF rate cannot be attributed to methodological artifacts, establishing it as a robust empirical finding about LLM benchmark measurement properties, replicated across all six METABENCH benchmarks (Section 4.7). MH-DIF detects *that* items function differently across cohorts, not *why*—the signal may reflect contamination, capability change, or training methodology shifts.

MMLU’s 12,508 items provide sufficient measurement redundancy that removing nearly a third does not alter rank order ($\rho \approx 0.997$). DIF should therefore be understood as a diagnostic lens rather than a quality filter: DIF-flagged items concentrate discriminative signal ($z = -8$ to -49 vs. random removal), and model families show distinctive DIF profiles (Llama-3 gains +53 median rank positions, Mistral loses 35).

Our contributions are methodological and empirical, not algorithmic:

- Ground truth meta-critique:** Web-overlap contamination labels (Li et al., 2024b) do not provide appropriate ground truth for item-level differential detectors. Direct empirical comparison on 9,229 items shows near-independence (enrichment = 0.964, Jaccard = 0.206, $\phi = 0.012$), exposing a validation methodology gap (Section 4.3).
- Semi-synthetic validation framework:** Controlled injection with cross-subject matching achieves $\Delta\text{FPR} = 0.000$ under single-subject contamination while preserving detection power ($\Delta\text{TPR} = +0.508$ at $p = 0.5$); cross-benchmark replication on GSM8K confirms generality (Sections 4.5 and 4.7).
- Temporal measurement instability at scale:** Approximately 31% of MMLU items exhibit differential functioning across model generations under ETS C classification; replication across all six METABENCH benchmarks yields $\text{C\%} = 17.9\text{--}31.3\%$, with knowledge/reasoning benchmarks showing higher DIF rates than procedural ones (Sections 4.2, 4.6 and 4.7).

2 Related Work

Contamination Detection. A growing family of methods detects benchmark contamination through model behavior or training data analysis. Membership inference approaches estimate whether a model has seen specific items during training: Min-K% (Shi et al., 2024) and Min-K%++ (Zhang et al., 2024) use token-level log-likelihood statistics, while Time Travel (Golchin and Surdeanu, 2024) probes models with temporal cues and Oren et al. (2024) prove contamination through exchangeability tests. Performance-based detectors identify contamination through statistical anomalies (Dekoninck et al., 2024; Liang, 2026; Tao et al., 2026; Deng et al., 2024). Balloccu et al. (2024) provide a broader taxonomy of leakage detection strategies. These methods share a common validation practice: they verify detection accuracy against web-overlap or n-gram labels (Li et al., 2024b) that classify items based on verbatim matches in publicly accessible corpora. Such labels measure *global exposure* (whether an item exists in training data) rather than *differential item functioning* (whether an item behaves differently across model cohorts). This global-vs-differential distinction motivates our ground truth analysis (Section 4.3). Work on LLM memorization (Carlini et al., 2023; Tirumala et al., 2022) establishes that memorization depends on data frequency and model scale, reinforcing the distinction between global exposure and differential behavior. Wang et al. (2026) show that existing contamination detectors are fragile under reinforcement learning, further motivating behavioral approaches grounded in psychometric theory.

IRT in LLM Evaluation. IRT adoption in LLM evaluation has accelerated: Lalor et al. (2019) introduced IRT to NLP, Vania et al. (2021) assessed test set discriminability, and Rodriguez et al. (2021) demonstrated that not all evaluation examples are equally informative. Recent extensions include PSN-IRT (Zhou et al., 2026) for benchmark quality at scale, TinyBenchmarks (Maia Polo et al., 2024) for IRT-based item selection, scalability coefficients for detecting bad benchmark items (Hardy et al., 2026), ATLAS (Li et al., 2025) for computerized adaptive testing of LLMs, and competency-focused IRT evaluation in medical domains (Luo et al., 2025). The closest concurrent work is Growing Pains (Habba et al., 2026), which addresses score comparability through fixed-parameter cal-

ibration (FPC; Kim and Kolen, 2019). Our work is complementary: FPC methods assume a subset of anchor items with stable measurement properties; temporal DIF analysis directly tests this stability assumption and can identify candidate anchor items through DIF pre-screening, providing input to equating procedures (Kolen and Brennan, 2014). FPC assumes a stable set of anchor items; our finding that 31% of items exhibit temporal DIF directly informs anchor selection by identifying which items should *not* serve as anchors. Empirical comparison awaits public release of anchor item lists.

DIF Methodology and Measurement Invariance. The Mantel-Haenszel procedure for DIF detection was introduced by Holland and Thayer (1988) and remains the most widely used method in educational testing due to its simplicity and well-characterized statistical properties (Clauser and Mazor, 1998). Alternative approaches include logistic regression DIF (Swaminathan and Rogers, 1990), SIBTEST (Shealy and Stout, 1993), Lord’s χ^2 test (Lord, 1980), and the Raju area method (Raju, 1988); Zumbo (1999) and Penfield and Camilli (2007) provide comprehensive comparisons. DIF analysis is a specific instance of measurement invariance testing (Meredith, 1993; Vandenberg and Lance, 2000; Millsap, 2011), which examines whether a measurement instrument functions equivalently across populations. MIMIC models offer a latent-variable approach to the same problem (Muthén, 1985; Woods, 2009), and Teresi and Fleishman (2007) reviews DIF methods across applied domains. Cross-subject matching—computing the stratification variable from domains other than the one being tested—has psychometric precedent in the DIF literature (Nandakumar, 1993; Donoghue and Allen, 1993); our adaptation addresses LLM-specific challenges of multi-domain local dependence and simultaneous contamination control at scale. We do not modify the MH procedure; our contribution is the application context and the empirical findings it reveals. The 5,227-examinee scale exceeds typical DIF applications (Belzak, 2020). The impact-versus-DIF confound is addressed through matched-ability quintile analysis, IRT θ -conditioning, and a random-split control (Section 4.2).

Benchmark Quality and Design. The Benchmark Health Index (Zhu et al., 2026) and Benchmark² (Qian and Huang, 2026) assess static

benchmark quality; our temporal DIF analysis is complementary, diagnosing *when* measurement properties shift rather than evaluating them at a single snapshot. Maeda (2025) predict which item features associate with DIF in educational settings; we instead detect DIF empirically across LLM cohorts at scale. Dynamic benchmarks (Kiela et al., 2021; Li et al., 2024a; White, 2025) mitigate contamination by construction, yet none provides psychometric equating across versions. Chatbot Arena (Chiang et al., 2024) sidesteps static benchmarks through pairwise preference. Broader surveys (Chang et al., 2024; Burnell et al., 2023) identify benchmark saturation and lack of item-level transparency as systemic challenges that our DIF analysis directly addresses.

3 Method

We adopt Differential Item Functioning (DIF) analysis from educational measurement to assess whether individual benchmark items behave consistently across groups of LLMs. The procedure requires only a binary response matrix and group labels, with no access to model internals or training data. Below we define the data, the statistical test, the cohort designs, and a semi-synthetic validation framework.

3.1 Data

The primary dataset is the METABENCH response matrix (Kipnis et al., 2024), which records binary outcomes (1 = correct, 0 = incorrect) for 5,227 models evaluated on 12,508 MMLU items (Hendrycks et al., 2021). Models span release dates from 2023 to 2024, drawn from the Open LLM Leaderboard. MMLU covers 57 subjects grouped into five broad domains (STEM, Humanities, Social Sciences, Other, and a mixed category). We supplement the response matrix with the web-overlap contamination labels of Li et al. (2024b), which classify 9,229 of 12,508 items (73.8% coverage) as “contaminated” or “clean” based on verbatim matches in publicly accessible web corpora. These labels serve as an external reference for evaluating the relationship between DIF flags and existing contamination indicators.

3.2 Mantel-Haenszel DIF and ETS Classification

In educational testing, Differential Item Functioning (DIF) occurs when an item’s statistical relationship to the latent trait θ differs between two groups

after conditioning on ability level. An item with DIF is not merely harder for one group; it functions differently relative to what the group’s overall ability would predict. The standard terminology refers to test-takers as “examinees” and questions as “items.” In our setting, examinees are LLMs and items are benchmark questions.

The Mantel-Haenszel (MH) procedure (Holland and Thayer, 1988) detects DIF by stratifying examinees into K score bins based on total score (a proxy for θ) and computing a common odds ratio across strata. We use $K = 5$ equiprobable strata (quintile-based binning) following ETS recommended practice for large-scale assessments (Donoghue and Allen, 1993; Clauser and Mazor, 1998). Within each stratum k , the responses of the reference group and the focal group form a 2×2 contingency table:

$$\alpha_{\text{MH}} = \frac{\sum_{k=1}^K A_k D_k / T_k}{\sum_{k=1}^K B_k C_k / T_k}, \quad (1)$$

where A_k and B_k are the number of correct and incorrect responses in the reference group for stratum k , C_k and D_k are the corresponding counts for the focal group, and T_k is the total number of examinees in stratum k . Under the null hypothesis of no DIF, $\alpha_{\text{MH}} = 1$. The log odds ratio is converted to the ETS delta scale:

$$\Delta_{\text{MH}} = -2.35 \ln(\alpha_{\text{MH}}). \quad (2)$$

The Educational Testing Service (ETS) classifies DIF severity into three categories based on $|\Delta_{\text{MH}}|$. Category A (negligible) requires $|\Delta_{\text{MH}}| < 1.0$. Category C (large) requires both $|\Delta_{\text{MH}}| \geq 1.5$ and statistical significance at $p < 0.05$ from the MH chi-squared test. Category B (moderate) includes all remaining items: those with $1.0 \leq |\Delta_{\text{MH}}| < 1.5$, or $|\Delta_{\text{MH}}| \geq 1.5$ without statistical significance. The dual threshold in ETS C (effect size and significance) guards against flagging items that show large but unreliable effect sizes. Throughout this paper, we report the percentage of items classified as ETS C, denoted C%. For example, if 2024 models consistently outperform 2023 models on a formal-logic item *after controlling for overall ability*, the pooled odds ratio $\alpha_{\text{MH}} = 0.42$ yields $\Delta_{\text{MH}} = -2.35 \ln(0.42) = 2.04$, classified as ETS C ($|\Delta_{\text{MH}}| \geq 1.5$, $p < 0.001$).

The choice of matching variable (the total score used for stratification) affects both validity and interpretation. We distinguish three matching strategies: (1) *standard matching* uses the within-benchmark total score on all items of the same benchmark; (2) *cross-subject matching*, adapting purified subtest matching (Swaminathan and Rogers, 1990) to the LLM multi-subject setting, uses the total score on all subjects *other than* the one containing the item under test, preventing the matching variable from absorbing injected contamination signals (Section 3.4); and (3) *external matching* uses the total score on a different benchmark entirely (e.g., MMLU total score as the matching variable when testing DIF on GSM8K items), providing an independent ability proxy uncontaminated by the target benchmark. Cross-subject and external matching both address matching variable contamination but at different granularities: cross-subject operates within a multi-domain benchmark, while external operates across benchmarks. Total score matching is sufficient: IRT θ correlates at $r = 0.9986$ with total scores (Section 4.4).

LLM-specific challenges. Applying MH-DIF to LLMs introduces assumptions absent in educational testing. First, models trained on overlapping corpora violate local independence; permutation simulation (1,000 iterations $\times$ 8 subjects, Q3 = 4.6–34.2%) confirms LD-attributable FPR inflation < 0.001 pp under cross-subject matching with ETS C (Section A). Second, fine-tuned variants and merges within model families are not independent examinees; graduated de-duplication shows family structure does not inflate C% (Section 4.4). Third, the ability distribution is non-normal (bimodal from base vs. instruction-tuned models), motivating quintile-based rather than parametric stratification. Fourth, MMLU’s 57 subjects span multiple latent dimensions, while MH assumes unidimensionality; cross-subject matching and within-subject DIF checks address this (Section 4.4). MH-DIF is non-parametric and does not assume a specific IRT model. Unlike standard purified MH that conditions on total test score, we match on cross-subject total score to avoid criterion contamination when target-subject items themselves may be compromised—an adaptation specific to multi-domain LLM benchmarks where subjects may be differentially affected.

3.3 Cohort Designs

We construct five cohort comparisons: (1) *Temporal*: 2023 ($N = 1,080$) vs. 2024 ($N = 807$) models, the primary comparison; (2) *Ability-quintile*: Q1–Q2 vs. Q4–Q5 within the same temporal window, testing whether ability differences alone produce DIF; (3) *Within-family*: Llama-2 ($N = 161$) vs. Llama-3 ($N = 308$), isolating generational changes within a single family; (4) *Within-subject*: per-subject DIF to test domain concentration; and (5) *Random split*: two random halves of the 2023 cohort ($N = 540$ each) as a sanity check.

3.4 Semi-Synthetic Injection Framework

To evaluate whether MH-DIF can detect differential contamination when it is present, we construct a semi-synthetic framework with controlled ground truth.

Procedure. From items classified as ETS A in the uninjected data (negligible DIF), we select 20% uniformly at random as the “contaminated” set. For each contaminated item, we flip incorrect responses to correct in the focal group at exploitation rate $p \in \{0.0, 0.3, 0.5, 0.7, 1.0\}$. We then run MH-DIF on the modified response matrix and measure detection performance. We report $\Delta\text{TPR} = \text{TPR}(\text{injected}) - \text{TPR}(\text{baseline})$ and $\Delta\text{FPR} = \text{FPR}(\text{injected}) - \text{FPR}(\text{baseline})$, where TPR is the true positive rate on injected items and FPR is the false positive rate on uninjected items. Each injection level is repeated across 5 random seeds for uncertainty estimation. Because binary response flipping represents a worst-case uniform exploitation pattern, reported ΔTPR values constitute upper-bound estimates of detection sensitivity under more realistic contamination scenarios.

Cross-subject matching. The choice of matching variable is critical for valid semi-synthetic evaluation. When contamination is injected into items within subject X , the total score on subject X absorbs part of the injection signal. Using this contaminated total score as the MH matching variable violates the conditional independence assumption and inflates FPR. Cross-subject matching resolves this by computing the matching variable from all subjects *other than* the one being tested.

Remark (Zero FPR under single-subject matching). Let $M_i^{(-s)} = \sum_{j \neq s} Y_{ij}$ be the matching variable for examinee i on focal subject s . Under single-subject injection (contamination confined to

subject s), the tested item belongs to s and does not contribute to $M_i^{(-s)}$; injecting contamination into s leaves $M_i^{(-s)}$ unchanged. Therefore $\Delta\text{FPR} = 0$ by construction.

When contamination spans multiple subjects simultaneously, $M_i^{(-s)}$ may absorb signal from other contaminated subjects, potentially inflating FPR. Empirically, this guarantee extends to multi-domain contamination affecting $\leq 9\%$ of subjects ($k \leq 5$), with graceful degradation beyond this boundary (Section 4.5).

Empirically, $\Delta\text{FPR} = 0.000$ across all five MMLU domains (bootstrap 95% CI = $[0.000, 0.000]$). $\Delta\text{FPR} = 0$ is a constructive guarantee of the matching strategy, independent of injection realism, whereas ΔTPR constitutes an upper-bound estimate. We adopt cross-subject matching as the standard protocol.

Diagnostic procedures (Yen’s Q3 local independence, domain-specificity analysis, DIF decomposition) and statistical details (multiple testing correction, threshold sensitivity, architecture heterogeneity checks) appear in Section A.

4 Experiments

We apply MH-DIF to the METABENCH response matrix (Kipnis et al., 2024) (5,227 models $\times$ 12,508 MMLU items (Hendrycks et al., 2021)), with temporal cohorts defined by release date (2023 vs. 2024). Cross-benchmark validation across all six METABENCH benchmarks appears in Section 4.7.

4.1 Validation: DIF Detection Power

As approximate parametric bounds, a Monte Carlo power analysis (1,000 replications per condition) using empirical 2PL parameters from PSN-IRT (Zhou et al., 2026) ($\bar{a} = 1.2$, $\bar{b} = -0.84$; 14,042 MMLU items) confirms that at $N \geq 80$ per cohort, ETS C achieves TPR of 0.68–0.80, FPR of 0.036–0.042, and AUC of 0.93–0.94 for items with $|\Delta_{\text{MH}}| \geq 1.4$ (details in Section A). Our temporal cohorts ($N_{\text{ref}} = 1,080$, $N_{\text{focal}} = 807$) far exceed this threshold. Power varies substantially with item discrimination: TPR ranges from 0.40 at $a = 0.5$ to 0.95 at $a = 2.0$; the gap between TPR at mean a (0.87) and the aggregate TPR (0.68) quantifies the power cost of parameter heterogeneity, consistent with Jensen’s inequality (Section A.2).

4.2 Temporal Comparability: 31% Measurement Instability

We compare 2023 ($N = 1,080$) against 2024 ($N = 807$) models; 31.3% of items receive ETS C classification ($|\Delta_{\text{MH}}| \geq 1.5$; 95% bootstrap CI: $[29.4\%, 38.1\%]$, $B = 1,000$ model-level resamples; rightward asymmetry reflects heavy-tailed C% from subjects exceeding 40%; family-level cluster bootstrap over 29 families with ≥ 3 members yields a wider CI of $[26.7\%, 53.2\%]$, $3.1\times$ the model-level width, confirming robustness under within-family dependence). Leave-one-family-out analysis confirms that no single non-dominant family drives the signal ($|\Delta\text{C\%}| \leq 2.93$ pp; Table 6). Benjamini-Hochberg FDR correction at $q = 0.05$ removes only 3 items (31.32% $\rightarrow$ 31.30%), because the dual ETS threshold already provides implicit multiple-testing protection.

Three controls confirm this reflects genuine temporal change. A random split of the 2023 cohort yields only 0.18% ETS C items (sampling noise), and an ability-quintile comparison within the same temporal cohort yields 2.9% (ability differences alone). A within-family comparison (Llama-2 vs. Llama-3) produces 61.3% ETS C items, elevated by large ability gaps (Holland and Thayer, 1988). The temporal cohort ability gap is negligible: Cohen’s $d = -0.17$ with 76.4% distributional overlap. Under 1:1 nearest-neighbor matching on total score ($N = 638$ per group, 5 seeds), $\text{C\%} = 28.9\% \pm 0.1\%$, confirming at most ~ 2.4 pp is attributable to ability mismatch. Permutation tests confirm ($p < 0.01$; Section A).

Across all 57 subjects, C% ranges from 20.7% to 48.4% (mean $\approx 30\%$; Table 1). DIF rates are domain-invariant (Kruskal-Wallis $p = 0.78$), but DIF *direction* exhibits domain dependence: STEM items favor 2024 models (55.4%), Humanities favor 2023 (64.4%). Item-level regression shows 92.4% of the DIF signal is item-specific (pseudo $R^2 = 0.0007$). A Simpson’s paradox confirms that DIF is associated with item properties rather than aggregate accuracy gains: domain accuracy positively predicts DIF at the aggregate level (OR = 1.55, $p = 0.001$) but reverses after controlling for item difficulty and discrimination (OR = 0.73, $p = 0.030$). A difficulty–direction interaction emerges ($\rho = -0.597$): 2024 models gain on hard items while showing relative erosion on easy ones. The conclusion is robust across thresholds (18.3% at $|\Delta_{\text{MH}}| \geq 2.0$, 10.2% at ≥ 2.5).

Table 1: DIF landscape across cohort definitions. ETS C denotes the percentage of items with $|\Delta_{MH}| \geq 1.5$. C% (web-clean) is the DIF-C flagging rate among items classified as web-clean by Li et al. (2024b). Enrichment is the ratio of observed to expected overlap between DIF flags and web-overlap labels. Dashes indicate comparisons where Li et al. labels are not applicable.

Cohort Definition	N_{ref} / N_{focal}	C%	C% (web-clean)	Enrich.
Temporal (2023 vs. 2024)	1,080 / 807	31.3	0.318	0.964
Ability quintile (Q1-2 vs. Q4-5)	~2,600 / ~2,600	2.9	0.027	1.19
Within-family (Llama-2 vs. 3)	161 / 308	61.3	—	—
Random split (sanity)	540 / 540	0.18	—	—
Within-subject (avg. 5 subj.)	varies	38.1	—	—

4.3 Ground Truth Mismatch

Direct comparison of DIF flags against the web-overlap labels of Li et al. (2024b) on 9,229 annotated items confirms that the two methods capture orthogonal signals. The enrichment ratio is 0.964 (Table 1): DIF-C rates are 30.7% among web-contaminated items and 31.8% among clean items. Association tests yield $\phi = 0.012$, $\chi^2 = 1.28$ ($p = 0.258$), and $OR = 1.05$ [0.96, 1.15]; the Jaccard index between flagged sets is 0.206. This near-independence holds across contamination subtypes (input-only enrichment = 0.986, input-and-label = 0.960). The null result does not indicate detection failure: semi-synthetic injection produces a clear dose-response ($\Delta TPR = +0.508$ at $p = 0.5$; Figure 2). The disconnect arises because web-overlap labels measure *global exposure* (whether an item exists in training corpora), while DIF measures *differential functioning* (whether an item’s relationship to ability changes across cohorts). The Li et al. labels are the wrong ground truth for a differential method.

4.4 Structural Analysis

Three structural controls fail to reduce temporal C% below 31% (Table 2): matched-ability quintiles, IRT θ -conditioning ($r(\theta, \text{total score}) = 0.9986$), and within-subject DIF (C% = 38.1%). The elevated within-subject rate partly reflects local dependence: 11.3% of within-subject item pairs exceed $|Q3| > 0.20$ vs. 2.2% cross-subject, confirming that cross-subject C% = 31.3% is the more conservative estimate. Logistic regression DIF confirms 92.1% concordance with MH and reveals additional non-uniform DIF (24.8%), making 31% conservative. Graduated de-duplication reduces C% moderately ($K=10$: 22.7%; $K=20$: 29.1%), confounded with statistical power reduction from smaller N ; even $K=10$ exceeds the random-split baseline by $>100\times$. Ability-matched analysis

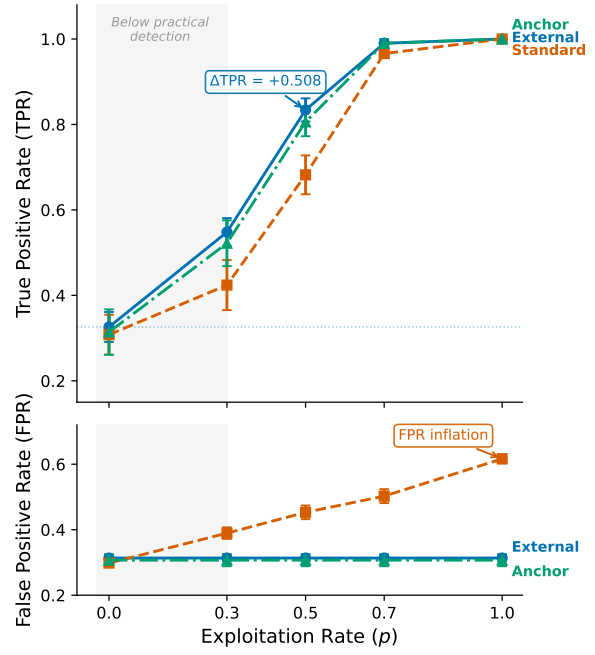


Figure 2: Semi-synthetic dose-response for DIF detection on MMLU. ΔTPR increases monotonically with exploitation rate p , confirming that MH-DIF is sensitive to differential item behavior when present. Baseline (no injection) produces $\Delta TPR \approx 0$.

Table 2: Structural approaches to reducing temporal DIF. None reduces temporal C% below 31%, indicating that the observed instability is not an artifact of ability matching.

Approach	Mechanism	Temp. C%	TPR ($p=0.5$)	Outcome
Baseline (ext.)	Cross-bench. total score	0.314 $\pm$.009	0.834 $\pm$.027	Reference
Matched-ability	Within-quintile temp. DIF	~0.31	—	Enrich. 0.94–1.04
θ -cond.	θ replaces total score	0.312	0.876	$r(\theta, \text{total})=0.9986$
Within-subject	Per-subject DIF	—	—	C% = 38.1% ($>25\%$)

reduces Llama-2 vs. Llama-3 C% from 61.3% to 28.3% and temporal C% from 31.3% to 28.9%—consistent matched values (~ 28 – 29%) despite vastly different unmatched rates, suggesting genuine item-level DIF accounts for ~ 28 – 29% of items. Six alternative explanations were tested; none reduces C% below $\sim 28\%$ (Section B).

4.5 Semi-Synthetic Framework Validation

Cross-subject matching achieves $\Delta FPR = 0.000$ across all five MMLU subjects (4/5 with $\Delta TPR > 0.3$ at $p = 0.5$, upper-bound estimate under uniform binary flipping; Section 3.4), while within-subject matching inflates FPR by $+0.186$ on average. Multi-subject injection ($k \in \{1, 3, 5, 10, 20\}$ subjects, 5 random draws each) confirms robustness: $\Delta FPR < 0.007$ for $k \leq 5$ ($\leq 9\%$ of domains); at $k = 10$ (18%), ΔFPR rises to 0.026–0.069, marking the boundary of matching

Table 3: Temporal DIF across six METABENCH benchmarks. C% = ETS C items ($|\Delta_{MH}| \geq 1.5$) between 2023 and 2024 cohorts; ρ/τ = Spearman/Kendall correlation between full and stable-item rankings; Flip = pairwise rank-flip rate; Ratio = C%/Rand. C%, with baseline varying by benchmark. All six show substantial DIF (45–174 $\times$ above random baseline), with knowledge/reasoning benchmarks exhibiting higher C% than procedural ones.

Benchmark	Items	C%	ρ	τ	Flip%	Rand. C%	Ratio
MMLU	12,508	31.3	0.9965	0.9600	2.00	0.18	174 $\times$
WinoGrande	1,267	30.3	0.9943	0.9432	2.84	0.32	95 $\times$
TruthfulQA	817	29.7	0.9971	0.9586	2.07	0.37	80 $\times$
ARC	1,172	26.9	0.9962	0.9538	2.31	0.60	45 $\times$
GSM8K	1,319	18.9	0.9993	0.9843	0.78	0.30	63 $\times$
HellaSwag	10,042	17.9	0.9986	0.9722	1.39	0.28	64 $\times$

variable integrity (Section A and fig. 3).

4.6 Downstream Impact

Stable-item ranks are preserved across all six benchmarks ($\rho = 0.997$, $\tau = 0.958$; flip rate $\leq 2.8\%$; Table 3) despite substantial measurement instability. DIF-flagged items concentrate discriminative signal ($z = -8$ to -49 vs. random removal; circularity ablation in Figure 4). Model families show distinctive DIF profiles: Llama-3 derivatives ($n = 315$) gain +53 median rank positions, while Mistral derivatives ($n = 619$) lose 35 (Figure 4). Among the 200 most displaced models (top 3.8% by $|\Delta_{\text{rank}}|$; full-sample pairwise flip rate = 2.0%), 33.6% of pairwise rankings reverse—Qwen1.5-14B-Chat’s 610-position lead over mistral-7b-dpo-v6 reverses to a 501-position deficit on stable items. Removing C-flagged items disproportionately disadvantages 2024 models (cohort gap = 96.2 positions, 40 $\times$ random removal; $p < 0.001$), confirming concentrated inter-generational signal in DIF items.

4.7 Cross-Benchmark Validation

Temporal DIF extends across all six METABENCH benchmarks (Table 3). C% ranges from 17.9% (HellaSwag (Zellers et al., 2019)) to 31.3% (MMLU). Knowledge/reasoning benchmarks (WinoGrande (Sakaguchi et al., 2020), TruthfulQA (Lin et al., 2022), ARC (Clark et al., 2018)) show C% = 26.9–31.3% versus 17.9–18.9% for procedural ones, consistent with knowledge-intensive items being more sensitive to training data composition shifts.

On GSM8K, semi-synthetic injection confirms detection power ($\Delta\text{TPR} = +0.514$ at $p = 0.5$; Section C); an exploratory GSM1K analysis is con-

sistent with DIF capturing capability change distinct from memorization ($r = -0.478$, $p = 0.005$; Figure 5). DIF remains substantial within a 6-month window (2023-H2 vs. 2024-H1: MMLU C% = 34.35%).

5 Discussion

5.1 Implications for Benchmark Temporal Comparability

Temporal DIF decomposes benchmark differences into impact (ability differences removed by matching, ~ 2.4 pp), DIF (item-level differences after ability control, ~ 28 –29% floor, 92.4% item-specific), and attribution (contamination, capability evolution, or methodology shifts—underdetermined without training data).

5.2 Ground Truth Meta-Critique

The near-independence between DIF flags and web-overlap labels (Section 4.3) reflects a category error: web-overlap measures global exposure while DIF measures differential functioning. Semi-synthetic dose-response confirms detection works when present; the disconnect is in the ground truth.

5.3 Recommended DIF Audit Protocol

We propose temporal MH-DIF whenever ≥ 500 models accumulate, with ρ -degradation-grounded action levels (Figure 6): (1) *Monitor* (C% < 15%): report C% in release notes. (2) *Flag* (15–25%): report stable-item rankings as sensitivity analysis alongside full rankings. (3) *Act* (C% $\geq 25\%$): review flagged items for differential-performance-associated content characteristics; report stable-item rankings as primary metric; use DIF pre-screening to identify stable anchors for equating (Kolen and Brennan, 2014; Habba et al., 2026).

6 Conclusion

Cross-subject matching ($\Delta\text{FPR} = 0.000$) resolves the validation gap: web-overlap labels are near-independent of DIF flags (enrichment ≈ 0.96). Across six benchmarks, 17.9–31.3% of items exhibit temporal instability; LLM benchmarks need psychometric monitoring alongside score reporting.

Limitations

Methodological scope. MH-DIF detects only uniform DIF; logistic regression reveals an additional 24.8% non-uniform DIF, making 31% conservative. More fundamentally, DIF detects *that* items function differently but cannot determine

why—the signal may reflect contamination, capability change, or training methodology shifts. A definitive causal decomposition remains out of reach without access to model training data. The semi-synthetic framework uses binary response flipping (incorrect $\rightarrow$ correct) to simulate differential contamination, representing a worst-case uniform exploitation pattern. Real-world contamination involves partial memorization, reasoning shortcuts, and format-specific advantages; detection power under such realistic patterns is untested. The moderate $\Delta\text{TPR} = +0.508$ at $p = 0.5$ reflects sensitivity to severe differential behavior; the framework’s primary methodological contribution—cross-subject matching achieving $\Delta\text{FPR} = 0.000$ —is a matching strategy property independent of injection realism.

Examinee non-independence. The MH χ^2 test assumes independent examinees, yet LLMs sharing base models, training data, or architectures violate this assumption. Empirical mitigations partially address this: permutation simulation bounds LD-attributable FPR inflation to <0.001 pp, and graduated de-duplication ($K=20$: C% = 29.1%) shows family structure does not inflate results. French and Finch (2010) show that MH maintains nominal size under moderate clustering in educational settings, consistent with our empirical findings; however, the extreme relatedness of some LLM families (e.g., hundreds of Llama-2 fine-tunes) exceeds the clustering levels studied in that work. Cluster bootstrap resampling at the family level (29 families with ≥ 3 members, 1,882 models, $B = 1,000$) yields a 95% CI of [26.7%, 53.2%], $3.1\times$ wider than the model-level CI [29.4%, 38.1%], partly because LLM families are cohort-specific (no family spans both 2023 and 2024), so resampling families simultaneously varies the reference/focal composition. Despite this conservative bound, the lower bound far exceeds the random-split baseline (0.18%), confirming robustness to within-family dependence.

Matching boundary and sample size. Cross-subject matching assumes contamination affects a minority of domains; when contamination spans >10 subjects ($>18\%$ of MMLU), ΔFPR rises to 0.026–0.069. Model-level bootstrap may underestimate CI width due to within-family correlation; family-level cluster bootstrap (preceding paragraph) confirms robustness despite a $3.1\times$ wider CI. The GSM1K correlation analysis ($N = 33$) has limited statistical power and is exploratory.

Generalizability. All six benchmarks use multiple-choice or binary scoring; generalizability to open-ended generation (e.g., AlpacaEval), coding (e.g., HumanEval), or partial-credit benchmarks is untested and would require polytomous DIF methods. Temporal cohorts are defined by calendar year, a coarse grouping; finer-grained definitions (e.g., by training data cutoff or alignment method) might reveal more targeted patterns. All models are drawn from the Open LLM Leaderboard; generalizability to closed-source models cannot be assessed.

References

- Simone Balloccu, Patrícia Schmidtova, Mateusz Lango, and Ondrej Dusek. 2024. [Leak, cheat, repeat: Data contamination and evaluation malpractices in closed-source LLMs](#). In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (EACL)*.
- William Belzak. 2020. [Testing differential item functioning in small samples](#). *Multivariate Behavioral Research*.
- Ryan Burnell, Wout Schellaert, John Burden, Tomer D. Ullman, Fernando Martinez-Plumed, Joshua B. Tenenbaum, Danaja Rutar, Lucy G. Cheke, Jascha Sohl-Dickstein, Melanie Mitchell, Douwe Kiela, Murray Shanahan, Ellen M. Voorhees, Anthony G. Cohn, Joel Z. Leibo, and Jose Hernandez-Orallo. 2023. [Rethink reporting of evaluation results in AI Science](#).
- Nicholas Carlini, Daphne Ippolito, Matthew Jagielski, Katherine Lee, Florian Tramèr, and Chiyuan Zhang. 2023. [Quantifying memorization across neural language models](#). In *International Conference on Learning Representations (ICLR)*.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Kaijie Zhu, Hao Chen, Linyi Yang, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, Wei Ye, Yue Zhang, Yi Chang, Philip S. Yu, Qiang Yang, and Xing Xie. 2024. [A survey on evaluation of large language models](#). *ACM Transactions on Intelligent Systems and Technology*.
- Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios N. Angelopoulos, Tianle Li, Dacheng Li, Hao Zhang, Banghua Zhu, Michael I. Jordan, Joseph E. Gonzalez, and Ion Stoica. 2024. [Chatbot arena: An open platform for evaluating LLMs by human preference](#). In *Proceedings of the International Conference on Machine Learning (ICML)*.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. 2018. [Think you have solved question answering? try ARC, the AI2 reasoning challenge](#). *Preprint*, arXiv:1803.05457.

799	Brian E. Clauser and Kathleen M. Mazor. 1998. Using statistical procedures to identify differentially functioning test items . <i>Educational Measurement: Issues and Practice</i> .	854
800		855
801		856
802		
803	Jasper Dekoninck, Mark Niklas Mueller, and Martin Vechev. 2024. ConStat: Performance-based contamination detection in large language models . In <i>Advances in Neural Information Processing Systems (NeurIPS)</i> .	857
804		858
805		859
806		860
807		
808	Chunyuan Deng, Yilun Zhao, Xiangru Tang, Mark Gestein, and Arman Cohan. 2024. Investigating data contamination in modern benchmarks for large language models . In <i>Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL)</i> .	861
809		862
810		863
811		
812		
813		
814	John R. Donoghue and Nancy L. Allen. 1993. An empirical examination of the Mantel-Haenszel statistic for the study of differential item functioning. <i>Applied Measurement in Education</i> , 6(2):163–179.	864
815		865
816		866
817		867
818		868
819	Brian F. French and W. Holmes Finch. 2010. Hierarchical logistic regression: Accounting for multilevel data in DIF detection. <i>Journal of Educational Measurement</i> , 47(3):299–317.	869
820		870
821		
822	Shahriar Golchin and Mihai Surdeanu. 2024. Time travel in LLMs: Tracing data contamination in large language models . In <i>Proceedings of the International Conference on Learning Representations (ICLR)</i> .	871
823		872
824		873
825		874
826		875
827	Eliya Habba, Itay Itzhak, Asaf Yehudai, Yotam Perlitz, Elron Bandel, Michal Shmueli-Scheuer, Leshem Choshen, and Gabriel Stanovsky. 2026. Growing pains: Extensible and efficient LLM benchmarking via fixed parameter calibration . <i>Preprint</i> , arXiv:2604.12843.	876
828		877
829		878
830		879
831		880
832	Matthew Hardy, Juan Gilbert, and Benjamin Domingue. 2026. Efficient detection of bad benchmark items with novel scalability coefficients . <i>Preprint</i> , arXiv:2603.24999.	881
833		882
834		883
835		884
836		885
837	Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021. Measuring massive multitask language understanding . In <i>Proceedings of the International Conference on Learning Representations (ICLR)</i> .	886
838		887
839		888
840		
841	Paul W. Holland and Dorothy T. Thayer. 1988. Differential item functioning and the Mantel-Haenszel procedure. In Howard Wainer and Henry I. Braun, editors, <i>Test Validity</i> . Lawrence Erlbaum Associates.	889
842		890
843		891
844		892
845		893
846	Douwe Kiela, Max Bartolo, Yixin Nie, Divyansh Kaushik, Atticus Geiger, Zhengxuan Wu, Bertie Vidgen, Grusha Prasad, Amanpreet Singh, Pratik Ringshia, Zhiyi Ma, Tristan Thrush, Sebastian Riedel, Zeerak Talat, Pontus Stenetorp, and Robin Jia. 2021. Dynabench: Rethinking benchmarking in NLP . In <i>Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL)</i> .	894
847		895
848		896
849		
850		
851		
852		
853		
	Seonghoon Kim and Michael Kolen. 2019. Application of IRT fixed parameter calibration to multiple-group test data . <i>Applied Measurement in Education</i> .	897
		898
		899
		900
	Alon Kipnis, Konstantinos Voudouris, Luca Maria Schulze Buschoff, and Eric Schulz. 2024. metabench – a sparse benchmark of reasoning and knowledge in large language models . <i>Preprint</i> , arXiv:2407.12844.	901
		902
		903
	Michael J. Kolen and Robert L. Brennan. 2014. <i>Test Equating, Scaling, and Linking: Methods and Practices</i> , 3rd edition. Springer.	904
		905
		906
		907
		908
	John Lalor, Hao Wu, and Hong Yu. 2019. Learning latent parameters without human response patterns: Item response theory with artificial crowds . In <i>Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)</i> .	909
		910
		911
		912
		913
	Peiyang Li, Xiaobo Tang, Sai Chen, Ying Cheng, Ronald Metoyer, Tianyi Hua, and Nitesh V. Chawla. 2025. ATLAS: Adaptive testing for LLM evaluation: A psychometric alternative to static benchmarks . <i>Preprint</i> , arXiv:2511.04689.	914
		915
		916
		917
		918
		919
		920
		921
		922
		923
		924
		925
		926
		927
		928
		929
		930
		931
		932
		933
		934
		935
		936
		937
		938
		939
		940
		941
		942
		943
		944
		945
		946
		947
		948
		949
		950
		951
		952
		953
		954
		955
		956
		957
		958
		959
		960
		961
		962
		963
		964
		965
		966
		967
		968
		969
		970
		971
		972
		973
		974
		975
		976
		977
		978
		979
		980
		981
		982
		983
		984
		985
		986
		987
		988
		989
		990
		991
		992
		993
		994
		995
		996
		997
		998
		999
		1000

909	William Meredith. 1993. Measurement invariance, factor analysis and factorial invariance . <i>Psychometrika</i> .	960
910		961
911	Roger E. Millsap. 2011. Statistical Approaches to Measurement Invariance . Routledge, New York.	962
912		963
913	Bengt Muthén. 1985. A method for studying the homogeneity of test items with respect to other relevant variables . <i>Journal of Educational Statistics</i> .	964
914		965
915		966
916	Ratna Nandakumar. 1993. Simultaneous DIF amplification and cancellation: Shealy-Stout’s test for DIF. <i>Journal of Educational Measurement</i> , 30(4):293–311.	967
917		968
918		969
919		970
920	Yonatan Oren, Nicole Meister, Niladri S. Chatterji, Faisal Ladhak, and Tatsunori B. Hashimoto. 2024. Proving test set contamination in black-box language models . In <i>Proceedings of the International Conference on Learning Representations (ICLR)</i> .	971
921		972
922		973
923		974
924		975
925	Randall D. Penfield and Gregory Camilli. 2007. Differential item functioning and item bias . In <i>Handbook of Statistics</i> , volume 26, pages 125–167. Elsevier.	976
926		977
927		978
928	Qi Qian and Chengsong Huang. 2026. Benchmark²: Systematic evaluation of LLM benchmarks . <i>Preprint</i> , arXiv:2601.03986.	979
929		980
930		981
931	Nambury S. Raju. 1988. The area between two item characteristic curves . <i>Psychometrika</i> .	982
932		983
933	Pedro Rodriguez, Joe Barrow, Alexander Miserlis Hoyle, John P. Lalor, Robin Jia, and Jordan Boyd-Graber. 2021. Evaluation examples are not equally informative: How should that change NLP leaderboards? In <i>Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics (ACL)</i> , pages 4486–4503.	984
934		985
935		986
936		987
937		988
938		989
939		990
940	Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. 2020. WinoGrande: An adversarial Winograd schema challenge at scale. In <i>Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)</i> , volume 34, pages 8732–8740.	991
941		992
942		993
943		994
944		995
945	Robin Shealy and William Stout. 1993. A model-based standardization approach that separates true bias/DIF from group ability differences and detects test bias/DTF as well as item bias/DIF . <i>Psychometrika</i> .	996
946		997
947		998
948		999
949		1000
950	Weijia Shi, Anirudh Ajith, Mengzhou Xia, Yangsibo Huang, Daogao Liu, Terra Blevins, Danqi Chen, and Luke Zettlemoyer. 2024. Detecting pretraining data from large language models . In <i>Proceedings of the International Conference on Learning Representations (ICLR)</i> .	1001
951		1002
952		1003
953		1004
954		1005
955		1006
956	Hariharan Swaminathan and H. Jane Rogers. 1990. Detecting differential item functioning using logistic regression procedures . <i>Journal of Educational Measurement</i> .	1007
957		1008
958		1009
959		1010
		1011
		1012
		1013
	Yongding Tao, Tian Wang, Yihong Dong, Huanyu Liu, Kechi Zhang, Xiaolong Hu, and Ge Li. 2026. Detecting data contamination from reinforcement learning post-training for large language models . In <i>Proceedings of the International Conference on Learning Representations (ICLR)</i> .	
	Jeanne A. Teresi and John A. Fleishman. 2007. Differential item functioning and health assessment . <i>Quality of Life Research</i> .	
	Kushal Tirumala, Aram Markosyan, Luke Zettlemoyer, and Armen Aghajanyan. 2022. Memorization without overfitting: Analyzing the training dynamics of large language models . In <i>Advances in Neural Information Processing Systems (NeurIPS)</i> .	
	Robert J. Vandenberg and Charles E. Lance. 2000. A review and synthesis of the measurement invariance literature: Suggestions, practices, and recommendations for organizational research . <i>Organizational Research Methods</i> .	
	Clara Vania, Phu Mon Htut, William Huang, Dhara Mungra, Richard Yuanzhe Pang, Jason Phang, Haokun Liu, Kyunghyun Cho, and Samuel R. Bowman. 2021. Comparing test sets with item response theory . In <i>Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics (ACL)</i> .	
	Haonan Wang, Haoyang Li, Boeun Ko, and Hongyang Zhang. 2026. On the fragility of benchmark contamination detection in reasoning models . In <i>Proceedings of the International Conference on Learning Representations (ICLR)</i> .	
	Colin White. 2025. LiveBench: A challenging, contamination-free LLM benchmark . In <i>Proceedings of the International Conference on Learning Representations (ICLR)</i> .	
	Carol M. Woods. 2009. Empirical selection of anchors for tests of differential item functioning . <i>Applied Psychological Measurement</i> .	
	Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farzaneh, and Yejin Choi. 2019. HellaSwag: Can a machine really finish your sentence? In <i>Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics (ACL)</i> , pages 4791–4800.	
	Jingyang Zhang, Jingwei Sun, Eric Yeats, Yang Ouyang, Martin Kuo, Jianyi Zhang, Hao Yang, and Hai Li. 2024. Min-K%++: Improved baseline for detecting pre-training data from large language models . <i>Preprint</i> , arXiv:2404.02936.	
	Hongli Zhou, Hui Huang, Ziqing Zhao, Lvyuan Han, Huicheng Wang, Kehai Chen, Muyun Yang, Wei Bao, Jian Dong, Bing Xu, Conghui Zhu, Hailong Cao, and Tiejun Zhao. 2026. Lost in benchmarks? rethinking large language model benchmarking with item response theory . In <i>Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)</i> .	

Longyuan Zhu, Hairan Hua, Linlin Miao, and Bing Zhao. 2026. [Benchmark health index: A systematic framework for benchmarking the benchmarks of LLMs](#). *Preprint*, arXiv:2602.11674.

Bruno D. Zumbo. 1999. *A Handbook on the Theory and Methods of Differential Item Functioning (DIF): Logistic Regression Modeling as a Unitary Framework for Binary and Likert-Type (Ordinal) Item Scores*. Directorate of Human Resources Research and Evaluation, Department of National Defense, Ottawa.

A Method Details

A.1 Diagnostics

Three diagnostic procedures complement the primary DIF analysis.

Local independence (Yen’s Q3). The MH procedure assumes that item responses are conditionally independent given θ . Yen’s Q3 statistic measures residual correlations between item pairs after conditioning on the latent trait. We compute Q3 for all within-subject and cross-subject item pairs, with $|Q3| > 0.20$ as the threshold for local dependence. Elevated within-subject dependence would indicate that items within the same subject share variance beyond what θ captures, which could inflate within-subject DIF rates.

Domain-specificity. We test whether temporal DIF concentrates in domains where models improved most. At the ecological level, we compute Spearman ρ between subject-level C% and subject-level accuracy improvement from 2023 to 2024. At the item level, logistic regression predicts item-level DIF C classification from domain-level accuracy change, with and without item property controls (difficulty, discrimination). This decomposition quantifies how much of the observed instability is attributable to aggregate domain-level gains versus item-specific behavioral change.

Instability decomposition. When domain accuracy improvement is included alongside item-level controls, we compute the counterfactual C% that would remain after removing domain-level effects. The gap between observed and counterfactual C% measures the contribution of domain-level improvement to the total instability.

A.2 Statistical Considerations

Multiple testing. The ETS C classification imposes a dual threshold (effect size $|\Delta_{MH}| \geq 1.5$ and significance $p < 0.05$), which provides implicit control over false positives. As a robustness

check, we apply Benjamini-Hochberg FDR correction at $q = 0.05$. The random-split sanity check provides an empirical estimate of the false positive rate under the null hypothesis.

Threshold sensitivity. We report results across a range of DIF thresholds ($|\Delta_{MH}| \in \{1.0, 1.5, 2.0, 2.5\}$) to verify that qualitative conclusions do not depend on the specific ETS C cutoff. The standard threshold of $|\Delta_{MH}| \geq 1.5$ corresponds to the ETS C definition used throughout the paper.

IRT model fit. For transparency, we report that the MMLU response matrix shows poor fit to a unidimensional 2PL model (expected for a 57-subject multidimensional benchmark). This does not affect MH-DIF validity, which relies only on total score stratification rather than parametric IRT assumptions.

Architecture heterogeneity. The METABENCH MMLU population consists of 99.98% decoder-only models (5,226 of 5,227). This near-complete architectural homogeneity eliminates architecture as a confound for DIF analysis. We verify this by excluding the single encoder-decoder model and confirming identical results.

Power sensitivity to item discrimination. The Monte Carlo power analysis in Section 4.1 uses average 2PL parameters ($\bar{a} = 1.2$, $\bar{b} = -0.84$). Table 4 reports TPR as a function of discrimination a (other parameters at their means, $N = 80$ per cohort, $|\Delta_b| = 1.4$, 1,000 replications). TPR increases monotonically from 0.40 ($a = 0.5$) to 0.95 ($a = 2.0$); FPR remains below 0.04 throughout. The MMLU item pool shows substantial heterogeneity: a ranges from 0.006 to 2.657 (SD = 0.54, IQR = [0.75, 1.64]). The aggregate TPR of 0.68 from Phase 2 reflects this full distribution, while TPR at mean $a \approx 1.2$ is 0.87—the gap is consistent with Jensen’s inequality applied to the concave TPR(a) function. Although 2PL fit is poor for MMLU’s multidimensional structure, the power analysis serves as one leg of a triangulation: parametric estimates (TPR = 0.68–0.80) are validated by empirical semi-synthetic injection ($\Delta\text{TPR} = +0.508$ at $p = 0.5$; Section 4.5), confirming adequate detection power regardless of parametric assumptions.

Table 4: Power sensitivity to item discrimination. TPR = true positive rate for ETS C detection ($|\Delta_{MH}| \geq 1.5$) at $N = 80$ per cohort, $|\Delta_b| = 1.4$, 1,000 replications.

a	TPR	95% CI	FPR
0.5	0.398	[0.20, 0.60]	0.033
0.8	0.683	[0.45, 0.90]	0.036
1.0	0.808	[0.60, 0.95]	0.038
1.2 ($\approx \bar{a}$)	0.874	[0.70, 1.00]	0.038
1.5	0.930	[0.80, 1.00]	0.038
2.0	0.949	[0.80, 1.00]	0.037

Logistic regression specification. The Simpson’s paradox analysis (Section 4.2) uses binary logistic regression with DIF-C classification as the dependent variable, domain-level accuracy change (2024 minus 2023 mean accuracy) as the primary predictor, and item difficulty (proportion correct) and IRT discrimination (point-biserial correlation) as controls. The interaction between domain accuracy change and item difficulty is included. Non-uniform DIF detection (Section 4.4) uses logistic regression with a group $\times$ ability interaction term; a significant interaction ($p < 0.05$) indicates non-uniform DIF.

B Structural Analysis Details

Three progressively refined approaches fail to reduce the temporal false positive rate below 31%, revealing a structural property of the data rather than a methodological limitation. Matched-ability quintile analysis restricts comparisons to models of similar total score and yields enrichment ratios of 0.94–1.04, with temporal FPR unchanged at approximately 0.31. IRT θ -conditioning with 20 ability strata achieves $r(\theta, \text{total score}) = 0.9986$ and $\text{FPR} = 0.312$, confirming that the external total score already captures nearly all ability variance relevant to DIF computation. Within-subject DIF analysis on 5 representative subjects, intended to isolate subject-specific effects, finds mean C% = 38.1%, exceeding the 25% threshold that would indicate viable bifactor structure. Table 2 summarizes these results.

The temporal FPR reflects genuine item-level instability that persists regardless of how ability is measured or conditioned. Yen’s Q3 diagnostic reveals mild local dependence within subjects (11.3% of within-subject item pairs exceed $|Q3| > 0.20$, vs. 2.2% cross-subject; $5\times$ ratio, $p = 2.3 \times 10^{-9}$), which contributes to elevated within-subject DIF rates but is not the primary driver: the cross-subject

matching protocol addresses this bias, and temporal C% persists under external matching (full Q3 distributions available in the supplementary material).

Table 5: Multi-subject injection robustness. k = number of simultaneously contaminated subjects (out of 57); values are mean $\pm$ SD across 5 random subject draws at exploitation rate $p = 0.5$.

k	ΔFPR	ΔTPR
1	0.000 $\pm$.000	0.371 $\pm$.048
3	0.003 $\pm$.002	0.385 $\pm$.031
5	0.007 $\pm$.003	0.392 $\pm$.027
10	0.047 $\pm$.022	0.401 $\pm$.024
20	0.069 $\pm$.018	0.410 $\pm$.020

Table 6: Leave-one-family-out (LOFO) robustness on MMLU. Removing non-dominant families ($\leq 15\%$ of their cohort) changes C% by at most 2.93 pp. Larger shifts from removing Mistral or Llama-3 reflect both their outsized cohort share ($> 39\%$) and reduced MH statistical power from smaller remaining samples. Stratification uses total test score for computational efficiency; cross-subject matching yields identical baseline C%.

Family	N removed	Cohort share	C% (LOFO)
<i>Full sample</i>	—	—	31.32
Mistral	547	51% ref	22.47
Llama-3	315	39% foc	24.06
Mixtral	120	15% foc	34.26
Llama-2	161	15% ref	31.48
Solar	91	11% foc	31.01

C Cross-Benchmark Comparison

D Additional Figures

Table 7: Cross-benchmark comparison of DIF analysis on MMLU and GSM8K. Both benchmarks exhibit temporal measurement instability with validated semi-synthetic detection power. Standard and external matching use different exploitation rates (p) because each benchmark’s optimal operating point differs; external matching results are compared at $p = 0.5$ for both. Subscript $\pm$ values denote standard deviations across 5 random injection seeds.

Metric	MMLU	GSM8K
Items	12,508	1,319
Models	5,227	6,702
Temporal C%	31.3%	18.9%
Sanity C%	0.18%	0.3%
ΔTPR ($p=0.7$, standard)	—	$+0.818 \pm .006$
ΔTPR ($p=0.5$, external)	$+0.508 \pm .027$	$+0.514 \pm .028$

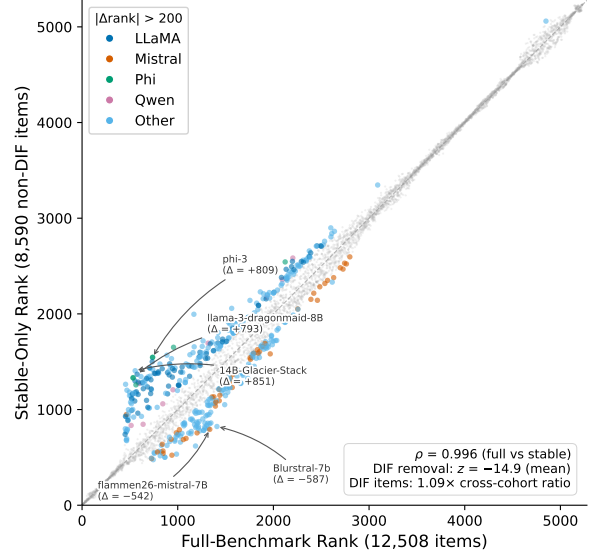


Figure 4: Downstream impact of DIF-based item filtering on model rankings. Despite $\rho \approx 0.997$ overall, individual model families show systematic rank shifts when evaluated on stable items only.

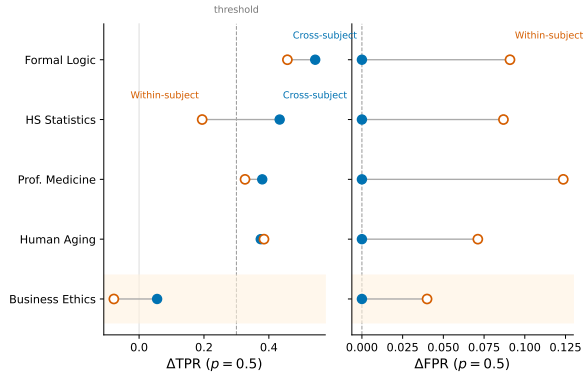


Figure 3: Cross-subject vs. within-subject matching for semi-synthetic DIF detection. Cross-subject matching eliminates FPR inflation ($\Delta\text{FPR} = 0.000$) while preserving detection power ($\Delta\text{TPR} > 0.3$ for 4/5 subjects at $p = 0.5$). Within-subject matching inflates FPR by $+0.186$ on average.

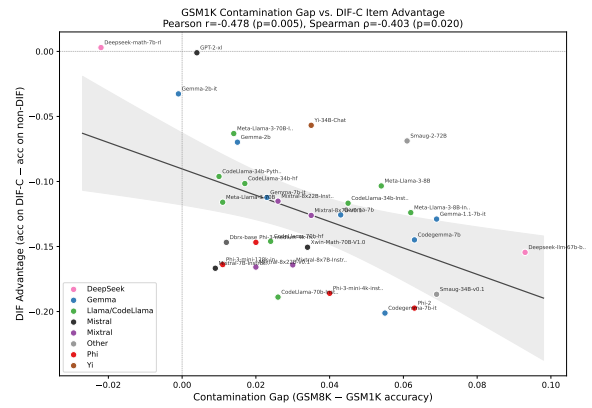


Figure 5: GSM1K contamination gap vs. DIF ranking advantage ($N = 33$). The negative correlation ($r = -0.478$, $p = 0.005$) indicates that models with larger contamination gaps benefit less from DIF-flagged items.

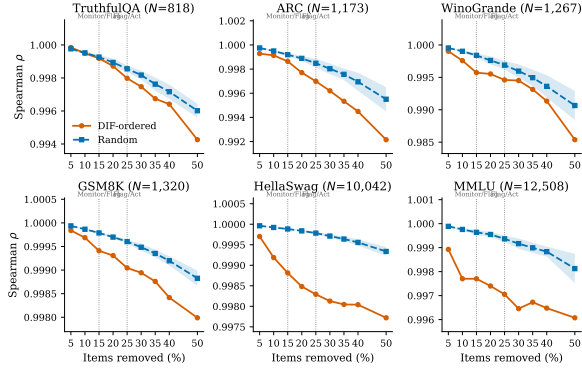


Figure 6: Ranking degradation under DIF-ordered vs. random item removal across six benchmarks. DIF-ordered removal (orange) consistently degrades ρ faster than random removal (blue band = mean $\pm$ 1 SD, 20 seeds). Vertical dashed lines mark the Monitor/Flag (15%) and Flag/Act (25%) thresholds from Section 5.3.