

Psychometric Instability of LLM Benchmarks: Differential Item Functioning Reveals 31 % of MMLU Items Behave Differently Across Model Generations

Anonymous ACL submission

Abstract

LLM benchmark scores are routinely compared across model generations, yet the assumption that individual items measure the same construct over time is rarely tested. We apply Mantel-Haenszel Differential Item Functioning (DIF) analysis with ETS severity classification to six METABENCH benchmarks (5,227 models, 27,125 total items), and find that 17.9–31.3% of items exhibit large DIF (ETS Category C) between 2023 and 2024 model cohorts—knowledge/reasoning benchmarks show higher instability ($C\% \geq 26.9\%$) than procedural ones ($C\% \leq 18.9\%$), each 45–174 $\times$ above random baselines. This does not threaten benchmark validity ($\rho \approx 0.997$ between full and stable-item rankings) but reveals which capability dimensions shift across generations. Item-level decomposition shows 92.4% of instability is item-specific; a Simpson’s paradox in odds ratio regression confirms item properties, not accuracy gains, drive DIF. We expose a validation methodology gap: web-overlap labels measure global exposure, not differential functioning (enrichment ≈ 0.96). A semi-synthetic injection framework with cross-subject matching preserves detection power ($\Delta\text{TPR} = +0.508$ at $p = 0.5$) with zero false positive inflation. DIF-flagged items concentrate cross-generational discriminative information ($z = -8\sigma$ to -49σ vs. random removal), and a difficulty–direction interaction ($\rho = -0.597$) reveals that capability gains concentrate on hard items while easy items erode, suggesting DIF captures temporal construct shift rather than noise. LLM benchmarks need psychometric monitoring, not just score reporting.

1 Introduction

When we say “Model B outperforms Model A on MMLU,” we implicitly assume that the benchmark measures the same construct in the same way for both models. This assumption of temporal com-

parability underpins every cross-generation comparison published on leaderboards and in model reports, yet it is rarely tested. We apply Mantel-Haenszel Differential Item Functioning (MH-DIF) analysis (Holland and Thayer, 1988) with Educational Testing Service (ETS) severity classification to the METABENCH response matrix (Kipnis et al., 2024),¹ and find that 31% of MMLU (Hendrycks et al., 2021) items receive ETS Category C classification ($|\Delta_{\text{MH}}| \geq 1.5$, $p < 0.05$), indicating large shifts in item functioning between models released in 2023 and 2024. This is not statistical noise: a random-split control within the 2023 cohort yields only 0.18% ETS C items. The instability persists across all 57 MMLU subjects ($C\%$ range 21–48%, unweighted mean $\approx 30\%$), and item-level regression shows that 92.4% of this instability is unrelated to aggregate domain-level accuracy gains. Nearly one in three MMLU items behaves differently depending on when the evaluated models were trained. Crucially, this instability does not threaten benchmark validity: Spearman rank correlation between model rankings computed on all items versus stable-only items is $\rho \approx 0.997$. The instability is diagnostic, not destructive; it reveals which capability dimensions shift across model generations rather than rendering MMLU scores unreliable.

A growing body of contamination detection research has produced sophisticated item-level methods, from membership inference approaches such as Min-K% (Shi et al., 2024) to performance-based detectors such as ConStat (Dekoninck et al., 2024), DVD (Liang, 2026), and Self-Critique (Tao, 2026). These methods validate detection accuracy primarily against web-overlap labels such as those of Li et al. (2024b), which classify benchmark items as contaminated based on verbatim or near-verbatim

¹Analysis code and DIF audit scripts are available at <https://anonymous.4open.science/r/dif-audit>.

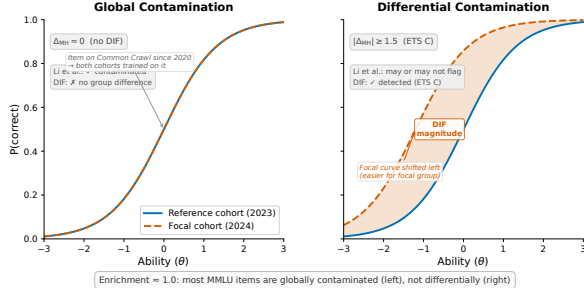


Figure 1: Global vs. differential contamination, illustrated via Item Characteristic Curves (ICCs). **Left:** global contamination produces no DIF; both cohorts encounter the item, and their ICCs overlap. **Right:** differential contamination produces DIF; the focal cohort’s ICC shifts because only that cohort was disproportionately exposed during training. The enrichment ratio of ≈ 1.0 between DIF flags and web-overlap labels is expected because most MMLU items fall into the left category.

matches in publicly accessible training corpora. Such labels measure *global exposure*: whether an item exists in the data ecosystem that all training pipelines can access. They do not measure *differential item functioning*: whether an item behaves differently across model cohorts that may have had varying degrees of exposure or different training methodologies. Figure 1 illustrates the distinction. Most MMLU items are globally contaminated in the sense that they exist in web-accessible text, so all model cohorts encounter them and no differential signal arises. The items that function differentially are those where exposure or training methodology changed asymmetrically across cohorts. Validating differential detectors against global-exposure labels therefore conflates two phenomena. Direct comparison confirms near-independence between the two flag sets (enrichment = 0.964, Jaccard = 0.206, $\phi = 0.012$), consistent across contamination subtypes.

We apply classical MH-DIF with ETS classification to the full METABENCH response matrix (5,227 models $\times$ 12,508 MMLU items), to our knowledge, the largest-scale DIF analysis on LLM benchmarks. This psychometric approach complements concurrent work on anchor-item calibration for score comparability (Habba et al., 2026) and addresses the fragility of existing contamination detectors under post-training perturbation (Wang et al., 2026). Semi-synthetic injection experiments confirm that MH-DIF is sensitive to differential item behavior when present ($\Delta\text{TPR} = +0.508$

at exploitation rate $p = 0.5$), and our cross-subject matching protocol eliminates false positive inflation ($\Delta\text{FPR} = 0.000$). Three structural controls (matched-ability quintile analysis, IRT θ -conditioning, and within-subject pre-checks) confirm that the 31% temporal instability cannot be attributed to methodological artifacts, establishing it as a robust empirical finding about LLM benchmark measurement properties, replicated across all six METABENCH benchmarks (Section 4.7). MH-DIF detects *that* items function differently across cohorts, not *why*—the signal may reflect contamination, capability change, or training methodology shifts.

MMLU’s 12,508 items provide sufficient measurement redundancy that removing nearly a third does not alter rank order ($\rho \approx 0.997$). DIF should therefore be understood as a diagnostic lens rather than a quality filter. DIF-flagged items concentrate discriminative signal: removing them degrades ranking discriminability more than random removal ($z = -8\sigma$ to -49σ across 21 conditions). Model families show distinctive DIF profiles: Llama-3 derivatives gain a median of +53 rank positions under stable-item evaluation, while Mistral-based models lose a median of 35; 25% of models shift by $|\Delta\text{Rank}| \geq 100$.

Our contributions are empirical and methodological, not algorithmic:

- Benchmark temporal comparability** (Claim 1): 31% of MMLU items are functionally unstable across model generations under ETS C classification; replication across all six METABENCH benchmarks yields C% = 17.9–31.3% (45–174 $\times$ above random baselines), with knowledge/reasoning benchmarks showing higher instability than procedural ones (Sections 4.2 and 4.7).
- Ground truth meta-critique** (Claim 2): Web-overlap contamination labels (Li et al., 2024b) do not provide appropriate ground truth for item-level differential detectors. Direct empirical comparison on 9,229 items shows near-independence (enrichment = 0.964, Jaccard = 0.206, $\phi = 0.012$), exposing a validation methodology gap in the contamination detection literature (Section 4.3).
- Semi-synthetic validation framework** (Claim 3): Controlled injection with cross-subject matching achieves

$\Delta\text{FPR} = 0.000$ while preserving detection power ($\Delta\text{TPR} = +0.508$ at $p = 0.5$); cross-benchmark replication on GSM8K confirms generality (Sections 4.5 and 4.7).

4. **DIF as diagnostic lens** (Claim 4): DIF-flagged items concentrate discriminative information ($z = -8\sigma$ to -49σ vs. random removal, Jaccard overlap with high-discrimination items = 0.12) and exhibit a structured difficulty-direction interaction ($\rho = -0.597$): capability gains concentrate on hard items while easy items erode (Section 4.6).

2 Related Work

Contamination Detection. A growing family of methods detects benchmark contamination through model behavior or training data analysis. Membership inference approaches estimate whether a model has seen specific items during training: Min-K% (Shi et al., 2024) and Min-K%++ (Zhang et al., 2024) use token-level log-likelihood statistics, while Time Travel (Golchin and Surdeanu, 2024) probes models with temporal cues. Performance-based detectors identify contamination through statistical anomalies: ConStat (Dekoning et al., 2024) tests performance gaps between original and perturbed items, DVD (Liang, 2026) uses distributional verification, and Self-Critique (Tao, 2026) employs model self-evaluation. Balloccu et al. (2024) provide a broader taxonomy of leakage detection strategies. These methods share a common validation practice: they verify detection accuracy against web-overlap or n-gram labels (Li et al., 2024b) that classify items based on verbatim matches in publicly accessible corpora. Such labels measure *global exposure* (whether an item exists in training data) rather than *differential item functioning* (whether an item behaves differently across model cohorts). This global-vs-differential distinction motivates our ground truth analysis (Claim 2, Section 4.3). Work on LLM memorization (Carlini et al., 2023; Tirumala et al., 2022) establishes that memorization depends on data frequency and model scale, reinforcing the distinction between global exposure and differential behavior. Wang et al. (2026) show that existing contamination detectors are fragile under reinforcement learning, further motivating behavioral approaches grounded in psychometric theory.

IRT in LLM Evaluation. IRT adoption in LLM evaluation has accelerated: Lalor et al. (2019) introduced IRT to NLP, Vania et al. (2021) assessed test set discriminability, and Rodriguez et al. (2021) demonstrated that not all evaluation examples are equally informative. Recent extensions include PSN-IRT (Zhou et al., 2026) for benchmark quality at scale, TinyBenchmarks (Maia Polo et al., 2024) for IRT-based item selection, and scalability coefficients for detecting bad benchmark items (Hardy et al., 2026). The closest concurrent work is Growing Pains (Habba et al., 2026), which addresses score comparability through fixed-parameter calibration (FPC; Kim and Kolen, 2019). Our work is complementary: Growing Pains assumes anchor item stability, while DIF analysis diagnoses which items violate this assumption.

DIF Methodology and Measurement Invariance. The Mantel-Haenszel procedure for DIF detection was introduced by Holland and Thayer (1988) and remains the most widely used method in educational testing due to its simplicity and well-characterized statistical properties (Clauser and Mazor, 1998). Alternative approaches include logistic regression DIF (Swaminathan and Rogers, 1990), SIBTEST (Shealy and Stout, 1993), Lord’s χ^2 test (Lord, 1980), and the Raju area method (Raju, 1988); Zumbo (1999) provides a comprehensive comparison. DIF analysis is a specific instance of measurement invariance testing (Meredith, 1993; Vandenberg and Lance, 2000), which examines whether a measurement instrument functions equivalently across populations. MIMIC models offer a latent-variable approach to the same problem (Muthén, 1985; Woods, 2009), and Teresi and Fleishman (2007) reviews DIF methods across applied domains. Cross-subject matching—computing the stratification variable from domains other than the one being tested—has psychometric precedent in the DIF literature (Nandakumar, 1993; Donoghue and Allen, 1993); our adaptation addresses LLM-specific challenges of multi-domain local dependence and simultaneous contamination control at scale. We do not modify the MH procedure; our contribution is the application context and the empirical findings it reveals. The scale of this analysis (5,227 examinees across a 57-subject multidimensional ability space) exceeds typical educational testing applications, where Belzak (2020) note that DIF methods can behave differently at extreme sample sizes. The

primary methodological challenge is the impact-versus-DIF confound: genuine ability differences between temporal cohorts can inflate DIF estimates. We address this through matched-ability quintile analysis, IRT θ -conditioning, and a random-split control (Section 4.2).

Benchmark Quality and Design. The Benchmark Health Index (Liu et al., 2026) assesses static benchmark quality; our temporal DIF analysis is complementary, diagnosing *when* measurement properties shift rather than evaluating them at a single snapshot. Maeda (2025) predict which item features associate with DIF in educational settings; we instead detect DIF empirically across LLM cohorts at scale. Dynamic benchmarks (Kielbaso et al., 2021; Li et al., 2024a; White, 2025) mitigate contamination by construction, yet none provides psychometric equating across versions. Chatbot Arena (Chiang et al., 2024) sidesteps static benchmarks through pairwise preference. Broader surveys (Chang et al., 2024; Burnell et al., 2023) identify benchmark saturation and lack of item-level transparency as systemic challenges that our DIF analysis directly addresses.

3 Method

We adopt Differential Item Functioning (DIF) analysis from educational measurement to assess whether individual benchmark items behave consistently across groups of LLMs. The procedure requires only a binary response matrix and group labels, with no access to model internals or training data. Below we define the data, the statistical test, the cohort designs, and a semi-synthetic validation framework.

3.1 Data

The primary dataset is the METABENCH response matrix (Kipnis et al., 2024), which records binary outcomes (1 = correct, 0 = incorrect) for 5,227 models evaluated on 12,508 MMLU items (Hendrycks et al., 2021). Models span release dates from 2023 to 2024, drawn from the Open LLM Leaderboard. MMLU covers 57 subjects grouped into five broad domains (STEM, Humanities, Social Sciences, Other, and a mixed category). We supplement the response matrix with the web-overlap contamination labels of Li et al. (2024b), which classify 9,229 of 12,508 items (73.8% coverage) as “contaminated” or “clean” based on verbatim matches in publicly accessible web corpora. These

labels serve as an external reference for evaluating the relationship between DIF flags and existing contamination indicators.

3.2 Mantel-Haenszel DIF and ETS Classification

In educational testing, Differential Item Functioning (DIF) occurs when an item’s statistical relationship to the latent trait θ differs between two groups after conditioning on ability level. An item with DIF is not merely harder for one group; it functions differently relative to what the group’s overall ability would predict. The standard terminology refers to test-takers as “examinees” and questions as “items.” In our setting, examinees are LLMs and items are benchmark questions.

The Mantel-Haenszel (MH) procedure (Holland and Thayer, 1988) detects DIF by stratifying examinees into K score bins based on total score (a proxy for θ) and computing a common odds ratio across strata. We use $K = 5$ equiprobable strata (quintile-based binning) following ETS recommended practice for large-scale assessments (Donoghue and Allen, 1993; Clauser and Mazor, 1998). Within each stratum k , the responses of the reference group and the focal group form a 2×2 contingency table:

$$\alpha_{\text{MH}} = \frac{\sum_{k=1}^K A_k D_k / T_k}{\sum_{k=1}^K B_k C_k / T_k}, \quad (1)$$

where A_k and B_k are the number of correct and incorrect responses in the reference group for stratum k , C_k and D_k are the corresponding counts for the focal group, and T_k is the total number of examinees in stratum k . Under the null hypothesis of no DIF, $\alpha_{\text{MH}} = 1$. The log odds ratio is converted to the ETS delta scale:

$$\Delta_{\text{MH}} = -2.35 \ln(\alpha_{\text{MH}}). \quad (2)$$

The Educational Testing Service (ETS) classifies DIF severity into three categories based on $|\Delta_{\text{MH}}|$. Category A (negligible) requires $|\Delta_{\text{MH}}| < 1.0$. Category C (large) requires both $|\Delta_{\text{MH}}| \geq 1.5$ and statistical significance at $p < 0.05$ from the MH chi-squared test. Category B (moderate) includes all remaining items: those with $1.0 \leq |\Delta_{\text{MH}}| < 1.5$, or $|\Delta_{\text{MH}}| \geq 1.5$ without statistical significance. The dual threshold in ETS C (effect size

and significance) guards against flagging items that show large but unreliable effect sizes. Throughout this paper, we report the percentage of items classified as ETS C, denoted C%.

The choice of matching variable (the total score used for stratification) affects both validity and interpretation. We distinguish three matching strategies: (1) *standard matching* uses the within-benchmark total score on all items of the same benchmark; (2) *cross-subject matching* uses the total score on all subjects *other than* the one containing the item under test, preventing the matching variable from absorbing injected contamination signals (Section 3.4); and (3) *external matching* uses the total score on a different benchmark entirely (e.g., MMLU total score as the matching variable when testing DIF on GSM8K items), providing an independent ability proxy uncontaminated by the target benchmark. Cross-subject and external matching both address matching variable contamination but at different granularities: cross-subject operates within a multi-domain benchmark, while external operates across benchmarks.

3.3 Cohort Designs

We construct five cohort comparisons: (1) *Temporal*: 2023 ($N = 1,080$) vs. 2024 ($N = 807$) models, the primary comparison; (2) *Ability-quintile*: Q1–Q2 vs. Q4–Q5 within the same temporal window, testing whether ability differences alone produce DIF; (3) *Within-family*: Llama-2 ($N = 161$) vs. Llama-3 ($N = 308$), isolating generational changes within a single family; (4) *Within-subject*: per-subject DIF to test domain concentration; and (5) *Random split*: two random halves of the 2023 cohort ($N = 540$ each) as a sanity check.

3.4 Semi-Synthetic Injection Framework

To evaluate whether MH-DIF can detect differential contamination when it is present, we construct a semi-synthetic framework with controlled ground truth.

Procedure. From items classified as ETS A in the uninjected data (negligible DIF), we select 20% uniformly at random as the “contaminated” set. For each contaminated item, we flip incorrect responses to correct in the focal group at exploitation rate $p \in \{0.0, 0.3, 0.5, 0.7, 1.0\}$. We then run MH-DIF on the modified response matrix and measure detection performance. We report $\Delta\text{TPR} = \text{TPR}(\text{injected}) - \text{TPR}(\text{baseline})$ and

$\Delta\text{FPR} = \text{FPR}(\text{injected}) - \text{FPR}(\text{baseline})$, where TPR is the true positive rate on injected items and FPR is the false positive rate on uninjected items. Each injection level is repeated across 5 random seeds for uncertainty estimation.

Cross-subject matching. The choice of matching variable is critical for valid semi-synthetic evaluation. When contamination is injected into items within subject X , the total score on subject X absorbs part of the injection signal. Using this contaminated total score as the MH matching variable violates the conditional independence assumption and inflates FPR. Cross-subject matching resolves this by computing the matching variable from all subjects *other than* the one being tested.

Proposition 1 (Zero FPR under cross-subject matching). *Let $M_i^{(-s)} = \sum_{j \neq s} Y_{ij}$ be the matching variable for examinee i on focal subject s . Since the tested item belongs to s , it does not contribute to $M_i^{(-s)}$; injecting contamination into s leaves $M_i^{(-s)}$ unchanged. Therefore $\Delta\text{FPR} = 0$ by construction.*

Empirically, $\Delta\text{FPR} = 0.000$ across all five MMLU domains (bootstrap 95% CI = $[0.000, 0.000]$, 5,000 resamples), while detection power is preserved ($\Delta\text{TPR} > 0.3$ at $p = 0.5$ for four of five subjects). We adopt cross-subject matching as the standard protocol for all semi-synthetic analyses.

Diagnostic procedures (Yen’s Q3 local independence, domain-specificity analysis, instability decomposition) and statistical details (multiple testing correction, threshold sensitivity, architecture heterogeneity checks) appear in Section A.

4 Experiments

We apply MH-DIF to the METABENCH response matrix (Kipnis et al., 2024) (5,227 models $\times$ 12,508 MMLU items (Hendrycks et al., 2021)), with temporal cohorts defined by release date (2023 vs. 2024). Cross-benchmark validation across all six METABENCH benchmarks appears in Section 4.7.

4.1 Validation: DIF Detection Power

A power analysis using empirical MMLU IRT parameters confirms that at $N \geq 80$ per cohort, ETS C achieves TPR of 0.68–0.80, FPR of 0.036–0.042, and AUC of 0.93–0.94 for items with

$|\Delta_{\text{MH}}| \geq 1.4$. Our temporal cohorts ($N_{\text{ref}} = 1,080$, $N_{\text{focal}} = 807$) far exceed this threshold.

4.2 Temporal Comparability: 31% Item Instability

We compare 2023 ($N = 1,080$) against 2024 ($N = 807$) models; 31.3% of items receive ETS C classification ($|\Delta_{\text{MH}}| \geq 1.5$). Benjamini-Hochberg FDR correction at $q = 0.05$ removes only 3 items (31.32% $\rightarrow$ 31.30%), because the dual ETS threshold on effect size and significance already provides implicit multiple-testing protection.

Three controls confirm this reflects genuine temporal change. A random split of the 2023 cohort yields only 0.18% ETS C items (sampling noise), and an ability-quintile comparison within the same temporal cohort yields 2.9% (ability differences alone). A within-family comparison (Llama-2 vs. Llama-3) produces 61.3% ETS C items, elevated by large ability gaps that confound the DIF signal (Holland and Thayer, 1988). The contrast between 2.9% (ability-controlled) and 61.3% (ability-confounded) brackets the temporal rate of 31.3%. Crucially, the temporal cohort ability gap is negligible: Cohen’s $d = -0.17$ (below the $|d| = 0.2$ small-effect threshold) with 76.4% distributional overlap. Under strict 1:1 nearest-neighbor matching ($d \approx -0.010$, $N = 638$ per group, 5 seeds), $C\% = 28.9\% \pm 0.1\%$ —a 7.7% relative reduction from 31.3%, confirming that at most ~ 2.4 pp of observed DIF is attributable to ability mismatch.

Across all 57 MMLU subjects, $C\%$ ranges from 20.7% to 48.4% (mean $\approx 30\%$); within-subject matching on 5 subjects yields 38.1% as a robustness check (Table 1). Item-level logistic regression shows domain accuracy improvement explains only 2.4 percentage points of 31.3% $C\%$ (pseudo $R^2 = 0.0007$); 92.4% of instability is item-specific. Odds ratio regression reveals a Simpson’s paradox: domain accuracy improvement positively predicts DIF at the aggregate level ($\text{OR} = 1.55$ per 10 pp, $p = 0.001$) but reverses after controlling for item difficulty and discrimination ($\text{OR} = 0.73$, $p = 0.030$; $\text{LR } \chi^2 = 647$), confirming that item properties—not accuracy gains—drive DIF classification. The conclusion is robust across thresholds: $C\% = 48.9\%$ at $|\Delta_{\text{MH}}| \geq 1.0$, 18.3% at ≥ 2.0 , 10.2% at ≥ 2.5 .

4.3 Ground Truth Mismatch

Direct comparison of DIF flags against the web-overlap labels of Li et al. (2024b) on 9,229 an-

Table 1: DIF landscape across cohort definitions. ETS C denotes the percentage of items with $|\Delta_{\text{MH}}| \geq 1.5$. FPR is measured against Li et al. web-overlap labels on the “clean” (non-overlapping) subset. Enrichment is the ratio of observed to expected overlap between DIF flags and web-overlap labels.

Cohort Definition	$N_{\text{ref}} / N_{\text{focal}}$	$C\%$	FPR (clean)	Enrich.
Temporal (2023 vs. 2024)	1,080 / 807	31.3	0.318	0.964
Ability quintile (Q1–2 vs. Q4–5)	$\sim 2,600 / \sim 2,600$	2.9	0.027	1.19
Within-family (Llama-2 vs. 3)	161 / 308	61.3	–	–
Random split (sanity)	540 / 540	0.18	–	–
Within-subject (avg. 5 subj.)	varies	38.1	–	–

notated items confirms that the two methods capture orthogonal signals. The enrichment ratio is 0.964 (Table 1): DIF-C rates are 30.7% among web-contaminated items and 31.8% among clean items. Association tests yield $\phi = 0.012$, $\chi^2 = 1.28$ ($p = 0.258$), and $\text{OR} = 1.05$ [0.96, 1.15]; the Jaccard index between flagged sets is 0.206. This near-independence holds across contamination subtypes (input-only enrichment = 0.986, input-and-label = 0.960). The null result does not indicate detection failure: semi-synthetic injection produces a clear dose-response ($\Delta \text{TPR} = +0.508$ at $p = 0.5$; Figure 2). The disconnect arises because web-overlap labels measure *global exposure* (whether an item exists in training corpora), while DIF measures *differential functioning* (whether an item’s relationship to ability changes across cohorts). The Li et al. labels are the wrong ground truth for a differential method. This near-independence extends to behavioral contamination detectors: the enrichment ratio of 0.964 and Jaccard overlap of 0.206 between DIF flags and web-overlap labels imply that any detector validated against these labels—including ConStat (Dekoninck et al., 2024)—is evaluated on a ground truth orthogonal to differential functioning.

4.4 Structural Analysis

Three structural controls fail to reduce temporal $C\%$ below 31%: matched-ability quintiles, IRT θ -conditioning ($r(\theta, \text{total score}) = 0.9986$, $\text{FPR} = 0.312$), and within-subject DIF ($C\% = 38.1\%$, exceeding the 25% bifactor viability threshold). Logistic regression DIF confirms 92.1% concordance with MH and reveals additional non-uniform DIF (24.8% at $|\beta_{\text{interaction}}| \geq 0.5$), making the 31% estimate conservative. Graduated de-duplication ($K=10$: 22.7% vs. random 26.8%; $K=20$: 29.1% vs. 30.9%) confirms family structure does not inflate $C\%$. Ability-matched within-family analysis reduces Llama-2 vs. Llama-3 $C\%$ from 61.3%

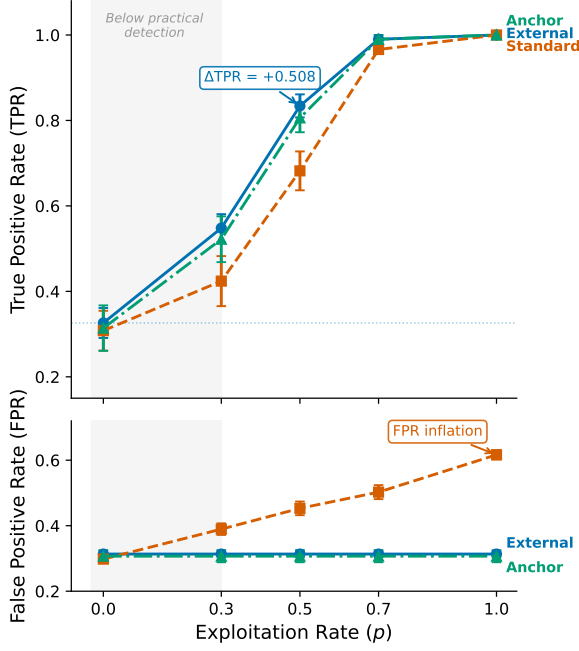


Figure 2: Semi-synthetic dose-response for DIF detection on MMLU. ΔTPR increases monotonically with exploitation rate p , confirming that MH-DIF is sensitive to differential item behavior when present. Baseline (no injection) produces $\Delta\text{TPR} \approx 0$.

to $28.3\% \pm 1.6\%$ (Cohen’s $d = -0.99$, overlap = 0.18), while temporal matching reduces C% from 31.3% to $28.9\% \pm 0.1\%$ ($d = -0.17$, overlap = 0.76). The matched C% values ($\sim 28\text{--}29\%$) are consistent with each other despite vastly different unmatched rates (61.3% vs. 31.3%), suggesting that genuine item-level DIF accounts for $\sim 28\text{--}29\%$ of items, with the Llama comparison carrying 33 pp of additional ability confound (54% reduction) versus only 2.4 pp for temporal cohorts (7.7% reduction). In total, six alternative explanations were tested and ruled out: ability confounding, model family inflation, IRT θ -conditioning, within-subject effects, aggregate ranking impact, and local item dependence—none reduces C% below $\sim 28\%$, confirming item-level differential functioning. Full details in Section B.

4.5 Semi-Synthetic Framework Validation

The critical methodological finding is that the choice of matching strategy determines validity. Cross-subject matching computes the conditioning variable from subjects *other than* the one being tested, achieving $\Delta\text{FPR} = 0.000$ across all five MMLU subjects while four of five produce $\Delta\text{TPR} > 0.3$ at $p = 0.5$. Within-subject matching inflates FPR by +0.186 on average because

Table 2: Temporal DIF across six METABENCH benchmarks. C% = ETS C items ($|\Delta_{\text{MH}}| \geq 1.5$) between 2023 and 2024 cohorts. All six show substantial instability (45–174 $\times$ above random baseline), with knowledge/reasoning benchmarks exhibiting higher C% than procedural ones.

Benchmark	Items	C%	Rand. C%	Ratio
MMLU	12,508	31.3	0.18	174 $\times$
WinoGrande	1,267	30.3	0.32	95 $\times$
TruthfulQA	817	29.7	0.37	80 $\times$
ARC	1,172	26.9	0.60	45 $\times$
GSM8K	1,319	18.9	0.30	63 $\times$
HellaSwag	10,042	17.9	0.28	64 $\times$

the matching variable absorbs part of the injection signal. We adopt cross-subject matching as the standard protocol (Figure 3).

4.6 Downstream Impact

Spearman correlation between full and stable-item rankings is $\rho \approx 0.997$: aggregate model ordering is preserved despite 31% item instability. DIF-flagged items nonetheless carry more discriminative signal than average ($z = -8\sigma$ to -49σ vs. random removal across 21 conditions), though a circularity ablation shows DIF-based removal is the *least* disruptive among non-random strategies (Jacard overlap with high-discrimination items is only 0.12). Individual model families show distinctive DIF profiles: Llama-3 derivatives gain a median of +53 rank positions (mean +121), while Mistral-based models lose a median of 35 (mean -54); individual extremes reach +793 and -542 (Figure 4). Overall, 25% of models shift by $|\Delta\text{Rank}| \geq 100$. Section 4.7 demonstrates that this instability pattern extends across all six METABENCH benchmarks.

4.7 Cross-Benchmark Validation

Temporal DIF extends across all six METABENCH benchmarks (Table 2). C% ranges from 17.9% (HellaSwag) to 31.3% (MMLU), each 45–174 $\times$ above its random-split baseline—none attributable to sampling noise. A task-type dichotomy emerges: knowledge and reasoning benchmarks (MMLU, WinoGrande (Sakaguchi et al., 2020), TruthfulQA (Lin et al., 2022), ARC (Clark et al., 2018)) show C% = 26.9–31.3%, while procedural benchmarks (GSM8K, HellaSwag (Zellers et al., 2019)) show C% = 17.9–18.9%, consistent with knowledge-intensive items being more sensitive to shifts in training data composition across model generations.

On GSM8K specifically, semi-synthetic injection with external matching confirms detection power ($\Delta\text{TPR} = +0.514$ at $p = 0.5$; Section D). An exploratory GSM1K analysis ($N = 33$) shows a negative correlation between contamination gap and DIF ranking advantage ($r = -0.478$, $p = 0.005$; partial $r = -0.385$, $p = 0.027$), suggesting DIF captures capability change distinct from memorization (Figure 5).

Even within a 6-month window (2023-H2 vs. 2024-H1), DIF remains substantial on MMLU ($C\% = 34.35\%$, $181\times$ above random baseline) and TruthfulQA ($C\% = 31.33\%$, $51\times$), indicating that the signal is not an artifact of the coarse annual cohort split.

5 Discussion

5.1 Implications for Benchmark Temporal Comparability

The 31% ETS C instability on MMLU is robust across thresholds and structural controls (Section 4.4), and extends across all six METABENCH benchmarks ($C\% = 17.9\text{--}31.3\%$, $45\text{--}174\times$ above random baselines; Table 2). Knowledge/reasoning benchmarks show higher instability ($C\% \geq 26.9\%$) than procedural ones ($C\% \leq 18.9\%$), and the Simpson’s paradox in odds ratio regression (Section 4.2) confirms item properties—not accuracy gains—drive DIF. This does not invalidate these benchmarks as ranking instruments ($\rho \approx 0.997$) but signals measurement drift across model generations.

5.2 Ground Truth Meta-Critique

The near-independence between DIF flags and web-overlap labels (enrichment = 0.964, Jaccard = 0.206, $\phi = 0.012$; consistent across contamination subtypes) exposes a category error: web-overlap labels identify a condition shared by nearly all MMLU items (global exposure), so evaluating a differential method against them conflates two phenomena. Item-level differential detectors require item-level differential ground truth.

5.3 DIF as Diagnostic Lens

The GSM1K correlation ($r = -0.478$, $p = 0.005$; partial $r = -0.385$ after controlling for accuracy; Section 4.7) provides exploratory evidence that DIF-flagged items capture behavioral change distinct from memorization. DIF-C items are harder ($d = -0.247$) and more discriminating

($d = 0.230$), with a difficulty $\times$ direction interaction ($\rho = -0.597$): capability gains concentrate on hard items (88.7% focal-favoring) while easy items erode (96.2% reference-favoring). Yen’s Q3 confirms local dependence does not drive DIF ($r = 0.09$, $p = 0.50$).

5.4 From Demographic Fairness to Temporal Measurement Invariance

In educational testing, DIF compares demographic groups to detect biased items—a fairness diagnostic (Holland and Thayer, 1988; Clauser and Mazor, 1998). Transplanting this to LLM evaluation redefines the grouping variable from demographic to temporal: a flagged item signals that its relationship to overall ability has shifted across model generations, not demographic bias. The statistical machinery transfers unchanged, requiring only a binary response matrix and cohort labels.

5.5 Recommended DIF Audit Protocol

These findings motivate a benchmark maintenance protocol: (1) MH-DIF audits whenever ≥ 500 new models accumulate (or quarterly), using cross-subject matching (Section 4.5); (2) $C\% > 20\%$ triggers item review—consecutively flagged items are labeled “unstable,” while items that flip between flagged and unflagged across audits are tagged “volatile” (stochastic sensitivity, not systematic drift); (3) graduated responses: flag-and-annotate, item rotation, or weighted scoring. MMLU’s $C\% = 31.3\%$ already exceeds this threshold, with flagged items distributed uniformly across subjects ($\chi^2 p = 0.32$).

6 Conclusion

MH-DIF analysis of six METABENCH benchmarks (27,125 items, 5,227 models) reveals 17.9–31.3% temporal item instability (ETS C); a Simpson’s paradox confirms item properties, not accuracy gains, drive DIF. Web-overlap labels are near-independent of DIF flags (enrichment ≈ 0.96); our semi-synthetic framework validates detection power ($\Delta\text{FPR} = 0.000$). DIF-flagged items concentrate discriminative information ($z = -8\sigma$ to -49σ) with a difficulty–direction interaction ($\rho = -0.597$): gains on hard items, erosion on easy ones. LLM benchmarks need psychometric monitoring alongside score reporting.

Limitations

Methodological scope of MH-DIF. The Mantel-Haenszel procedure detects only *uniform* DIF, where the odds ratio between cohorts is constant across ability strata. Logistic regression DIF analysis reveals an additional 24.8% of items exhibiting non-uniform DIF ($|\beta_{\text{interaction}}| \geq 0.5$), making the 31% ETS C estimate conservative. Future work should apply non-uniform DIF methods (e.g., logistic regression or IRT-based approaches) as the primary analysis to capture the full spectrum of item instability. Critically, MH-DIF is nonparametric and conditions on observed total score, not latent θ —its validity does not depend on IRT model fit (Holland and Thayer, 1988). Our Yen’s Q3 analysis confirms that local dependence domains do not correlate with DIF domains ($r = 0.09$, $p = 0.50$), further supporting the robustness of the MH procedure in this setting.

Ability confounding. Although the temporal cohort ability gap is negligible (Cohen’s $d = -0.17$, overlap = 76.4%) and nearest-neighbor matching confirms that at most 2.4 percentage points of C% are attributable to ability mismatch, within-family comparisons with large ability gaps (e.g., Llama-2 vs. Llama-3, $d = -0.99$) produce substantially inflated C% (61.3% unmatched vs. 28.3% matched). Any application of MH-DIF to cohorts with larger ability differences must incorporate ability matching or stratification beyond the standard 5-strata procedure.

Sample size requirements. Our power analysis indicates reliable ETS C detection requires $N \geq 80$ per cohort. The temporal cohorts (1,080 and 807 models) far exceed this threshold, but the GSM1K correlation analysis ($N = 33$) has limited statistical power (95% CI = $[-0.71, -0.16]$). The negative correlation between contamination gap and DIF ranking advantage ($r = -0.478$) is exploratory and warrants replication with larger model samples.

Contamination vs. capability change. DIF analysis detects *that* items function differently across cohorts but cannot determine *why*. The differential signal may reflect contamination, capability change, training methodology shifts, or interactions among these factors. We present evidence that DIF captures something distinct from memorization (negative GSM1K correlation, semi-synthetic

dose-response), but a definitive causal decomposition remains out of reach without access to model training data.

Benchmark scope. We analyze six METABENCH benchmarks (MMLU, WinoGrande, TruthfulQA, ARC, GSM8K, HellaSwag; 27,125 total items), all multiple-choice or short-answer benchmarks scored as binary correct/incorrect. The generalizability to open-ended generation benchmarks (e.g., AlpacaEval, MT-Bench), coding benchmarks (e.g., HumanEval), or benchmarks with non-binary scoring remains untested. The binary response format is a prerequisite for MH-DIF; extending to continuous or partial-credit scoring would require polytomous DIF methods.

Temporal cohort definition. We define cohorts by calendar year of model release (2023 vs. 2024), a coarse grouping that aggregates models with diverse training pipelines, data mixtures, and post-training procedures. Finer-grained cohort definitions (e.g., by training data cutoff, model family, or alignment method) might reveal more targeted patterns of item instability but would reduce per-cohort sample sizes and statistical power.

References

- Simone Balloccu, Patrícia Schmidtova, Mateusz Lango, and Ondrej Dusek. 2024. [Leak, cheat, repeat: Data contamination and evaluation malpractices in closed-source LLMs](#). In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (EACL)*.
- William Belzak. 2020. [Testing differential item functioning in small samples](#). *Multivariate Behavioral Research*.
- Ryan Burnell, Wout Schellaert, John Burden, Tomer D. Ullman, Fernando Martinez-Plumed, Joshua B. Tenenbaum, Danaja Rutar, Lucy G. Cheke, Jascha Sohl-Dickstein, Melanie Mitchell, Douwe Kiela, Murray Shanahan, Ellen M. Voorhees, Anthony G. Cohn, Joel Z. Leibo, and Jose Hernandez-Orallo. 2023. [Rethink reporting of evaluation results in AI Science](#).
- Nicholas Carlini, Daphne Ippolito, Matthew Jagielski, Katherine Lee, Florian Tramèr, and Chiuyan Zhang. 2023. [Quantifying memorization across neural language models](#). In *International Conference on Learning Representations (ICLR)*.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Kaijie Zhu, Hao Chen, Linyi Yang, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, Wei Ye, Yue Zhang,

799	Yi Chang, Philip S. Yu, Qiang Yang, and Xing Xie.	Zeeraq Talat, Pontus Stenetorp, and Robin Jia. 2021.	855
800	2024. A survey on evaluation of large language mod-	Dynabench: Rethinking benchmarking in NLP . In	856
801	els . <i>ACM Transactions on Intelligent Systems and</i>	<i>Proceedings of the 2021 Conference of the North</i>	857
802	<i>Technology</i> .	<i>American Chapter of the Association for Computa-</i>	858
		<i>tional Linguistics (NAACL)</i> .	859
803	Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anasta-	Seonghoon Kim and Michael Kolen. 2019. Application	860
804	sios N. Angelopoulos, Tianle Li, Dacheng Li, Hao	of IRT fixed parameter calibration to multiple-group	861
805	Zhang, Banghua Zhu, Michael I. Jordan, Joseph E.	test data . <i>Applied Measurement in Education</i> .	862
806	Gonzalez, and Ion Stoica. 2024. Chatbot arena: An		
807	open platform for evaluating LLMs by human prefer-	Alon Kipnis, Konstantinos Voudouris, Luca Maria	863
808	ence . In <i>Proceedings of the International Conference</i>	Schulze Buschoff, and Eric Schulz. 2024. metabench	864
809	<i>on Machine Learning (ICML)</i> .	– a sparse benchmark of reasoning and knowledge in	865
		large language models . <i>Preprint</i> , arXiv:2407.12844.	866
810	Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot,	John Lalor, Hao Wu, and Hong Yu. 2019. Learning	867
811	Ashish Sabharwal, Carissa Schoenick, and Oyvind	latent parameters without human response patterns:	868
812	Tafjord. 2018. Think you have solved question an-	Item response theory with artificial crowds . In <i>Pro-</i>	869
813	swering? try ARC, the AI2 reasoning challenge.	<i>ceedings of the 2019 Conference on Empirical Meth-</i>	870
814	<i>arXiv preprint arXiv:1803.05457</i> .	<i>ods in Natural Language Processing and the 9th In-</i>	871
815	Brian E. Clauser and Kathleen M. Mazor. 1998. Using	<i>ternational Joint Conference on Natural Language</i>	872
816	statistical procedures to identify differentially func-	<i>Processing (EMNLP-IJCNLP)</i> .	873
817	tioning test items . <i>Educational Measurement: Issues</i>		
818	<i>and Practice</i> .	Yucheng Li, Frank Guerin, and Chenghua Lin. 2024a.	874
819	Jasper Dekoninck, Mark Niklas Mueller, and Martin	LatestEval: Addressing data contamination in lan-	875
820	Vechev. 2024. ConStat: Performance-based contam-	guage model evaluation through dynamic and time-	876
821	ination detection in large language models . In <i>Ad-</i>	sensitive test construction . In <i>Proceedings of the</i>	877
822	<i>advances in Neural Information Processing Systems</i>	<i>AAAI Conference on Artificial Intelligence (AAAI)</i> .	878
823	<i>(NeurIPS)</i> .		
824	John R. Donoghue and Nancy L. Allen. 1993. An em-	Yucheng Li, Yunhao Guo, Frank Guerin, and Chenghua	879
825	pirical examination of the Mantel-Haenszel statistic	Lin. 2024b. An open-source data contamination re-	880
826	for the study of differential item functioning. <i>Applied</i>	port for large language models . In <i>Findings of the</i>	881
827	<i>Measurement in Education</i> , 6(2):163–179.	<i>Association for Computational Linguistics: EMNLP</i>	882
		<i>2024</i> .	883
828	Shahriar Golchin and Mihai Surdeanu. 2024. Time	Rongzhen Liang. 2026. DVD: Detection via variance	884
829	travel in LLMs: Tracing data contamination in large	of generation distribution for variant contamination .	885
830	language models . In <i>Proceedings of the International</i>	<i>Preprint</i> , arXiv:2601.04895.	886
831	<i>Conference on Learning Representations (ICLR)</i> .		
832	Eitam Habba, Ido Itzhak, Asaf Yehudai, Yotam Per-	Stephanie Lin, Jacob Hilton, and Owain Evans. 2022.	887
833	litiz, Elron Bandel, Michal Shmueli-Scheuer, Leshem	TruthfulQA: Measuring how models mimic human	888
834	Choshen, and Gabriel Stanovsky. 2026. Grow-	falsehoods . In <i>Proceedings of the 60th Annual Meet-</i>	889
835	ing pains: Extensible and efficient LLM bench-	<i>ing of the Association for Computational Linguistics</i>	890
836	marking via fixed parameter calibration . <i>Preprint</i> ,	<i>(ACL)</i> , pages 3214–3252.	891
837	arXiv:2604.12843.		
838	Matthew Hardy, Juan Gilbert, and Benjamin Domingue.	Yifan Liu and 1 others. 2026. Benchmark health index:	892
839	2026. Efficient detection of bad benchmark	A systematic framework for benchmarking the bench-	893
840	items with novel scalability coefficients . <i>Preprint</i> ,	marks of LLMs . <i>arXiv preprint arXiv:2602.11674</i> .	894
841	arXiv:2603.24999.		
842	Dan Hendrycks, Collin Burns, Steven Basart, Andy	Frederic M. Lord. 1980. <i>Applications of Item Response</i>	895
843	Zou, Mantas Mazeika, Dawn Song, and Jacob Stein-	<i>Theory to Practical Testing Problems</i> . Lawrence	896
844	hardt. 2021. Measuring massive multitask language	Erlbaum Associates, Hillsdale, NJ.	897
845	understanding . In <i>Proceedings of the International</i>		
846	<i>Conference on Learning Representations (ICLR)</i> .	Hotaka Maeda. 2025. Finding words associated with	898
847	Paul W. Holland and Dorothy T. Thayer. 1988. Dif-	DIF: Predicting DIF using LLMs and explainable AI .	899
848	ferential item functioning and the Mantel-Haenszel	<i>arXiv preprint arXiv:2502.07017</i> .	900
849	procedure . In Howard Wainer and Henry I. Braun,		
850	editors, <i>Test Validity</i> . Lawrence Erlbaum Associates.	Felipe Maia Polo, Lucas Weber, Leshem Choshen,	901
851	Douwe Kiela, Max Bartolo, Yixin Nie, Divyansh	Yuekai Sun, Gongjun Xu, and Mikhail Yurochkin.	902
852	Kaushik, Atticus Geiger, Zhengxuan Wu, Bertie Vid-	2024. tinyBenchmarks: evaluating LLMs with fewer	903
853	gen, Grusha Prasad, Amanpreet Singh, Pratik Ring-	examples . In <i>Proceedings of the International Con-</i>	904
854	shia, Zhiyi Ma, Tristan Thrush, Sebastian Riedel,	<i>ference on Machine Learning (ICML)</i> .	905
		William Meredith. 1993. Measurement invariance, fac-	906
		tor analysis and factorial invariance . <i>Psychometrika</i> .	907

908	Bengt Muthén. 1985. A method for studying the homogeneity of test items with respect to other relevant variables . <i>Journal of Educational Statistics</i> .	961
909		962
910		963
911	Ratna Nandakumar. 1993. Simultaneous DIF amplification and cancellation: Shealy-Stout’s test for DIF.	964
912	<i>Journal of Educational Measurement</i> , 30(4):293–	965
913	311.	966
914		
915	Nambury S. Raju. 1988. The area between two item characteristic curves . <i>Psychometrika</i> .	967
916		968
917	Pedro Rodriguez, Joe Barrow, Alexander Miserlis	969
918	Hoyle, John P. Lalor, Robin Jia, and Jordan Boyd-	970
919	Graber. 2021. Evaluation examples are not equally	971
920	informative: How should that change NLP leader-	
921	boards? In <i>Proceedings of the 59th Annual Meet-</i>	
922	<i>ing of the Association for Computational Linguistics</i>	
923	(ACL), pages 4486–4503.	
924		
925	Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhaga-	
926	vatula, and Yejin Choi. 2020. WinoGrande: An ad-	
927	versarial Winograd schema challenge at scale. In	
928	<i>Proceedings of the AAAI Conference on Artificial</i>	
929	<i>Intelligence</i> , volume 34, pages 8732–8740.	
930		
931	Robin Shealy and William Stout. 1993. A model-	
932	based standardization approach that separates true	
933	bias/DIF from group ability differences and detects	
934	test bias/DTF as well as item bias/DIF . <i>Psychome-</i>	
935	<i>trika</i> .	
936		
937	Weijia Shi, Anirudh Ajith, Mengzhou Xia, Yangsibo	
938	Huang, Daogao Liu, Terra Blevins, Danqi Chen, and	
939	Luke Zettlemoyer. 2024. Detecting pretraining data	
940	from large language models . In <i>Proceedings of the</i>	
941	<i>International Conference on Learning Representa-</i>	
942	<i>tions (ICLR)</i> .	
943		
944	Hariharan Swaminathan and H. Jane Rogers. 1990. De-	
945	tecting differential item functioning using logistic	
946	regression procedures . <i>Journal of Educational Mea-</i>	
947	<i>surement</i> .	
948		
949	Yixin Tao. 2026. Detecting data contamination from	
950	reinforcement learning post-training for large lan-	
951	guage models . In <i>Proceedings of the International</i>	
952	<i>Conference on Learning Representations (ICLR)</i> .	
953		
954		
955		
956	Robert J. Vandenberg and Charles E. Lance. 2000. A	
957	review and synthesis of the measurement invariance	
958	literature: Suggestions, practices, and recommen-	
959	dations for organizational research . <i>Organizational</i>	
960	<i>Research Methods</i> .	
	Clara Vania, Phu Mon Htut, William Huang, Dhara	961
	Mungra, Richard Yuanzhe Pang, Jason Phang,	962
	Haokun Liu, Kyunghyun Cho, and Samuel R. Bow-	963
	man. 2021. Comparing test sets with item response	964
	theory . In <i>Proceedings of the 59th Annual Meeting of</i>	965
	<i>the Association for Computational Linguistics (ACL)</i> .	966
	Haonan Wang, Haoyang Li, Boeun Ko, and Hongyang	967
	Zhang. 2026. On the fragility of benchmark contami-	968
	nation detection in reasoning models . In <i>Proceedings</i>	969
	<i>of the International Conference on Learning Repre-</i>	970
	<i>sentations (ICLR)</i> .	971
	Colin White. 2025. LiveBench: A challenging,	972
	contamination-free LLM benchmark . In <i>Proceed-</i>	973
	<i>ings of the International Conference on Learning</i>	974
	<i>Representations (ICLR)</i> .	975
	Carol M. Woods. 2009. Empirical selection of anchors	976
	for tests of differential item functioning . <i>Applied</i>	977
	<i>Psychological Measurement</i> .	978
	Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali	979
	Farzaneh, and Yejin Choi. 2019. HellaSwag: Can a	980
	machine really finish your sentence? In <i>Proceedings</i>	981
	<i>of the 57th Annual Meeting of the Association for</i>	982
	<i>Computational Linguistics (ACL)</i> , pages 4791–4800.	983
	Jingyang Zhang, Jingwei Sun, Eric Yeats, Yang Ouyang,	984
	Martin Kuo, Jianyi Zhang, Hao Yang, and Hai Li.	985
	2024. Min-K%++: Improved baseline for detect-	986
	ing pre-training data from large language models .	987
	<i>Preprint</i> , arXiv:2404.02936.	988
	Hao Zhou, Heng Huang, Zhenheng Zhao, Lin Han,	989
	Haoyu Wang, Ke Chen, Min Yang, Weidong Bao,	990
	Ji Dong, Bo Xu, Changshui Zhu, Huijun Cao, and	991
	Tiejun Zhao. 2026. Lost in benchmarks? rethink-	992
	ing large language model benchmarking with item	993
	response theory . In <i>Proceedings of the AAAI Confer-</i>	994
	<i>ence on Artificial Intelligence (AAAI)</i> .	995
	Bruno D. Zumbo. 1999. <i>A Handbook on the Theory and</i>	996
	<i>Methods of Differential Item Functioning (DIF): Lo-</i>	997
	<i>gistic Regression Modeling as a Unitary Framework</i>	998
	<i>for Binary and Likert-Type (Ordinal) Item Scores</i> .	999
	Directorate of Human Resources Research and Eval-	1000
	uation, Department of National Defense, Ottawa.	1001
	A Method Details	1002
	A.1 Diagnostics	1003
	Three diagnostic procedures complement the pri-	1004
	mary DIF analysis.	1005
	Local independence (Yen’s Q3). The MH proce-	1006
	dure assumes that item responses are conditionally	1007
	independent given θ . Yen’s Q3 statistic measures	1008
	residual correlations between item pairs after con-	1009
	ditioning on the latent trait. We compute Q3 for all	1010
	within-subject and cross-subject item pairs, with	1011
	$ Q3 > 0.20$ as the threshold for local dependence.	1012
	Elevated within-subject dependence would indicate	1013

that items within the same subject share variance beyond what θ captures, which could inflate within-subject DIF rates.

Domain-specificity. We test whether temporal DIF concentrates in domains where models improved most. At the ecological level, we compute Spearman ρ between subject-level C% and subject-level accuracy improvement from 2023 to 2024. At the item level, logistic regression predicts item-level DIF C classification from domain-level accuracy change, with and without item property controls (difficulty, discrimination). This decomposition quantifies how much of the observed instability is attributable to aggregate domain-level gains versus item-specific behavioral change.

Instability decomposition. When domain accuracy improvement is included alongside item-level controls, we compute the counterfactual C% that would remain after removing domain-level effects. The gap between observed and counterfactual C% measures the contribution of domain-level improvement to the total instability.

A.2 Statistical Considerations

Multiple testing. The ETS C classification imposes a dual threshold (effect size $|\Delta_{MH}| \geq 1.5$ and significance $p < 0.05$), which provides implicit control over false positives. As a robustness check, we apply Benjamini-Hochberg FDR correction at $q = 0.05$. The random-split sanity check provides an empirical estimate of the false positive rate under the null hypothesis.

Threshold sensitivity. We report results across a range of DIF thresholds ($|\Delta_{MH}| \in \{1.0, 1.5, 2.0, 2.5\}$) to verify that qualitative conclusions do not depend on the specific ETS C cutoff. The standard threshold of $|\Delta_{MH}| \geq 1.5$ corresponds to the ETS C definition used throughout the paper.

Architecture heterogeneity. The METABENCH MMLU population consists of 99.98% decoder-only models (5,226 of 5,227). This near-complete architectural homogeneity eliminates architecture as a confound for DIF analysis. We verify this by excluding the single encoder-decoder model and confirming identical results.

B Structural Analysis Details

Three progressively refined approaches fail to reduce the temporal false positive rate below 31%, revealing a structural property of the data rather than a methodological limitation. Matched-ability quintile analysis restricts comparisons to models of similar total score and yields enrichment ratios of 0.94–1.04, with temporal FPR unchanged at approximately 0.31. IRT θ -conditioning with 20 ability strata achieves $r(\theta, \text{total score}) = 0.9986$ and $\text{FPR} = 0.312$, confirming that the external total score already captures nearly all ability variance relevant to DIF computation. Within-subject DIF analysis on 5 representative subjects, intended to isolate subject-specific effects, finds mean C% = 38.1%, exceeding the 25% threshold that would indicate viable bifactor structure. Table 3 summarizes these results.

The temporal FPR reflects genuine item-level instability that persists regardless of how ability is measured or conditioned. Yen’s Q3 diagnostic reveals mild local dependence within subjects (11.3% of within-subject item pairs exceed $|Q3| > 0.20$, vs. 2.2% cross-subject; $5\times$ ratio, $p = 2.3 \times 10^{-9}$), which contributes to elevated within-subject DIF rates but is not the primary driver: the cross-subject matching protocol addresses this bias, and temporal C% persists under external matching (full Q3 distributions in Appendix Figure A2).

Table 3: Structural approaches to reducing temporal DIF. None reduces baseline FPR below 31%, indicating that the observed instability is not an artifact of ability matching. Subscript $\pm$ values denote standard deviations across 5 injection seeds (baseline row only).

Approach	Mechanism	Temp. FPR	TPR ($p=0.5$)	Outcome
Baseline (ext.)	Cross-bench. total score	0.314 $\pm$.009	0.834 $\pm$.027	Reference
Matched-ability	Within-quintile temp. DIF	~ 0.31	–	Enrich. 0.94–1.04
θ -cond.	θ replaces total score	0.312	0.876	$r(\theta, \text{total})=0.9986$
Within-subject	Per-subject DIF	–	–	C% = 38.1% ($>25\%$)

C Additional Figures

D Cross-Benchmark Comparison

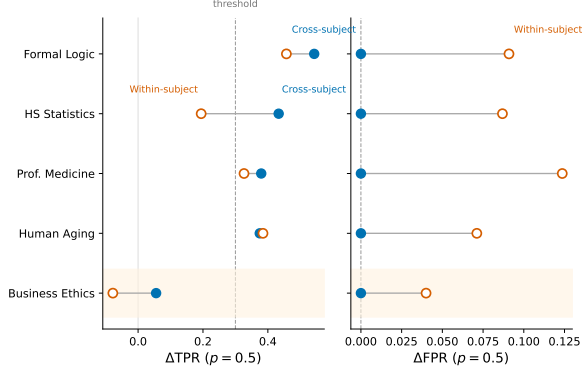


Figure 3: Cross-subject vs. within-subject matching for semi-synthetic DIF detection. Cross-subject matching eliminates FPR inflation ($\Delta\text{FPR} = 0.000$) while preserving detection power ($\Delta\text{TPR} > 0.3$ for 4/5 subjects at $p = 0.5$). Within-subject matching inflates FPR by $+0.186$ on average.

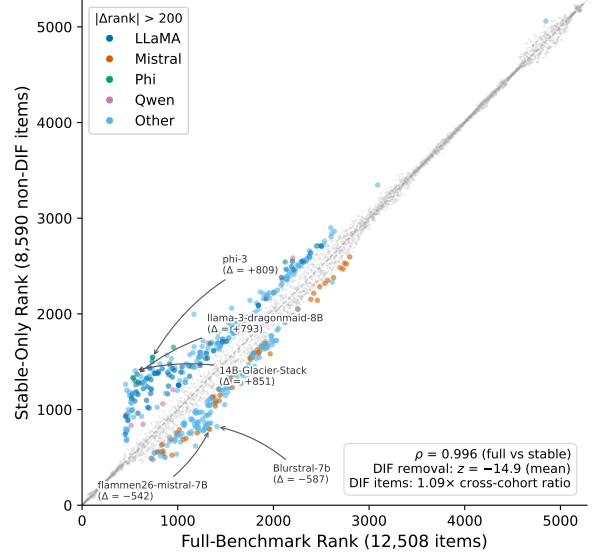


Figure 4: Downstream impact of DIF-based item filtering on model rankings. Despite $\rho \approx 0.997$ overall, individual model families show systematic rank shifts when evaluated on stable items only.

Table 4: Cross-benchmark comparison of DIF analysis on MMLU and GSM8K. Both benchmarks exhibit temporal item instability with validated semi-synthetic detection power. Standard and external matching use different exploitation rates (p) because each benchmark’s optimal operating point differs; external matching results are compared at $p = 0.5$ for both. Subscript $\pm$ values denote standard deviations across 5 random injection seeds.

Metric	MMLU	GSM8K
Items	12,508	1,319
Models	5,227	6,702
Temporal C%	31.3%	18.9%
Sanity C%	0.18%	0.3%
ΔTPR ($p=0.7$, standard)	—	$+0.818 \pm .006$
ΔTPR ($p=0.5$, external)	$+0.508 \pm .027$	$+0.514 \pm .028$

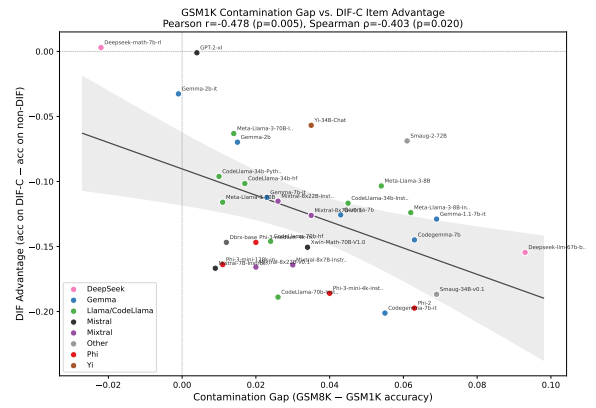


Figure 5: GSM1K contamination gap vs. DIF ranking advantage ($N = 33$). The negative correlation ($r = -0.478$, $p = 0.005$) indicates that models with larger contamination gaps benefit less from DIF-flagged items.