

./ HackX


HackX for hackers of the professional and beginner

This application for hackers without command and without learn is programming language

Just open the terminal and write the following commands to download and install the program

This program is only for Linux and run is all Linux versions

Gallery HackX

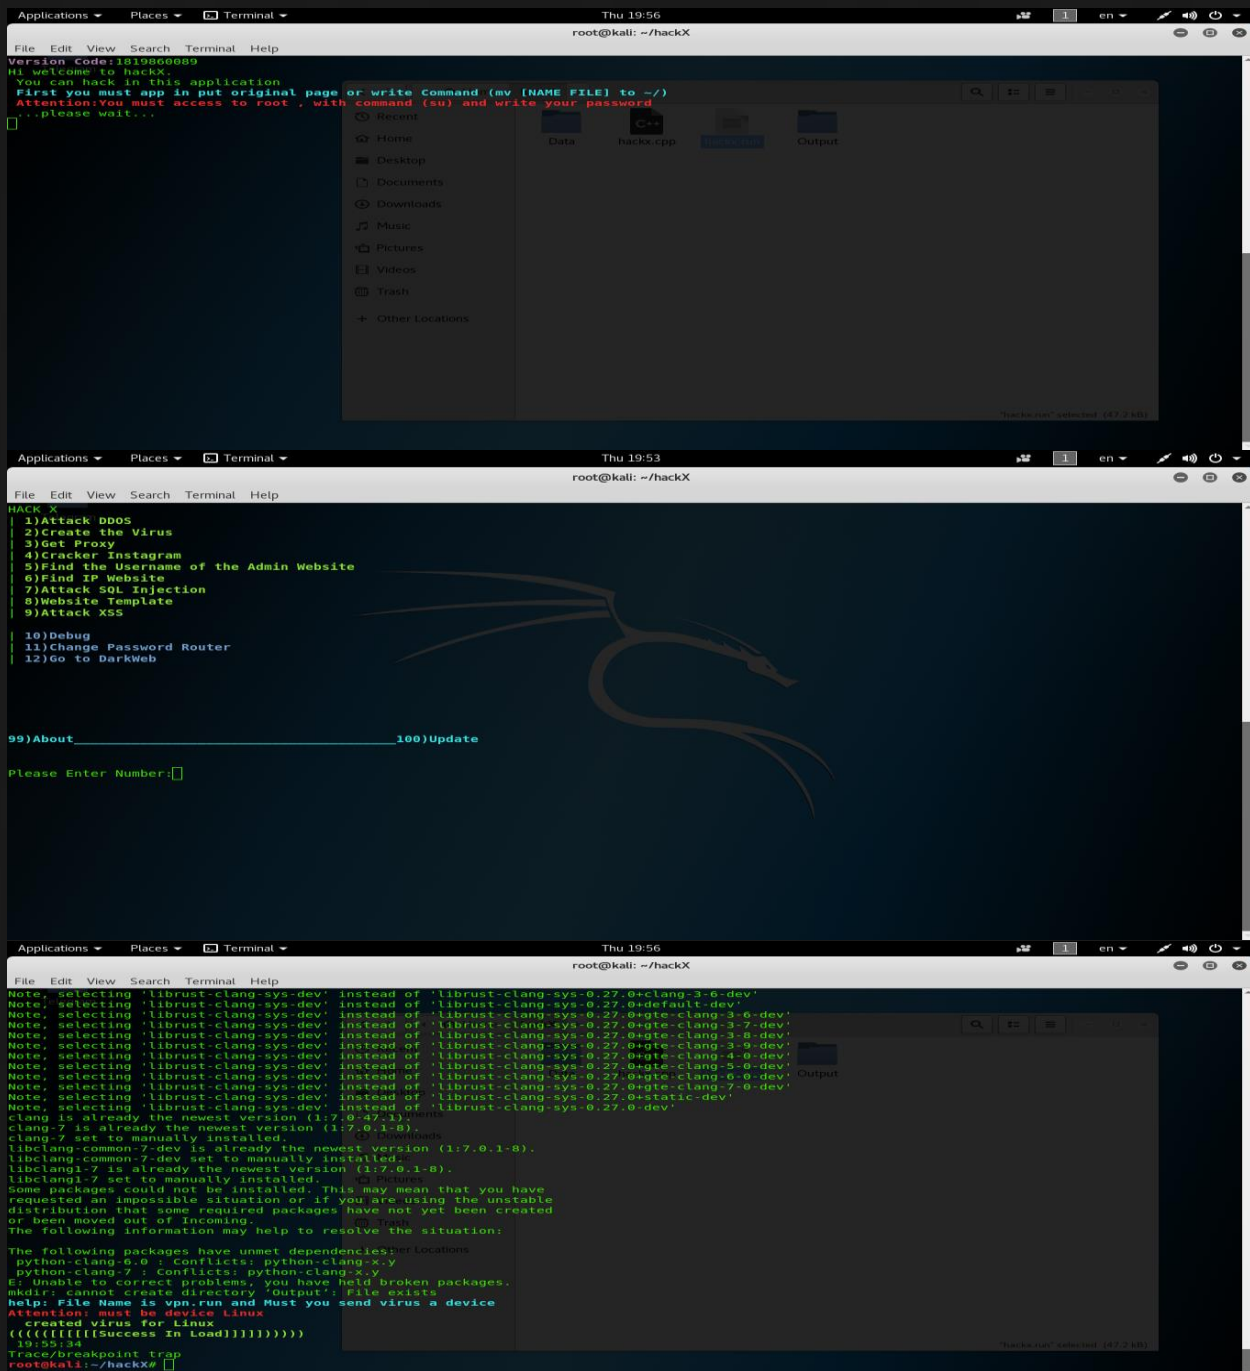

The first screenshot shows the initial terminal window with the HackX application running. It displays a welcome message and instructions: "First you must app in put original page or write Command (mv [NAME FILE] to ~/)", "Attention: You must access to root, with command (su) and write your password", and "...please wait...". The terminal also shows a file explorer view with folders like Data, hackx.cpp, and Output.

The second screenshot shows the HackX application menu. It lists 12 options: 1) Attack DDOS, 2) Create the Virus, 3) Get Proxy, 4) Cracker Instagram, 5) Find the Username of the Admin Website, 6) Find IP Website, 7) Attack SQL Injection, 8) Website Template, 9) Attack XSS, 10) Debug, 11) Change Password Router, and 12) Go to DarkWeb. At the bottom, it says "99) About" and "100) Update".

The third screenshot shows the HackX application after selecting option 10) Debug. It displays a list of packages and their versions, along with a message: "The following packages have unmet dependencies: python-clang-0.0 : Conflicts: python-clang-x.y python-clang-7 : Conflicts: python-clang-x.y". It also shows a message: "Attention: must be device Linux created Virus for Linux (((((((((((Success in Load))))))))))".

Download Help

For download must write commands

1. Debian Linux and Kali Linux and Ubuntu

```
apt-get update
```

```
apt-get install git
```

2. Fedora Linux for version up to 21 and RedHat and CentOS

```
yum update
```

```
yum install git
```

3. Fedora Linux for version 22 later

```
dnf update
```

```
dnf install git
```

4. Arch Linux and BlackArch

```
pacman -Syu
```

```
pacman -S git
```

5. FreeBSD and Termux

```
pkg update
```

```
pkg install git
```

6. OpenBSD

```
pkg_add git
```

7. MacOS

```
/bin/bash -c "$(curl -fsSL  
https://raw.githubusercontent.com/Homebrew/install/HEAD/install.sh)"
```

```
brew update
```

Install Application

Remember it must be hackX, not hackx

For Install must write commands

```
git clone http://github.com/anonymous14725/hackX.git
```

```
cd hackX
```

```
chmod +x hackX.run
```

```
./hackX.run
```

and Install on freebsd

```
cd hackX
```

```
c++ hackX.cpp
```

```
./a.out
```

Install on Termux

For install on Termux must write commands under

```
pkg install clang
```

```
pkg install clang++
```

```
pkg install git
```

```
git clone http://github.com/anonymous14725/hackX.git
```

```
cd hackX
```

```
c++ hackx.cpp
```

```
./a.out
```

__ Warning: You must app in put original page or write Command (mv [NAME FILE] to ~/)

Attantion: You must access to root , with command (su) and write your password __

__ For access to root in Ubuntu, you must Command sudo -sand enter your password __