



R1 regression routers: target transform and objective against raw V, ten core cells (post-hoc)


20 %: nDG(label) - nDG(raw V) (* paired 95 % interval excludes 0)

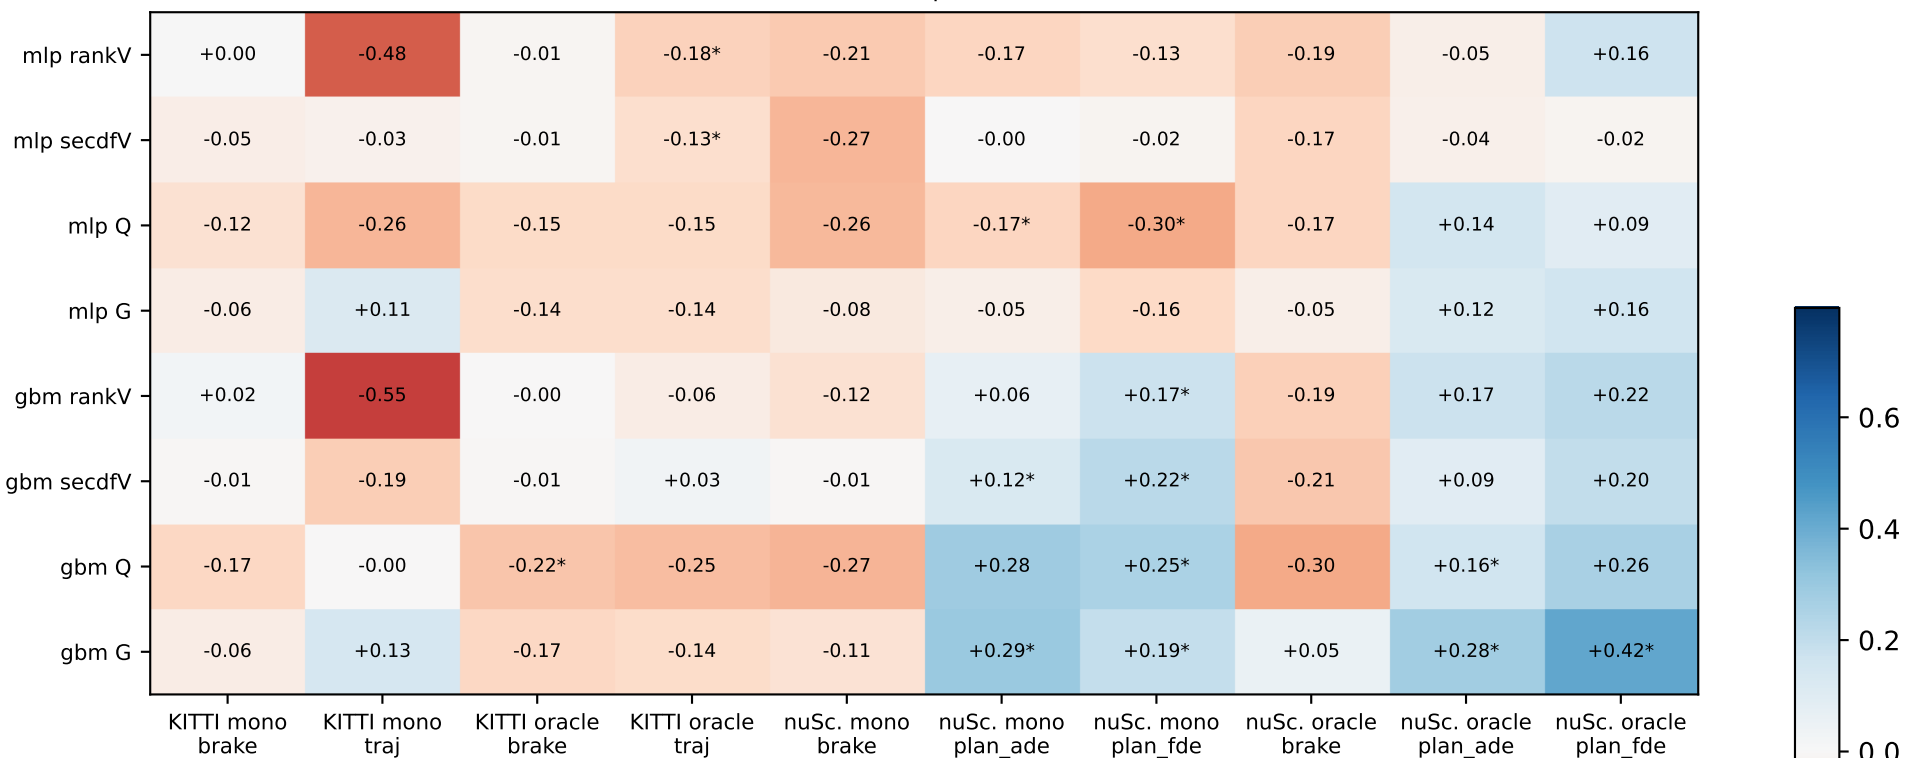

10 %: nDG(label) - nDG(raw V)

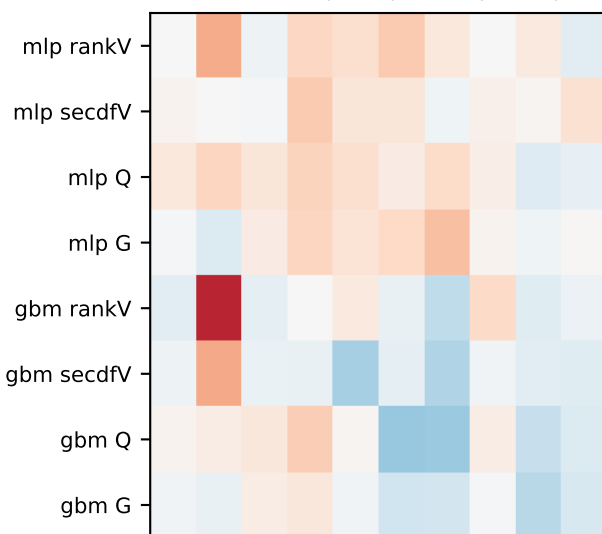

30 %: nDG(label) - nDG(raw V)

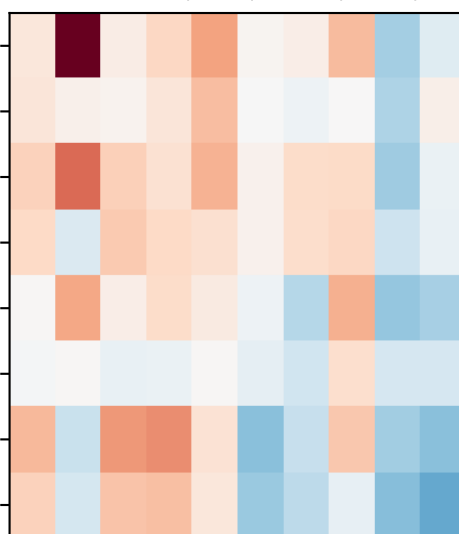

50 %: nDG(label) - nDG(raw V)

