


TASK 7


pc4, pc5 should get address from DHCP server

So Configure PC1 as DHCP Server.

1. setting pc1 as DHCP server


vim /etc/dhcp/dhcpd.conf

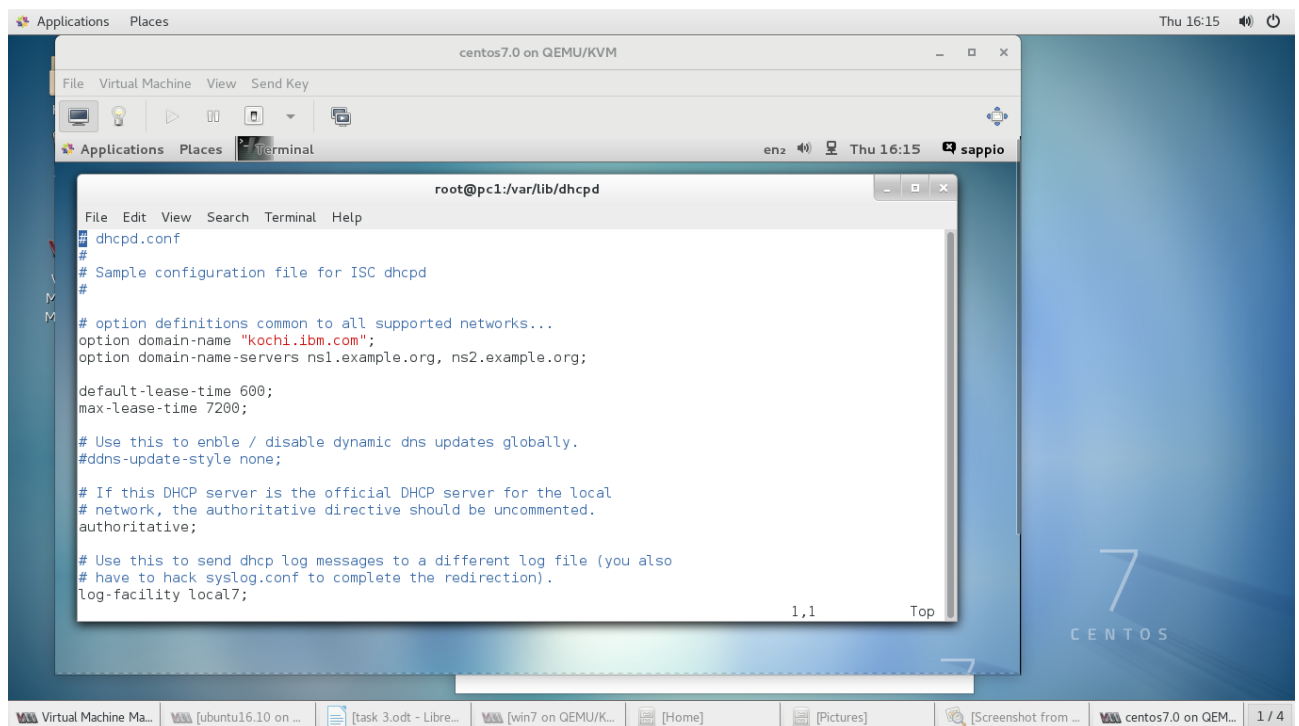

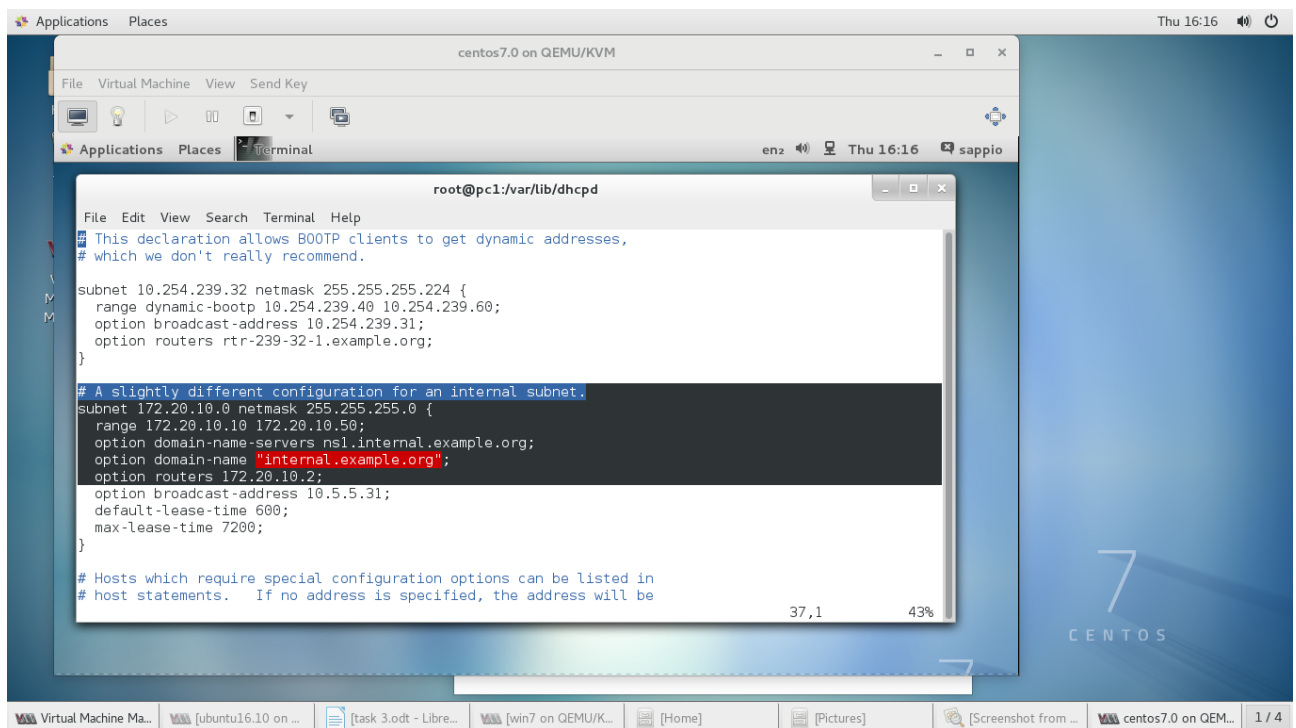


for checking from dhcp server.

cat /var/lib/dhcpd/dhcpd.leases

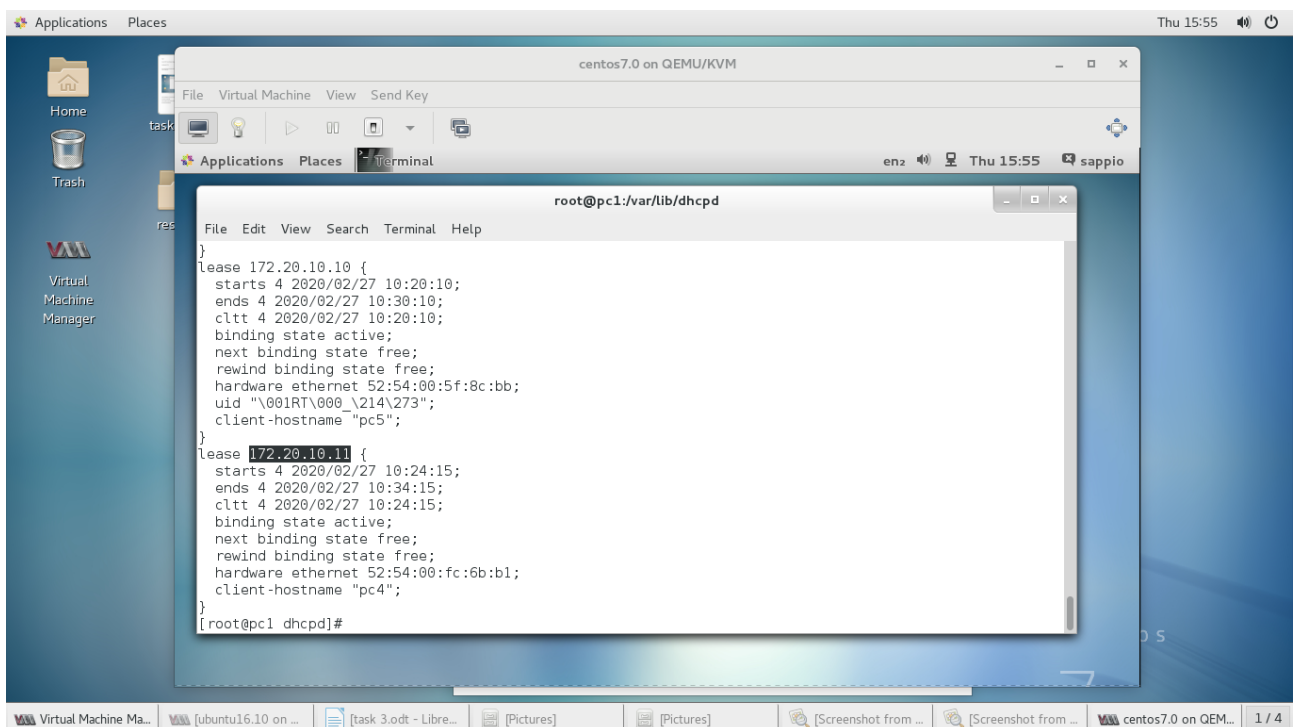

for checking from client.

Pc4.

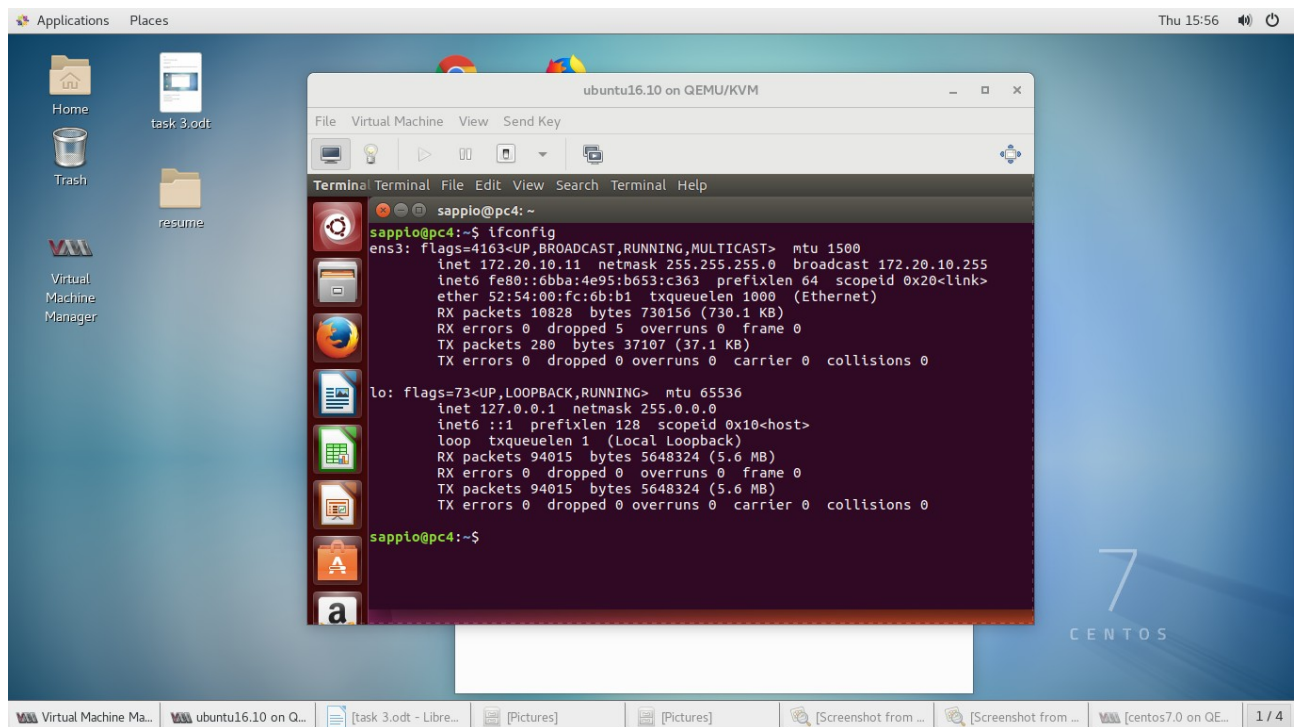

Pc5.

