


FULL PROJECT ARCHITECTURE

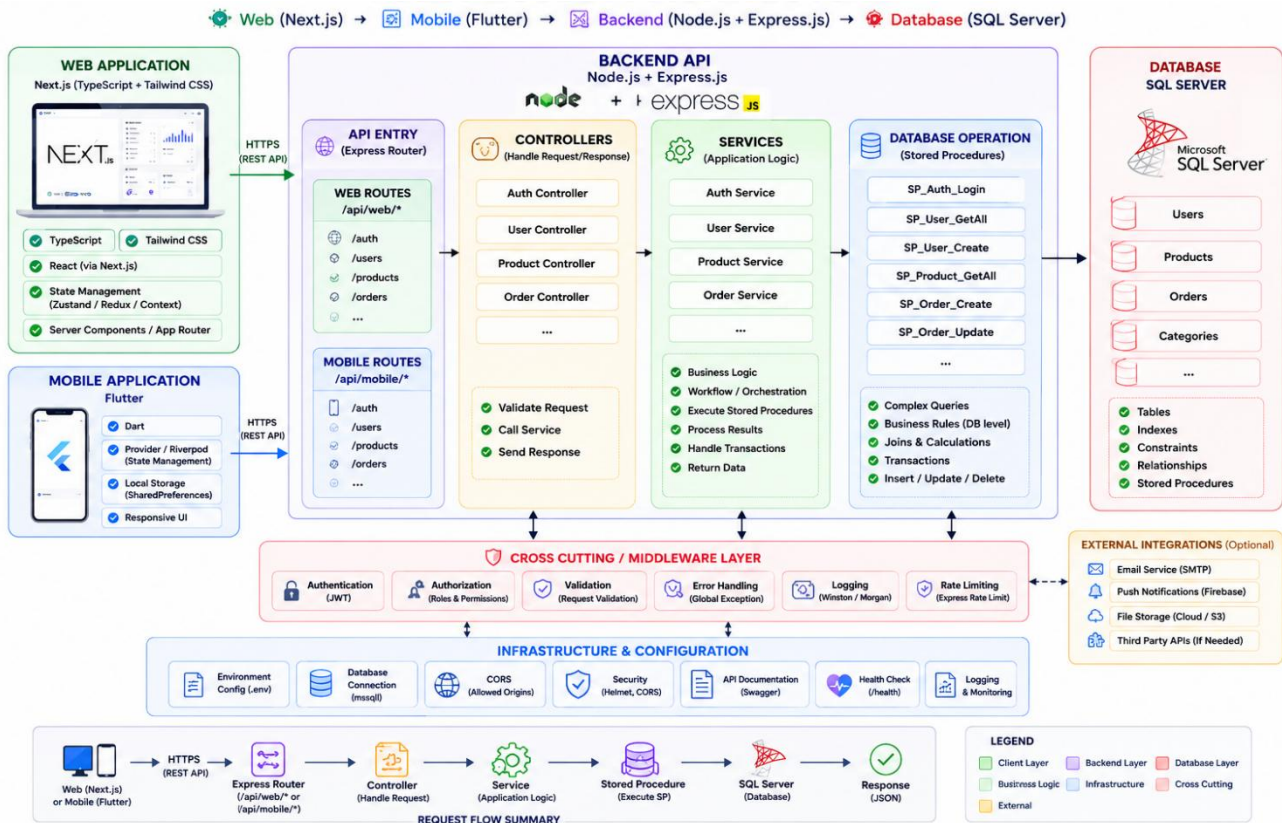

APIs Project Architecture

Tech Stack

Node.js + Express.js

API/

├─ src/

| └─ config/

| | └─ database.js

| | └─ env.js

| |

| └─ routes/

| | └─ web/

| | | └─ auth.routes.js

| | | └─ user.routes.js

```
| | | └─ index.js
| | |
| | └─ mobile/
| | | └─ auth.routes.js
| | | └─ user.routes.js
| | | └─ index.js
| | |
| | └─ index.js
| |
| └─ controllers/
| └─ services/
| └─ middleware/
| └─ validators/
| └─ utils/
| └─ app.js
| └─ server.js
|
└─ .env
└─ .env.example
└─ .gitignore
└─ package.json
└─ README.md
```

NextJS Project Architecture (Website)

Tech Stack

- **Framework:** Next.js (App Router)
- **Language:** TypeScript
- **UI:** React + Tailwind CSS
- **API Communication:** Native fetch through a centralized API client
- **Server/API State:** TanStack Query

- **Client/Global State:** Zustand
- **Forms:** React Hook Form + Zod
- **Database:** No direct database access from Next.js. All data comes through the backend APIs.

web/

```

|
├─ src/
| |
| └─ app/
| | └─ layout.tsx
| | └─ page.tsx
| | └─ globals.css
| | |
| | └─ (auth)/
| | | └─ login/
| | | | └─ page.tsx
| | | └─ forgot-password/
| | | | └─ page.tsx
| | | └─ ...
| | |
| | └─ dashboard/
| | | └─ page.tsx
| | |
| | └─ users/
| | | └─ page.tsx
| | | └─ [id]/
| | | | └─ page.tsx
| | |
| | └─ products/
| | | └─ page.tsx
| | |

```

```
| | └─ ...
| |
| └─ components/
| | └─ ui/
| | └─ common/
| | └─ layout/
| | └─ ...
| |
| └─ lib/
| | └─ api/
| | | └─ client.ts
| | | └─ endpoints.ts
| | └─ auth/
| | └─ utils/
| |
| └─ store/
| | └─ auth.store.ts
| | └─ ui.store.ts
| |
| └─ types/
| | └─ common.ts
| |
| └─ proxy.ts
|
└─ public/
|
└─ .env.local
└─ .env.example
└─ .gitignore
└─ next.config.ts
```

└─ tailwind.config.ts

└─ tsconfig.json

└─ package.json

└─ README.md