

# Inter-Procedural Heap Reference Analysis for Concurrent Programs

B.Tech. Project 1st Stage Report

Submitted in partial fulfillment of the requirements for the degree of  
Bachelor of Technology (Honors)

*Student:*

Anshul Purohit

Roll No: 110050002

*Guide:*

Prof. Uday Khedkar



Department of Computer Science and Engineering  
Indian Institute of Technology Bombay  
Mumbai 400076, India

## **Abstract**

This report mainly deals with designing inter-procedural heap reference analysis for concurrent programs in Java. The analysis is both flow-sensitive and context-sensitive at the inter-procedural level. Heap Reference analysis determines a collection of objects pointed to by program variables or their fields. Java implements pointers by references. This report also discusses about analysis techniques for concurrent programs at intra-procedural level and about extending analysis to inter-procedural level using the VASCO tool.

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Background on Program Analysis . . . . .	1
1.2	Types of Data Flow Analysis . . . . .	1
1.3	Inter-Procedural Analysis . . . . .	2
1.4	Concurrency . . . . .	2
1.5	Problem Statement . . . . .	2
1.6	Organization of the Report . . . . .	3
<b>2</b>	<b>Heap Reference Analysis</b>	<b>4</b>
2.1	Difficulties in Analysis of Heap Data . . . . .	4
2.2	Pointer Analysis . . . . .	5
2.3	Heap Reference Analysis . . . . .	6
<b>3</b>	<b>Inter-Procedural Analysis</b>	<b>8</b>
3.1	Context Sensitivity . . . . .	8
3.2	Call Graph . . . . .	9
3.3	Approaches to Inter-procedural Analysis . . . . .	10
3.3.1	Functional approach . . . . .	10
3.3.2	Call Strings Approach . . . . .	10
3.3.3	Value Context Method . . . . .	11
3.4	Example of value context method . . . . .	12
<b>4</b>	<b>Analysis for Concurrent Programs</b>	<b>14</b>
4.1	Memory Model and Data Races . . . . .	14
4.2	Concurrent analysis technique . . . . .	17
<b>5</b>	<b>Design of the Analysis</b>	<b>19</b>
5.1	Call Graph Generation . . . . .	19
5.2	Combined Unit Graph . . . . .	21
5.3	VASCO framework . . . . .	22

<b>6 Conclusion and Future Work</b>	<b>24</b>
<b>Bibliography</b>	<b>25</b>

# Chapter 1

## Introduction

### 1.1 Background on Program Analysis

Program Analysis is the set of techniques to get appropriate information about the behavior of programs. Static analysis techniques involve computing approximate information about the program without executing it. In this report, only static analysis techniques would be discussed.

Data flow analysis is a technique for gathering information about the possible set of values calculated at various points in a program. The value at each program point is then propagated in the Control Flow graph (CFG) of the program. The information gathered is often used by compilers when optimizing a program.

### 1.2 Types of Data Flow Analysis

A data flow analysis can be either flow-insensitive or flow-sensitive.

Flow-insensitive analysis:

- Ignores the control-flow graph, and assumes that statements can execute in any order.
- Rather than producing a solution for each program point, produces a single solution that is valid for the entire program

Flow-sensitive analysis:

- Takes the control flow structure of a program into account

- Has the computed abstract state that represents different reachable memory states at different program points.

A flow-sensitive version of an analysis is more precise and expensive than the flow-insensitive version.

Categorizing according to the direction of traversal of program statements in the CFG, data flow analysis can be broadly of 2 types : forward and backward. Examples of data-flow analysis are Available Expressions analysis which is a forward data flow analysis and Live Variables analysis which is a backward data flow analysis.

## 1.3 Inter-Procedural Analysis

Inter-procedural analysis operates across an entire program makes information flow from caller to callee and vice-versa. It extends the scope of data flow analysis across procedure boundaries and it incorporates the effects of procedure calls in the caller procedures, and calling contexts in the callee procedure. A context-sensitive analysis is an **interprocedural analysis** which reanalyzes callee procedure for each context whereas context insensitive analysis performs analysis independent of calling context.

## 1.4 Concurrency

For concurrency, we assume the thread model in Java. The high level abstractions of concurrency (such as the DOALL, FORALL, PARBEGIN , PAREND constructs of FORTRAN ) can be modeled in terms of threads and so we use the model of threads to uniformly refer to concurrent programs. The parbegin and parend operations and synchronization during joining of threads will be handled by the Java thread library. The user needs to extend the thread class and define a run method for the object. Invoking the run method on the thread objects starts concurrent execution. For accessing shared data critical sections need to be guarded by the lock and unlock statements. Also we expect a data-race free program as input for analysis.

## 1.5 Problem Statement

The idea of the problem statement is to design a framework for carrying out inter-procedural analysis of concurrent programs and then implement

heap reference analysis using the framework. The techniques for performing inter-procedural and concurrent analysis is discussed later in the report. Heap reference analysis refers to determining the information like liveness, accessibility and points-to information of reference expressions. Reference expressions, for example  $x.lptr.rptr.data$  are primarily used to access the objects in the heap. The main focus is on the java model of heap access, in which root variables (variable  $x$  is on the stack) are stored on the stack. The root variables represent references to memory in heap. Also, root variables cannot be pointed to by any reference.

## 1.6 Organization of the Report

In this chapter, an introduction to the basics of Data Flow Analysis and its types was provided. I have also mentioned about concurrency model used and pointer analysis for Java and how it is different from that of C/C++.

In the subsequent chapters, I will be covering Heap Reference Analysis, Inter-Procedural Analysis and Concurrent Data Flow Analysis and respectively. I would then present the tools required for the implementation in the next chapter followed by summary and future work.

# Chapter 2

## Heap Reference Analysis

Analyzing properties of heap data is not very trivial. This is because the spatial and temporal structure of stack and static data is simple to understand. The stack variables have a compile-time name(alias) associated with it. However, this is not the case with heap data. We need to devise a flow and context sensitive analysis to get information from heap data.

### 2.1 Difficulties in Analysis of Heap Data

A program accesses data through expressions having l-values and hence are called access expressions. The l-values can either be a scalar ( $x$ ), or may involve array access such as  $a[2*i]$  or can be a reference expression like  $x.l.data$ . In the case of reference or array, the mapping of the access expression and the l-value may change. The reference expression is primarily used to access the heap.[1]

Heap analysis tries to find out the answer to the questions:

- Can an access expression  $a_1$  at program point  $p_1$  have the same l-value as access expression  $a_2$  at program point  $p_2$ .
- Can there exist objects in the heap that will not be reachable from the access expressions?
- Which of the access links will be live at a particular point?



```

class A(){
class B(){
public A f;
public void set(A p)
{
this.f = p;
}
}
class C(){
public B g;
public void set(B q){
this.g = q;
}
}
s1 : A x = new A()
s2 : B y = new B()
s3 : C z = new C()
s4 : y.set(x);
s5 : z.set(y);
s5 : A a = z.g.f;

```

Figure 2.1: Code to illustrate heap access and points-to analysis

## 2.2 Pointer Analysis

Pointer analysis is a static analysis technique that establishes which pointers or heap references can point to which variables. Pointer analysis collects information about indirect accesses in programs. It can enable precise data analysis and precise inter-procedural control flow analysis. The latter will be used in the VASCO tool that will be discussed later in the report.

We have two types of pointer analysis information: points-to analysis and alias analysis. Alias analysis tell if two references point to the same location on the heap. It is transitive in nature. Whereas, points-to analysis tells which memory locations are pointed by references at run-time.

Alias information plays an important role in the liveness analysis. Must-alias information is needed to improve precision. May aliases can be found out using information from the points-to analysis.

In Java pointers are not created explicitly.[2] All objects in Java are accessed using references and these references are termed as pointers here. Every time we create an object in Java it creates pointer to the object. This pointer could then be set to a different object or to null, but the original object will still exist. Thus points-to analysis for Java programs identifies the objects pointed to by references at run time. Thus we wish to determine the objects pointed to by a reference variable or a field. Consider the Java program in Figure 2.1.

In the code given in Figure 2.1, three heap objects pointed to by  $x$ ,  $y$  and

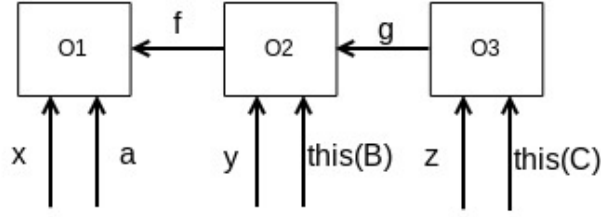


Figure 2.2: Points to graph for Java program in 2.1

$z$  are created at  $s_1$ ,  $s_2$  and  $s_3$  respectively. We refer to the objects based of their allocation site as  $o_1$ ,  $o_2$  and  $o_3$ . The statement  $s_4$  assigns the  $f$  field of  $o_2$  to point to  $o_1$ . Similarly, the  $g$  field of object  $o_3$  is pointed to object  $o_2$ . Finally the variable  $a$  points to the object  $o_1$ , through reference field indirections.

**Liveness and Points-to Analysis :** We can remove some information from the points-to analysis result by considering only information for live pointers. For field references and indirections, liveness is defined using points-to information. [3]

**Points-to graph** in Java contain two types of edges. The first type of edge is to represent the information that reference variable  $v$  is pointing to object  $o$ . The second type of edge represents the field  $f$  of  $o_1$  pointing to  $o_2$ . Example of points to graph for the code in Figure 2.1 is shown in Figure 2.2.

## 2.3 Heap Reference Analysis

A reference can be represented by access path. In order to perform liveness analysis of heap and identify the set of live links, naming of links is necessary. This is achieved by access path. An Access Path is defined as root variable name following any number of field names and is represented as  $x \rightarrow n_1 \rightarrow n_2 \dots n_k$  where  $x$  is root variable,  $n_1$ ,  $n_2 \dots$  are field names. If access path  $x \rightarrow f \rightarrow d$  is live then, the objects pointed to by  $x$ ,  $x \rightarrow f$  and  $x \rightarrow f \rightarrow d$  are live. Example of access path is given for the expression  $x.left.right.data$  in figure 2.3

An access path can be unbounded in the case of loops. Thus, we require to set a bound on the representation of access paths for liveness information. This is achieved using access graphs which summarizes information based on

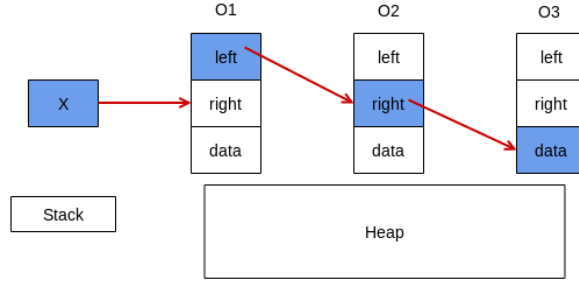


Figure 2.3: Heap reference using access expression  $x.left.right.data$ .

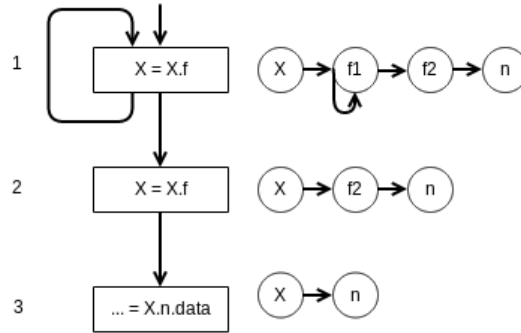


Figure 2.4: Example of use of access graph and liveness data flow values

allocation sites. Access Graph is a directed graph representing access paths starting from root variable. Root node is connected to any number of nodes each having unique labels of form  $n_i$  where  $n$  is name of the field and  $i$  is the program point. Inclusion of program points in access graphs helps in summarization and performing the merge operation.[4] Example of access graph and liveness analysis is shown in Figure 2.4.

Availability and Anticipability analysis of heap data : An access path  $\rho$  is said to be available at a program point  $p$  if the target of each prefix of  $\rho$  is guaranteed to be created along each path reaching  $p$ . An access path  $\rho$  is said to be anticipable at  $p$  if the target of each prefix of  $\rho$  will be dereferenced along every path starting from  $p$ . Note that access graphs are not needed to carry out available and anticipable analysis over heap data because the sets are bounded as a result of every control flow path nature of the problems.

# Chapter 3

## Inter-Procedural Analysis

Interprocedural Analysis is required to obtain more precise results as it is very common that programs can have multiple function calls. It is essential to consider the effect of function call on the data flow value entering the node. Inter-procedural analysis takes into account call return, parameter passing, local variables of the function, return values and recursion into account. Major issue to be dealt while handling inter-procedural analysis is to deal with calling contexts. Handling concurrency also needs to be supported, which would be discussed in the next chapter.

### 3.1 Context Sensitivity

A context sensitive analysis is an inter-procedural analysis which analyses callee procedure for each context whereas context insensitive analysis performs analysis irrespective of calling context. Context insensitive analysis over-approximates inter procedural control flow which results in imprecision because it takes into account invalid control paths. Each function is analyzed once with single abstract context. Whereas context sensitive analysis is more precise as it considers the valid inter procedural control flow.

Java is an object oriented language supporting features like encapsulation and inheritance. Thus data access is indirect through method calls for each class. So context sensitivity plays a very important role for Object Oriented languages.

## 3.2 Call Graph

Call Graph is graph with nodes and edges in which nodes represent procedures and there is edge from a to b if some call-site at a calls procedure b. Hence this is a static data structure that represents the run-time calling relationships among procedures in program. Soot provides a Spark engine which generates the call graph. VASCO on the other hand returns a much precise call graph, which is generated using liveness based inter-procedural pointer analysis. A thing to note here is that construction of call graph requires inter-procedural analysis and inter-procedural analysis on the other hand requires call graph. An approach to breaking this dependency is to initially approximate the call-graph and in every iteration perform inter-procedural analysis and improve the precision of the call graph.

Call multi-graph is a directed graph which represents calling relationships between procedures in a program where nodes represent procedures and edges procedure call. A cycle in the call multi-graph denotes recursion. Super graph is another representation in which callsites are connected to the callee procedure entry node and the exit node of the callee is connected to return node in the caller procedure.

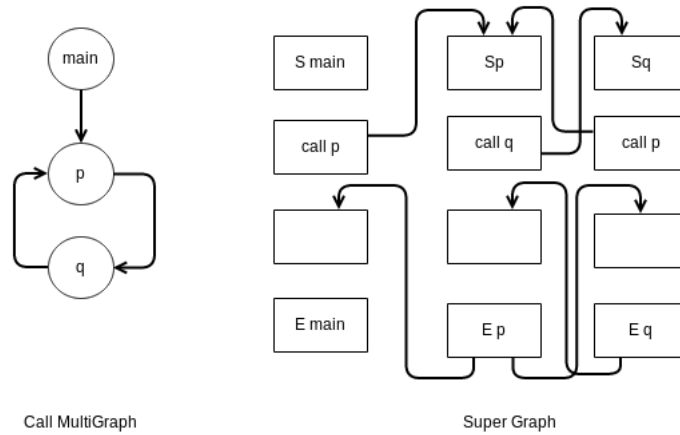


Figure 3.1: Example of call multi-graph and super-graph

Data flow analysis uses static representation of programs to compute summary information along paths. For ensuring safety, all the valid paths must be covered. A valid path is the path which represents legal control

flow. Ensuring precision is subject to merging data flow values at shared program points without including invalid paths. For ensuring efficiency, only those valid paths that yield information that affects the summary information should be covered.

### 3.3 Approaches to Inter-procedural Analysis

In this section approaches to perform inter-procedural analysis is discusses. A very simple approach is to perform procedure in-lining where every procedure call is replaced by the procedure body. this would however only be applicable when target of the call is known and call is not made by pointers or is virtual. However this is not good way to handle recursion as the code size can increase in an unbounded manner.

#### 3.3.1 Functional approach

In the functional approach, summary flow functions are computed for each function. The summary flow functions are used as the flow functions for the procedure call. The summary flow function of a given procedure is influenced by the summary flow functions of the callees of  $r$  and not by the callers of  $r$ . Also in the presence of loops or recursion, iterative computation will be needed till fixed point is achieved. Termination is only guaranteed if, lattice is finite.

#### 3.3.2 Call Strings Approach

This is a general flow and context sensitive method. In this approach the call history stored for information to be propagated back to the correct point. Call string at a program point is the sequence of unfinished calls reaching that point starting from the main procedure call. The data flow equations are changed to incorporate the merging of the data flow values only if the contexts(call strings) are the same. At a call node  $c_i$ ,  $c_i$  is appended to the call-string value at that point. Similarly at a return node the last call site  $c_i$  is removed. And other data flow values are blocked. For non-recursive programs number of call strings are finite. For recursive programs, number of call strings can be infinite. However, the problem is decidable for finite lattices.

There is an approach of value based termination of call-strings. This method deals with creating equivalence classes. If two call-strings have same

data flow values at the start node of the procedure, then they will produce the same data flow values at the return node of the procedure call. Such call strings are grouped into equivalence classes.

An very simple example of call strings method is used is shown below.[2]

```
public static void main ()
{
  B x;
  // Callsites are appended to the current call string before making call
  C1 : x = deref(f);
  C2 : x = deref(g);
}
B deref(B a) // c1 [a = f] c2 [a = h]
{
  x.next = a;
  return x;
}
// c1 [ object return would have its next pointed to f]
// c2 [ object returned would have its next field pointed to h]
```

### 3.3.3 Value Context Method

In this method, a combination of tabulation (functional approach) and value based termination (call strings) approach is adopted. The call-strings are partitioned based on the data flow value at the call site. And then analysis of the procedure can then be performed once for each partition. It also combines the two views of contexts: data flow values at call site are stored as value contexts and call strings as calling contexts. Distinct data flow values are maintained for each context of a procedure.[5]

A value context is defined by a particular data flow value reaching a procedure. It is used to enumerate and store the summary flow function of the procedure in terms on input and output pairs. In order to compute these pairs, data flow analysis is performed within the procedure for each context(input data flow value). Each context is initialized with the top element initially. This approach also maintains a context transition table which allows flow of information along inter-procedurally valid paths. Transitions are recorded in the form  $(X,c)$  ,  $Y$  where  $X$  represents calling context,  $c$  represents call site and  $Y$  represents callee context. Hence when analysis of callee procedure completes where to return is identified by context transition

table, therefore propagation to valid path is guaranteed.

When a new call to a procedure is encountered, the pairs are consulted to decide if the procedure needs to be analysed again. If it was already analysed once for the input value, output can be directly processed else a new context is created and the procedure is analysed for this new context.

### 3.4 Example of value context method

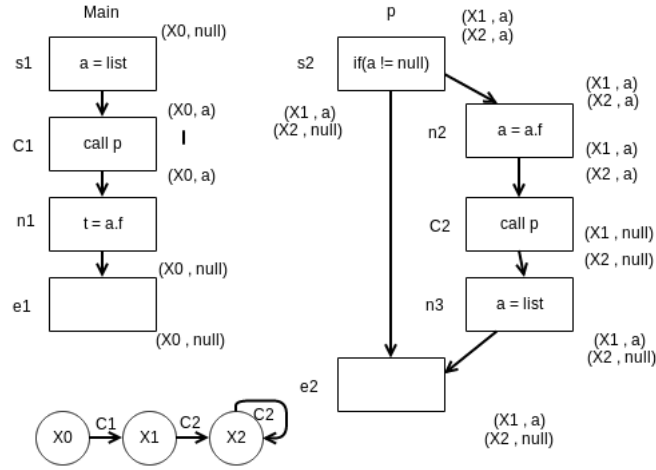


Figure 3.2: Example of value-context based IP analysis

This is an example of an inter-procedural heap liveness analysis. We wish to find out if  $a$  is live before and after the statement  $C_1$ . The procedure  $p$  is recursive and gets called with two different contexts  $X_1$  and  $X_2$  as shown in the context transition diagram as well.

The analysis starts with the initial context  $X_0$  at statement  $e1$  in main with the value  $null$ . The value of  $n_1$  becomes  $a$  as  $a.f$  is being set to  $t$  in the statement. On the next node  $C_1$ , we have a function call to  $p$ . So a new value context  $X_1$  is created with input  $a$  and value  $null$  and the transition from  $X_0$  to  $X_1$  is noted. Now in  $X_1$  context, node  $n_3$  is processed followed by  $c_2$ , which creates another value context  $X_2$  for procedure  $p$  with input  $null$  with value  $null$ . The transition  $X_1$  to  $X_2$  is also recorded in the context transition table.



In the context  $X_2$ , node  $c_2$  is evaluated. Since there is already a context for input value *null* we take its out value to be *null* (the top value of the lattice). Thus, the in values of  $C_2$  and  $n_2$  are set to *null* and  $a$  respectively. Since  $s_2$  does not kill the access path  $a$ , the output value of context  $X_2$  is set to  $a$ .

The callers of  $X_2$  are  $X_1$  and  $X_2$  itself. Both these contexts are now added to the work-list for processing. The only change for context  $X_2$  is in the call statement  $c_2$  whose in value is now set to  $a$ . On evaluating context  $X_1$ , we similarly get its output value to be  $a$ . After this step, the statement  $C_1$  in context  $X_0$  gets the in value assigned to be  $a$ , which gets killed in  $s_1$ .

# Chapter 4

## Analysis for Concurrent Programs

We will be using the technique mentioned in the paper Dataflow Analysis for Data-Race-Free Programs. This technique when given a sequential data-flow analysis produces an efficient and fairly precise analysis for concurrent programs. The criteria to be met for applying this analysis is that data-flow fact should be dependent on the contents of the associated lvalues (expression referring to memory location at runtime). Sequential analysis like null-pointer analysis, interval analysis and constant propagation. In terms of precision of the data-flow facts, useful information will be derived at program points where the lvalue is read.

The main challenge in converting the analysis from sequential to concurrent programs is that propagating data-flow values such that all the possible concurrent executions of the thread are taken care of. In this technique, the synchronization structure of the program is made use of to propagate data-flow values. The main insight used is that the data-flow values are only propagated between threads at the lock and unlock points in threads for access to critical sections. Also this approach will not work for programs containing data race.

### 4.1 Memory Model and Data Races

A memory model specifies the interactions of threads with memory and its shared use. Thus, memory model specifies the constraints on data access and conditions on how data written by one thread is accessible to other threads.

Happens before is the memory model described in the paper and thesis on Concurrent Program analysis.

The happens before memory model is based on the happens-before relation which relates the happenings of two events such that if one happens before the other, it should be reflected in the results. That is if statement A occurs before statement B then the memory written by statement A is visible to statement B.

There are three components of the happens before memory model.

1. Program Order: It is generally used to refer to the order of statement in a thread as they appear in the program. However the formal definition of program order is the intra-thread order during the execution of the program.
2. Synchronizes-with Relation: This relation is defined over synchronization relations which are lock, unlock (for acquiring/releasing locks), spawn, join (to synchronize creation/ending of multiple threads), start, end(first/last statement of a thread). The synchronizes-with relation is defined from
  - Lock statement to all previous unlock statements
  - A begin statement to the spawn statement of the thread
  - Join statement to the end statements of all the threads synchronized
3. Happens-Before Order: Statement a happens before statement b if one of the following hold
  - a appears before b in the program order
  - b synchronizes-with a
  - b can be reached transitively using happens-before relation from a.

Consider the example presented in Figure 4.1. We have an example of 2 threads executing the critical section. Assume that *a.next* was initially pointing to an object *o<sub>i</sub>* on the heap which contains non-null data. We need to check if the exception in *T<sub>2</sub>* can be thrown. Applying the happens-before relation, we can find out this will never be the case. The synchronization of locks and unlocks always prevents the possibility of *a.next* pointing to a dynamically created object with *null* when the *if* condition in *T<sub>2</sub>* is checked,

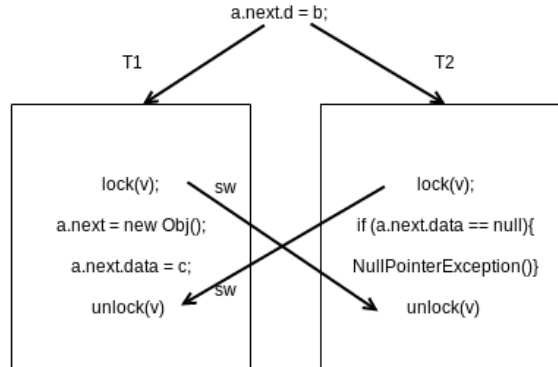


Figure 4.1: Happens Before memory model with thread synchronization

irrespective of any possible thread scheduling. The exception would only have been raised if the statement 2 of T

Now consider the case given in Figure 4.2. It has the same statements but does not contain proper locking and hence no synchronization edges. So in this case all the actions in T1 need not happen before the evaluation of the condition. The exception can now thrown be in case the execution order is  $(T_1, s1), (T_2, s2)$ . This necessitates data race free program as input to the analysis.

**Data Race :** A data race occurs when two or more threads can access shared data at the same time and try to change it at the same time. Also the order of access among the threads will not be known, so both the threads are racing to access or modify the shared data. Formally, a data race is said when

1. Two or more threads access the same memory location concurrently

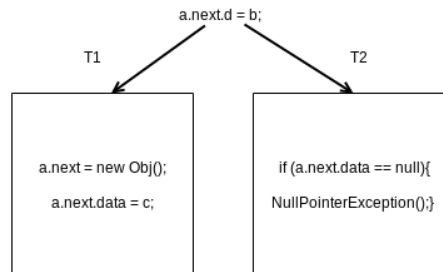


Figure 4.2: Happens Before memory model without thread synchronization

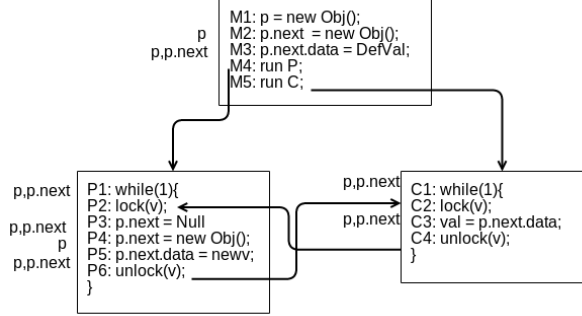


Figure 4.3: Heap Access path based null pointer analysis

2. At least one of the accesses is a write
3. the threads are not using any exclusive locks to control their accesses to that memory.

Data race can be defined in terms of happens before relation. Two statements are said to be conflicting/racy if neither a happens before b or b happens before a. We will only deal with programs which are data race free.

## 4.2 Concurrent analysis technique

Arnab De has explained his approach to concurrent data flow analysis[6] by giving example of access path based null-pointer analysis. He argues that the data-flow value is true only before the statement where the corresponding access path/lvalue is relevant.

The first step in the analysis is to add edges between nodes of control flow graph representing different threads. These edges map to the synchronize-with edges in the happens before memory model. Hence, the name sync-CFG is given to this control flow graph. The edges are added from the spawn statement to the first statement of each thread, from the unlock statement to lock statement if they access the same lock variable and belong to different threads. In the next step sequential data flow analysis is performed on the syn-CFG. The synchronization edges have identity flow functions. The example of the access-path based null pointer analysis inspired from[6] is in Figure 3.1

In Figure 3.1 the synchronization edges are added to generate the sync-CFG. It also shows access paths to memory locations which are discovered

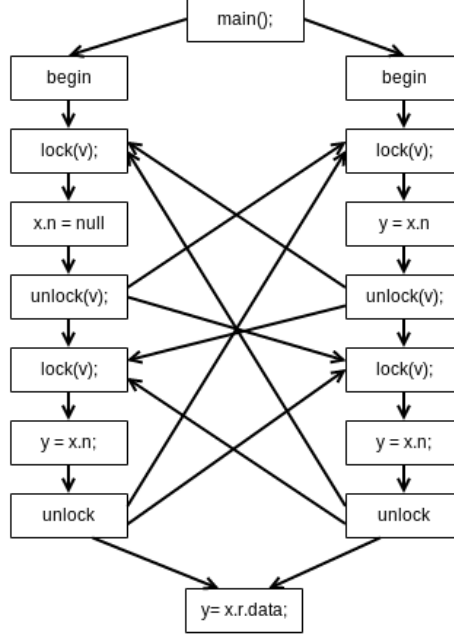


Figure 4.4: Concurrent Heap liveness analysis input

to be not null by the analysis. The values are marked in *italics* for each corresponding statement. As  $p.data$  is non-null at point  $M_5$  in the main thread before spawning the cons thread, this value gets propagated to the first instruction  $C_1$  of the cons thread through one of the added edges, and from there to the lock instruction at  $C_2$ . Similarly, although  $p.next$  is set back to non-null at  $P_4$  before the unlock, despite being set to null at  $P_3$  in the prod thread. This fact also gets propagated to the lock statement of the cons thread through the edge from  $P_6$  to  $C_2$ . As  $p.next$  is not null in both the paths joining at  $C_2$ , we can conclude  $p.next$  to be non-null before the lock statement in all executions by the merge operation.

An important point to note about this technique is that, it may compute incorrect values at program points not containing access paths. For all data-race free programs, relevant statements will occur in the lock-unlock regions. Those statements containing access path or reference expression are considered relevant. In the given example  $C_1$  is not a relevant statement and the data flow value  $p.next$  is incorrect considering the program execution order  $[P_3 C_1]$ . An example that can be designed to provide as input for concurrent heap liveness analysis is shown in Figure 4.4.

# Chapter 5

## Design of the Analysis

For programs with procedure call, context-sensitive analysis is required to improve the precision of data flow facts. It is needed to extend the concurrent analysis technique to inter-procedural level. In the paper, an extension based on the call strings approach was proposed. However we wish to perform inter-procedural analysis using value contexts, for better way to handle recursive programs.

A thread now consists of a number of procedure calls, each with their own CFGs. Each thread has an entry procedure with the same name as the thread. Execution of a thread starts with the execution of the start node of the entry procedure. Due to the inter-procedural nature we would need to handle call and return statements by adding edges from the call statement to the root node of the called procedure CFG and edges from the return statement of the called procedure CFG to the statement immediately following the call statement.

As an input for the concurrent inter-procedural analysis, we will supply programs with multiple threads with procedure calls in the main thread functions which can be recursive.

### 5.1 Call Graph Generation

Call graph construction can be done using Soot[7]. The call graph is available only in whole program mode of soot (-w option). It can be accessed through the *getCallGraph* method. Alternatively, call graph can also be constructed using the VASCO using the class *vasco.callgraph.CallGraphTest* in the *vasco.callgraph* package. VASCO generates a much precise call graph

using flow and context sensitive points to analysis over the program. The arguments that need to be given along to run is the classpath containing the soot jar file, the output directory, maximum depth of call chains and the main class indicating the entry point of the program.

The command is:

```
java [-cp CLASSPATH] vasco.callgraph.CallGraphTest [-out DIR] [-k DEPTH]
MAIN_CLASS.
```

For example

```
java -cp bin:jars/* vasco.callgraph.Test -out "vasco-output/" -k 9 tests.test
```

is executed from the project root directory. The class file to be given as input is into the package tests.

For the given input program

---

```
package tests;
public class test {
    static class A {
        void foo() { bar(); }
        void bar() { }
    }

    public static void main(String[] args) {
        A a1 = new A();
        a1.foo();

        A a2 = new A();
        a2.foo();

        a2.bar();
    }
}
```

---

We get the calls in the main procedure as

```
PCG Method : main → foo
PCG Method : main → bar
PCG Method : main → foo
PCG Method : main → <init>
PCG Method : main → <init>
```



## 5.2 Combined Unit Graph

We will be using the *CombinedUnitGraph* API to create a sync-CFG required to perform the analysis. This is currently implemented to handle 2 threads and perform intra-procedural analysis. This needs to be improved to handle more than 2 threads and construct inter-procedural CFG as discussed.

Creating an intra-procedural CFG : We first create an object of the *CombinedUnitGraph* class by passing the body of the 1st CFG (for the first thread) to be combined to its constructor. Then, we call the *addLockUnlockUnitsForThread1* method to add the lock and unlock nodes in the 1st CFG and store them in respective lists. Now, we can add the 2nd CFG to this object by calling the *addGraph* method with the 2nd graph as an argument. This is to be followed by a call to the *addLockUnlockUnitsForThread2* method and finally the *addUnlockToLockEdges* method call in order to complete the construction of the sync-CFG by joining unlock to lock edges for the same lock object. Exact API details are provided in the thesis on Concurrent Analysis of programs.[8]

Consider this input program for intra-procedural live variable analysis:

---

```
import java.util.concurrent.locks.Lock;
import java.util.concurrent.locks.ReentrantLock;

public class LiveVariablesInput {
private Lock lock = new ReentrantLock();

private class Thread1 extends Thread {
    public void run() {
        int a=0,b=0;
        lock.lock();
        a = 0;
        lock.unlock();

        lock.lock();
        b = a;
        lock.unlock();
    }
}

private class Thread2 extends Thread {
```

```

    public void run() {
        int a=0,b=0;
        lock.lock();
        a = 0;
        lock.unlock();

        lock.lock();
        a = 0;
        lock.unlock();
    }
}

public static void main(String[] args) {
    LiveVariablesInput ip = new LiveVariablesInput();

    Thread t1 = new Thread(ip.new Thread1());
    t1.start();

    Thread t2 = new Thread(ip.new Thread2());
    t2.start();
}
}

```

---

The combined unit graph creates a sync-CFG in Figure 5.1 for the statements in the jimple representation of the program. The class file is converted to Jimple using Soot.

## 5.3 VASCO framework

We have already seen the use of VASCO framework to generate precise call graph for inter-procedural programs. VASCO framework is also used to design inter-procedural analysis. To perform an analysis, it is needed to override the methods *normalFlowFunction*, *callEntryFlowFunction*, *callExitFlowFunction*, *callLocalFlowFunction*, *boundaryValue*, *copy*, *meet*, *topValue*, *programRepresentation* from the *ForwardInterProceduralAnalysis* (or *BackwardInterProceduralAnalysis* depending on the nature of the analysis).

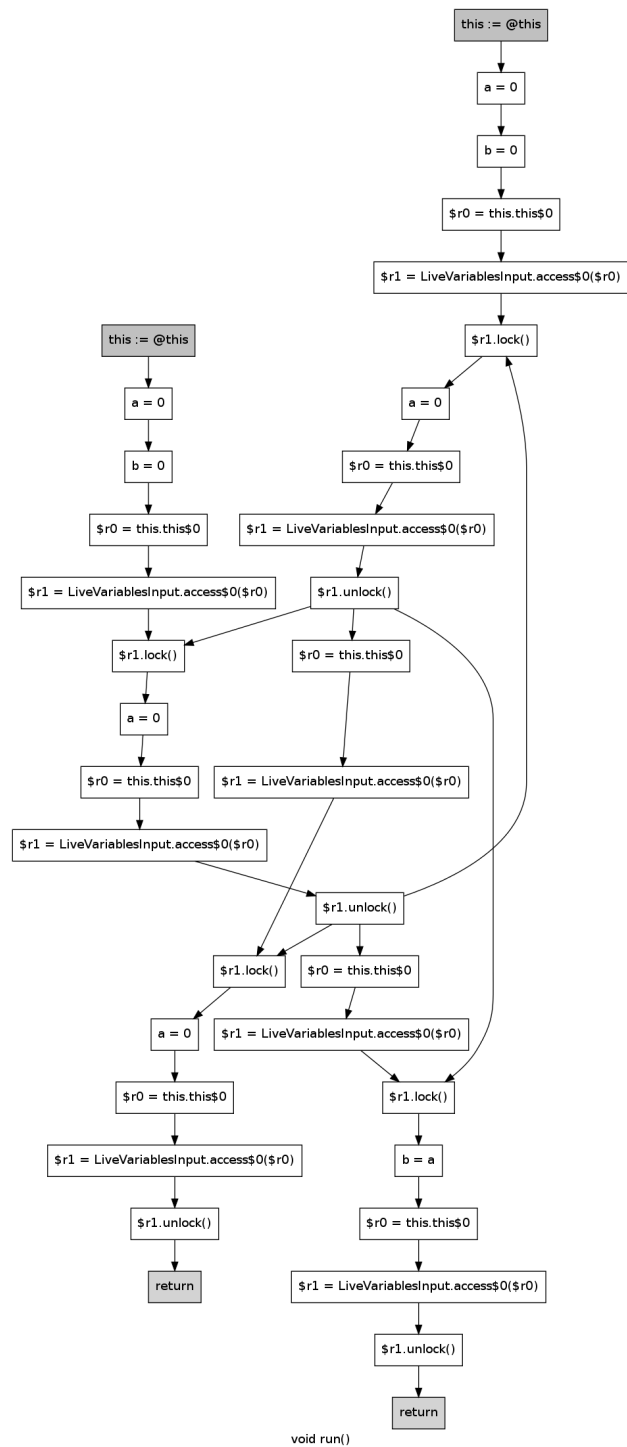


Figure 5.1: Sync-cfg for intra-procedural live variable analysis

# Chapter 6

## Conclusion and Future Work

In this report the topics covered are :

- The mechanism of Heap reference analysis using points-to and live variable analysis on access paths. It is necessary to store the access path values at a statement as an access graph to keep the data fact bounded.
- The method of value context used to carry out precise inter-procedural analysis with an example case on handling recursion.
- The technique of constructing sync-cfg for performing intra-procedural data flow analysis of concurrent programs.
- The extension of concurrent analysis to an inter-procedural level, by using VASCO for generating call-graph and designing inter-procedural analysis.

The future work to be done is:

- Implementation of CombinedUnitGraph class to handle programs with more than 2 threads.
- Using Value context method of performing inter-procedural analysis on data-race free concurrent programs containing function calls.
- Implementing Heap reference analysis on concurrent programs containing function calls.

# Bibliography

- [1] Amitabha Sanyal Uday P. Khedker and Amey Karkar. *Heap Reference Analysis Using Access Graphs*. ACM Transactions on Programming Languages and Systems. 2007.
- [2] Alefiya Lightwala. *Interprocedural Liveness Based Heap Points-to Analysis for Java*. MTP Thesis, Department of Computer Science and Engineering, Indian Institute of Technology, Bombay. 2013.
- [3] Alan Mycroft Uday P. Khedker and Prashant Singh Rawat. *Liveness-Based pointer analysis*. SAS’12 Proceedings of the 19th international conference on Static Analysis. 2012.
- [4] Uday P. Khedker. *Slides on Interprocedural Data Flow Analysis*. Department of Computer Science and Engineering, Indian Institute of Technology, Bombay. 2013.
- [5] Rohan Padhye and Uday P. Khedker. *Interprocedural Data Flow Analysis in Soot using Value Contexts*. In the Proceedings of the 2nd ACM SIGPLAN. 2013.
- [6] Deepak DSouza Arnab De and Rupesh Nasre. *Dataflow Analysis for Datarace-Free Programs*. 2010.
- [7] Arni Einarsson and Janus Dam Nielsen. “A Survivor’s Guide to Java Program Analysis with Soot”. Notes for the Soot framework from McGill University. 2008.
- [8] Aditya Bhandari. *Data Flow Analysis for Concurrent Programs*. BTP Thesis, Department of Computer Science and Engineering, Indian Institute of Technology, Bombay. 2013.