ReSIde: Reusable service identification from software families

Anas Shatnawi, Abdelhak Seriai, Houari Sahraoui, Tewfik Ziadi, Abderrahmene Seriai

PII: S0164-1212(20)30172-2

DOI: https://doi.org/10.1016/j.jss.2020.110748

Reference: JSS 110748

To appear in: The Journal of Systems & Software

Received date: 2 November 2019 Revised date: 2 July 2020 Accepted date: 16 July 2020



Please cite this article as: A. Shatnawi, A. Seriai, H. Sahraoui et al., ReSIde: Reusable service identification from software families. *The Journal of Systems & Software* (2020), doi: https://doi.org/10.1016/j.jss.2020.110748.

This is a PDF file of an article that has undergone enhancements after acceptance, such as the addition of a cover page and metadata, and formatting for readability, but it is not yet the definitive version of record. This version will undergo additional copyediting, typesetting and review before it is published in its final form, but we are providing this version to give early visibility of the article. Please note that, during the production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

© 2020 Published by Elsevier Inc.

Highlights

- Automate the identification of reusable services from multiple software products
- Increase the reusability of Identified services by analyzing multiple products
- Propose an adaptable service quality fitness function
- Experiment on three software families (small, medium, large size)
- Support the migration of product variants to SPLs

ReSIde: Reusable Service Identification from Software Families

Anas Shatnawi^{a,b}, Abdelhak Seriai^b, Houari Sahraoui^c, Tewfik Ziadi^b Abderrahmene Seriai^c

^aLIRMM, University of Montpellier, Montpellier, France

^bLIP6, Sorbonne University, Paris, France

^cGEODES, University of Montreal, Montreal, Quebec, Canada

Email addresses: anas.shatnawi@lip6.fr (Anas Shatnawi), abdelhak.seriai@lirmm.fr (Abdelhak Seriai), sahraouh@iro.umontreal.ca (Houari Sahraoui), tewfik.ziadi@lip6.fr (Tewfik Ziadi), seriai.abdelrahmene@gmail.com (Abderrahmene Seriai)

Corresponding author: Anas Shatnawi

Abstract: The clone-and-own approach becomes a common practice to quickly develop Software Product Variants (SPVs) that meet variability in user requirements. However, managing the reuse and maintenance of the cloned codes is a very hard task. Therefore, we aim to analyze SPVs to identify cloned codes and package them using a modern systematic reuse approach like Service-Oriented Architecture (SOA). The objective is to benefit from all the advantages of SOA when creating new SPVs. The development based on services in SOA supports the software reuse and maintenance better than the development based on individual classes in monolithic object-oriented software. Existing service identification approaches identify services based on the analysis of a single software product. These approaches are not able to analyze multiple SPVs to identify reusable services of cloned codes. Identifying services by analyzing several SPVs allows to increase the reusability of identified services. In this paper, we propose ReSIde (Reusable Service Identification): an automated approach that identifies reusable services from a set of object-oriented SPVs. This is based on analyzing the commonality and the variability between SPVs to identify the implementation of reusable functionalities corresponding to cloned codes that can be packaged as reusable services. To validate ReSIde, we have applied it on three product families of different sizes. The results show that the services identified based on the analysis of multiple product variants using ReSIde are more reusable than services identified based on the analysis of singular ones.



ReSIde: Reusable Service Identification from Software Families

Anas Shatnawi^{a,c,1}, Abdelhak Seriai^a, Houari Sahraoui^b, Tewfik Ziadi^c, Abderrahmene Seriai^b

^aLIRMM, University of Montpellier, Montpellier, France ^bGEODES, University of Montreal, Montreal, Quebec, Canada ^cLIP6, Sorbonne University, Paris, France

Abstract

The clone-and-own approach becomes a common practice to quickly develop Software Product Variants (SPVs) that meet variability in user requirements. However, managing the reuse and maintenance of the cloned codes is a very hard task. Therefore, we aim to analyze SPVs to identify cloned codes and package them using a modern systematic reuse approach like Service-Oriented Architecture (SOA). The objective is to benefit from all the advantages of SOA when creating new SPVs. The development based on services in SOA supports the software reuse and maintenance better than the development based on individual classes in monolithic object-oriented software. Existing service identification approaches identify services based on the analysis of a single software product. These approaches are not able to analyze multiple SPVs to identify reusable services of cloned codes. Identifying services by analyzing several SPVs allows to increase the reusability of identified services. In this paper, we propose ReSIde (Reusable Service Identification): an automated approach that identifies reusable services from a set of object-oriented SPVs. This is based on analyzing the commonality and the variability between SPVs to identify the implementation of reusable functionalities corresponding to cloned codes that can be packaged as reusable services. To validate ReSIde, we have applied it on three product families of different sizes. The results show that the services identified based on the analysis of multiple product variants using ReSIde are more reusable than services identified based on the analysis of singular ones.

Keywords: software reuse, service-oriented reengineering, reverse engineering, variability, software families, object-oriented source code

41

1. Introduction

10

11

12

13

14

15

17

It is a common practice that software developers rely on 21 the clone-and-own approach to deal with custom-tailored 22 software [1, 2]. New software products are developed by 23 copying and modifying codes corresponding to functionali- 24 ties from existing software to meet the requirement of new 25 needs of new customers. The resulting software products 26 are considered Software Product Variants (SPVs) because 27 they share features and differ in terms of others [1]. The 28 existence of this phenomenon has been proved by empirical 29 studies like [2] [3].

For monolithic object-oriented SPVs, managing the soft-31 ware reuse and maintenance of the cloned codes is a very 32 hard task [4]. For reuse, e.g., it is hard to identify reusable 33 codes from the monolithic object-oriented implementation 34 of these SPVs [5]. For maintenance, e.g., it is difficult to 35 propagate updates for fixing bugs related to the implementation of the cloned codes. Therefore, we are interested in 37

Email addresses: anas.shatnawi@lip6.fr (Anas Shatnawi), abdelhak.seriai@lirmm.fr (Abdelhak Seriai), sahraouh@iro.umontreal.ca (Houari Sahraoui), tewfik.ziadi@lip6.fr (Tewfik Ziadi), seriai.abdelrahmene@gmail.com (Abderrahmene Seriai)

1 Corresponding author

analyzing SPVs to identify cloned codes and package them using a modern systematic reuse approach like Service-Oriented Architecture (SOA). The objective is to benefit from all the advantages of SOA when creating new SPVs. With SOA, SPVs are defined in terms of flexible architectures composed of a set of independent coarse-grained services that implement reusable functionalities across several SPVs, and *clearly* define their external dependencies in an explicit way through their provided and required interfaces.

One of the most important steps for reengineering monolithic object-oriented SPVs to SOAs is the identification of reusable services corresponding to cloned codes of reusable functionalities across several SPVs. Moreover, the identification of reusable services is an efficient way to supply service-based libraries.

Existing service identification approaches identify services based on the analysis of a single software product [6, 7, 8, 9]. These existing approaches partition the object-oriented implementation to disjoint groups of classes where each group is the implementation of a potential service. As these approaches only analyze single products, the identified services may be useless in other software products and consequently their reusability is not guaranteed. In addition, these approaches are not able to analyze multiple

SPVs to identify reusable services related to cloned func- 99 tionalities and their related codes. In fact the probabil-100 ity of reusing a service in a new software product is pro-101 portional to the number of software products that have 102 already used it [10, 11]. Thus, mining software services 103 based on the analysis of a set of SPVs contributes to iden-104 tify reusable services. Nonetheless, this has not been inves-105 tigated in the literature. Identifying services by analyzing 106 multiple SPVs makes it possible to improve the reusability 107 of services to reduce the effort when developing new soft-108 ware products (by reuse) and to reduce the maintenance 109 effort by making it possible to propagate any change to a110 service across all of the products that reuse this service.

46

47

50

51

53

54

55

57 58

61

62

63

65

69

70

71

73

74

76 77

78

80

81

82

83

85

87

88

90

91

92

93

94

Identification): an automated approach that identifies reusable

Background: service quality model services from a set of similar object-oriented SPVs. ReSIde analyzes the commonality and the variability between the object-oriented source code of multiple SPVs to identify the implementation of reusable functionalities corresponding to cloned codes. These identified functionalities are intended to be packaged as reusable services that can be reused across multiple products. ReSIde is motivated by the fact that services identified based on the analysis of several existing SPVs will be more useful (reusable) for the development of new SPVs than services identified from singular ones.

To validate ReSIde, we have applied it on three opensource product families of different sizes (i.e., small, medium and large-scale ones). We propose an empirical measurement to evaluate the reusability of the identified services. According to this measurement, the results show that the reusability of the identified services using ReSIde is better than the reusability of those identified from singular

The idea of analyzing multiple SPVs to identify reusable components was introduced in our conference paper [12]. In relationship with this conference paper, this journal paper addresses the identification of services and not software components. Also, it includes additional contents in terms¹¹² of:

- 1. Proposition of a deep analysis of the problem of iden- $_{115}$ tifying reusable services from multiple SPVs.
- 2. Proposition of more details and deep analysis of the 117 proposed solution, e.g., by giving more details about₁₁₈ used algorithms and illustrating the solution based₁₁₉ on new examples and figures.
- 3. Adding a new case study that is Health Watcher and 121 consequently extending the evaluation.
- Presentation of new detailed results and new analysis¹²³ of their relevance.
- 5. Adding threats to validity discussions.
- 6. Important extension of related work analysis and 126 classification.
- 7. The analysis of the research and practical implica- $^{\scriptscriptstyle 128}$ tions of the obtained results.

The rest of this paper is organized as follows. Section 2 presents a background needed to understand our approach. In Section 3, we provide the foundations of ReSIde. Section 4.1 discusses how ReSIde identifies potential services from each SPV. In Section 4.2, we present the identification of similar services between different SPVs. Reusable services are recovered from the similar ones in Section 4.3. Section 4.4 presents how ReSIde structures the service interfaces. The evaluation results are discussed in Section 5 and Section 6. In Section 7, we present the related works to our approach. A conclusion of this paper is presented in Section 8.

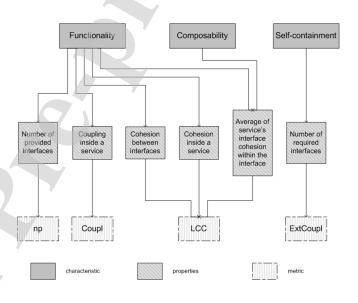


Figure 1: Service quality model

In this section, we discuss the service quality model proposed in our previous work [6] and which is reused in this paper to evaluate the quality of a cluster of classes to form a quality-centric service based on the structural dependencies between these classes. From the service structure point of view, any group of classes can form a service. Therefore, we need a measurement to distinguish good services from bad ones. To do so, we use this quality fitness function to identify only groups of classes that could form high quality services.

To define this service quality model, we studied the existing definition of services in the literature and identified three quality characteristics that should be measured to evaluate the quality of a group of classes to form a quality-centric service. These characteristics are: (i) the coarse-grained of functionalities implemented by the cluster of classes, (ii) the *composability* of the cluster of classes to be reused through their interfaces without any modifi-

125

cation, and (iii) the self-containment of the the cluster of 179

131

132

133

135

136

137

139

140

141

143

144

145

147

148

149

150

151

152

153

155

156

157

158

159

160

162

164

165

166

167

168

170

171

172

174

175

177

As presented in Figure 1, we perform similar to the 181 ISO9126 quality model [13] to refine these three charac-182 teristics to a number of service properties that can be183 measured using a number of object-oriented metrics (e.g., 184 self-containment is refined to the number of required interfaces by a given service).

The service quality model identifies service character- $^{^{185}}$ istics and refine them as metrics. However, to identify ser-186 vices, we need to put these metrics as function that can be computed to output a numerical value for evaluating the semantic of a service (i.e. what a service is) based on its implementation composed of a cluster of object-oriented 189 classes. Therefore, we defined a quality fitness function (QFF) based on our service quality model where its input $^{\rm 191}$ is a cluster of classes (E), and its output is a value, situated in [0–1], corresponding to the quality of this cluster of 193 classes to form a quality-centric service. This QFF is represented by Equation 1 based on the linear combination 195 of the three quality characteristics: Functionality (Fun), ¹⁹⁶

Composeivility (Comp.) and Salf Containment (SalfCon). ¹⁹⁷ Composability (Comp) and Self-Containment (SelfCon).

$$QFF(E) = \frac{1}{\sum_{i=1}^{3} \lambda_i} \cdot (\lambda_1 \cdot Fun(E) + \lambda_2 \cdot Comp(E) + \lambda_3 \cdot SelfCont(E))$$
(1)

SelfCont(E)

Where λ_i are parameters used by the practitioners to weight each characteristic.

The Functionality (Fun), the Composability (Comp) and the Self-Containment (SelfCon) of a group of classes (E) are measured based on Equation 2, Equation 3 and Equation 4 respectively.

$$Fun(E) = \frac{1}{5} \cdot (np(E) + \frac{1}{I} \sum_{i \in I} LCC(i) + CCC(i) + LCC(E) + LCC(E)$$
(2)

$$Comp(E) = \frac{1}{I} \sum_{i \in I} LCC(i)$$
 (3)

$$SelfCont(E) = ExtCoupl(E)$$
 (4)

Where np(E) is the number of provided interfaces based₂₀₀ on the number of public methods in E. LCC(i) (Loose₂₀₁ Class Cohesion) [14] is the average of the cohesion of a_{202} group of methods composing the service interfaces. These₂₀₃ methods are the public methods implemented in the iden-204 tified classes of the service. LCC(i) is calculated based on₂₀₅ the percentage between the number of links among these 206 methods and the total number of possible links among₂₀₇ these methods. LCC(I) is the cohesion between inter-208 faces. LCC(E) is the cohesion inside a service. $Coupl(E)_{209}$ (Coupling) measures the level of connectivity (e.g., method₂₁₀ calls, attribute accesses) of a group of classes with the₂₁₁ reaming classes of the software. ExtCoupl (External Cou-212 pling) measures the coupling of a given potential service₂₁₃ with other services (1 - Coupl).

In this paper, we use this quality fitness function as a black box component. It worths to note that it can be replaced by any service quality fitness function following the needs of the software engineers. Please refer to [6] for more details regarding the service quality model and its quality fitness function.

3. ReSIde foundations

3.1. Illustrative example

We present in Figure 2 an illustrative example to easy understand the foundations of our approach. We have 2 SPVs that are developed based on the clone-and-own ap-

SPV1 includes 5 classes that implement functionalities related to the photo management. SPV2 cloned SPV1 and extends it based on 10 additional classes. These classes aim to improve existing functionalities and to add other functionalities related to the music management.

Our goal is to identify reusable services based on the analysis of source codes respectively of theses two SPVs.

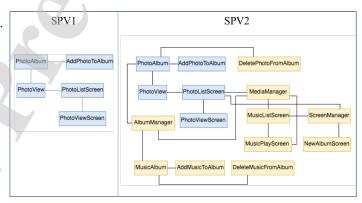


Figure 2: Illustrative example of two SPVs

3.2. ReSIde principles

ReSIde aims to identify reusable services based on the analysis of the object-oriented source code of similar SPVs. To identify services from the source code of object-oriented software, we propose an object-to-service mapping model that maps the object-oriented elements (classes and methods) to SOA ones (services and interfaces). We present this mapping model in Figure 3. We define a service in terms of a cluster of object-oriented classes. A service implements a set of functionalities provided using its interfaces. Each interface is defined in terms of a set of object-oriented methods implemented in the classes of the service. The provided interfaces of a service are defined as a group of methods implemented by classes composing the service and accessed by classes of other services. The required interfaces of a service are defined as a group of 263

264

265

266

267

268

269

270

271

273

274

275

276

277

278

methods invoked by classes of the service and implemented₂₄₉ in the classes of other services.

250

215

216

217

218

219

220

221

223

224

225

227

228

229

230

231

232

233

235

236

237

238

240

241

242

246

247

248

To identify a cluster of classes frequently appear to-251 gether in several SPVs to implement the same functionalities, we rely on two types of dependencies: the co-existence²⁵² together and the structural object-oriented dependencies.²⁵³ The co-existence together dependencies measure how much²⁵⁴ a cluster of classes are reused together in the same subset²⁵⁵ of SPVs. These are used to guarantee that the resulting²⁵⁶ services are reusable across different SPVs. The structural²⁵⁷ object-oriented dependencies evaluate the quality of a clus-²⁵⁸ ter of classes to form a quality-centric service based on the²⁵⁹ service quality model proposed in our previous work (c.f. ²⁶⁰ Section 2). These are used to guarantee that we produce quality-centric services.




Figure 3: Object-to-service mapping model

We summarize the principles of ReSIde as follows.

- ReSIde defines a service in terms of a cluster of object²⁷⁹ oriented classes. E.g., the PhotoAlbum service could²⁸⁰ be formed based on the *PhotoAlbum*, *AddPhotoToAl*-²⁸¹ bum, *AlbumManager* and *DeletePhotoFromAlbum* classes.
- A reusable service is the one identified in several SPVs. E.g., the PhotoAlbum service is identified in the two SPVs in our illustrative example.
- Co-existence together dependency between classes is 287 used to identify reusable services already reused in 288 several SPVs. E.g., the *PhotoAlbum* and *AddPhoto-289 ToAlbum* co-exist together in the two SPVs.
- Object-oriented dependency between classes is used to identify quality-centric services. E.g., the *Pho-* to *Album* and *AddPhotoToAlbum* are cohisive based on their method calls and attribute accesses.
- ReSIde analyzes the commonality and the variability²⁹⁶ between SPVs to identify reusable services.
- Classes composing a reusable service should imple-299 ment one or more coarse-grained functionalities in

several SPVs. E.g., the *PhotoAlbum*, *AddPhotoToAlbum* and *DeletePhotoFromAlbum* classes implement the cohesive PhotoAlbum service.

- A class can belong to many services since this class could contribute to implement different functionalities by participating with different groups of classes. E.g., the AlbumManager class is a part of the PhotoAlbum service (AlbumManager, PhotoAlbum, AddPhotoToAlbum, DeletePhotoFromAlbum) and the MusicAlbum service (AlbumManager, MusicAlbum, AddMusicToAlbum, DeleteMusicFromAlbum).
- A provided interface of a service is a group of methods that are accessed by classes composing other services.
- A required interface of a service is a set of methods used by classes composing this service and belonging to other services' classes.

3.3. ReSIde process

Based on what we mentioned before, we propose a process presented in Figure 4 to identify reusable services from a set of SPVs. This process consists of four main steps.

1. Identification of potential services in each SPV. We analyze each SPV independently to identify all potential services composing each SPV. To identify quality-centric potential services, we rely on object-oriented dependencies between classes to evaluate their quality. We consider that any set of classes could form a potential service if and only if it has an accepted value following the quality fitness function of the quality model presented in Section 2.

In our illustrative example, we identify the 5 clusters of classes corresponding to potential services in SVP1.

- (a) PhotoAlbum, AddPhotoToAlbum.
- (b) PhotoAlbum, AddPhotoToAlbum, PhotoView.
- (c) PhotoListScreen, PhotoViewScreen.
- (d) PhotoListScreen, PhotoViewScreen, PhotoView.
- (e) Photo View Screen, Photo View.

These clusters of classes are obtained based on the strength of the structural dependencies among the classes.

2. Identification of similar services between different SPVs. Due to the similarity between the SPVs, their identified potential services could provide similar functionalities. Similar services are those providing mostly the same functionalities and differ compared to few others. Thus, we identify similar services from all potential ones identified from different SPVs. To this end, we cluster the services into groups based on the lexical similarity among classes

Figure 4: The process of reusable services identification from multiple SPVs

composing the services based on the cosine similarity₃₂₆ metric [15].

300

301

302

303

304

305

306

307

308

309

310

311

312

313

315

316

317

318

319

320

321

323

324

325

Considering our illustrative, we identify the clus-328 ter of [PhotoAlbum, AddPhotoToAlbum, PhotoView] in SPV1 as similar to the cluster of [AlbumMan-330 ager, PhotoAlbum, AddPhotoToAlbum, PhotoView] 331 in SPV2.

3. Identification of one reusable service from sim-333 ilar potential services. Similar services identified334 from different SPVs are considered as variants of one335 service because they provide mostly the same func-336 tionalities. Therefore, from a cluster of similar ser-337 vices, we identify one common service that is rep-338 resentative of this cluster of similar services and it₃₃₉ is considered as the most reusable one compared to the members of the analyzed cluster. We rely on the $_{\scriptscriptstyle{340}}$ co-existence together dependencies and the structural object-oriented dependencies to identify the classes³⁴¹ composing this common service. The co-existence to-342 gether dependencies are identified based on the per-343 centage of services containing the classes. The *struc*-344 tural object-oriented dependencies are based on the 345 quality fitness function of the quality model pre-346 sented in Section 2.

For example, we identify the group of [PhotoAlbum, 348 AddPhotoToAlbum, PhotoView] as implementation 349

- of the resuable service from the similar clusters of [PhotoAlbum, AddPhotoToAlbum, PhotoView] in SPV1 and [AlbumManager, PhotoAlbum, AddPhotoToAlbum, PhotoView] in SPV2.
- 4. Identification of object-oriented methods corresponding to service interfaces. Only classes constituting the internal structures, i.e., the implementation, of the reusable services are identified in the previous steps. However a service is used based on its provided and required interfaces. Thus, we structure service interfaces, required and provided ones, based on the analysis of the dependencies (e.g., method calls, attribute accesses) between services in order to identify how they interact with each others.

4. ReSIde in depth

4.1. Identification of potential services in each software product variant

We view a potential service as a cluster of object-oriented classes, where the corresponding value of the quality fitness function is satisfactory (i.e., its quality value is higher than a predefined quality threshold). Thus, our analysis consists of extracting any set of object-oriented classes that can be formed as a potential service. Such that the overlapping between the services is allowed.

4.1.1. Method to identify potential services

351

352

354

355

358

359

360

361

362

363

366

367

368

369

371

372

373

375

376

378

379

380

381

382

383

384

386

387

388

389

390

391

392

394

395

398

400

401

402

Identifying all potential services needs to investigate all subsets of classes that can be formulated from the source code. Then, the ones that maximize the quality fitness function are selected. Nevertheless, this is considered as NP-hard problem as the computation of all subsets requires an exponential time complexity $(O(2^n))$. To this end, we propose a heuristic-based technique that aim to extract services that are good enough ones compared to the optimal potential services. We consider that classes composing a potential service are gradually identified starting from a core class that participates with other classes to contribute functionalities. Thus, each class of the analyzed SPV can be selected to be a core one. Classes having either direct or indirect link with it are candidates to be added to the corresponding service.

4.1.2. Algorithm to identify potential services

Algorithm 1 illustrates the process of identifying potential services. In this algorithm, Q refers to the quality fitness function and $Q_{-}threshold$ is a predefined quality threshold. The selection of a class to be added at each step is decided based on the quality fitness function value obtained from the formed service. Classes are ranked based on the obtained value of the quality fitness function when it is gathered to the current group composing the service. 404 The class obtaining the highest quality value is selected to 405 extend the current group (c.f. lines 7 and 8). We do this $_{406}$ until all candidate classes are grouped into the service (c.f.₄₀₇ lines 6 to 11). The quality of the formed groups is evaluated at each step, i.e., each time when a new class is added. We select the peak quality value to decide which classes₄₁₀ form the service (c.f. lines 10 and 11). This means that₄₁₁ we exclude classes added after the quality fitness function₄₁₂ reaches the peak value since they minimize the quality of₄₁₃ the identified service. For example, in Figure 5, the $7th_{414}$ and the 8th added classes are putted aside from the group₄₁₅ of classes related to service 2 because when they have been₄₁₆ added the quality of the service is decreased compared to₄₁₇ the peak value. Thus, classes retained in the group are₄₁₈ those maximizing the quality of the formed service. Af-419 ter identifying all potential services of such a SPV, the 420 only ones retained are services that their quality values₄₂₁ are higher than a quality threshold that is defined by soft-422 ware architects (c.f. lines 12 and 13). For example, in_{423} Figure 5, suppose that the predefined quality threshold₄₂₄ value is 70%. Thus, Service 1 does not reach the required₄₂₅ threshold. Therefore, it should not be retained as a po-426 tential service. This means that the starting core class is 427 not suitable to form a service.

4.2. Identification of similar services between different software product variants

We define similar services as a set of services providing $_{431}$ mostly the same functionalities and differing in few ones. $_{432}$ These can be considered as variants of the same service. $_{433}$

```
Input: Object-Oriented Source Code(OO)
   Output: A Set of Potential Services(PS)
  classes = extractInformation(OO);
{f 2} for each c in classes {f do}
      service = c;
3
      candidateClasses = 0
       classes.getConnectedClasses(c):
      bestService = service;
5
      while (|candidateClasses| >= 1) do
 6
         c1 = \text{getNearestClass}(service,
           candidateClasses);
         service = service + c1;
 8
         candidateClasses = candidateClasses - c1;
 9
10
         if Q(service) > Q(bestService) then
             bestService = service;
11
         end
      end
      if Q(bestService) > Q_threshold then
12
         PS = PS + bestService;
13
      end
   end
14 return PS
    Algorithm 1: Identifying Potential Services
```

4.2.1. Method to identify similar services

SPVs are usually developed using the clone and own technique. Thus, we consider that classes having similar names implement almost the same functionalities. Although some of the composed methods are overridden, added or deleted, the main functionalities are still the same ones from the architectural point of view. Therefore, the similarity as well as the difference between services are calculated based on the object-oriented classes composing these services. Thus, similar services are those sharing the majority of their classes and differing considering the other ones.

Groups of similar services are built based on a lexical similarity metric. Thus, services are identified as similar compared to the strength of similarity links between classes composing them. A survey of text similarity metrics is conducted in [16]. Practitioners could use any of these similarity metrics based on their needs. For our experimentation, we selected the cosine similarity metric because it is based on the angle between vectors instead of points [15]. Following this cosine similarity metric each service is considered as a text document, which consists of a list of service classes' names. The similarity between a set of services is calculated based on the ration between the number of shared classes to the total number of distinguished classes.

4.2.2. Algorithm to identify similar services

We use a hierarchical clustering technique to gather similar services into groups. This hierarchical clustering technique consists of two algorithms. The first algorithm

458

459

461

462

463

465

467

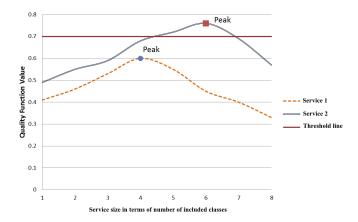


Figure 5: Forming potential services by incremental selection of 456 classes

```
Input: Potential Services(PS)
 Output: Dendrogram (dendrogram)
1 Dendrogram dendrogram = PS;
 while (|dendrogram| > 1) do
     c1, c2 =
3
      mostLexicallySimilarNodes(dendrogram);
     c = \text{newNode}(c1, c2);
4
     remove(c1, dendrogram);
5
6
     remove(c2, dendrogram);
     add(c, dendrogram);
7
 end
```

8 return dendrogram

435

436

437

439

440

441

442

443

444

445

447

448

449

451

452

453

455

Algorithm 2: Building Dendrogram of Similar Services

aims at building a binary tree, called *dendrogram*. This dendrogram provides a set of candidate clusters by presenting a hierarchical representation of service similarity. Figure 6 shows an example of a dendrogram, where S_i refers to $Service_i$. The second algorithm aims at traveling through the built dendrogram, in order to extract the best clusters, representing a partition.

To build a dendrogram of similar services, we rely on Algorithm 2. It takes a set of potential services as an input. The result of this algorithm is a dendrogram representing candidate clusters, similar to Figure 6. The algorithm starts by considering individual services as initial leaf nodes in a binary tree, i.e., the lowest level of the dendrogram in Figure 6 (c.f. line 1). Next, the two most similar nodes are grouped into a new one, i.e., as a parent of them (c.f. lines 3 and 4). For example, in Figure 6, the S_2 and S_3 are grouped. This is continued until all nodes are grouped in the root of the dendrogram (c.f. lines 2 to 7)

To identify the best clusters, we rely on Algorithm 3^{470} that uses a depth first search technique to travel through₄₇₁ the dendrogram. It starts from the dendrogram root node₄₇₂




Figure 6: An example of a dendrogram

to find the cut-off points (i.e., the highest node holding S1, S2, S3, S4, S5, S6 in Figure 6). It compares the similarity of the current node with its children (c.f. lines 4 to 7). For example, the node holding S1, S2, S3, S4 and the node holding S5, S6 in Figure 6. If the current node has a similarity value exceeding the average similarity value of its children, then the cut-off point is in the current node where the children minimize the quality fitness function value (c.f. lines 7 and 8). Otherwise, the algorithm recursively continues through its children (c.f. lines 9 to 11). The results of this algorithm are a collection of clusters, where each cluster groups a set of similar services (c.f. line 12).

```
Input: Dendrogram(dendrogram)
  Output: A Set of Clusters of Potential
            Services(clusters)
1 Stack traversal;
2 traversal.push(dendrogram.getRoot());
3 while (! traversal.isEmpty()) do
      Node father = traversal.pop();
4
      Node left = dendrogram.getLeftSon(father);
5
      Node right =
6
       dendrogram.getRightSon(father);
      if similarity(father) > (similarity(left) +
7
       similarity(right) / 2) then
         clusters.add(father)
8
      else
9
10
         traversal.push(left);
         traversal.push(right);
      end
  end
```

12 return clusters

Algorithm 3: Dendrogram Traversal to Identify Cluster of Similar Services

4.3. Identification of one reusable service from similar potential services

As previously mentioned, similar services are considered as variants of a common one. Thus, from each cluster

of similar services, we extract a common service which is considered as the most reusable compared to the members of the analyzed group.

475

477

478

480

481

482

483

484

485

488

489

490

491

492

495

496

497

498

499

500

501

502

503

504

505

506

507

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

4.3.1. Method to identify reusable service based on similar ones

Classes composing similar services are classified into two types. The first one consists of classes that are shared by these services. We call these classes as *Shared* classes. In Figure 7, *C3*, *C4*, *C8* and *C9* are examples of *Shared* classes in the three services belonging to the cluster of similar services. The second type is composed of other classes that are diversified between the services. These are called as *Non-Shared* classes. *C1*, *C2*, *C5*, *C6*, *C7* and *C10* are examples of *Non-Shared* classes in the cluster of similar services presented in Figure 7.

As Shared classes are identified in several SPVs to be part of one service, we consider that Shared classes form the core of the reusable service. Thus, C3, C4, C8 and C9 should be included in the service identified from the cluster presented in Figure 7. However, these classes may not form a correct service following our quality fitness function. Thus, some Non-Shared classes need to be added to the reusable service, in order to keep the service quality high. The selection of a Non-Shared class to be included in the service is based on the following criteria:

- \bullet The quality of the service obtained by adding a Non^{-533} Shared class to the core ones. This criterion is to ⁵³⁴ increase the service quality. Therefore, classes max-⁵³⁵ imizing the quality fitness function value are more ⁵³⁶ preferable to be added to the service.
- The density of a Non-Shared class in a cluster of sim-539 ilar services. This refers to the occurrence ratio of540 the class compared to the services of this group. It is calculated based on the number of services includ-541 ing the class to the total number of services com-542 posing the cluster. We consider that a class having543 a high density value contributes to build a reusable544 service because it keeps the service belonging to a545 larger number of SPVs. For example, in Figure 7, the546 densities of C2 and C1 are respectively 66% (2/3)547 and 33% (1/3). Thus, C2 is more preferable to be548 included in the service than C1, as C2 keeps the549 reusable service belonging to two SPVs, while C1550 keeps it belonging only to one SPV.

As results of the clone-and-own approach, classes of $_{553}$ identified services could have different implementations across various SPVs. These different implementations of the same $_{555}$ cloned class across SPVs should be merged by creating $_{556}$ one suitable and representative abstraction that allows the $_{557}$ variability configuration, e.g., using the preprocessing an- $_{558}$ notations. In literature, we identify potential approaches to be reused for merging the several implementations of $_{559}$ cloned methods/classes [17] [18].

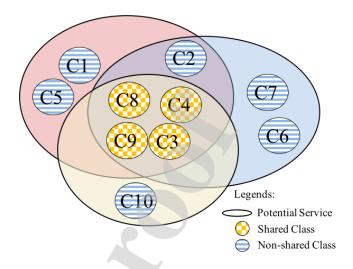


Figure 7: An example of a cluster of three similar services

4.3.2. Algorithm to identify reusable service based on similar ones

Based on the method given in the previous section, an optimal solution requires identifying all subsets of a collection of classes which represents an NP-complete problem (i.e., $O(2^n)$). This algorithm is not scalable for a large number of *Non-Shared* classes (e.g., 10 Non-Shared classes need 1024 operations, while 20 classes need 1048576 operations).

Therefore, we propose to identify the optimal solution only for services with a small number of *Non-Shared* classes. Otherwise, we rely on a near-optimal solution. In the following subsections, we discuss two algorithms to identify an optimal solution and a near-optimal one respectively.

Algorithm providing optimal solution for reusable service identification. Algorithm 4 computes an optimal reusable service from similar ones, where Q refers to the service quality fitness function, Q_threshold refers to the predefined quality threshold and *D_threshold* refers to the predefined density threshold. First, for each cluster of similar services, we extract all candidate subsets of classes among the set of Non-Shared ones (c.f. lines 1 to 8). Then, the subsets that reach a predefined density threshold are only selected (c.f. line 12). The density of a subset is the average densities of all classes in this subset. Next, we evaluate the quality of the service formed by grouping core classes with classes of each subset resulting from the previous step (c.f. lines 13 and 14). Thus, the subset maximizing the quality value is grouped with the core classes to form the reusable service. Only services with a quality value higher than a predefined threshold are retained (c.f. lines 15 to 17).

Algorithm providing near-optimal solution for reusable service identification. We defined a heuristic algorithm pre-

```
Input: Clusters of Services(clusters)
   Output: A Set of Reusable Services(RC)
 1
   for each cluster \in clusters do
      shared = cluster.getFirstservice().getClasses;
 2
      allClasses = \emptyset;
 3
      for each service \in cluster do
 4
          shared = shared \cap service.getClasses();
 5
          allClasses =
 6
           allClasses \cup service.getClasses();
      nonShared = allClasses - shared;
 7
      allSubsets = generateAllsubsets(nonShared);
 8
      reusableService = shared;
 9
10
      bestService = reusableService;
      for each \ subset \in allSubsets \ do
11
          if Density(subset) > D_threshold then
12
13
             if Q(reusableService \cup subset)) >
               Q(bestService) then
                 bestService =
14
                  reusableService \cup subset;
             end
          end
      if Q(bestService) >= Q_threshold then
15
          add(RC,bestService);
16
      end
   end
17 return RC
```

Algorithm 4: Optimal Solution for Reusable Service Identification

562

563

567

568

569

570

571

572

574

575

576

578

579

580

581

582

sented in Algorithm 5, where Q refers to the quality fitness function, Q-threshold refers to the predefined quality 584 threshold and *D_threshold* refers to the predefined density⁵⁸⁵ threshold. First of all, Non-Shared classes are evaluated586 based on their density. The Classes that do not reach assr predefined density threshold are rejected (c.f. lines 9 to 588 11). Then, we identify the greater subset that reaches asso predefined quality threshold when it is added to the corespon classes. To identify the greater subset, we consider the 591 set composed of all Non-Shared classes as the initial one 592 (c.f. lines 9 to 11). This subset is grouped with the core593 classes to form a service. If this service reaches the pre-594 defined quality threshold, then it represents the reusable 595 service (c.f. lines 12 to 15). Otherwise, we remove the 596 Non-Shared class that reduces the quality of the service597 when this Non-Shared class is added to the corresponding core classes (c.f. line 17). We do this until a service⁵⁹⁸ reaching the quality threshold or the subset of Non-Shared⁵⁹⁹ classes becomes empty (c.f. line 12).

```
4.4. Identification of object-oriented methods correspond-602 ing to service interfaces 603
```

A service is used based on its provided and required on interfaces. For object-oriented services, the interaction

```
Input: Clusters of Services(clusters)
   Output: A Set of Reusable Services(RC)
1 for each cluster \in clusters do
      shared = cluster.getFirstservice().getClasses;
      allClasses = \emptyset;
 3
      for each service \in cluster do
 4
 5
          shared = shared \cap service.getClasses();
          allClasses =
 6
           allClasses \cup service.getClasses();
      nonShared = allClasses - shared;
7
      reusableService = shared;
8
      for each class \in nonShared do
9
10
          if Density(class) < D_threshold then
             nonShared = nonShared - class;
11
          end
      end
      while (|nonShare| > \theta) do
12
          if Q(reusableService \cup nonShare) >=
13
           Q_threshold then
             add(RC,reusableservice);
14
             break;
15
          else
16
             removeLessQualityClass(nonShare,
17
               shared);
          end
      end
   end
18 return RC
```

Algorithm 5: Near-Optimal Solution for Reusable Service Identification

between the services is realized through object-oriented method calls (i.e., method invocations). A service provides its services through a set of object-oriented methods that can be called by the other services that require functionalities of this service. Thus, the provided interfaces are composed of a set of public methods that are implemented by classes composing this service. On the other hand, required interfaces are composed of methods that are invoked by classes of this service and belong to classes of other services (i.e., the provided interfaces of the other services). The identification of service interfaces is based on grouping a set of object-oriented methods into a set of service interfaces. We rely on the following heuristics to identify these interfaces:

Object-oriented methods belonging to the same object-oriented entities. In object-oriented, methods implementing cohesive functionalities are generally implemented by the same object-oriented entities (e.g., object-oriented interface, abstract class and concrete class). Therefore, we consider any object-oriented entity that groups together a set of methods as an indicator of high probability that these methods belong to the same service interface. We propose

647

648

649

651

652

614

615

617

618

619

620

621

622

623

625

626

627

630

631

632

633

635

636

637

638

639

642

643

608

Algorithm 6 to measure how much a set of methods⁶⁴⁴ M belongs to the same service interface. This algo-⁶⁴⁵ rithm calculates the size of the greatest subset of M⁶⁴⁶ which consists of methods that belong to the same object-oriented class or interface (c.f. lines 1 to 4). Then, it divides the size of the greatest subset by the size of M (c.f. line 5) and returns SI as a final return value (c.f. line 6).

```
Input: A Set of Methods(M), a Set of
         Object-Oriented Entities (OOI)
  Output: Same Object-Oriented Entity Value
            (SI)
1 \ sizeGreatest =
   |M \cap OOI.getFirstInterface().getMethods()|;
 for each interface \in OOI do
     if |M \cap interface.getMethods()| >
      sizeGreatest then
        sizeGreatest =
4
          |M \cap interface.getMethods()|;
     end
  end
SI = sizeGreatest / M.size();
6 return SI
 Algorithm 6: Same Object-Oriented Entity (SI)
```

Object-oriented method cohesion. Methods access the same set of attributes to participate to provide the same services. Thus, cohesive methods have more probability to belong the same service interface than those that are not. To measure how much a set for methods is cohesive, we use the Loose Class Cohesion (LCC) metric [14]. We select LCC because it measures direct and indirect dependencies between for methods. Please refer to [14] for more details about LCC.

Method lexical similarity. The lexical similarity of methods probably indicates to similar implemented⁶⁶³ services. Therefore, methods having a lexical sim-⁶⁶⁴ ilarity likely belong to the same interface. To this⁶⁶⁵ end, we utilize *Conceptual Coupling* metric [19] to⁶⁶⁶ measure methods lexical similarity based on the se-⁶⁶⁷ mantic information obtained from the source code,⁶⁶⁸ encoded in identifiers and comments.

Method correlation of usage: when a service provides functionalities for another service, it provides them $_{671}$ through the same object-oriented entities (e.g., object-oriented interface, abstract class and concrete class). $_{672}$ Thus, methods that have got called together by object oriented classes the other services are likely to belong $_{674}$ to the same service interface. To this end, we pro- $_{675}$ pose Algorithm 7 to calculate the Correlation of Usage (CU) of a given set of methods M. It is based on the size of the greatest subset of M that has got called together by the same service (c.f, lines 2 to 4).

The final value of CU is the percentage between the identified size of the greatest subset and the size of M (c.f, line 5).

```
Input: A Set of Methods(M), a Set of services(Services)
Output: Correlation of Usage Value(CU)

1 sizeGreatest = |M \cap Services.getFirstservice().getCalledMethods()|;
2 for each service \in Services do

3 | if |M \cap service.getCalledMethods()| > sizeGreatest then

4 | sizeGreatest = |M \cap interface.getCalledMethods()|; end
end

5 CU = sizeGreatest / M.size();
6 return CU
Algorithm 7: Correlation of Usage (CU)
```

According to these heuristics, we define a fitness function for measuring the quality of a group of methods M to form a service interface. We rely on a set of parameters (i.e., λ_i) to allow architects to weight each characteristic as needed. The values of these parameters are situated in [0-1]. The selection of values of these parameters is based on the knowledge of architects about the SPVs. Furthermore, architects could use these parameters to analyze the relationships between each characteristic and the quality of the obtained service interfaces by changing the values of parameters. Once architects identify the best values based on a set of test cases of service interfaces, they could generalize these values to the remaining of the SPVs in the same family.

$$Interface(M) = \frac{1}{\sum_{i} \lambda_{i}} \cdot (\lambda_{1} \cdot SI(M) + \lambda_{2} \cdot LCC(M) + \lambda_{3} \cdot CS(M) + \lambda_{4} \cdot CU(M))$$
(5)

Based on this fitness function, we use a hierarchical clustering technique to partition a set of public methods into a set of clusters, where each cluster is considered as a service interface. The hierarchical clustering technique constructs a dendrogram of similar public methods like Algorithm 2. Then, it extracts the best clusters of public methods using a depth first search technique similar to Algorithm 3.

5. Evaluation

5.1. Data collection

To evaluate ReSIde, we collect three sets of software product families that are Mobile Media² [20], Health Watcher³, and ArgoUML⁴ [21].

 $[\]overline{\begin{tabular}{lll} 2 Available at http://homepages.dcc.ufmg.br/~figueiredo/spl/icse08 \\ 3 Available at http://ptolemy.cs.iastate.edu/design-study/#healthwatcher \\ \end{tabular}$

⁴Available at http://argouml-spl.tigris.org/

Mobile Media (MM) is a SPL that manipulates music,730 video and photo on mobile phones. It is implemented us-731 ing Java. In our experimentation, we considered, as SPVs,732 a set of 8 products derived by [20] as representative of733 all features of the SPL. The average size of a product is734 43.25 classes. Health Watcher product variants imple-735 ment a set of web-based software applications that offers services related to managing health records and customer736 complaints. We consider 10 SPVs written in Java. On av-737 erage, each SPV is composed of 137.6 classes. ArgoUML738 (AL) is a UML modeling tool. It is developed in Java as a739 software product line. We applied ReSIde on 9 products generated and used in [22]. Each SPV contains 2198.11740 classes on average.

Our method to select these software families is based⁷⁴² on four factors. First, we consider covering different sizes⁷⁴³ of software families to test the scalability of ReSIde with⁷⁴⁴ different system sizes; MM as a small-scale software (43.25⁷⁴⁵ classes per SPV), HW as medium-scale software (137.6⁷⁴⁶ classes per SPV), and AL as a large-scale one (2198.11⁷⁴⁷ classes per SPV). Second, we consider software families⁷⁴⁸ that were already used by other researchers in the domain of reverse engineering of software product lines such as⁷⁴⁹ [23, 22, 24, 25]. Third, the suitability of the case studies to⁷⁵⁰ identify services that were reused in the implementation of⁷⁵¹ several SPVs. Fourth, the availability of their source code.⁷⁵²

5.2. Research questions and their methodologies

We aim to answer four Research Questions (RQs) as 754 follows.

5.2.1. RQ1: What are good threshold values to identify¹⁵⁷ potential services from each SPV? ⁷⁵⁸

Goal. As the selection of threshold values affects both the⁷⁵⁹ quality and the number of the identified potential services,⁷⁶⁰ the aim of this RQ is to help software architects selecting proper threshold values to consider a group of classes form-⁷⁶¹ ing a potential service or not.

Methodology. To support software architects choosing a⁷⁶⁴ proper threshold value, we assign the quality threshold⁷⁶⁵ values situated in $[0\%,\ 100\%]$. The goal of changing the⁷⁶⁶ threshold values is to explicitly identify the general relationship between the number of identified services and the⁷⁶⁷ selected threshold values. To do this, we need to explore⁷⁶⁸ all the values of the interval [0%-100%]. To segment this⁷⁶⁹ interval, we can start from 0% and increment using any⁷⁷⁰ value $(1\%,\ 1.55\%,\ 5\%,\ 8,09\%,\ 23\%,\ etc.)$. We rely on two strategies applied successively.

The first strategy is to explore the threshold values based on a 5% increment. We consider that 5% is a fair empirical increment for two reasons. First it provides a finite number of values that are distributed uniformly compared to this interval (i.e. 0%, 5%, 10%, 15%... 100%). Second, the variation of values obtained based on successive increments allows the interpolation of other unconsidered values. As soon as we identify an interesting interval based on the

number of identified services and the maximum value of the quality fitness function, we apply the second strategy which consists of exploring the values in this interval by a finer increment which is 1. We show the impact of threshold values on the average number of identified services for each software family of SPVs.

5.2.2. RQ2: What potential services implement similar functionalities across different SPVs?

Goal. The goal of this RQ is to study the characteristics of potential services identified as similar across SPVs.

Methodology. We applied the second step of ReSide to cluster similar potential services based a hierarchical clustering technique. For each case study, we identify the number of clusters, the average number of services in the identified clusters, the average number of Shared classes in these clusters, the average value of the Functionality characteristic, the average value of the Self-containment characteristic, and the average value of Composability characteristic of the Shared classes in these clusters.

5.2.3. RQ3: What are the reusable services identified based on ReSide?

Goal. The aim of this RQ is to to study the characteristics of reusable services identified from clusters of similar potential services.

Methodology. We rely on the third step of ReSide to extract one reusable service from each cluster of potential services. For each case study, we identify the number of the identified services, the average service size in terms of number of included classes, and the average value of the Functionality, the Self-containment, and the Composability of the identified services.

5.2.4. RQ4: What is the reusability of services identified based on ReSide?

Goal. This RQ evaluates the improvement of the reusability of services identified based on the analysis several SPVs using ReSide compared to the reusability of services identified based on the analysis of singular software.

Methodology. To validate the reusability of services identified by the ReSIde approach, we propose a validation process presented in Figure 8. This process consists of three main steps as follows:

1. Dividing SPVs into K parts: To prove that our validation can be generalized for other independent SPVs, we depend on K-fold cross validation method [15]. In data mining, K-fold is widely used to validate the results of a mining model. The main idea is to evaluate the model using an independent data set. Thus, K-fold divides the data set into two parts: train data, and test data. On the one hand, train data are used to learn the mining model. On the

Figure 8: The process of validating the reusability of services identified by ReSIde

other hand, test data are then used to validate the some mining model. To do so, K-fold divides the data sets into K parts. The validation is applied K times by since considering K-1 parts as train data and the other size one as test data. We validate ReSIde by dividing size the SPVs into K parts. Then, we only identify services from the train SPVs (i.e., K-1 parts). Next, we said validate the reusability of these services in the test SPVs. We evaluate the result by assigning 2, 4 and 8 to the K at each run of the validation.

780

781

782

784

785

786

788

789

790

791

792

794

795

797

798

800

801

804

805

806

807

808

- 2. Identifying services of train SPVs: To compare₃₁₈ the reusability of services identified based on the₈₁₉ analysis of multiple SPVs versus singular SPV, we₃₂₀ identified services using the ReSIde approach and a₈₂₁ traditional service identification approach that ana-₈₂₂ lyzes only singular SPVs independently. We selected₈₂₃ Adjoyan et al. approach [6] due to the availability of₈₂₄ the tool of its implementation.
- 3. Calculating the reusability of services in test₈₂₆ SPVs: We consider that the reusability of a service₈₂₇ is evaluated based on the number of SPVs that the₈₂₈ service can be reused in. For a collection of SPVs,₈₂₉ the reusability is calculated as the ratio between the₈₃₀ number of SPVs that can reuse the service to the₈₃₁ total number of SPVs in the test part. A service₈₃₂ can be reused in a SPV if it provides functionalities₈₃₃ required by this SPV. We analyze the functionalities₈₃₄ of each SPV in the test part to check if an identified₈₃₅ service provides some of these functionalities. The

functionalities required by a SPV are identified based on the potential services extracted from this SPV using the first step of ReSIde in Section 4.3. The validation results are calculated based on the average of all K trails.

5.3. Results

5.3.1. RQ1: What are good threshold values to identify potential services from each SPV?

The results obtained from MM, HW and AL case studies are respectively shown in Figure 9, Figure 10 and Figure 11, where the values of the threshold are at the X-axis, and the average numbers of the identified services in a SPV are at the Y-axis.

The results show that the number of the identified services is lower than the number of classes composing the SPVs, for low threshold values. The reason behind that is the fact that some of the investigated classes produce the same service. For example, InvalidPhotoAlbumName-Exception and InvalidImageFormatException produce the same service, when they are considered as the core for identifying potential services.

Moreover, the results show that the number of identified services is the same for all quality threshold values in this interval [0%, 55%] for the three case studies. This means that selecting a value in this interval does not make sense as it does not make a distinction between services having diverse quality values.

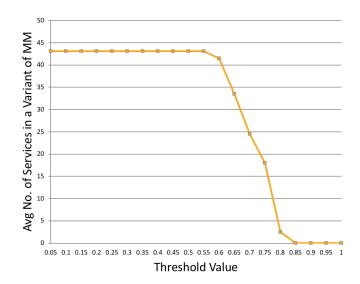


Figure 9: Changing threshold value to extract potential services from MM

836

837

839

840

841

843

844

847

848

850

851

852

855

856

857

858

859

862

863

864

865

867

868

The results of incrementing 5% each time allow us to identify the interesting intervals as [65%, 70%], [75%, 80%] and [80%, 85%] respectively for MM, HW and AL case studies. Thus, any value in these intervals can be selected as a threshold to be considered respectively for each case study. We rely on the number of functionalities of the analyzed SPVs to select threshold values in these intervals. We use the number of classes of SPVs as indicators for the number of functionalities implemented in the SPVs (direct proportion). We assign 70%, 77% and 83% as threshold values respectively for MM, HW and AL case Table 1 shows the detail results obtained based on these threshold values. It presents the total number of potential services (TNOPS) identified based on the analysis of all SPVs, the average size of these services (ASOS) in terms on number of included classes, the average value of 871 the Functionality characteristic (AF), the average value of₈₇₂ the Self-containment characteristic (ASC) and the average value of the Composability characteristic (AC).

Figure 12 presents an example of a potential service $_{875}$ extracted from AL. This service is identified by considering $_{876}$ GoClassToNavigableClass as the core class. The quality $_{877}$ fitness function reaches the peak value when we add $18_{_{878}}$ classes to this identified service. We find that classes added $_{879}$ later reduce the quality of the identified service. Therefore, we reject classes added after the 18th class to be part of $_{881}$ this identified service.

5.3.2. RQ2: What potential services implement similar surface surface

Table 2 presents the results of the process of group-886 ing similar potential services into clusters. For each case 887 study, it shows the number of clusters (NOC), the average number of services in the identified clusters (ANOC),

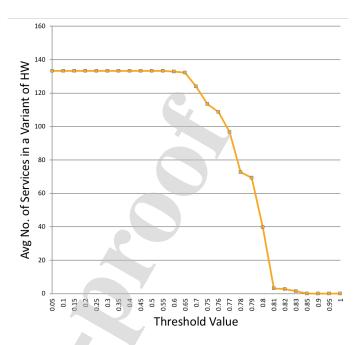


Figure 10: Changing threshold value to extract potential services from ${\rm HW}$

Table 1: The results of potential services extraction

Family Name	TNOPS	ASOS	$ \mathbf{AF} $	ASC	AC
MM	24.50	6.45	0.56	0.71	0.83
HW	96.6	5.55	0.61	0.76	0.99
AL	811	11.38	0.64	0.83	0.89

TNOPS: total number of potential services.

ASOS: average size of potential services in classes.

AF: average value of the Functionality characteristic of potential services.

ASC: average value of the Self-containment characteristic of potential services.

AC: average value of the Composability characteristic of potential services.

the average number of Shared classes in these clusters (ANSC), the average value of the Functionality characteristic (AFS), the average value of the Self-containment characteristic (ASCS), and the average value of Composability characteristic of the Shared classes (ACS) in these clusters. The results show that SPVs sharing a bunch of similar services. For instance, each SPV of MM has 24.5 services in average. These services are grouped into 42 clusters. This means that each SPV shares 5.38 services with the other SPVs, in average. Thus, a reusable service can be identified from these services. In the same way, AL SPVs share 5.26 services. Table 3 shows an example of a cluster of similar services identified from AL case study, where X refers to that a class is a member in the corresponding SPV. In this example, we note that the services have 5 Shared classes. These classes have been identified to be part of the same service in 9 SPVs of AL. Thus, they can be considered as core classes to form a reusable service that is reused in the 9 SPVs.

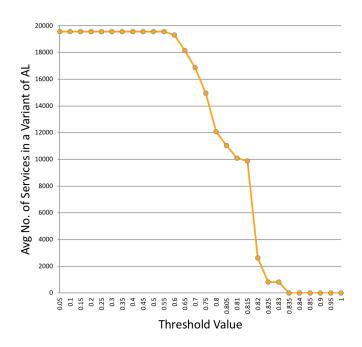


Figure 11: Changing threshold value to extract potential services from AL

Table 2: The results of service clustering

Family Name	NOC	ANOC	ANSC	AFS	ASCS	ACS
MM	42	5.38	5.04	0.59	0.71	0.89
HW	504	6.17	5.33	0.62	0.74	0.99
AL	325	5.26	8.67	0.57	0.87	0.93

NOC: the number of clusters.

889

891

892

895

896

897

898

902

903

904

906

907

ANOC: the average number of services in the identified clusters.

ANSC: the average number of Shared classes in these clusters.

AFS: the average value of the Functionality of the Shared classes in the identified clusters.

ASCS: the average value of the Self-containment of the Shared classes in the identified clusters

ACS: the average value of Composability of the Shared classes in the identified clusters.

5.3.3. RQ3: What are the reusable services identified based on ReSide?

Table 4 summarizes the final set of reusable services identified using ReSIde. Based on our experimentation, we assign 50% to the density threshold value. For each product family (i.e., a set of SPVs), we present the number of the identified services (NOIS), the average service size in terms of number of included classes (ASS), and the average value of the Functionality (AF), the Self-containment (ASC), and the Composability (AC) of the identified services. The results show that some of the identified clusters do not produce reusable services. For instance, in Mobile Media, the 42 clusters produce only 39 services. 911 This means that three of the clusters are not able to form 912 reusable services. The reason behind that is one of the 913 following two situations. The first one is that the selec-914 tion of threshold density causes to remove classes that are 915 important to constitute the service, and hence, the service $^{916}\,$ was rejected because it did not exceed the quality thresh-917 old value. The second one is that the produced service $^{918}\,$ is already identified from another cluster, therefore, the 919



Figure 12: An instance of a potential service extracted from AL case study

Table 3: An instance of a cluster of similar potential services in AL

001			Poo	011010				
1	2	3	4	5	6	7	8	9
X	X	X	X	X	X	X	X	X
X	X	X	X	X	X	X	X	X
X	X	X	X	X	X	X	X	X
X	X	X	X	X	X	X	X	X
X	X	X	X	X	X	X	X	X
X				X	X	X		X
X		X		X	X	X		
	X	X	X				X	
	1 X X X X X X X X X	1 2 X X X X X X X X X X X X X X X X X X	1 2 3 X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X	1 2 3 4 X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X	1 2 3 4 5 X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X	1 2 3 4 5 6 X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X	1 2 3 4 5 6 7 X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X X	X

service is removed to avoid the redundancy.

Table 4: The final set of identified reusable services.

Family Name	NOIS	ASS	\mathbf{AF}	ASC	\mathbf{AC}
MM	39	5.61	0.58	0.74	0.90
HW	443	6.90	0.63	0.75	0.99
AL	324	9.77	0.61	0.84	0.84

NOIS: the number of the identified reusable services.

ASS: the average size of identified reusable services in terms of number of included classes.

AF: the average value of the Functionality of identified reusable services. ASC: the average value of the Self-containment of identified reusable services

AC: the average value of the Composability of identified reusable services.

Table 5 shows examples of a set of reusable services that are identified based on the analysis of Mobile Media. Where, NOV refers to the number of SPVs that contain the service, NOC represents the number of classes that form the service. S, A and C respectively represent the Functionality, the Self-containment, and the Composability of each service. As it is shown in Table 5, the second service provides two functionalities, which are Add Constants Photo Album, and Count Software Splash Down Screen. The former one deals with adding a photo to an

album. The letter is dedicated to the splash screen service.

Table 5: Some services							
Description of the functionalities	NOV	NOC	S	A	C		
New Constants Screen Album Image	6	6	0.59	0.75	0.94		
Add Constants Photo Album	0	10	0.57	0.75	0.80		
Count Software Splash Down Screen		10	0.57	0.75	0.09		
Base Image Constants Album Screen Accessor List	6	0	0.67	0.50	0.85		
Controller Image Interface Thread	1 "	9	0.07	0.50	0.00		

NOV: the number of SPVs that contain the services.

NOC: the number of classes that form the services.

F: the value of the Functionality characteristic of the services.

S: the value of the Self-containment characteristic of the services.

C: the value of the Composability characteristic of the services.

5.3.4. RQ4: What is the reusability of services identified based on ReSide?

The results obtained from MM, HW and AL case studies are respectively presented in Figure 13, Figure 14 and Figure 15. These results show that the reusability of the services which are identified from a collection of similar software is better than the reusability of services which is identified from singular software. We note that the reusability is increased when the number of K is increased. The reason is that the number of train SPVs is increased compared to the test SPVs. For example, there is only one test SPV when K=8. We note that the difference between the reusability results of the two approaches is increased as well as the number of train SPVs is increased.

The slight difference between the reusability results for small K comes from the nature of our case studies, where these case studies are very similar. Consequently, the resulting services are closely similar. In other words, there are many groups of similar services containing exactly the same classes. This yields a reusable service that is identical to cluster services. Therefore, the reusability has the same value for all of these services. However, ReSIde remains outperforming the traditional service identification approach proposed by Adjoyan et al. [6]. In Table 5.3.4,962 we provide a conceptional comparison between the ReSide 963 and Adjoyan approaches based on seven attributes.

6. Discussion

921

922

923

924

925

928

929

930

931

932

933

935

936

937

939

943

944

950

951

952

953

955

956

957

960

6.1. Deployment of the identified services

ReSide currently reverse engineers the structural im-⁹⁶⁹ plementation of reusable services in terms of groups of ⁹⁷⁰ object-oriented classes. To complete the reengineering to ⁹⁷¹ SOA, these groups of classes need to be transformed and packaged based on existing service-oriented models. There-⁹⁷² fore, we plan in our near future work to extend ReSide⁹⁷³ where reusable web services (e.g., generate WSDL files) ⁹⁷⁴ and REST services can be generated from these groups of clusters identified in this paper. In this context, we need⁹⁷⁵ to deal with direct dependencies between different services, ⁹⁷⁶ exception handling of Java programs and the instantiation⁹⁷⁷ of services.

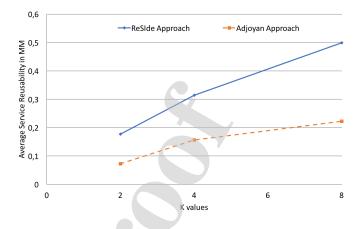


Figure 13: The results of reusability validation of MM services

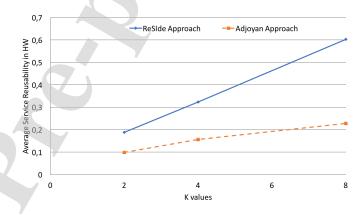


Figure 14: The results of reusability validation of HW services

6.2. The adaption of our approach for SPVs that already applied SOA

Although our approach is designed for object-oriented SPVs, it can be adapted for SPVs that already applied SOA from the start. This adaptation is based on ignoring the first step of our approach (i.e., Identification of Potential Services in Each SPV) where we identify a set of services from the object-oriented implementation of each SPV. This means that we provide as input for the second step of our approach the already implemented services corresponding to the SOA of SPVs.

6.3. Threats to validity

ReSIde is concerned by two types of threats to validity. These are internal and external.

6.3.1. Threats to internal validity

There are three aspects to be considered regarding the internal validity. These are as follows.

965

966

Table 6: Comparisons between ReSide and Adjoyan's approaches

Attributes	ReSide approach	Adjoyan's approach
Goal	Service identification	Service identification
Input artifacts	Multiple software product variants	Single software product
Target development paradigm	Object-oriented	Object-oriented
Quality metrics	Structural and co-existence together dependencies	Structural dependencies
Used Algorithms	Authors' defined heuristic and clustering algorithms	Clustering algorithm
Service interface identification	Yes	No
Output	Clusters of classing corresponding to services	Clusters of classing corresponding to services

1016

1017

1018

1019

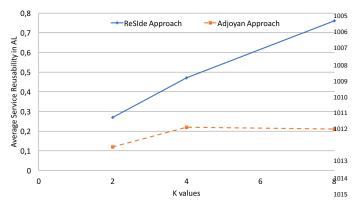


Figure 15: The results of reusability validation of AL services

- 1020 1. The input we used to evaluate our approach are $\mathrm{Ab}_{\bar{1}021}$ stract Syntax Trees (ASTs) of the analyzed $SVPs_{1022}$ These ASTs obtained based on Eclipse Java Development $Tools^5$ (JDT) API reflect static dependencies between source code entities. This means that all dependencies in the source code will be equally $_{1026}$ considered regardless if they are really existed or not compared to the program execution scenarios. dependencies between source code entities are used to compute the value of the fitness function that 1030 evaluates the quality of clusters of classes to form services, then the precision of the identified services $_{\scriptscriptstyle{1032}}$ can be impacted. I.e., the fitness function may consider some dependencies that are not materialized in $_{1033}$ the program execution scenarios.
 - Also, the ASTs do not consider polymorphism and dynamic binding. Consequently some dependencies are not captured (e.g., Java reflection dependencies). This impacts the recall of the identified services.
- 2. We use a hierarchical clustering algorithm to group similar services. We use this hierarchical clustering algorithm because it does not need to specify the number of clusters in advance as we do not know the number of services to be identified in advance. However, it provides a near optimal solution of the partitioning. Other grouping techniques may projude vide more accurate solutions, such as search-based 045

- algorithms. This will be a future extension of Re-SIde to implement simulated annealing and genetic algorithms.
- 3. Due to the lack of models that measure the reusability of object-oriented services, we propose our own empirical measurement to validate the reusability of the identified services. This can threat the reusability validation results.

6.3.2. Threats to external validity

There are two aspects to be considered regarding the external validity. These are as follows:

- 1. ReSIde is experimented via SPVs that are implemented by Java. As other object-oriented languages (e.g., C++, C#) include other concepts than Java (e.g., templates and preprocessor directives in C++), we need to develop new parsers to handle these new concepts properly to allow ReSide to work with these other languages.
- 2. Only three case studies have been collected in the experimentation (Mobile Media, Health Watcher and ArgoUML). However these are used in several research papers that address the problem of migrating SPVs into software product line. On average, the selected case studies obtained the same results. We do not claim that our results can be generalized for other similar case studies without testing ReSIde with a large number of case studies. This will be a logical extension of our work.

6.4. Research implications

As research implication, we find that services identified based on the analysis of multiple SPVs are more reusable than ones identified from singular software. We can generalize this conclusion to all domain of software reuse. E.g., when a collection of SPVs is available, it will be suitable to recover reusable entities (e.g., components, microservices, modules) by analyzing commonality and variability across these SPVs.

6.5. Practical implications

As it is mentioned in the motivation of the paper, SOA improves the management of reuse and maintenance of cloned SPVs. However, it provides limited customizability of services as they are used as black-boxes. Furthermore,

980

981

983

984

987

988

989

991

992

994

995

996

997

998

999

1000

1002

1003

⁵https://www.eclipse.org/jdt/

1120

1121

the performance of the identified services may be nega_{*102} tively impacted as the service technologies add communi_{*103} cation layers between services. This impact can be ampli_{*104} fied if the identified services rely on heavy data exchange_{*105} The security challenge maybe emerged if the identified ser_{*106} vices are going to be accessed by third-party applications_{*107}

7. Related work

1049

1050

1052

1053

1054

1056

1057

1059

1060

1061

1063

1064

1065

1066

1067

1069

1070

1071

1072

1073

1074

1075

1077

1078

1079

1081

1082

1083

1085

1086

1087

1088

1089

1090

1091

1093

1094

1095

1096

1097

1098

1100

1101

In this section, we discuss four research areas ${\rm crosscut}_{\bar{1}110}$ ting with ReSIde. These are service identification, ${\rm com}_{\bar{1}111}$ ponent identification, software product line architecture, recovery and feature identification research areas. We de_{$\bar{1}113$} cide to also include the latter three research areas because, we find that they share with service identification similar_{$\bar{1}115$} input artifacts (e.g., source code) and technical analysis_{$\bar{1}16$} processes (e.g., reverse engineering, clustering algorithm)_{$\bar{1}117$} but with different conceptual identification goals (i.e., ${\rm ser}_{\bar{1}118}$ vice vs component vs feature).

7.1. Service identification

Several service identification approaches have been pro-1122 posed to identify services based on the analysis of object-1123 oriented software [6, 7, 8, 9]. According to the life cycle of 124 service identification approaches, we classify approaches₁₂₅ presented in the literature based on four axes; the goal₁₁₂₆ the input, the applied process and the resulting output₁₂₇ of service identification approaches. In our classification, 128 we select approaches based on two criteria. The first one129 focuses on the approaches that are frequently cited since 130 they are considered as the most known approaches pre-1131 sented in the state-of-the-art. The second one is related to 132 the comprehension of the classification axes. This means that we select approaches that cover all of the classifica-133 tion axes to give concrete examples of these classification,124 axes. 1135

The goal of an identification approach can be: $under_{\overline{1}_{136}}$ standing, reuse, construction, evolution, analysis or management [26]. Software understanding is supported by $\mathrm{pro}_{\overline{1}138}$ viding a high level of abstraction describing the system, 139 structure. Reuse is supported by providing a coarse-grain, 140 software entities that can be easily decoupled from the $\operatorname{sys}_{\bar{1}_{14}}$ tem and deployed in another one. Construction is guided,142 by explaining how software components interact with each $_{1143}$ other through their interfaces. A better comprehension of 144 the outcome changes is provided to software maintainers $_{1145}$ Thus, they can be more precise in estimating cost of mod₁₁₄₆ ifications of the software evolution. Software analysis is enriched by understanding the dependencies provided by software architectures. Managing the development tasks get success, when a clear view of the system structure is provided [26].

The input of a service identification approach can be source codes [6, 27, 7, 28, 29], data bases [30, 31, 32], execution and log traces [33, 34, 35], business process models [36, 37], knowledge of human expertises [27, 38], documentations [39, 40, 41, 42] or a combination of these input artifacts [29, 43, 33].

The process of service identification approaches aims to cluster elements of input artifacts into services. Existing approaches uses several algorithm including clustering algorithm, genetic algorithm [27, 44], Formal Concept Analysis [45, 32, 46] or user-defined heuristics [27, 8]. These algorithms rely on various quality characteristics in their fitness functions to maximize the service quality of identified clusters. Such quality characteristics are loose coupling [6, 27, 28, 47, 40, 43, 48, 49, 41], cohesion [6, 27, 28, 47, 40, 43, 48, 49, 37], service granularity level [47, 40, 41, 43, 48, 49], self-containment [6, 41], composability [6] and interoperability [42].

The output of these service identification approaches is normally clusters of classes where each cluster represents the implementation of one service. Some approaches propose to package these clusters to form web service [6], REST services [7, 50] or microservices [8, 51, 49].

Nevertheless all of these existing service identification approaches perform the identification based on the analysis of only one single software product. Services are identified as group of object-oriented elements that have strong object-oriented dependencies without considering the global reusability of these elements together in other software products. Therefore, the identified services may be useless in other software products and consequently their reusability is not guaranteed. In our evaluation results where we compare our approach with a traditional one, we find that the reusability of services identified by considering multiple software products outperforms the reusability of services identified using the traditional service identification approaches.

7.2. Component identification

Following the definitions of services [52] [53] [54] [55] [56] and software components [57]⁶, [58]⁷ [59]⁸, we find that services are very similar to software components in terms of their characteristics (loose coupling, reusability, autonomy, composability, etc.). However, we can distinguish between services and components based on two aspects: the granularity level and the deployment technologies and models. Services start at higher level of abstractions compared to components. A service can be a part of a business process (at the requirement level), an architectural element (at the design level) and a function (at the implementation level). Components appear only at the design level and the implementation level in terms of

⁶A component is "abstract, self-contained packages of functionality performing a specific business function within a technology framework. These business components are reusable with well-defined interfaces" [57].

⁷A component is "a unit of composition with contractually specified interfaces and explicit context dependencies only. A software component can be deployed independently and is subject to composition by third parties" [58].

⁸A component is "a software element that (a) encapsulates a reusable implementation of functionality, (b) can be composed without modification, and (c) adheres to a component model" [59].

architectural elements and functions. Services and compo₁₂₀₃ nents are different in terms of deployment technologies and₂₀₄ models that are used to technically implement them. Fo₁₁₂₀₅ examples, services can be web-services [60], micro-services₂₀₆ [61], REST services [62], etc., while components can be₂₀₇ OSGi [63], Fractal [64], SOFA [65], etc. These have varia₁₂₀₈ tions in their specification that make the implementation₂₀₉ of services and components varied and respectively theil₁₂₁₀ provided and required interfaces.

1147

1148

1149

1150

1151

1152

1153

1154

1156

1157

1158

1160

1161

1162

1163

1164

1165

1166

1167

1168

1169

1171

1172

1173

1174

1175

1176

1177

1179

1180

1181

1182

1183

1184

1185

1187

1188

1189

1190

1191

1192

1194

1195

1196

1197

1198

1199

1201

1202

Therefore, we can see that service identification and 212 component identification are very similar in terms of iden 1213 tifying architectural elements that represent main reusable 214 functionalities, but they are different in the way of pack 1215 aging these functionalities following SOA or component-based models and deployment technologies (e.g., REST216 services vs OSGi components).

Many approaches were proposed to identify $compo_{1218}$ nents from object-oriented software such as [66, 67, 68_{1219} 69, 70]. These approaches mined components from $single_{1220}$ software that limits the reusability of identified $compo_{1221}$ nents.

In [66], Kebir et al. extracted the component-based ar $_{1223}$ chitecture based on partitioning classes into clusters cor_{1224} responding to components. The partitions are based on $_{1225}$ static code dependencies.

Mishra et al. [67] also extracted the component-based₂₂₇ architecture. Components are extracted based on informa₁₂₂₈ tion realized in use cases, sequence diagrams, and class di₁₂₂₉ agrams. Unlike source code, sequence diagrams, use cases 1230
and class diagrams are not always available. Hamza [71]₂₃₁ identified components from requirements and use cases us 1232
ing formal concept analysis. He focused on the component 1233
stability rather than the component reusability.

Allier et al. [68] depended on dynamic dependencies₂₃₅ between software classes to extract a component-based ar₁₂₃₆ chitecture. They relied on the use-cases to identify the₂₃₇ execution trace scenarios. Classes that frequently occur in₂₃₈ the execution traces are grouped into a component.

Liu et al. [72] identified interfaces of identified $compo_{1240}$ nents. Similar to our approach, they defined a $component_{1241}$ interface as a group of methods belonging to the cluster of $component_{1242}$ classes of an identified component. They relied on $component_{1242}$ mining tools to analyze the direct connections between $component_{1245}$ clusters of classes.

7.3. Software product line architecture identification

SPLA recovery approaches are similar to our approach¹²⁴⁶ in terms of the analysis of the variability between software products. However, compared to our service identifica-¹²⁴⁷ tion approach, they are different in their goal which is the identification of one architecture model that describes the design of a set of software products in the same family of software product line [73] based on variation points and variants between architectural-elements [74, 75, 76]. In the words, their focus is more on the understandability of the design of the family of products than the reusability of identified services.

Technically, SPLA recovery approaches identify component-based architecture (not potential reusable services) from each software product as disjoint clusters of classes that describe the system structure of this product. Then, they analyze the variability between the recovered architectures to identify variation points and variants using clone detection algorithm [77, 78, 79], clustering algorithm [25], or user-defined heuristics [80, 81]. They identify different aspects of SPLA such as mandatory components [25], optional components [25], component variability [77, 80, 25, 78, 81, 79], variability dependencies between different components [25, 78, 81], and feature model of architecture variability [25].

7.4. Feature identification

The distinguish between service identification and feature identification approaches comes from the differences between the concepts of a service and a feature. We have different goals and details processes to achieve these goals. Following Kang et al [82], a feature is defined as a nonstructural element that provides user visible aspects. On the other hand, a service is a structural (architectural) element that could implement either user visible or invisible aspects. Furthermore, services and features belong to various abstraction levels. Features abstract software requirements at a high level (e.g., requirement level), and services are architectural elements at the design level. Please note that services can be used to represent the implementation of features at the design level. The mapping model could be many-to-many, many-to-one, one-to-many or one-toone depending on the software engineers' decisions. Technically, features does not have any interfaces that represent the interaction between each others, rather than service interfaces, required and provided ones.

Feature identification has been investigated by many approaches. These aims to identify program units such as methods, or classes that represent features related only to user visible aspects, and without considering the position of these feature at the design level. Dit et al. [83] provided a survey of feature identification approaches. Features were identified based on the analysis of single software product like [84, 85, 86], or based on the analysis of multiple software products by exploring the commonality and the variability between these products like [87, 88, 89, 90].

8. Conclusion

In this paper, we presented ReSIde (Reusable Service Identification): an automated approach that identifies reusable services based on the analysis of a set of similar object-oriented SPVs. ReSIde identifies reusable functionalities of cloned codes that can be qualified as services across multiple SPVs based on the analysis of the commonality and the variability between the source code of these SPVs. We consider that identifying service based on the analysis

of multiple SPVs provides more guarantee for the reusabil $_{3313}$ ity of the identified services, compared to the analysis of singular SPV.

ReSIde firstly identifies all potential services from each ¹³¹⁶
SPV independently. A potential service is defined based ¹³²⁰
on a group of object-oriented classes identified gradually ¹³²⁰
based on one core class. Groups of classes have quality val ¹³²⁰
ues exceeding a pre-defined threshold value are considered ³²²
as potential services. Then, ReSIde explores the common ¹³²³
ality and the variability between the identified potential ¹³²⁵
services to identify ones that are shared between different ¹³²⁵
SPVs. The identification of these shared services is based ¹³²⁹
on a clustering algorithm. From each cluster of services ¹³²⁰
ReSIde extracts one common service that represents that ¹³³⁰
most reusable and quality-centric service in this cluster. ¹³³¹
¹³³⁰

To validate ReSIde, we applied it on three case studies³³² of product variants of three different sizes; 8 products of³³³ Mobile Media as a small-scale software (43.25 classes per³³⁴ product), 10 products of Health Watcher as medium-scale¹³³⁵ software (137.6 classes per product), and 9 products of Ar₄₃₃₇ goUML as a large-scale one (2198.11 classes per product)¹³³⁸ The results demonstrated the applicability of ReSIde on¹³⁴⁰ the selected three case studies and the capability to iden¹³⁴¹ tify reusable services that can be existed in multiple SPVs₁₃₄₂ We proposed an empirical measurement method to eval¹³⁴³ uate the reusability of the identified services. The results¹³⁴⁴ of this measurement method showed that the reusability,¹³⁴⁶ of the services identified based on ReSIde is better than³⁴⁷ the reusability of those identified based on the analysis of³⁴⁸ singular software product.

As future directions, we plan to extend ReSIde to trans₁₃₅₁ form the object-oriented implementation of identified ser¹³⁵² vices into truly deployable services by making them adhere to one or more SOA models such as Web services or mi¹³⁵⁴ croservices. Also, we want to evaluate the reusability of the identified services based on the human expert knowl¹³⁵⁷ edge.

References

1256

1257

1258

1260

1261

1264

1265

1266

1268

1269

1272

1273

1274

1275

1276

1277

1280

1281

1282

1283

1284

1285

1287

1288

1289

1291

1292

1293

1294

1295

1296

1298

1299

1300

1301

1302

1303

1304

1305

1306

1307

1308

1309

1310

1311

1312

- S. Fischer, L. Linsbauer, R. E. Lopez-Herrejon, A. Egyed, En-1364 hancing clone-and-own with systematic reuse for developing software variants, in: Software Maintenance and Evolution (ICSME), 2014 IEEE International Conference on, IEEE, pp. 1367 391–400.
- [2] J. Businge, M. Openja, S. Nadi, E. Bainomugisha, T. Berger 1369
 Clone-based variability management in the android ecosystem 1370
 in: 2018 IEEE International Conference on Software Maintenance and Evolution (ICSME), IEEE, pp. 625-634.
- [3] A. Shatnawi, T. Ziadi, M. Y. Mohamadi, Understanding source code variability in cloned android families: an empirical study on 75 families, in: 2019 26th Asia-Pacific Software Engineering Conference (APSEC), IEEE, pp. 292–299.
- Y. Dubinsky, J. Rubin, T. Berger, S. Duszynski, M. Becker 1377
 K. Czarnecki, An exploratory study of cloning in industrial 1378 software product lines, in: Software Maintenance and Reengineering (CSMR), 2013 17th European Conference on, IEEE, pp 1380
- 25-34.
 W. Jin, T. Liu, Y. Cai, R. Kazman, R. Mo, Q. Zheng, Ser-1382 vice candidate identification from monolithic systems based on 1383

- execution traces, IEEE Transactions on Software Engineering (2019).
- [6] S. Adjoyan, A. Seriai, A. Shatnawi, Service identification based on quality metrics - object-oriented legacy system migration towards SOA, in: The 26th International Conference on Software Engineering and Knowledge Engineering, Hyatt Regency, Vancouver, BC, Canada, July 1-3, 2013., pp. 1-6.
- [7] R. Rodríguez-Echeverría, F. Maclas, V. M. Pavón, J. M. Conejero, F. Sánchez-Figueroa, Generating a rest service layer from a legacy system, in: Information System Development, 2014, pp. 433–444.
- [8] M. Gysel, L. Kölbener, W. Giersche, O. Zimmermann, Service cutter: A systematic approach to service decomposition, in: ESOCC, pp. 185–200.
- [9] M. Abdellatif, A. Shatnawi, Y.-G. Guéhéneuc, H. Mili, J. Privat, Toward service identification to support legacy object-oriented software systems migration to soa.
- [10] M. Gasparic, A. Janes, A. Sillitti, G. Succi, An analysis of a project reuse approach in an industrial setting, in: Software Reuse for Dynamic Systems in the Cloud and Beyond, Springer, 2014, pp. 164–171.
- [11] J. Sametinger, Software engineering with reusable components, Springer Science & Business Media, 1997.
- [12] A. Shatnawi, A.-D. Seriai, Mining reusable software components from object-oriented source code of a set of similar software, in: IEEE 14th International Conference on Information Reuse and Integration (IRI 2013), IEEE, pp. 193–200.
- [13] I. Iso, Iec 9126-1: Software engineering-product quality-part 1: Quality model, Geneva, Switzerland: International Organization for Standardization (2001).
- [14] J. M. Bieman, B.-K. Kang, Cohesion and reuse in an objectoriented system, in: ACM SIGSOFT Software Engineering Notes, volume 20, ACM, pp. 259–262.
- [15] J. Han, M. Kamber, J. Pei, Data mining, southeast asia edition: Concepts and techniques, Morgan kaufmann, 2006.
- [16] W. H. Gomaa, A. A. Fahmy, A survey of text similarity approaches, International Journal of Computer Applications 68 (2013) 13–18.
- [17] K. Narasimhan, C. Reichenbach, J. Lawall, Cleaning up copypaste clones with interactive merging, Automated Software Engineering 25 (2018) 627–673.
- [18] G. P. Krishnan, N. Tsantalis, Unification and refactoring of clones, in: CSMR-WCRE, IEEE, pp. 104–113.
- [19] D. Poshyvanyk, A. Marcus, The conceptual coupling metrics for object-oriented systems, in: Software Maintenance, 2006. ICSM'06. 22nd IEEE International Conference on, IEEE, pp. 469–478.
- [20] E. Figueiredo, N. Cacho, C. Sant'Anna, M. Monteiro, U. Kulesza, A. Garcia, S. Soares, F. Ferrari, S. Khan, F. Dantas, et al., Evolving software product lines with aspects, in: ACM/IEEE 30th International Conference on Software Engineering (ICSE'08), IEEE, pp. 261–270.
- [21] M. V. Couto, M. T. Valente, E. Figueiredo, Extracting soft-ware product lines: A case study using conditional compilation, in: 15th European Conference on Software Maintenance and Reengineering (CSMR2011), IEEE, pp. 191–200.
- [22] H. Eyal Salman, A.-D. Seriai, C. Dony, Feature-level change impact analysis using formal concept analysis, International Journal of Software Engineering and Knowledge Engineering 25 (2015) 69–92.
- [23] L. P. Tizzei, C. M. Rubira, J. Lee, An aspect-based feature model for architecting component product lines, in: 2012 38th Euromicro Conference on Software Engineering and Advanced Applications, IEEE, pp. 85–92.
- [24] J. Martinez, N. Ordoñez, X. Tërnava, T. Ziadi, J. Aponte, E. Figueiredo, M. Valente, Feature location benchmark with argouml spl, in: Systems and Software Product Line Conference (SPLC).
- [25] A. Shatnawi, A.-D. Seriai, H. Sahraoui, Recovering software product line architecture of a family of object-oriented product variants, Journal of Systems and Software 131 (2017) 325–346.

1360

1361

[26] D. Garlan, Software architecture: A roadmap, in: Proceedings455 of the Conference on The Future of Software Engineering, ICSE456 '00, ACM, New York, NY, USA, 2000, pp. 91–101.
1457

1384

1385

1386

1387

1388

1389

1390

1391

1392

1393

1394

1395

1396

1398

1399

1400

1401

1402 1403

1404 1405

1406

1407

1408

1409

1410

1411

1412 1413

1418

1419

1420

1421

1422

1423 1424

1425

1426

1427

1428

1429

1430

1431

1432

1433

1434

1435

1436 1437

1438

1439 1440

1441

1442

1443

1444

1445

1446

- [27] H. Jain, H. Zhao, N. R. Chinta, A spanning tree based approach458 to identifying web services, International Journal of Web Ser4459 vices Research 1 (2004) 1.
- [28] S. Alahmari, E. Zaluska, D. De Roure, A service identifica4461 tion framework for legacy system migration into soa, in: Ser4462 vices Computing (SCC), 2010 IEEE International Conference463 on, IEEE, pp. 614–617.
- [29] H. M. Sneed, C. Verhoef, S. H. Sneed, Reusing existing object₄₄₆₅ oriented code as web services in a soa, in: Maintenance₄₄₆₆ and Evolution of Service-Oriented and Cloud-Based Systems₄₄₆₇ (MESOCA), 2013 IEEE 7th International Symposium on the₁₄₆₈ IEEE, pp. 31–39.
- [30] D. Saha, Service mining from legacy database applications, ini⁴⁷⁰ Web Services (ICWS), 2015 IEEE International Conference oni⁴⁷¹ IEEE, pp. 448–455.
- [31] Y. Baghdadi, Reverse engineering relational databases to iden₄₄₇₃ tify and specify basic web services with respect to service ori₄₄₇₄ ented computing, Information systems frontiers 8 (2006) 395-₁₄₇₅ 410.
- [32] C. Del Grosso, M. Di Penta, I. G.-R. de Guzman, An approach⁴⁷⁷ for mining services in database oriented applications, in: 11th⁴⁷⁸ European Conference on Software Maintenance and Reengineer⁴⁴⁷⁹ ing, IEEE, pp. 287–296.
- [33] A. Fuhr, T. Horn, V. Riediger, Using dynamic analysis and d81 clustering for implementing services by reusing legacy code, in1482 Reverse Engineering (WCRE), 2011 18th Working Conference d83 on, IEEE, pp. 275–279.
- [34] B. Upadhyaya, Y. Zou, F. Khomh, An approach to extract485
 restful services from web applications, International Journal of486
 Business Process Integration and Management 7 (2015) 213-487
 227.
 - [35] S. Mani, V. S. Sinha, N. Sukaviriya, T. Ramachandra, Using489 user interface design to enhance service identification, in: Web490 Services, 2008. ICWS'08. IEEE International Conference on;491 IEEE, pp. 78–87.
 - [36] E. Sosa, P. J. Clemente, J. M. Conejero, R. Rodríguez4493 Echeverría, A model-driven process to modernize legacy web494 applications based on service oriented architectures, in: 2013495 15th IEEE International Symposium on Web Systems Evolution496 (WSE), IEEE, pp. 61–70.
 - [37] M. J. Amiri, S. Parsa, A. M. Lajevardi, Multifaceted service498 identification: Process, requirement and data, Computer Sci4499 ence and Information Systems 13 (2016) 335–358.
 - [38] H. M. Sneed, Integrating legacy software into a service ori±501 ented architecture, in: Software Maintenance and Reengineer±502 ing, 2006. CSMR 2006. Proceedings of the 10th European Con±503 ference on, IEEE, pp. 11–pp.
 - [39] L. Aversano, L. Cerulo, C. Palumbo, Mining candidate websos services from legacy code, in: 10th International Symposiumson on Web Site Evolution, IEEE, pp. 37–40.
 - [40] M. Nakamur, H. Igaki, T. Kimura, K. Matsumoto, Identifyingsos services in procedural programs for migrating legacy system tosos service oriented architecture, Implementation and Integrations of Information Systems in the Service Sector (2012) 237.
 - [41] Z. Zhang, H. Yang, Incubating services in legacy systems for size architectural migration, in: Software Engineering Conference, 2004. 11th Asia-Pacific, IEEE, pp. 196–203.
 - [42] H. Sneed, Migrating to web services: A research framework, ini515 Proceedings of the International.
 - [43] Z. Zhang, R. Liu, H. Yang, Service identification and packagings₁₇ in service oriented reengineering., in: SEKE, volume 5, pp₁₅₁₈ 620–625.
- [44] M. Abdelkader, M. Malki, S. M. Benslimane, A heuristic ap4520
 proach to locate candidate web service in legacy software, In4521
 ternational Journal of Computer Applications in Technology 47522
 (2013) 152–161.
- [45] Z. Zhang, H. Yang, W. C. Chu, Extracting reusable object₄₅₂₄
 oriented legacy code segments with combined formal concept₅₂₅

- analysis and slicing techniques for service integration, in: 2006 Sixth International Conference on Quality Software (QSIC'06), IEEE, pp. 385–392.
- [46] F. Chen, Z. Zhang, J. Li, J. Kang, H. Yang, Service identification via ontology mapping, in: 2009 33rd Annual IEEE International Computer Software and Applications Conference, volume 1, IEEE, pp. 486–491.
- [47] R. S. Huergo, P. F. Pires, F. C. Delicato, Mdcsim: A method and a tool to identify services, IT Convergence Practice 2 (2014) 1–27
- [48] R. S. Huergo, P. F. Pires, F. C. Delicato, A method to identify services using master data and artifact-centric modeling approach, in: Proceedings of the 29th Annual ACM Symposium on Applied Computing, ACM, pp. 1225–1230.
- [49] L. Baresi, M. Garriga, A. De Renzis, Microservices identification through interface analysis, in: European Conference on Service-Oriented and Cloud Computing, Springer, pp. 19–33.
- [50] F. J. Frey, C. Hentrich, U. Zdun, Capability-based service identification in service-oriented legacy modernization, in: Proceedings of the 18th European Conference on Pattern Languages of Program, ACM, p. 10.
- [51] G. Mazlami, J. Cito, P. Leitner, Extraction of microservices from monolithic software architectures, in: Web Services (ICWS), 2017 IEEE International Conference on, IEEE, pp. 524–531.
- [52] D. K. Barry, Web Services, Service-oriented Architectures, and Cloud Computing: The Savvy Manager's Guide, Morgan Kaufmann, 2003.
- [53] M. Nakamura, H. Igaki, T. Kimura, K.-i. Matsumoto, Extracting service candidates from procedural programs based on process dependency analysis, in: Services Computing Conference, 2009. APSCC 2009. IEEE Asia-Pacific, IEEE, pp. 484–491.
- [54] A. Erradi, S. Anand, N. Kulkarni, Soaf: An architectural framework for service definition and realization, in: Services Computing, 2006. SCC'06. IEEE International Conference on, IEEE, pp. 151–158.
- [55] A. Brown, S. Johnston, K. Kelly, Using service-oriented architecture and component-based development to build web service applications, Rational Software Corporation (2002).
- [56] T. O. Group, Service oriented architecture, in: https://www.opengroup.org/soa/source-book/togaf/soadef.htm.
- [57] G. Baster, P. Konana, J. E. Scott, Business components: A case study of bankers trust australia limited, Commun. ACM 44 (2001) 92–98.
- [58] C. Szyperski, Component software: beyond object-oriented programming, Pearson Education, 2002.
- [59] C. Lüer, A. Van Der Hoek, Composition environments for deployable software components, Citeseer, 2002.
- [60] G. Alonso, F. Casati, H. Kuno, V. Machiraju, Web services, in: Web Services, Springer, 2004, pp. 123–149.
- [61] D. Namiot, M. Sneps-Sneppe, On micro-services architecture, International Journal of Open Information Technologies 2 (2014) 24–27
- [62] C. Riva, M. Laitkorpi, Designing web-based mobile services with rest, in: Service-Oriented Computing-ICSOC 2007 Workshops, Springer, pp. 439–450.
- [63] O. Alliance, Osgi service platform, release 3, IOS Press, Inc., 2003.
- [64] E. Bruneton, T. Coupaye, M. Leclercq, V. Quéma, J.-B. Stefani, The fractal component model and its support in java, Software: Practice and Experience 36 (2006) 1257–1284.
- [65] F. Plasil, D. Balek, R. Janecek, Sofa/dcup: Architecture for component trading and dynamic updating, in: Configurable Distributed Systems, 1998. Proceedings. Fourth International Conference on, IEEE, pp. 43–51.
- [66] S. Kebir, A.-D. Seriai, S. Chardigny, A. Chaoui, Quality-centric approach for software component identification from objectoriented code, in: 2012 Joint Working IEEE/IFIP Conference on Software Architecture (WICSA) and European Conference on Software Architecture (ECSA), IEEE, pp. 181–190.

- [67] S. Mishra, D. S. Kushwaha, A. K. Misra, Creating reusables97
 software component from object-oriented legacy system through598
 reverse engineering., Journal of object technology 8 (2009) 133-1599
 152.
- 1530 [68] S. Allier, H. A. Sahraoui, S. Sadou, S. Vaucher, Restructur₄₆₀₁ 1531 ing object-oriented applications into component-oriented ap₄₆₀₂ 1532 plications by using consistency with execution traces, in₁₆₀₃ 1533 Component-Based Software Engineering, Springer, 2010, pp₁₆₀₄ 1534 216–231.

1535

1536

1537

1538

1539

1540

1541

1546 1547

1548

1549

1550

1551

1552

1553

1554 1555

1556

1557 1558

1559

1560 1561

1562 1563

1564

1565

1566

1567

1568

1569

1570 1571

1572

1573

1578

1580

1581 1582

1583

1584

1585

1586

1587

1588

1589

1590

1591

- [69] A. Shatnawi, A.-D. Seriai, H. Sahraoui, Z. Alshara, Reverse666 engineering reusable software components from object-oriented667 apis, Journal of Systems and Software 131 (2017) 442–460. 1608
- [70] A. Shatnawi, H. Shatnawi, M. A. Saied, Z. A. Shara,609 H. Sahraoui, A. Seriai, Identifying components from object4610 oriented apis based on dynamic analysis, arXiv preprint611 arXiv:1803.06235 (2018).
- [71] H. S. Hamza, A framework for identifying reusable software613
 components using formal concept analysis, in: Sixth Interna4614
 tional Conference on Information Technology: New Generations615
 (ITNG), 2009, IEEE, pp. 813–818.
 - [72] C. Liu, B. van Dongen, N. Assy, W. van der Aalst, Component interface identification and behavioral model discovery from software execution data, in: International Conference on Program Comprehension, pp. 1–10.
 - [73] P. Clements, L. Northrop, Software product lines: practices and patterns (2002).
 - [74] H. Gomaa, Designing software product lines with uml, in: Software Engineering Workshop - Tutorial Notes, 2005. 29th Annual IEEE/NASA, pp. 160–216.
 - [75] C. Lima, Product line architecture recovery: an approach proposal, in: Proceedings of the 39th International Conference on Software Engineering Companion, IEEE Press, pp. 481–482.
 - [76] M. Zahid, Z. Mehmmod, I. Inayat, Evolution in software architecture recovery techniques—a survey, in: Emerging Technologies (ICET), 2017 13th International Conference on, IEEE, pp. 1–6.
 - [77] T. Mende, F. Beckwermert, R. Koschke, G. Meier, Supporting the grow-and-prune model in software product lines evolution using clone detection, in: 12th European Conference on Software Maintenance and Reengineering (CSMR), IEEE, pp. 163–172.
 - [78] R. Koschke, P. Frenzel, A. P. Breu, K. Angstmann, Extending the reflexion method for consolidating software variants into product lines, Software Quality Journal 17 (2009) 331–366.
 - [79] R. Kolb, D. Muthig, T. Patzke, K. Yamauchi, A case study in refactoring a legacy component for reuse in a product line, in: Proceedings of the 21st IEEE International Conference on Software Maintenance (ICSM 2005), IEEE, pp. 369–378.
- [80] M. Pinzger, H. Gall, J.-F. Girard, J. Knodel, C. Riva, W. Pasman, C. Broerse, J. G. Wijnstra, Architecture recovery for product families, in: Software Product-Family Engineering, Springer, 2004, pp. 332–351.
 - [81] K. C. Kang, M. Kim, J. Lee, B. Kim, Feature-oriented reengineering of legacy systems into product line assets—a case study, in: Software Product Lines, Springer, 2005, pp. 45–56.
 - [82] K. C. Kang, S. G. Cohen, J. A. Hess, W. E. Novak, A. S. Peterson, Feature-oriented domain analysis (FODA) feasibility study, Technical Report, DTIC Document, 1990.
 - [83] B. Dit, M. Revelle, M. Gethers, D. Poshyvanyk, Feature location in source code: a taxonomy and survey, Journal of Software: Evolution and Process 25 (2013) 53–95.
 - [84] G. Antoniol, Y.-G. Guéhéneuc, Feature identification: a novel approach and a case study, in: 21st IEEE International Conference on Software Maintenance (ICSM'05), IEEE, pp. 357–366.
 - [85] K. Chen, V. Rajlich, Case study of feature location using dependence graph, in: Program Comprehension, 2000. Proceedings. IWPC 2000. 8th International Workshop on, IEEE, pp. 241–247.
- 1593 247. 1594 [86] R. Damaševičius, P. Paškevičius, E. Karčiauskas, 1595 R. Marcinkevičius, Automatic extraction of features and 1596 generation of feature models from java programs, Information

- Technology and Control 41 (2012) 376–384.
- [87] Y. Xue, Reengineering legacy software products into software product line based on automatic variability analysis, in: Proceedings of the 33rd International Conference on Software Engineering, ACM, pp. 1114–1117.
- [88] T. Ziadi, L. Frias, M. A. A. da Silva, M. Ziane, Feature identification from the source code of product variants, in: Software Maintenance and Reengineering (CSMR), 2012 16th European Conference on, IEEE, pp. 417–422.
- [89] A. Ra'Fat, A. Seriai, M. Huchard, C. Urtado, S. Vauttier, H. E. Salman, Feature location in a collection of software product variants using formal concept analysis, in: International Conference on Software Reuse, Springer, pp. 302–307.
- [90] J. Carbonnel, M. Huchard, A. Gutierrez, Variability representation in product lines using concept lattices: feasibility study with descriptions from wikipedia's product comparison matrices, in: FCA&A 2015, co-located with 13th International Conference on Formal Concept Analysis (ICFCA 2015), volume 1434




Anas Shatnawi is a postdoctoral researcher at LIP6 of Sorbonne University, Paris, France. Before Joining Sorbonne University, Anas was a postdoctoral researcher at LTA of Università degli Studi di Milano-Bicocca (UniMib) and at LATECE of Université du Québec à Montréal (UQAM), Montreal (Quebec) Canada. He obtained his Ph.D. degree in Computer Science from LIRMM of University of Montpellier, France. He received my Master and Bachelor degrees in Computer Science respectively from Jordan University of Science and Technology and Irbid National University, Jordan. His research interest is in reengineering and reverse engineering, empirical software engineering, software reuse, maintenance, program analysis and refactoring, API, SPL, SOA and CBSE.



Abdelhak-Djamel Seriai is associate professor at University of Montpellier. He obtained his engineer degree in 1994. He obtained his PhD degree from University of Nantes, France in 2001. His research interests include software reuse, software architecture, software reengineering, reverse engineering, software component/service, software product line, software evolution, source code analysis, search-based algorithms, etc. He is author or co-author of more than 50 publications in international journals and conferences. He is the scientific editor of the first French book on "software evolution and maintenance". He is owner of the French scientific excellence reward from 2009 to


2013 and from 2014 to 2018 (award given by the French government in recognition of the scientific quality of a researcher).



Houari A. Sahraoui is professor at the department of computer science and operations research (GEODES, software engineering group) of University of Montreal. His research interests include software engineering automation, model-driven engineering, software visualization, and search-based software engineering. He has served as a program committee member in several IEEE and ACM conferences, as a member of the editorial boards of four journals, and as an organization member of many conferences and workshops.



Tewfik ZIADI is an associate professor with Habilitation (maître de conférences, HDR) at the Sorbonne University. His research is done in the MoVe team of the LIP6 laboratory. He is co-leading the MoVe team with Béatrice Bérard. His research interests include: software product line engineering, software product lines inference, behavioral models inference and variability for robotics applications.



Abderrahmene Seriai obtained his PhD in computer science from the University South Brittany (France) since 2015. His doctoral studies focused on the migration from object-oriented applications to component-oriented applications. He worked at Orange-Labs and CEA as a research and development engineer in the fields of software engineering and embedded systems security. He joined the Berger-Levrault group in 2017. His current work revolves around applied research in the field of software engineering. He actively participates in the scientific research, design, analysis and development aspects of use cases for new technologies (software migration, product lines, big data, blockchain, etc.).

Credit author statement

Anas Shatnawi: conceptualization, methodology, software, evaluation and validation, data collection, writing-original draft preparation, writing-reviewing and editing.

Abdelhak Seriai: conceptualization, methodology, evaluation and validation, writing-reviewing and editing.

Houari Sahraoui: writing-reviewing and editing.

Tewfik Ziadi: writing-reviewing and editing.

Abderrahmene Seriai: writing-reviewing and editing.

*Declaration of Interest Statement

Declaration of interests	
☑ The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.	
☐ The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:	