15.1

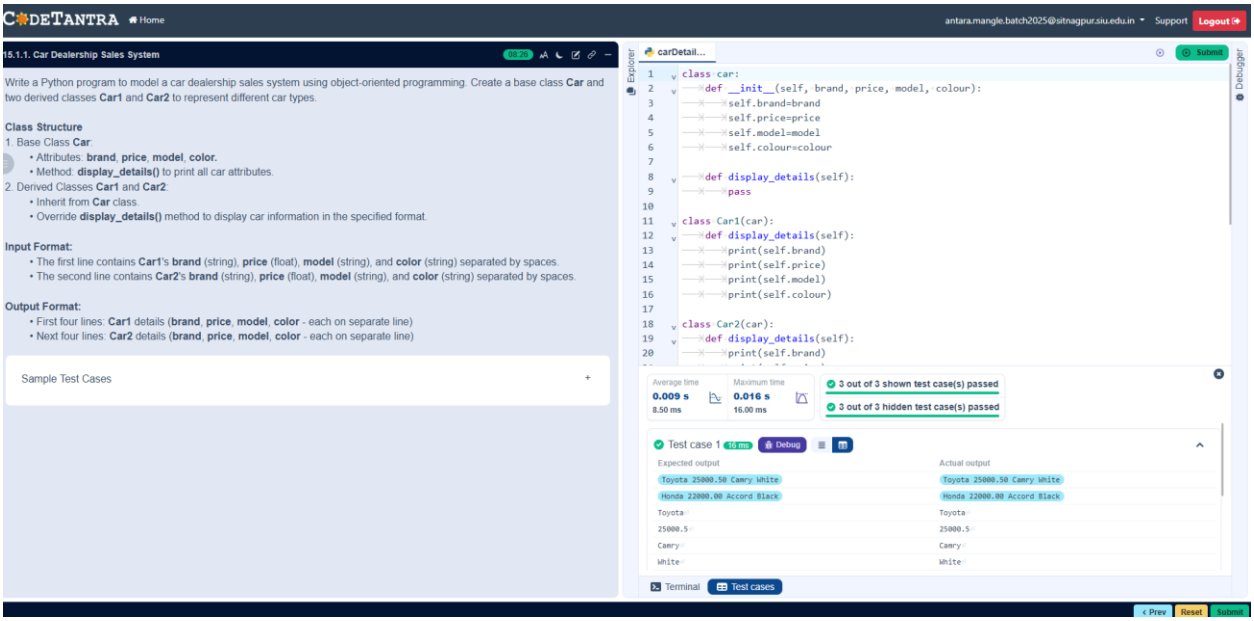

Algorithm

1. Start
2. Define Base Class Car
   Create attributes:
   brand
   price
   model
   color
   Create method display_details():
   Print all attributes (each on a new line)
3. Define Derived Class Car1
   Inherit from Car
   Override display_details():
   Print brand, price, model, color (each on separate line)
4. Define Derived Class Car2
   Inherit from Car
   Override display_details():
   Print brand, price, model, color (each on separate line)
5. Input Data
   Read first line:
   Store values for Car1 → brand, price, model, color
   Read second line:
   Store values for Car2 → brand, price, model, color
6. Create Objects
   Create object c1 of class Car1 using first input
   Create object c2 of class Car2 using second input

7. Display Output
   Call c1.display_details()
   Call c2.display_details()
8. Stop.

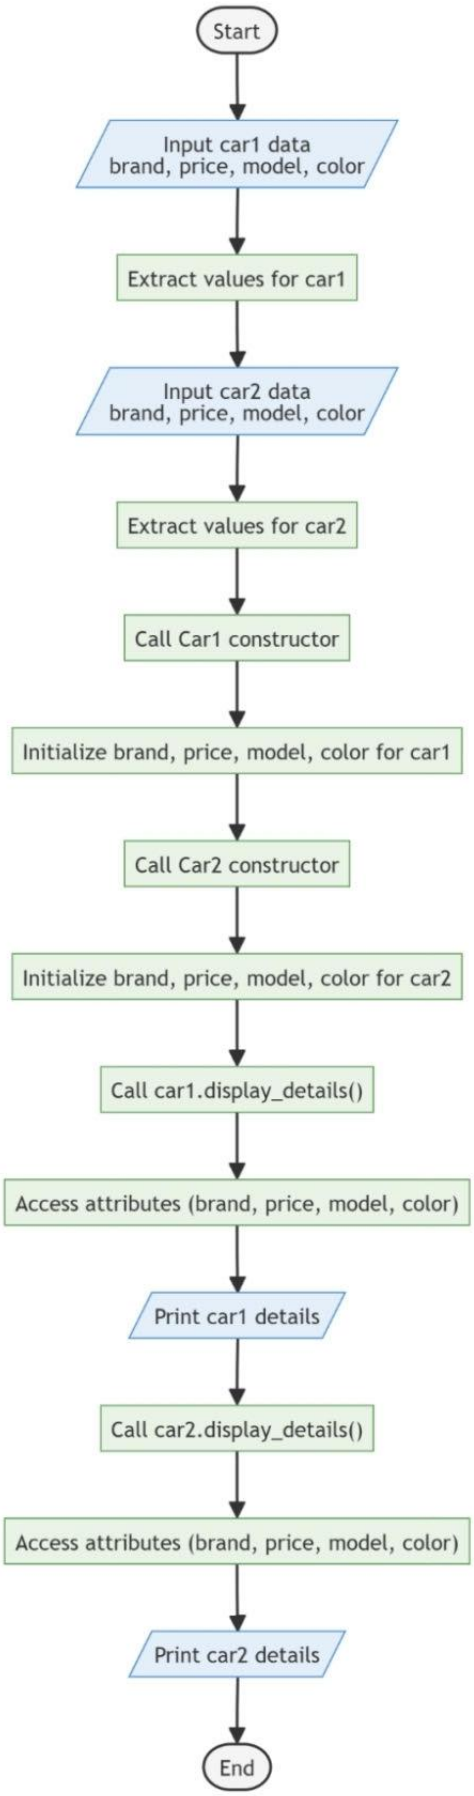
Start
Input car1 data
brand, price, model, color
Extract values for car1
Input car2 data
brand, price, model, color
Extract values for car2
Call Car1 constructor
Initialize brand, price, model, color for car1
Call Car2 constructor
Initialize brand, price, model, color for car2
Call car1.display_details()
Access attributes (brand, price, model, color)
Print car1 details
Call car2.display_details()
Access attributes (brand, price, model, color)
Print car2 details
End