



Comandos para listar servicios en ejecución (running).

Usuario normal

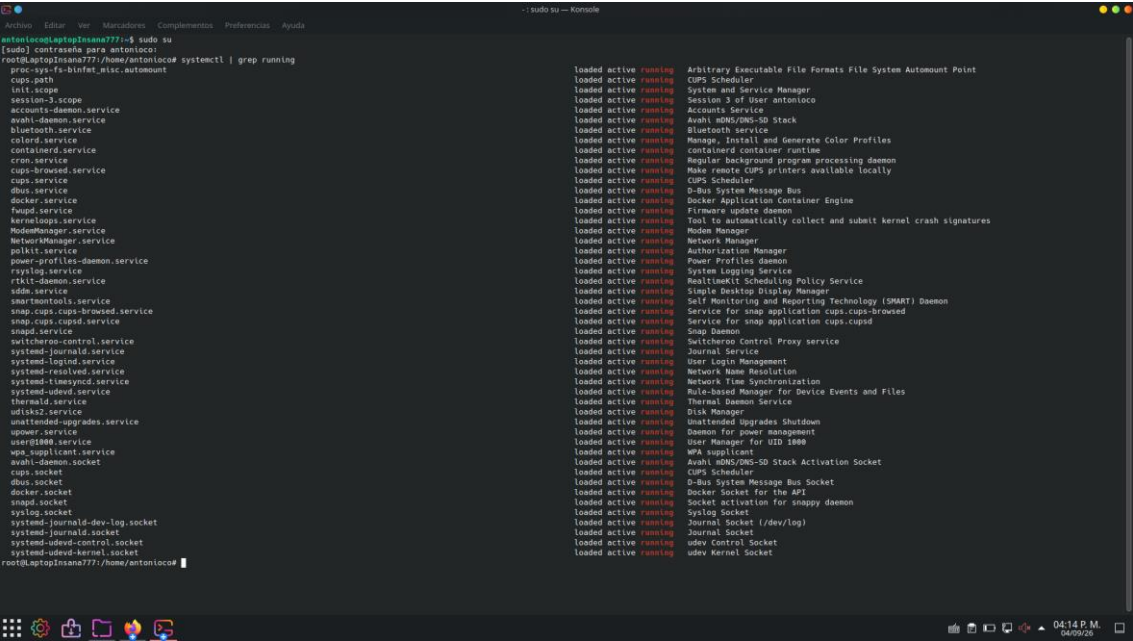

Usuario root

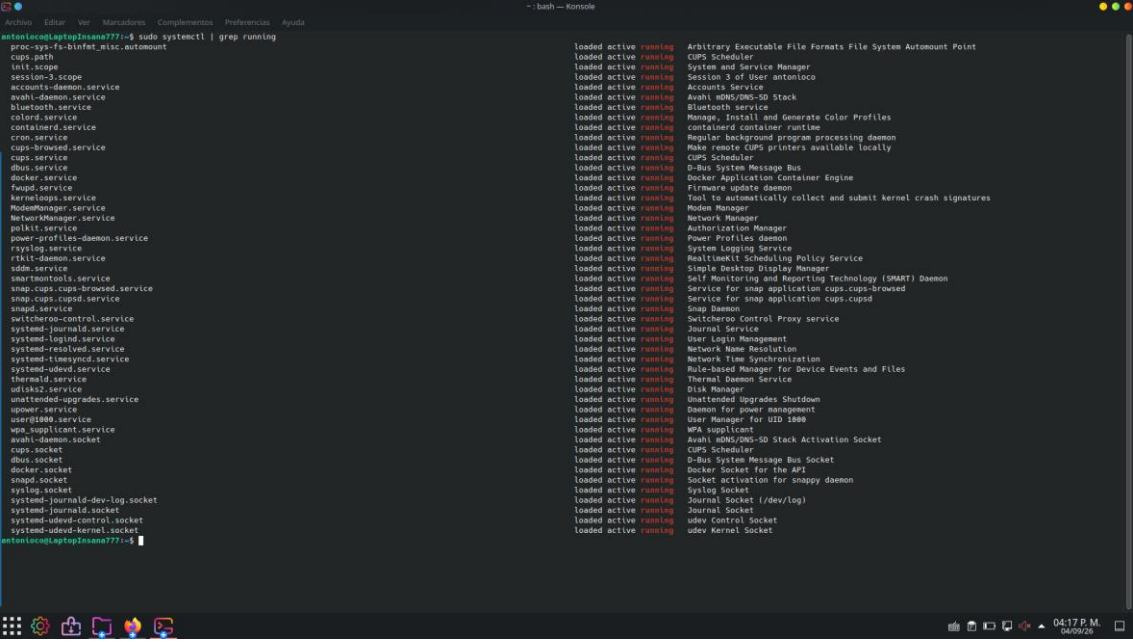

Comandos para listar servicios detenidos (exited)

Usuario root

```
systemd-tmpfiles-setup.service loaded active exited Create Volatile Files and Directories
systemd-udev-settle.service loaded active exited Wait for udev To Complete Device Initialization
systemd-udev-trigger.service loaded active exited Coldplug All udev Devices
systemd-udev.service loaded active running Rule-based Manager for Device Events and Files
systemd-update-utmp.service loaded active exited Record System Boot/Shutdown in UTMP
systemd-user-sessions.service loaded active exited Permit User Sessions
thermal.service loaded active running Thermal Daemon Service
udisks2.service loaded active running Disk Manager
ufw.service loaded active exited Uncomplicated Firewall
unattended-upgrades.service loaded active running Unattended Upgrades Shutdown
upower.service loaded active running Daemon for power management
user-runtime-dir@1000.service loaded active exited User Runtime Directory /run/user/1000
user@1000.service loaded active running User Manager for UID 1000
wpa_supplicant.service loaded active running WPA supplicant

Legend: LOAD -- Reflects whether the unit definition was properly loaded.
ACTIVE -- The high-level unit activation state, i.e. generalization of SUB.
SUB -- The low-level unit activation state, values depend on unit type.


59 loaded units listed. Pass --all to see loaded but inactive units, too.
To show all installed unit files use 'systemctl list-unit-files'.
root@laptopinsana7771:/home/antoniocew# systemctl | grep exited
also-restore.service loaded active exited Save/Restore Sound Card State
apparmor.service loaded active exited Load AppArmor profiles
apport.service loaded active exited automatic crash report generation
blk-availability.service loaded active exited Availability of block devices
console-setup.service loaded active exited Set console font and keymap
keyboard-setup.service loaded active exited Set the console keyboard layout
kmod-static-nodes.service loaded active exited Create List of Static Device Nodes
ln-sensors.service loaded active exited Initialize hardware monitoring sensors
lvm2-monitor.service loaded active exited Monitoring of LVM2 mirrors, snapshots etc. using dmeventd or progress polling
NetworkManager-wait-online.service loaded active exited Network Manager Wait Online
plymouth-quit.service loaded active exited Terminate Plymouth Boot Screen
plymouth-read-write.service loaded active exited Tell Plymouth To Write Out Runtime Data
plymouth-start.service loaded active exited Show Plymouth Boot Screen
setcpio.service loaded active exited Set console scheme
snapd.apparmor.service loaded active exited Load AppArmor profiles managed internally by snapd
snapd.seeded.service loaded active exited Wait until snapd is fully seeded
systemd.service loaded active exited Resets System Activity Logs
systemd-backlight@backlight:intel_backlight.service loaded active exited Load/Save Screen Backlight Brightness of backlight:intel_backlight
systemd-blifd.service loaded active exited Set up Additional Binary Formats
systemd-fck@dev-disk-by\x2duuid-8A66\x2d3B41.service loaded active exited File System Check on /dev/disk/by-uuid/8A66-3B41
systemd-journal-flush.service loaded active exited Flush Journal to Persistent Storage
systemd-modules-load.service loaded active exited Load Kernel Modules
systemd-random-seed.service loaded active exited Load/Save OS Random Seed
systemd-re mount-fs.service loaded active exited Remount Root and Kernel File Systems
systemd-sysctl.service loaded active exited Apply Kernel Variables
systemd-tmpfiles-setup-dev-early.service loaded active exited Create Static Device Nodes in /dev gracefully
systemd-tmpfiles-setup-dev.service loaded active exited Create Static Device Nodes in /dev
systemd-tmpfiles-setup.service loaded active exited Create Volatile Files and Directories
systemd-udev-settle.service loaded active exited Wait for udev To Complete Device Initialization
systemd-udev-trigger.service loaded active exited Coldplug All udev Devices
systemd-update-utmp.service loaded active exited Record System Boot/Shutdown in UTMP
systemd-user-sessions.service loaded active exited Permit User Sessions
ufw.service loaded active exited Uncomplicated Firewall
user-runtime-dir@1000.service loaded active exited User Runtime Directory /run/user/1000
root@laptopinsana7771:/home/antoniocew#
```

Usuario normal

```
root@laptopinsana7771:~# systemctl | grep exited
also-restore.service loaded active exited Save/Restore Sound Card State
apparmor.service loaded active exited Load AppArmor profiles
apport.service loaded active exited automatic crash report generation
blk-availability.service loaded active exited Availability of block devices
console-setup.service loaded active exited Set console font and keymap
keyboard-setup.service loaded active exited Set the console keyboard layout
kmod-static-nodes.service loaded active exited Create List of Static Device Nodes
ln-sensors.service loaded active exited Initialize hardware monitoring sensors
lvm2-monitor.service loaded active exited Monitoring of LVM2 mirrors, snapshots etc. using dmeventd or progress polling
NetworkManager-wait-online.service loaded active exited Network Manager Wait Online
plymouth-quit.service loaded active exited Terminate Plymouth Boot Screen
plymouth-read-write.service loaded active exited Tell Plymouth To Write Out Runtime Data
plymouth-start.service loaded active exited Show Plymouth Boot Screen
setcpio.service loaded active exited Set console scheme
snapd.apparmor.service loaded active exited Load AppArmor profiles managed internally by snapd
snapd.seeded.service loaded active exited Wait until snapd is fully seeded
systemd.service loaded active exited Resets System Activity Logs
systemd-backlight@backlight:intel_backlight.service loaded active exited Load/Save Screen Backlight Brightness of backlight:intel_backlight
systemd-blifd.service loaded active exited Set up Additional Binary Formats
systemd-fck@dev-disk-by\x2duuid-8A66\x2d3B41.service loaded active exited File System Check on /dev/disk/by-uuid/8A66-3B41
systemd-journal-flush.service loaded active exited Flush Journal to Persistent Storage
systemd-modules-load.service loaded active exited Load Kernel Modules
systemd-random-seed.service loaded active exited Load/Save OS Random Seed
systemd-re mount-fs.service loaded active exited Remount Root and Kernel File Systems
systemd-sysctl.service loaded active exited Apply Kernel Variables
systemd-tmpfiles-setup-dev-early.service loaded active exited Create Static Device Nodes in /dev gracefully
systemd-tmpfiles-setup-dev.service loaded active exited Create Static Device Nodes in /dev
systemd-tmpfiles-setup.service loaded active exited Create Volatile Files and Directories
systemd-udev-settle.service loaded active exited Wait for udev To Complete Device Initialization
systemd-udev-trigger.service loaded active exited Coldplug All udev Devices
systemd-update-utmp.service loaded active exited Record System Boot/Shutdown in UTMP
systemd-user-sessions.service loaded active exited Permit User Sessions
ufw.service loaded active exited Uncomplicated Firewall
user-runtime-dir@1000.service loaded active exited User Runtime Directory /run/user/1000
antoniocew@laptopinsana7771:~$
```

Comandos para listar servicios fallidos (failed)


Usuario normal

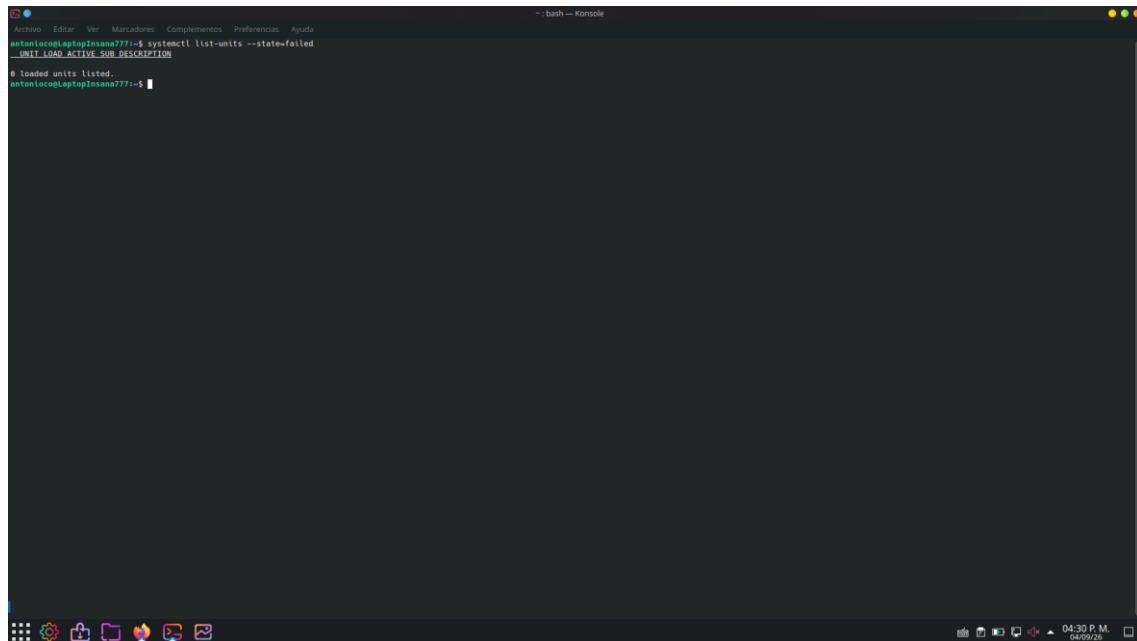

A terminal window titled "bash - Konsole" showing a normal user session. The user is antonio@laptopinsano777. The command executed is `systemctl list-units --state=failed`. The output shows a table header with columns `UNIT`, `LOAD`, `ACTIVE`, `SUB`, and `DESCRIPTION`. Below the header, it says "6 loaded units listed." and then the prompt `antonio@laptopinsano777:~$`.

```
antonio@laptopinsano777:~$ systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
6 loaded units listed.
antonio@laptopinsano777:~$
```

Usuario root

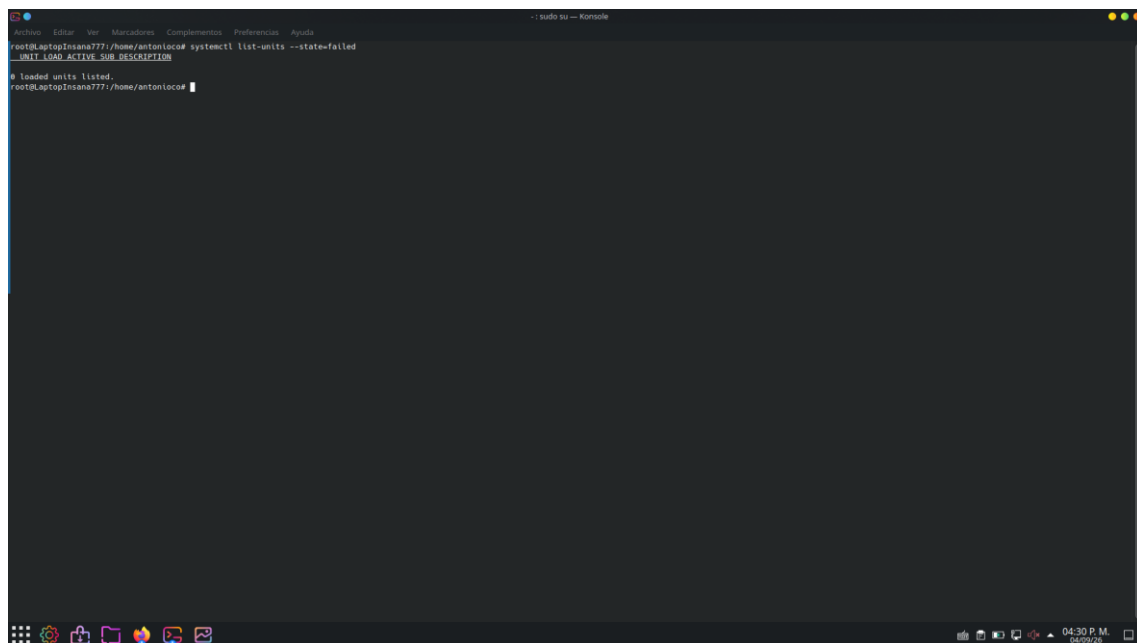

A terminal window titled "sudo su - Konsole" showing a root user session. The user is root@laptopinsano777. The command executed is `systemctl list-units --state=failed`. The output shows a table header with columns `UNIT`, `LOAD`, `ACTIVE`, `SUB`, and `DESCRIPTION`. Below the header, it says "6 loaded units listed." and then the prompt `root@laptopinsano777:~$`.

```
root@laptopinsano777:~$ systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
6 loaded units listed.
root@laptopinsano777:~$
```

Comandos para habilitar, deshabilitar, verificar, detener y empezar un servicio (SSH)

Usuario root

```
Archivo Editor Ver Marcadores Complementos Preferencias Ayuda
--: sudo su -- Konsole

root@LaptopInsana777:/home/antonlocos# systemctl status ssh
○ ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: inactive (dead) since Fri 2020-09-04 16:39:57 CST; 1min 7s ago
   Duration: 8min 28.271s
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
         man:ssh_config(5)
   Process: 11734 ExecStart=/usr/sbin/sshd -D $SSH_OPTS (code=exited, status=0/SUCCESS)
   Main PID: 11734 (code=exited, status=0/SUCCESS)
   CPU: 22ms

sep 04 16:31:37 LaptopInsana777 systemd[1]: Starting ssh.service - OpenSSH Secure Shell server...
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on 0.0.0.0 port 22.
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on :: port 22.
sep 04 16:31:37 LaptopInsana777 systemd[1]: Started ssh.service - OpenSSH Secure Shell server.
sep 04 16:39:57 LaptopInsana777 sshd[11734]: Received signal 15; terminating.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenSSH Secure Shell server...
sep 04 16:39:57 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenSSH Secure Shell server.
root@LaptopInsana777:/home/antonlocos#

Archivo Editor Ver Marcadores Complementos Preferencias Ayuda
--: sudo su -- Konsole

root@LaptopInsana777:/home/antonlocos# systemctl status ssh
○ ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: inactive (dead) since Fri 2020-09-04 16:39:57 CST; 1min 7s ago
   Duration: 8min 28.271s
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
         man:ssh_config(5)
   Process: 11734 ExecStart=/usr/sbin/sshd -D $SSH_OPTS (code=exited, status=0/SUCCESS)
   Main PID: 11734 (code=exited, status=0/SUCCESS)
   CPU: 22ms

sep 04 16:31:37 LaptopInsana777 systemd[1]: Starting ssh.service - OpenSSH Secure Shell server...
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on 0.0.0.0 port 22.
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on :: port 22.
sep 04 16:31:37 LaptopInsana777 systemd[1]: Started ssh.service - OpenSSH Secure Shell server.
sep 04 16:39:57 LaptopInsana777 sshd[11734]: Received signal 15; terminating.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenSSH Secure Shell server...
sep 04 16:39:57 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenSSH Secure Shell server.
root@LaptopInsana777:/home/antonlocos# systemctl disable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install disable ssh
Removed /etc/systemd/system/ssh.service.
Removed /etc/systemd/system/multi-user.target.wants/ssh.service.
Disabling 'ssh.service', but its triggering units are still active:
ssh.socket
root@LaptopInsana777:/home/antonlocos#
```

```
Archivos Editor Ver Marcadores Complementos Preferencias Ayuda
CPU: 22ms

sep 04 16:31:37 LaptopInsana777 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on 0.0.0.0 port 22.
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on :: port 22.
sep 04 16:31:37 LaptopInsana777 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
sep 04 16:39:57 LaptopInsana777 sshd[11734]: Received signal 15; terminating.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
sep 04 16:39:57 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
root@LaptopInsana777:/home/antoniocew# systemctl enable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Created symlink /etc/systemd/system/ssh.service → /usr/lib/systemd/system/ssh.service.
Created symlink /etc/systemd/system/multi-user.target.wants/ssh.service → /usr/lib/systemd/system/ssh.service.
root@LaptopInsana777:/home/antoniocew# systemctl status ssh
○ ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:39:57 CST; 2min 42s ago
   Duration: 4min 26.21s
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
          man:ssh_config(5)
   Main PID: 11734 (code=exited, status=0/SUCCESS)
   CPU: 22ms

sep 04 16:31:37 LaptopInsana777 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on 0.0.0.0 port 22.
sep 04 16:31:37 LaptopInsana777 sshd[11734]: Server listening on :: port 22.
sep 04 16:31:37 LaptopInsana777 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
sep 04 16:39:57 LaptopInsana777 sshd[11734]: Received signal 15; terminating.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
sep 04 16:39:57 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:39:57 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
root@LaptopInsana777:/home/antoniocew# systemctl start ssh
ssh.service: loaded (start) (start) - did you mean 'stop'?
root@LaptopInsana777:/home/antoniocew# systemctl start ssh
root@LaptopInsana777:/home/antoniocew# systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:42:49 CST; 3s ago
   TriggeredBy: ● ssh.socket
   Docs: man:ssh(8)
          man:ssh_config(5)
   Process: 13951 ExecStartPre=/usr/sbin/ssh -t (code=exited, status=0/SUCCESS)
   Main PID: 13953 (sshd)
   Tasks: 1 (limit: 756)
   Memory: 2.1M (peak: 2.7M)
   CPU: 23ms
   CPU Group: /system.slice/ssh.service
             └─13953 "sshd: /usr/sbin/sshd -D [listener] 0 of 16-100 startups"

sep 04 16:42:49 LaptopInsana777 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
sep 04 16:42:49 LaptopInsana777 sshd[13953]: Server listening on 0.0.0.0 port 22.
sep 04 16:42:49 LaptopInsana777 sshd[13953]: Server listening on :: port 22.
sep 04 16:42:49 LaptopInsana777 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
root@LaptopInsana777:/home/antoniocew#
```

Usuario normal

```
systemctl -- Console

antonio@LaptopInsana777:~$ systemctl status ssh
O ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:43:25 CST; 48s ago
     Duration: 35.189s
   TriggeredBy: ● ssh.socket
     Docs: man:ssh(8)
          man:ssh_config(5)
   Main PID: 13953 (code=exited, status=0/SUCCESS)
      CPU: 25ms

sep 04 16:42:49 LaptopInsana777 systemd[1]: Starting ssh.service - OpenSSH Secure Shell server...
sep 04 16:42:49 LaptopInsana777 sshd[13953]: Server listening on 0.0.0.0 port 22.
sep 04 16:42:49 LaptopInsana777 sshd[13953]: Server listening on :: port 22.
sep 04 16:42:49 LaptopInsana777 systemd[1]: Started ssh.service - OpenSSH Secure Shell server.
sep 04 16:43:25 LaptopInsana777 sshd[13953]: Received signal 15; terminating.
sep 04 16:43:25 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenSSH Secure Shell server...
sep 04 16:43:25 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:43:25 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenSSH Secure Shell server.
antonio@LaptopInsana777:~$ systemctl start ssh
Failed to start ssh.service: Access denied
See system logs and 'systemctl status ssh.service' for details.
antonio@LaptopInsana777:~$

antonio@LaptopInsana777:~$ systemctl status ssh
O ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:43:25 CST; 48s ago
     Duration: 35.189s
   TriggeredBy: ● ssh.socket
     Docs: man:ssh(8)
          man:ssh_config(5)
   Main PID: 13953 (code=exited, status=0/SUCCESS)
      CPU: 25ms

sep 04 16:42:49 LaptopInsana777 systemd[1]: Starting ssh.service - OpenSSH Secure Shell server...
sep 04 16:42:49 LaptopInsana777 sshd[13953]: Server listening on 0.0.0.0 port 22.
sep 04 16:42:49 LaptopInsana777 sshd[13953]: Server listening on :: port 22.
sep 04 16:42:49 LaptopInsana777 systemd[1]: Started ssh.service - OpenSSH Secure Shell server.
sep 04 16:43:25 LaptopInsana777 sshd[13953]: Received signal 15; terminating.
sep 04 16:43:25 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenSSH Secure Shell server...
sep 04 16:43:25 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:43:25 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenSSH Secure Shell server.
antonio@LaptopInsana777:~$ systemctl start ssh
Failed to start ssh.service: Access denied
See system logs and 'systemctl status ssh.service' for details.
antonio@LaptopInsana777:~$ sudo systemctl start ssh
[sudo] contraseña para antonio:
antonio@LaptopInsana777:~$ systemctl status ssh
● ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:45:12 CST; 2s ago
     TriggeredBy: ● ssh.socket
     Docs: man:ssh(8)
          man:ssh_config(5)
   Process: 14450 ExecStartPre=/usr/sbin/ssh -t (code=exited, status=0/SUCCESS)
   Main PID: 14451 (sshd)
      Tasks: 1 (limit: 7546)
     Memory: 2.1M (peak: 2.0M)
        CPU: 14ms
     CGroup: /system.slice/ssh.service
             └─14451 "sshd: /usr/sbin/sshd -D [listener] 0 of 16-100 startups"

sep 04 16:45:12 LaptopInsana777 systemd[1]: Starting ssh.service - OpenSSH Secure Shell server...
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on 0.0.0.0 port 22.
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on :: port 22.
sep 04 16:45:12 LaptopInsana777 systemd[1]: Started ssh.service - OpenSSH Secure Shell server.
antonio@LaptopInsana777:~$ systemctl enable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Failed to enable unit: Permission denied
antonio@LaptopInsana777:~$ sudo systemctl enable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Created symlink /etc/systemd/system/ssh.service → /usr/lib/systemd/system/ssh.service.
Created symlink /etc/systemd/system/multi-user.target.wants/ssh.service → /usr/lib/systemd/system/ssh.service.
antonio@LaptopInsana777:~$
```

```

[Archivo Editor Ver Marcadores Complementos Preferencias Ayuda]
- bash - Konsole

sep 04 16:43:25 LaptopInsana777 sshd[13953]: Received signal 15; terminating.
sep 04 16:43:25 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
sep 04 16:43:25 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:43:25 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
antonio@LaptopInsana777:~$ systemctl start ssh
Failed to start ssh.service: Access denied.
See system logs and 'systemctl status ssh.service' for details.
antonio@LaptopInsana777:~$ sudo systemctl start ssh
[sudo] contraseña para antonio:
antonio@LaptopInsana777:~$ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:40:12 CST; 2s ago
 TriggeredBy: ● ssh.socket
            Docs: man:ssh(8)
                  man:ssh_config(5)
   Main PID: 14451 (sshd)
   Tasks: 1 (limit: 7566)
   Memory: 2.1M (peak: 2.0M)
   CPU: 14ms
   CGroup: /system.slice/ssh.service
           └─14451 "sshd: /usr/sbin/sshd -D [listener] 0 of 16-100 startups"

sep 04 16:45:12 LaptopInsana777 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on 0.0.0.0 port 22.
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on :: port 22.
sep 04 16:45:12 LaptopInsana777 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
antonio@LaptopInsana777:~$ systemctl enable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Created symlink /etc/systemd/system/ssh.service ~ /usr/lib/systemd/system/ssh.service.
antonio@LaptopInsana777:~$ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:45:12 CST; 27s ago
 TriggeredBy: ● ssh.socket
            Docs: man:ssh(8)
                  man:ssh_config(5)
   Main PID: 14451 (sshd)
   Tasks: 1 (limit: 7566)
   Memory: 2.1M (peak: 2.0M)
   CPU: 14ms
   CGroup: /system.slice/ssh.service
           └─14451 "sshd: /usr/sbin/sshd -D [listener] 0 of 16-100 startups"

sep 04 16:45:12 LaptopInsana777 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on 0.0.0.0 port 22.
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on :: port 22.
sep 04 16:45:12 LaptopInsana777 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
antonio@LaptopInsana777:~$

[Archivo Editor Ver Marcadores Complementos Preferencias Ayuda]
- bash - Konsole

update-rc.d: error: Permission denied
antonio@LaptopInsana777:~$ sudo systemctl enable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Created symlink /etc/systemd/system/ssh.service ~ /usr/lib/systemd/system/ssh.service.
Created symlink /etc/systemd/system/multi-user.target.wants/ssh.service ~ /usr/lib/systemd/system/ssh.service.
antonio@LaptopInsana777:~$ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: enabled)
   Active: active (running) since Fri 2026-09-04 16:45:12 CST; 27s ago
 TriggeredBy: ● ssh.socket
            Docs: man:ssh(8)
                  man:ssh_config(5)
   Main PID: 14451 (sshd)
   Tasks: 1 (limit: 7566)
   Memory: 2.1M (peak: 2.0M)
   CPU: 14ms
   CGroup: /system.slice/ssh.service
           └─14451 "sshd: /usr/sbin/sshd -D [listener] 0 of 16-100 startups"

sep 04 16:45:12 LaptopInsana777 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on 0.0.0.0 port 22.
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on :: port 22.
sep 04 16:45:12 LaptopInsana777 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
antonio@LaptopInsana777:~$ systemctl stop ssh
Failed to stop ssh.service: Access denied.
See system logs and 'systemctl status ssh.service' for details.
antonio@LaptopInsana777:~$ sudo systemctl stop ssh
Stopping 'ssh.service', but its triggering units are still active:
ssh.socket
antonio@LaptopInsana777:~$ sudo systemctl disable ssh
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install disable ssh
Removed '/etc/systemd/system/ssh.service'
Removed '/etc/systemd/system/multi-user.target.wants/ssh.service'.
Disabling 'ssh.service', but its triggering units are still active:
ssh.socket
antonio@LaptopInsana777:~$ systemctl status ssh
● ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead) since Fri 2026-09-04 16:45:59 CST; 15s ago
   Duration: 46.417s
 TriggeredBy: ● ssh.socket
            Docs: man:ssh(8)
                  man:ssh_config(5)
   Main PID: 14451 (code=exited, status=0/SUCCESS)
   CPU: 15ms


sep 04 16:45:12 LaptopInsana777 systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on 0.0.0.0 port 22.
sep 04 16:45:12 LaptopInsana777 sshd[14451]: Server listening on :: port 22.
sep 04 16:45:12 LaptopInsana777 systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
sep 04 16:45:59 LaptopInsana777 systemd[1]: Stopping ssh.service - OpenBSD Secure Shell server...
sep 04 16:45:59 LaptopInsana777 sshd[14451]: Received signal 15; terminating.
sep 04 16:45:59 LaptopInsana777 systemd[1]: ssh.service: Deactivated successfully.
sep 04 16:45:59 LaptopInsana777 systemd[1]: Stopped ssh.service - OpenBSD Secure Shell server.
antonio@LaptopInsana777:~$

[Archivo Editor Ver Marcadores Complementos Preferencias Ayuda]
- bash - Konsole
```




Comandos para apagar o reiniciar el sistema


systemctl halt

```
antonio@LaptopInsana777:~$ systemctl halt
antonio@LaptopInsana777:~$ systemctl halt
[call to halt failed: kernel panic]
antonio@LaptopInsana777:~$ sudo systemctl halt
[sudo] contraseña para antonio: 
```


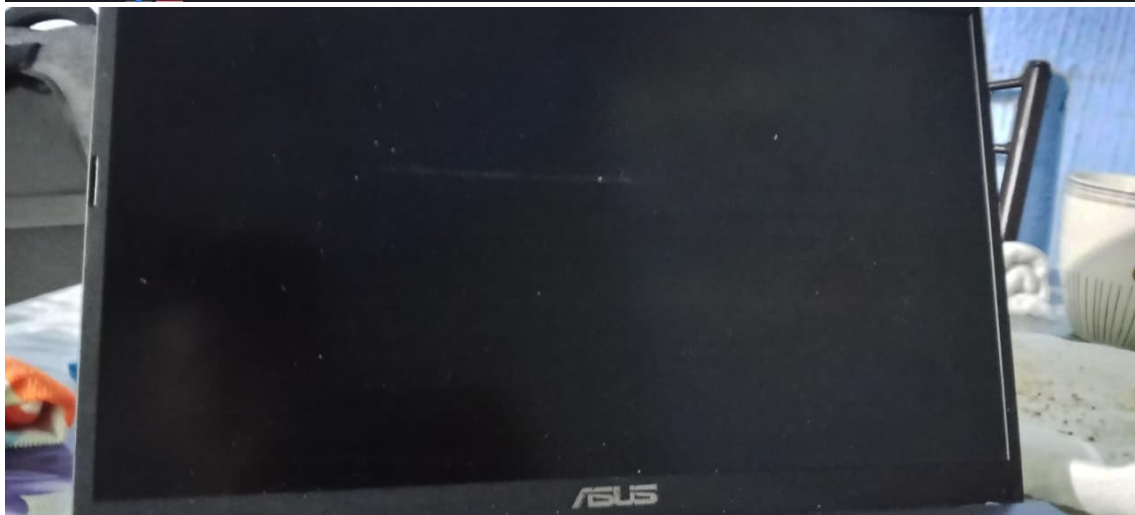




systemctl poweroff

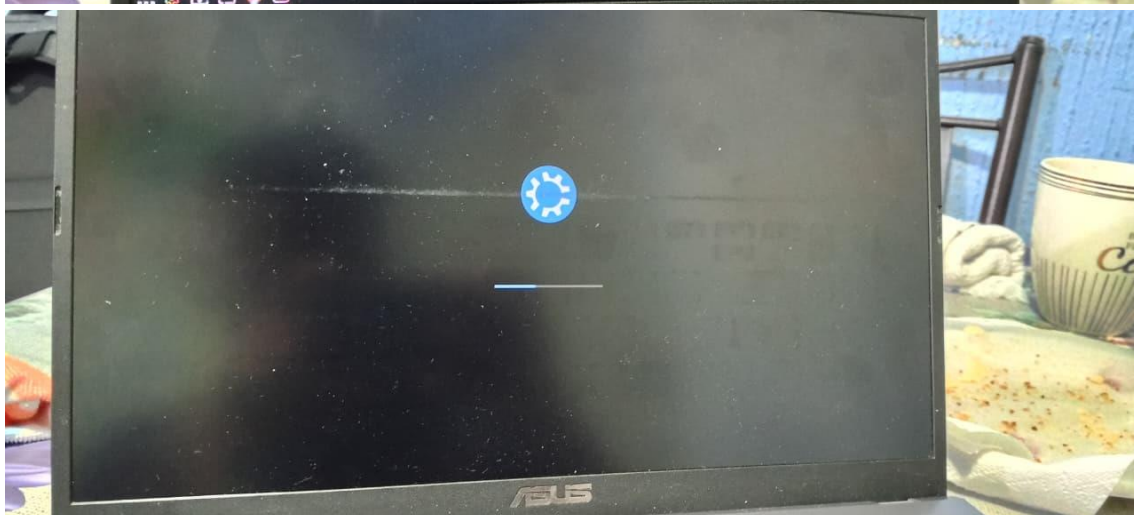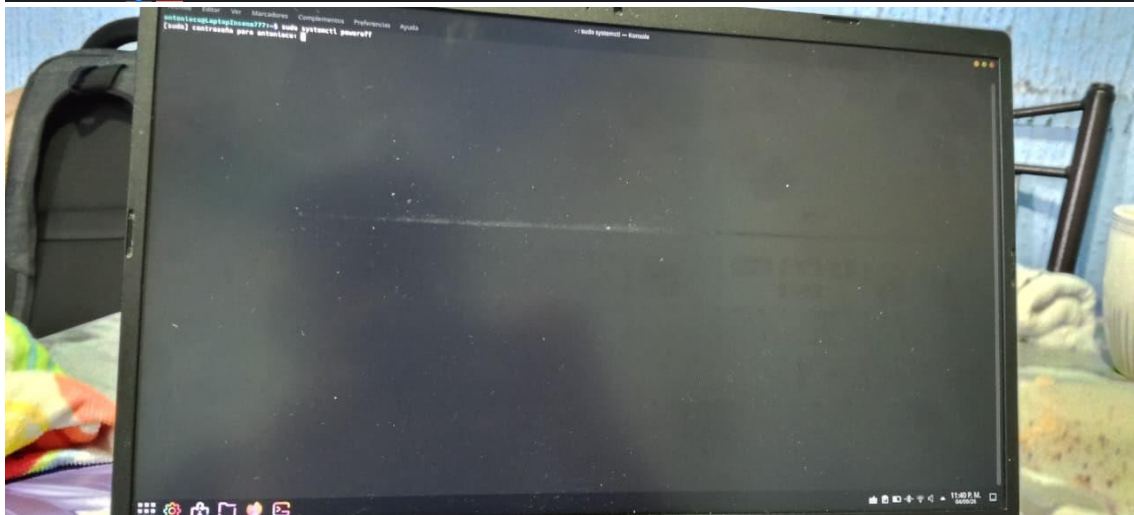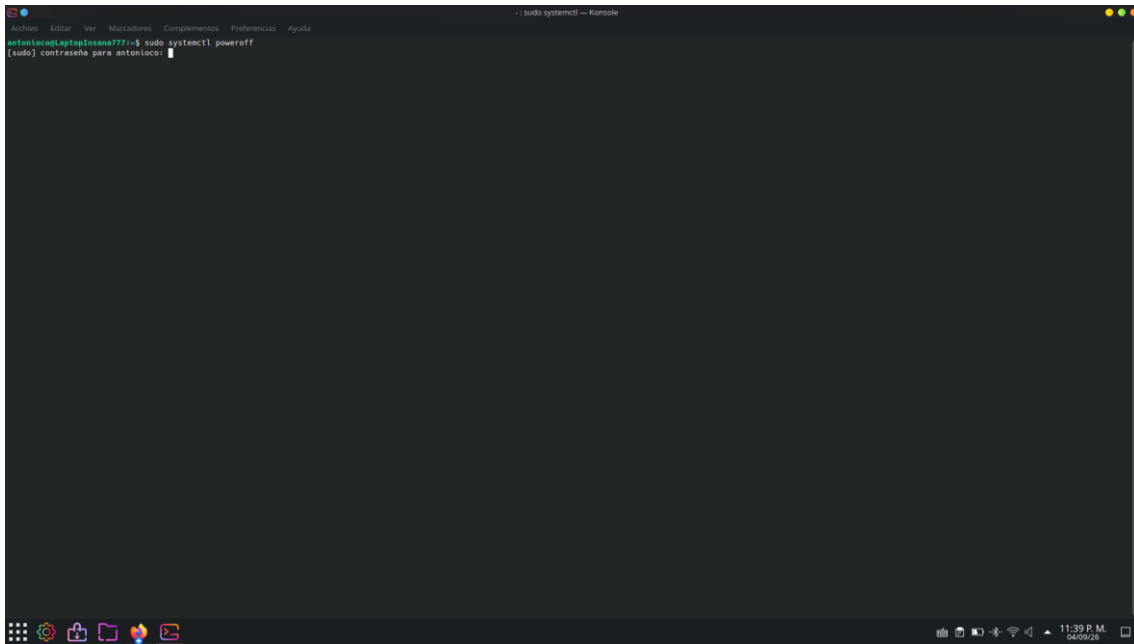

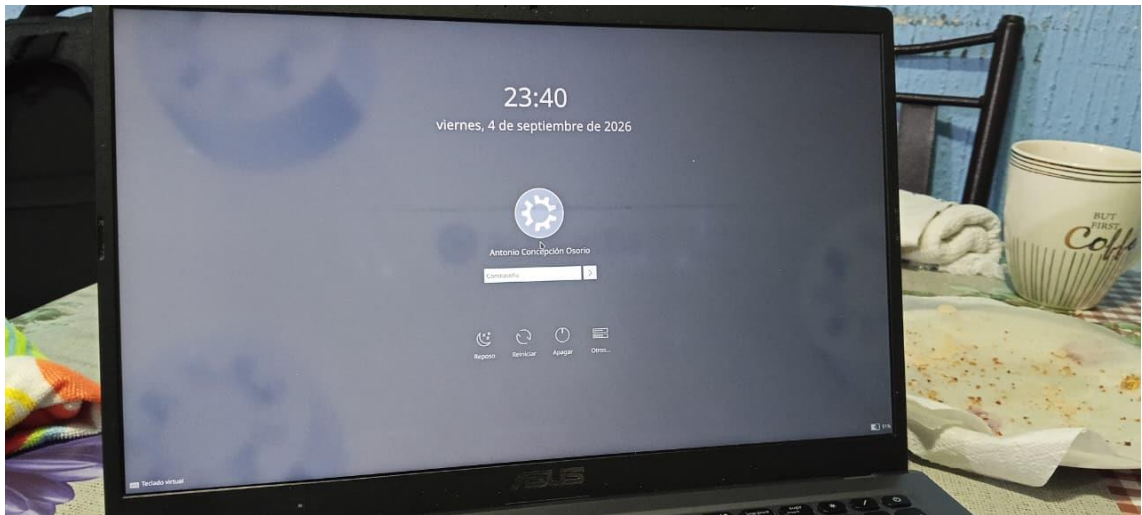

systemctl reboot

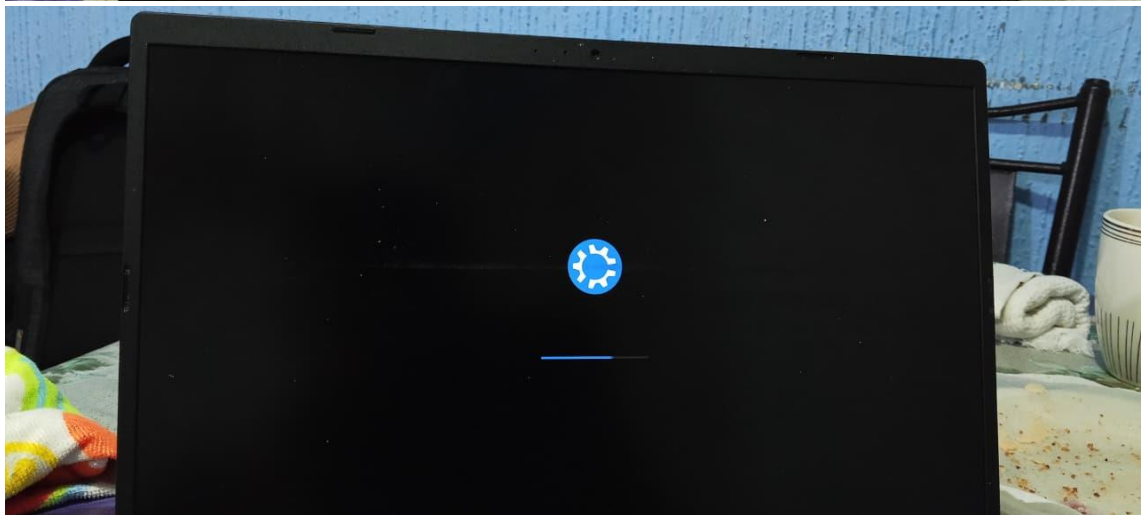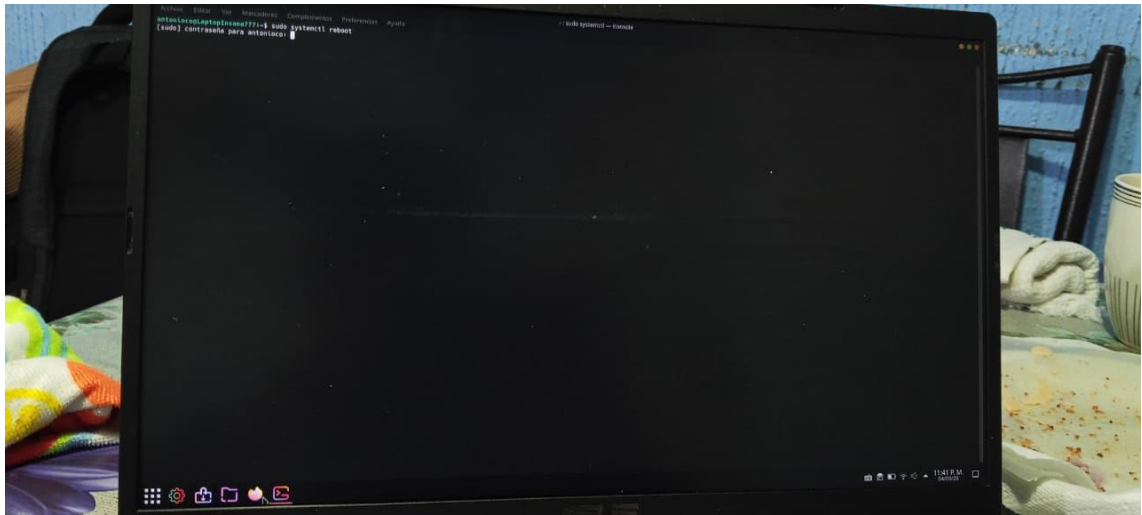

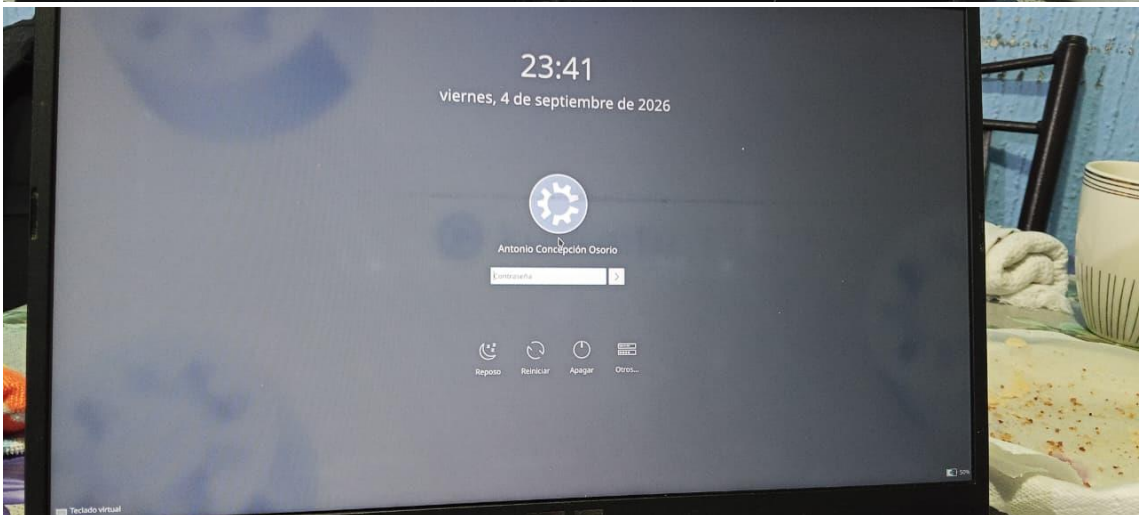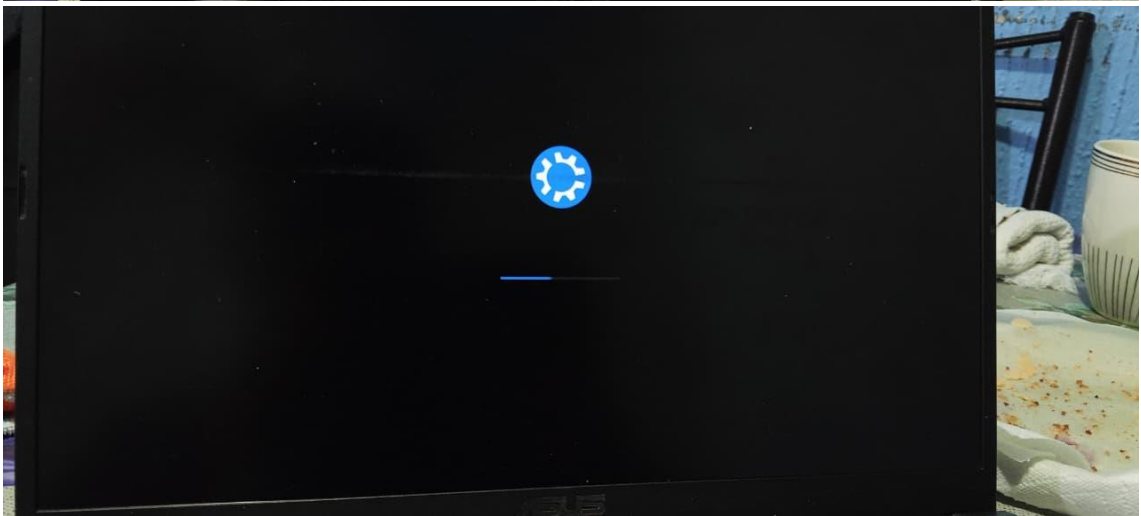

```
1928 clear
1929 exit
1930 sudo su
1931 exit
1932 sudo su
1933 su
1934 sudo su
1935 sudo systemctl --state=help
1936 systemctl | grep running
1937 clear
1938 systemctl | grep running
1939 clear
1940 systemctl | grep running
1941 exit
1942 systemctl | grep running
1943 sudo systemctl | grep running
1944 clear
1945 sudo systemctl | grep running
1946 clear
1947 sudo systemctl | grep stop
1948 sudo systemctl | grep stopped
1949 sudo systemctl | grep enabled
1950 sudo systemctl | grep
1951 systemctl | grep running
1952 clear
1953 systemctl | grep exited
1954 systemctl | grep dead
1955 systemctl | grep inactive
1956 systemctl | grep dead
1957 systemctl | grep failed
1958 systemctl failed
1959 systemctl --failed
1960 systemctl | grep exited
1961 systemctl | grep failed
1962 clear
1963 systemctl list-units --state=failed
1964 clear
1965 systemctl status ssh
1966 systemctl start ssh
1967 sudo systemctl start ssh
1968 systemctl status ssh
1969 systemctl enable ssh
1970 sudo systemctl enable ssh
1971 systemctl status ssh
1972 systemctl stop ssh
1973 sudo systemctl stop ssh
1974 sudo systemctl disable ssh
1975 systemctl status ssh
1976 clear
1977 sudo su
1978 systemctl half
1979 systemctl halt
1980 sudo systemctl halt
1981 sudo systemctl poweroff
1982 sudo systemctl reboot
1983 history
antonio@laptopinterna777:~$
```