
The Roadmap & Frameworks

1. The implementation roadmap

✎ DIAGRAM

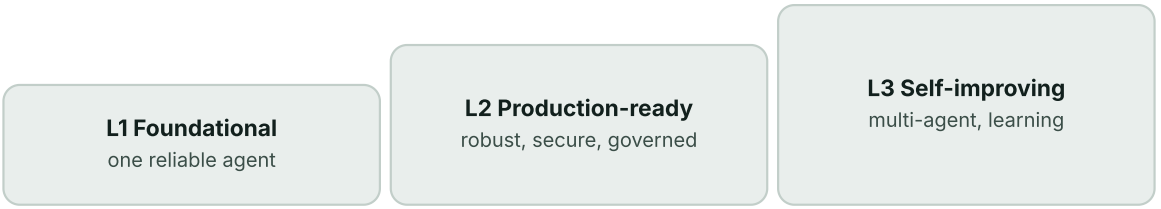

Autonomy is earned by evidence, one level at a time.

Implement patterns in this order.

- **Level 1, Foundational**: get one agent working reliably (baseline, memory, sensing with RAG, structured reasoning). Prove value on one well-defined task
- **Level 2, Production-ready**: add fault tolerance (watchdog, retry, fallback, checkpointing), compliance monitoring, authn/authz, human escalation, observability. This is the demo-to-production gap
- **Level 3, Self-improving**: multi-agent coordination, the flywheel with R^5, custom evals, learning patterns

2. The strategic reflection guide

1. Where are you today? (current maturity)
2. What is your **minimum viable agent**? (the smallest reliable Level-1 win)
3. What is your path to production? (the Level-2 patterns you need)
4. What is your North Star? (the Level-3 autonomy you're building towards)

3. Choosing a framework

✎ DIAGRAM

	Google ADK	CrewAI	LangGraph
Core idea	production agents + runtimes	role-playing teams (a crew)	stateful graph (state machine)
Control flow	planner-driven	sequential or hierarchical	edges, cycles, branches
State	managed	implicit	explicit State object
Best for	enterprise, Google ecosystem	standing up a team fast	complex flows, retry loops

The pattern is the architecture; the framework just expresses it.

- **CrewAI**: fastest way to stand up a collaborative team with simple flow
- **LangGraph**: cycles, conditional branching and explicit, inspectable state ('if validation fails, go to the rejection node')
- **ADK**: production runtimes, managed state and callback guardrails, especially in the Google / Vertex ecosystem

SAY IT

"I'd pick CrewAI to stand up a team fast, LangGraph when I need loops and explicit state, and ADK for managed production runtimes, but the pattern is the architecture, not the framework."