Agent-Level Patterns

1. Master the single agent first

Before adding multi-agent complexity, build one agent that's genuinely production-worthy. Five patterns stack into it:

1 **Single Agent Baseline**: one LLM plus tools on a well-defined task (e.g. a simple loan-approval agent)

2 **Agent-Specific Context and Memory**: state so it stays coherent across a session (remembers the applicant)

3 **Sensing with RAG**: retrieval as perception, grounded in current private facts (checks live policy)


4 **Structured Reasoning and Self-Correction**: plans, critiques its own draft against criteria, revises before acting (ReAct / Reflexion as an internal pattern)

5 **Multimodal Sensory Input**: senses beyond text (reads a scanned application form)

2. They map onto the anatomy

- Memory → **Memory** · RAG and multimodal input → **Sense** · reasoning and self-correction → **Reason / Plan** with an internal feedback loop
- Each maps to a measurable success metric

✎ DIAGRAM

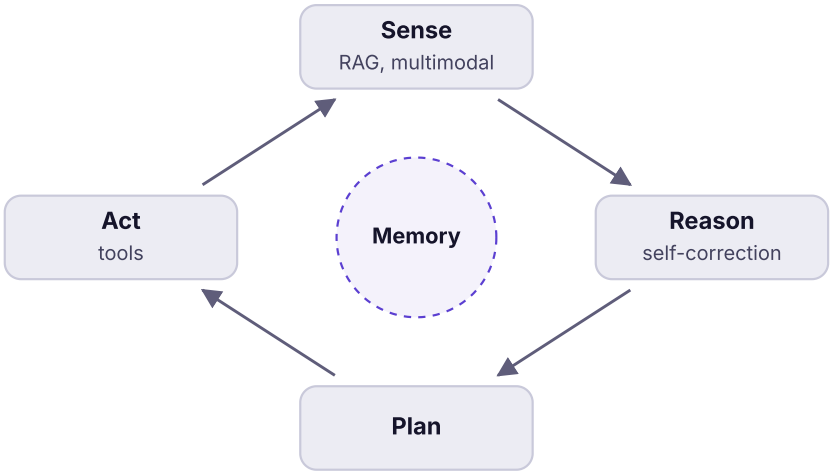

The agent-level patterns are the anatomy made concrete and reliable.

SAY IT

> *"I'd master one reliable agent before adding more: baseline, memory, sensing with RAG, self-correction, then multimodal input if the job needs it."*