Determining the Optimal Chunk Size and Overlap for BenepiKnow using PhilHealth Circular No. 2024-0037

Anthony Salva Mijares
Department of Computer Studies & Engineering (CSE)
José Rizal University
Mandaluyong, Philippines
anthony.mijares@my.jru.edu

***Abstract*—BenepiKnow is a retrieval-augmented generation assistant for Philippine family planning rights and benefits. This study determined the chunk size and overlap that retrieve the largest share of the required evidence from PhilHealth Circular No. 2024-0037, a 283-page source document composed of policy text and case rate annexes. Thirteen fixed-size chunking configurations were evaluated, with chunk sizes from 300 to 1,500 characters and overlap ratios of zero, ten, and twenty percent. A new FAISS index was built for each configuration with the SEA-LION-ModernBERT embedding model, and nine test questions across three difficulty levels were scored using precision, recall, and mean reciprocal rank at three retrieved chunks. The configuration of 500 characters without overlap achieved the highest precision of 0.296 and the highest recall of 0.556. No other configuration retrieved all evidence units of a three-unit question. The margin over the next configurations was one relevant chunk.**

Keywords—chunk overlap, chunk size, FAISS, retrieval evaluation, retrieval-augmented generation

I. Dataset Description

BenepiKnow is a retrieval-augmented generation (RAG) assistant that answers general questions on Philippine family planning rights and benefits in English, Filipino, and Taglish, with citations to official documents. In a RAG system, the question is used to retrieve relevant passages from a document collection, and the retrieved passages are supplied to the language model as the context of the answer. As a result, the answer is grounded in the source documents instead of the internal knowledge of the model [1]. The planned knowledge base of BenepiKnow consists of fifteen official documents, and PhilHealth Circular No. 2024-0037 provides the case rates of family planning and related procedures. The initial pipeline, developed in Part 1, used a chunk size of 1,000 characters with an overlap of 200 characters. Since the retrieval settings of the assistant must be fixed before the full evaluation, this experiment evaluated alternative chunk sizes and overlaps on the circular while all other pipeline components were held constant.

A. Source Document

The dataset is PhilHealth Circular No. 2024-0037, which implements a fifty percent adjustment of select case rates [2]. The 283-page Portable Document Format (PDF) file consists of a seven-page circular body and six annexes of case rate tables, as summarized in Table I. The circular body contains the rules on payment, co-payment, claims filing, and effectivity. Each annex row specifies a procedure or condition code, a description, the first case rate, the health facility fee, and the professional fee.

TABLE I. Parts of PhilHealth Circular No. 2024-0037

Part	Document Coverage	
	PDF pages	***Content***
Circular body	1–7	Policy rules, payment, claims filing, and effectivity
Annex A	8–112	List of medical case rates
Annex B	113–222	List of procedure case rates
Annex C	223–237	Benefits excluded from the 50% adjustment
Annex D	238–254	Conditions and procedures allowed as second case rate
Annex E	255–265	Medical case rates for infirmaries and dispensaries
Annex F	266–283	Procedure case rates for infirmaries and dispensaries

The PDF is a scanned document, and the extracted text contains optical character recognition (OCR) errors, such as “Phifippines” on page 1 and “Flog SUBDERMAE” in the FP001 implant row on page 254. The annexes consist mainly of numeric table rows with little descriptive text, which reduces the semantic differences between annex chunks. Several codes are also repeated across annexes. MCP01 appears in both Annex B and Annex F, and the FP001 and 58300 rows of Annex B are repeated in Annex D and Annex F with identical amounts. Text was extracted from all 283 pages, and the baseline configuration produced 1,707 chunks with an average length of 896 characters.

B. Test Questions and Evidence Units

Nine test questions were prepared, with three questions for each difficulty level, as listed in Table II. Easy questions require one fact from a single passage. Average questions require two closely related facts, such as the fees of two rows on the same page. Difficult questions require facts from different parts of the circular or require a code that appears in two annexes to be told apart. Five questions concern family planning and maternal care packages in Annex B, namely the implant, intrauterine device (IUD) insertion, vasectomy, tubal ligation, antenatal care, and maternity care packages. The other four concern the payment, claims filing, co-payment, and effectivity rules of the circular body.

TABLE II. TEST QUESTIONS

Q	Question Details			
	Level	*Topic*	*Units*	*Pages*
Q01	Easy	First case rate of the FP001 implant	1	222
Q02	Average	IUD (58300) and implant (FP001) fees compared	2	222
Q03	Difficult	Vasectomy and tubal ligation rates and who files the claim	3	193, 196, 5
Q04	Easy	Date of effectivity	1	6
Q05	Easy	Cases covered by the return to hospital policy	1	5
Q06	Average	ANC01 and ANC02 antenatal packages	2	222
Q07	Average	Co-payment in ward and non-basic rooms	2	4
Q08	Difficult	MCP01 in Annex B and Annex F	2	222, 283
Q09	Difficult	Payment against the SOA and direct filing	3	3, 4, 5

Each expected answer was verified against the source pages and decomposed into evidence units. An evidence unit is a single required fact together with the pages from which the fact may be retrieved. The nine questions contain 17 evidence units, of which nine are annex table rows and eight are clauses from the circular body. In Table II, SOA refers to the statement of account issued by the hospital.

II. EXPERIMENTAL METHODOLOGY

A. Chunk Sizes and Overlap Values

The baseline configuration used the Part 1 setting of 1,000 characters with an overlap of 200 characters. The other configurations were generated by the nested loops in Fig. 1 over chunk sizes of 300, 500, 750, and 1,000 characters and overlap ratios of 0, 10, and 20 percent of the chunk size. The pair of 1,000 characters and 20 percent was skipped because the pair is the baseline, leaving eleven configurations, C1 to C11. C1 to C5 correspond to the five configurations specified in the activity. C12, with 1,500 characters and 150 characters of overlap, was added because a 1,500-character chunk in Part 1 truncated the FP001 row before the amounts. The size and overlap of each configuration are listed in Table IV.

```
CHUNK_SIZES = [300, 500, 750, 1000]
OVERLAP_RATIOS = [0.0, 0.1, 0.2]
BASELINE_SETTINGS = (1000, 200)
configs = []
for chunk_size in CHUNK_SIZES:
    for overlap_ratio in OVERLAP_RATIOS:
        chunk_overlap = int(round(
            chunk_size * overlap_ratio))
        if (chunk_size, chunk_overlap) == BASELINE_SETTINGS:
            continue
        configs.append({
            "config_id": f"C{len(configs) + 1}",
            "chunk_size": chunk_size,
            "chunk_overlap": chunk_overlap})
configs.append({"config_id": f"C{len(configs) + 1}",
                "chunk_size": 1500, "chunk_overlap": 150})
```

Fig. 1. Nested loops that generate configurations C1 to C12.

Chunk size and overlap change both the recall and the precision of retrieval [3], and in RAG pipelines tested with chunk sizes from 128 to 2,048 tokens, intermediate sizes gave the best balance between relevance and faithfulness [4]. Since the best setting depends on the documents and questions, the configurations were evaluated directly on the circular.

B. Embedding and Retrieval Settings

All configurations used the same extracted page text and the fixed-size chunking function from Part 1. Because each page is processed independently, every chunk retains the source page number and never combines text from two pages. Each window advances by the chunk size minus the overlap. The chunks were converted into dense vectors, or embeddings, using the SEA-LION-ModernBERT-Embedding-600M model through the SEA-LION application programming interface (API) [5]. Each embedding has 1,024 dimensions and was normalized to unit length. With normalized vectors, the inner product of a question vector and a chunk vector equals the cosine similarity. The embeddings were stored in a FAISS (Facebook AI Similarity Search) IndexFlatIP index, which performs an exact search by comparing the question vector with every stored vector [6]. The top three chunks were retrieved for each question.

Because of the request rate limit of the API, the notebook sent 16 texts per request with an interval of 6.5 seconds between requests. The language model and prompt from Part 1 remained in the notebook, but the generated answers were not scored because the experiment evaluates retrieval only. Table III summarizes the experimental settings.

TABLE III. EXPERIMENT SETTINGS

Parameter	Experiment Setting
	Value
Source document	PhilHealth Circular 2024-0037, 283 pages
Chunking method	Fixed-size with overlap, per page
Chunk sizes	300, 500, 750, 1,000, and 1,500 characters
Overlap	0%, 10%, and 20% of the chunk size
Embedding model	SEA-LION-ModernBERT-Embedding-600M
Vector size	1,024, normalized
Vector index	FAISS IndexFlatIP, new index per run
Retrieved chunks (k)	3
Test questions	9 (3 easy, 3 average, 3 difficult)

C. Evaluation Metrics and Relevance Criteria

A retrieved chunk was considered relevant when the chunk contained at least one evidence unit of the question. Sharing only the topic or a keyword was not sufficient. For an annex row, the chunk had to contain the code or row label together with the required amounts, and truncation before the amounts made the chunk not relevant. For a policy clause, the chunk had to contain the complete key sentence. Each unit was accepted only from the allowed pages. For a question on Annex B, the same code and amounts in Annex D or Annex F were not accepted. To handle OCR errors, the matching ignored letter case, spaces, punctuation, and the commas in amounts such as 5,850.00. Known OCR errors in the amounts were added to each unit after verification against the page images. The same rules were applied to all configurations. Rule-based matching was chosen over evaluation frameworks such as RAGAS, which use a language model to judge

relevance [7], so that the same chunk receives the same label in every run.

Precision@3 (P@3) is the number of relevant chunks among the top three divided by three. Recall@3 (R@3) is the number of evidence units found in the top three chunks divided by the total number of evidence units of the question, and a chunk that contains two units counts toward both. The reciprocal rank is 1, 0.5, or 0.333 when the first relevant chunk is at rank 1, 2, or 3, and 0 when no relevant chunk is retrieved. MRR@3 is the mean reciprocal rank over the nine questions. The difficulty-level scores are the means of the three questions in each level, and the overall MRR@3 was computed over all nine questions instead of from the three level means. Fig. 2 shows the function that computes the three scores for one question.

```
def question_metrics(relevant_flags,
                     covered_units_per_rank, total_units):
    flags = list(relevant_flags)[:TOP_K]
    precision = sum(flags) / TOP_K
    covered = set()
    for units in list(covered_units_per_rank)[:TOP_K]:
        covered.update(units)
    recall = len(covered) / total_units
    reciprocal_rank = next(
        (1 / rank for rank, relevant
         in enumerate(flags, start=1) if relevant), 0.0)
    return {"precision": precision, "recall": recall,
            "rr": reciprocal_rank,
            "covered_units": sorted(covered)}
```

Fig. 2. Computation of Precision@3, Recall@3, and reciprocal rank for one question.

D. Controls for a Fair Comparison

Only the chunk size and overlap varied between configurations. The source pages, test questions, embedding model, number of retrieved chunks, and relevance rules were identical in every run. A new index was built for each configuration, and the cached chunk embeddings were deleted after each run so that no vector was reused by the next configuration.

Implementation checks were run before scoring. For the chunks, the overlap had to be smaller than the chunk size, no chunk could exceed the chunk size, and every chunk had to be an exact substring of the source page. Every page had to produce at least one chunk starting at the first character, and the text shared by adjacent chunks had to appear in both. For the index, the number of vectors had to equal the number of chunks, and a stored vector had to retrieve the corresponding chunk. The question list was also compared before each run. Any failed check stopped the run, and all thirteen runs passed.

III. Results

A. Configuration-Level Results

Among the thirteen runs, C4 (500/0) had the highest Precision@3 of 0.296 and the highest Recall@3 of 0.556 (Table IV and Fig. 3). The highest MRR@3, 0.667, was obtained by C5 (500/50). C2 (300/30) scored lowest on all three metrics, with 0.148, 0.278, and 0.370.

TABLE IV. Configuration-Level Results

Config.	Configuration and Retrieval Scores					
	Size	***Overlap***	***Chunks***	***P@3***	***R@3***	***MRR@3***
Baseline	1,000	200	1,707	0.222	0.463	0.426
C1	300	0	4,323	0.222	0.370	0.556
C2	300	30	4,790	0.148	0.278	0.370
C3	300	60	5,366	0.222	0.426	0.593
C4	500	0	2,642	0.296	0.556	0.537
C5	500	50	2,919	0.259	0.519	0.667
C6	500	100	3,281	0.222	0.463	0.481
C7	750	0	1,821	0.222	0.407	0.426
C8	750	75	2,003	0.259	0.481	0.556
C9	750	150	2,236	0.259	0.519	0.481
C10	1,000	0	1,379	0.222	0.519	0.444
C11	1,000	100	1,543	0.259	0.519	0.556
C12	1,500	150	1,079	0.259	0.519	0.611

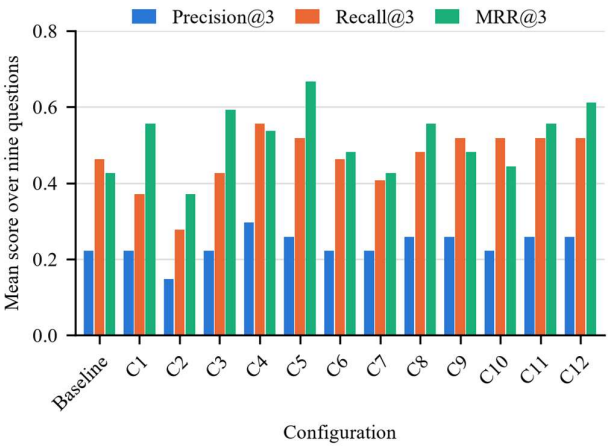


Fig. 3. Retrieval scores of the baseline and C1 to C12.

Precision@3 remained low across configurations, ranging from 0.148 to 0.296. Most questions have one or two evidence units, and each unit is usually contained in a single chunk. When only one chunk contains the evidence, the maximum Precision@3 for that question is 0.333. For this reason, the scores are interpreted relative to the other configurations and not against 1.0. Since each run retrieves 27 chunks, one additional relevant chunk increases Precision@3 by 0.037, and one question that moves from no relevant chunk to rank 1 increases MRR@3 by 0.111.

B. Performance by Question Difficulty

Easy questions produced the most consistent results across difficulty levels, with eleven of the thirteen runs reaching an easy-question Recall@3 of 0.667 (Table V, where P, R, and MRR are the three metrics for each level). Q04 and Q05 were retrieved in almost every run, while Q01 was not retrieved in any run. Average questions showed the widest variation. C1 and C5 ranked a relevant chunk first for all three average questions and reached an average-question MRR@3 of 1.000, compared with 0.278 for the baseline and C7.

Every configuration scored lowest on the difficult questions. For this group, the best Precision@3 and Recall@3 were 0.333 by C4, and the best MRR@3 was 0.667 by C3. C2 scored zero on all three difficult questions.

C. Efficiency

The number of chunks increased as the chunk size decreased or the overlap increased, ranging from 1,079 for C12 to 5,366 for C3 (Table VI). Because API requests were rate-limited, embedding time increased with the number of chunks and ranged from 442 seconds for C12 to 2,184 seconds for C3. Index size also followed the chunk count, since each chunk is stored as one vector of 1,024 four-byte values, and ranged from 4.4 to 22.0 megabytes. Index build time did not exceed 0.02 seconds, and mean search time ranged from 0.47 to 2.34 milliseconds. These two measures did not distinguish the configurations.

TABLE V. SCORES BY QUESTION DIFFICULTY

Config.	Easy			Average			Difficult		
	P	*R*	*MRR*	*P*	*R*	*MRR*	*P*	*R*	*MRR*
Baseline	0.222	0.667	0.667	0.222	0.500	0.278	0.222	0.222	0.333
C1	0.111	0.333	0.333	0.444	0.667	1.000	0.111	0.111	0.333
C2	0.111	0.333	0.333	0.333	0.500	0.778	0.000	0.000	0.000
C3	0.222	0.667	0.667	0.222	0.333	0.444	0.222	0.278	0.667
C4	0.222	0.667	0.667	0.333	0.667	0.611	0.333	0.333	0.333
C5	0.222	0.667	0.667	0.333	0.667	1.000	0.222	0.222	0.333
C6	0.222	0.667	0.667	0.222	0.500	0.444	0.222	0.222	0.333
C7	0.222	0.667	0.667	0.222	0.333	0.278	0.222	0.222	0.333
C8	0.222	0.667	0.667	0.444	0.667	0.833	0.111	0.111	0.167
C9	0.222	0.667	0.500	0.333	0.667	0.611	0.222	0.222	0.333
C10	0.222	0.667	0.500	0.222	0.667	0.500	0.222	0.222	0.333
C11	0.222	0.667	0.500	0.333	0.667	0.833	0.222	0.222	0.333
C12	0.222	0.667	0.667	0.333	0.667	0.833	0.222	0.222	0.333

TABLE VI. EFFICIENCY OF EACH CONFIGURATION

Config.	Efficiency Measures			
	Chunks	*Embedding time (s)*	*Index size (MB)*	*Search time (ms)*
Baseline	1,707	696	7.0	0.80
C1	4,323	1,771	17.7	1.66
C2	4,790	1,948	19.6	2.34
C3	5,366	2,184	22.0	2.18
C4	2,642	1,073	10.8	1.32
C5	2,919	1,189	12.0	1.20
C6	3,281	1,339	13.4	1.50
C7	1,821	742	7.5	0.65
C8	2,003	818	8.2	0.72
C9	2,236	911	9.2	0.93
C10	1,379	565	5.6	0.57
C11	1,543	631	6.3	0.61
C12	1,079	442	4.4	0.47

IV. DISCUSSION

A. Effects of Chunk Size and Overlap

Chunk size had a stronger effect on retrieval than overlap. The 300-character configurations had the lowest Recall@3 at every overlap ratio, with 0.370, 0.278, and 0.426. Without overlap, 500 characters had the best Precision@3 and Recall@3, although the MRR@3 of 300 characters was slightly higher at 0.556 compared with 0.537. At 10 percent overlap, 500 characters reached an MRR@3 of 0.667 and tied for the best Precision@3 and Recall@3. At 20 percent overlap, no single size was best on all metrics. C9 (750 characters) was best on Precision@3 and Recall@3, while C3 (300 characters) was best on MRR@3. Across the three ratios, 500 characters was the most effective chunk size.

Overlap increased the number of chunks in every case. A 10 percent overlap produced 10 to 12 percent more chunks, and a 20 percent overlap produced 23 to 24 percent more chunks than the same size without overlap. Retrieval quality did not increase in the same manner. At 300 characters, the 10 percent overlap (C2) produced the weakest result of the experiment, while the 20 percent overlap (C3) produced the highest MRR@3 for that size. At 500 characters, Precision@3 and Recall@3 decreased with each increase in overlap, from 0.296 and 0.556 to 0.259 and 0.519 and then to 0.222 and 0.463. At 750 characters, overlap improved Recall@3 from 0.407 to 0.481 and 0.519. At 1,000 characters, the 10 percent overlap raised MRR@3 from 0.444 to 0.556, while the 20 percent overlap lowered Recall@3 from 0.519 to 0.463.

In this dataset, every increase in overlap added chunks, but only some increases improved retrieval. A possible explanation is the short length of the required fee rows and clauses. A 500-character chunk can usually contain a complete fee row or clause. Additional overlap then mainly produces chunks with repeated text that occupy positions in the top three without adding new evidence.

B. Successful and Unsuccessful Retrieval

For Q09, C4 retrieved the three required clauses from pages 3, 4, and 5 at ranks 1, 2, and 3. Each part of the answer is located on a different page, and no other configuration retrieved all three units. In C10 (1000/0), a single chunk from page 222 contained both the 58300 IUD row and the FP001 implant row with the corresponding amounts, which gave Q02 full recall from the chunk at rank 1. For Q08, the MCP01 row of Annex B was retrieved only by C3 (300/60), at rank 1.

No configuration retrieved evidence for Q01 or Q03. The annex list on page 6 was ranked first for Q03 in 12 of the 13 runs, for Q08 in 11 runs, and for Q01 in 9 runs. The annex list contains the phrase “Annex B: List of Procedure Case Rates,” which matches the wording of the questions, but contains no amounts. The fee rows consist mainly of short codes and numbers and received lower similarity scores than the annex list, even though only the fee rows contain the answer. In C10, the page 222 chunk that answered Q02 was not retrieved for

Q01, although the same chunk contains the FP001 row, which indicates that the wording of the question also influenced retrieval.

Other failures resulted from chunk boundaries. In C1 (300/0), the top chunk for Q04 ends with "shall take effect on hospital admis," so the effectivity date was placed in the next chunk and Q04 was missed. In C2 (300/30), the chunks retrieved for Q09 begin in the middle of the required sentences, such as "mount indicated in the rate schedule," so none of the three units was complete. Repeated rows from other annexes were also retrieved. For Q02 in C4, the first two chunks were the FP001 and 58300 rows of Annex D on pages 254 and 247, which have the same amounts as Annex B but were not counted because the question refers to Annex B. In C10, the header of page 1, which contains only the PhilHealth name, address, and circular number, was ranked above the effectivity clause for Q04. In this case, the larger chunk size added unrelated text to the top results.

C. Trade-Offs Between Retrieval Quality and Efficiency

Smaller chunks increased the cost without improving evidence retrieval. The three 300-character configurations produced 4,323 to 5,366 chunks and required 1,771 to 2,184 seconds of embedding, about two and a half to three times the baseline, yet had the lowest Recall@3 at every overlap ratio. C12 produced only 1,079 chunks and required 442 seconds. C12 matched the Precision@3 and Recall@3 of C5 (0.259 and 0.519) with 37 percent of the chunks and an index of 4.4 megabytes compared with 12.0 megabytes. The MRR@3 of 0.611 for C12, compared with 0.667 for C5, resulted from a single question, Q07, in which C12 ranked the evidence second.

C4 produced 2,642 chunks, required 1,073 seconds of embedding, and produced a 10.8-megabyte index. C4 required about 2.4 times the chunks of C12 but retrieved one additional evidence unit for Q09, which completed all three parts of the Q09 answer compared with two parts for C12. The baseline also used more chunks than C10 and C11 (1,707 compared with 1,379 and 1,543) without a higher score than either configuration.

D. Limitations

Because only nine questions were used, a single question can change an overall mean by up to 0.111 and a difficulty-level mean by up to 0.333. Relevance was determined automatically by phrase and amount rules. A chunk that states the answer in different words or contains an unlisted OCR error was counted as not relevant. Q01, Q03, and Q08 were missed in almost every run regardless of chunk size, which suggests a limitation of embedding-based search on long numeric tables and not of the chunk settings. Only one embedding model was tested, the number of retrieved chunks was fixed at three, chunks were divided by character count instead of by table row or sentence, and each configuration was run once.

V. Final Recommendation

The recommended configuration for BenepiKnow is a chunk size of 500 characters with no overlap (C4) and three retrieved chunks. The choice was based on retrieval quality, question difficulty, evidence completeness, efficiency, and consistency. C4 had the highest recall without a loss of precision and was not lower than any other configuration on the easy-question and average-question recall. On the difficult questions, C4 retrieved the most evidence, including every unit of Q09. C4 also retrieved evidence for six of the nine questions, which equals the highest count of any run. With 2,642 chunks, C4 needs fewer chunks than C5, C6, and the 300-character configurations. Table VII compares C4 with the other leading configurations and the baseline.

TABLE VII. Comparison of the Leading Configurations

Config.	Retrieval and Efficiency Comparison					
	Chunks	***P@3***	***R@3***	***MRR@3***	***Difficult R@3***	***Questions found***
C4	2,642	0.296	0.556	0.537	0.333	6 of 9
C5	2,919	0.259	0.519	0.667	0.222	6 of 9
C12	1,079	0.259	0.519	0.611	0.222	6 of 9
Baseline	1,707	0.222	0.463	0.426	0.222	5 of 9

C5 achieved a higher MRR@3 than C4, with 0.667 compared with 0.537, because C5 ranked the first relevant chunk at rank 1 for every answered question, while C4 ranked the first relevant chunk third for Q02 and second for Q07. In BenepiKnow, all three retrieved chunks are passed to the language model, and three 500-character chunks fit within the 4,096-token prompt limit set in Part 1. The position of evidence affects answers mainly in long inputs [8], and three 500-character chunks form a short input. For this reason, retrieving the evidence within the top three is more important than ranking the evidence first, which supports the selection of C4 for the higher recall. C12 is the most efficient configuration with comparable scores. However, C12 retrieved less evidence for the difficult questions than C4, and Part 1 showed that 1,500-character chunks can truncate a fee row before the amounts.

The margin between the leading configurations is small. C4 leads the next group by one relevant chunk in Precision@3 and one evidence unit in Recall@3. The results identify 500 characters as the most suitable chunk size for the circular but do not establish that no overlap is better than an overlap of 50 characters. A larger evaluation with more questions per difficulty level, chunk sizes between 400 and 600 characters, and overlaps between 0 and 50 characters is needed to confirm the selection. Structure-aware chunking, which divides the annex tables by row instead of by character count, should also be evaluated, since fee rows were the most difficult evidence to retrieve. Row-based chunks would also keep the headings, conditions, and column labels of each table within the chunk, which BenepiKnow requires to explain benefits correctly. Since semantic chunking has not consistently outperformed fixed-size chunking and requires more computation [9], any alternative method should be compared with C4 on the same questions.

VI. Reproducibility

The modified notebook retains the Part 1 code without changes in Component I for indexing and Component II for prompting and retrieval. Component III contains the experiment, including the test questions and evidence units, the configuration loops, the implementation checks, the evidence matcher, the metric functions, and the function that runs each configuration. Component IV contains the analysis

and the recommendation. The results are reproduced by running Component I followed by Component III. The complete run of thirteen configurations required about four hours in Google Colab due to the API rate limit.

The notebook exports a results workbook with Table A, Table B, and Table C in separate worksheets, where Table C is the detailed retrieval log. The log is also exported as a comma-separated values (CSV) file, and the chart is saved as an image. The submitted files and the final configuration are listed in Table VIII.

TABLE VIII. SUBMITTED FILES AND FINAL CONFIGURATION

Item	**Submission Details**
	File or setting
Notebook	PT_F2_Chunking_Experiment_Mijares.ipynb
Results workbook	PT_F2_results.xlsx
Retrieval log	retrieval_log.csv
Metrics chart	metrics_chart.png
Ground truth	Questions and evidence units in Component III
Source dataset	PhilHealth Circular No 2024-0037.pdf
Final configuration	CHUNK_SIZE = 500, CHUNK_OVERLAP = 0, TOP_K = 3

REFERENCES

[1] Y. Gao et al., "Retrieval-augmented generation for large language models: A survey," arXiv:2312.10997, 2023.

[2] Philippine Health Insurance Corporation, "Fifty percent (50%) adjustment of select case rates," PhilHealth Circular No. 2024-0037, Pasig City, Philippines, 2024.

[3] B. Smith and A. Troynikov, "Evaluating chunking strategies for retrieval," Chroma, Tech. Rep., Jul. 2024. [Online]. Available: https://research.trychroma.com/evaluating-chunking

[4] X. Wang et al., "Searching for best practices in retrieval-augmented generation," in Proc. 2024 Conf. Empirical Methods in Natural Language Processing (EMNLP), 2024.

[5] AI Singapore, "SEA-LION-ModernBERT-Embedding-600M," Hugging Face model card, 2025. [Online]. Available: https://huggingface.co/aisingapore/SEA-LION-ModernBERT-Embedding-600M

[6] M. Douze et al., "The Faiss library," arXiv:2401.08281, 2024.

[7] S. Es, J. James, L. Espinosa-Anke, and S. Schockaert, "RAGAS: Automated evaluation of retrieval augmented generation," in Proc. 18th Conf. European Chapter Assoc. Comput. Linguistics: System Demonstrations, 2024.

[8] N. F. Liu et al., "Lost in the middle: How language models use long contexts," Trans. Assoc. Comput. Linguistics, vol. 12, pp. 157–173, 2024.

[9] R. Qu, R. Tu, and F. Bao, "Is semantic chunking worth the computational cost?" arXiv:2410.13070, 2024.