

 Search Home Guides Reference Learn

Drawer

Nesting navigators

Modals

Platform-specific Modules

Shared routes

Settings

Apple Handoff

 Reference

Hooks API

Search Parameters

Redirects

Static Rendering

Async routes

Sitemap

Typed routes

Authentication

Screen tracking for analytics

[Top-level src directory](#)


Testing

Troubleshooting

Top-level src directory

Learn how to use a top-level src directory in your Expo Router project.

As your project grows, it can be helpful to move all of the directories containing application code into a single **src** directory. Expo Router supports this out of the box.

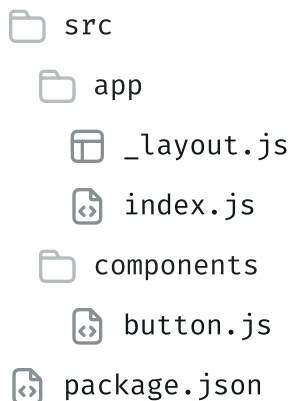

```
src
├── app
│   ├── _layout.js
│   ├── index.js
│   └── components
│       └── button.js
├── _layout.js
├── index.js
├── components
│   └── button.js
├── package.json
```

Simply move your **app** directory to **src/app** and restart the development server with a clear cache:

Terminal

```
- npx expo start --clear

# Or when exporting
- npx expo export --clear
```

Notes:

- The config files (**app.config.js**, **app.json**, **package.json**, **metro.config.js**,