

Main takeaways

- ▷ **Local connection rules** can enforce strict **global topological features**.
- ▷ These rules can be leveraged to design
 - new mathematical frameworks (ex.: ODEs, PGFs)
 - new sampling algorithms (ex.: edge swapping)

Multi-scale structure and topological anomaly detection via a new network statistic: The onion decomposition

Laurent Hébert-Dufresne¹, Joshua A. Grochow¹ & Antoine Allard²

Sci. Rep. 6, 31708 (2016)

Percolation and the Effective Structure of Complex Networks

Antoine Allard^{1,2} and Laurent Hébert-Dufresne^{3,1}

Phys. Rev. X 9, 011023 (2019)

Modeling critical connectivity constraints in random and empirical networks

Laurent Hébert-Dufresne,^{1,2,3} Márton Pósfai,⁴ and Antoine Allard^{3,5,1}

arXiv:2307.03559



Laurent Hébert-Dufresne
University of Vermont



François Thibault
Université Laval




Márton Pósfai
Central European University



Joshua A. Grochow
University of Colorado, Boulder

Theoretical justifications exist for the use of “simple” models of complex networks and of the dynamics they support.

Simple models can reproduce nontrivial complex connections patterns observed in real networks.

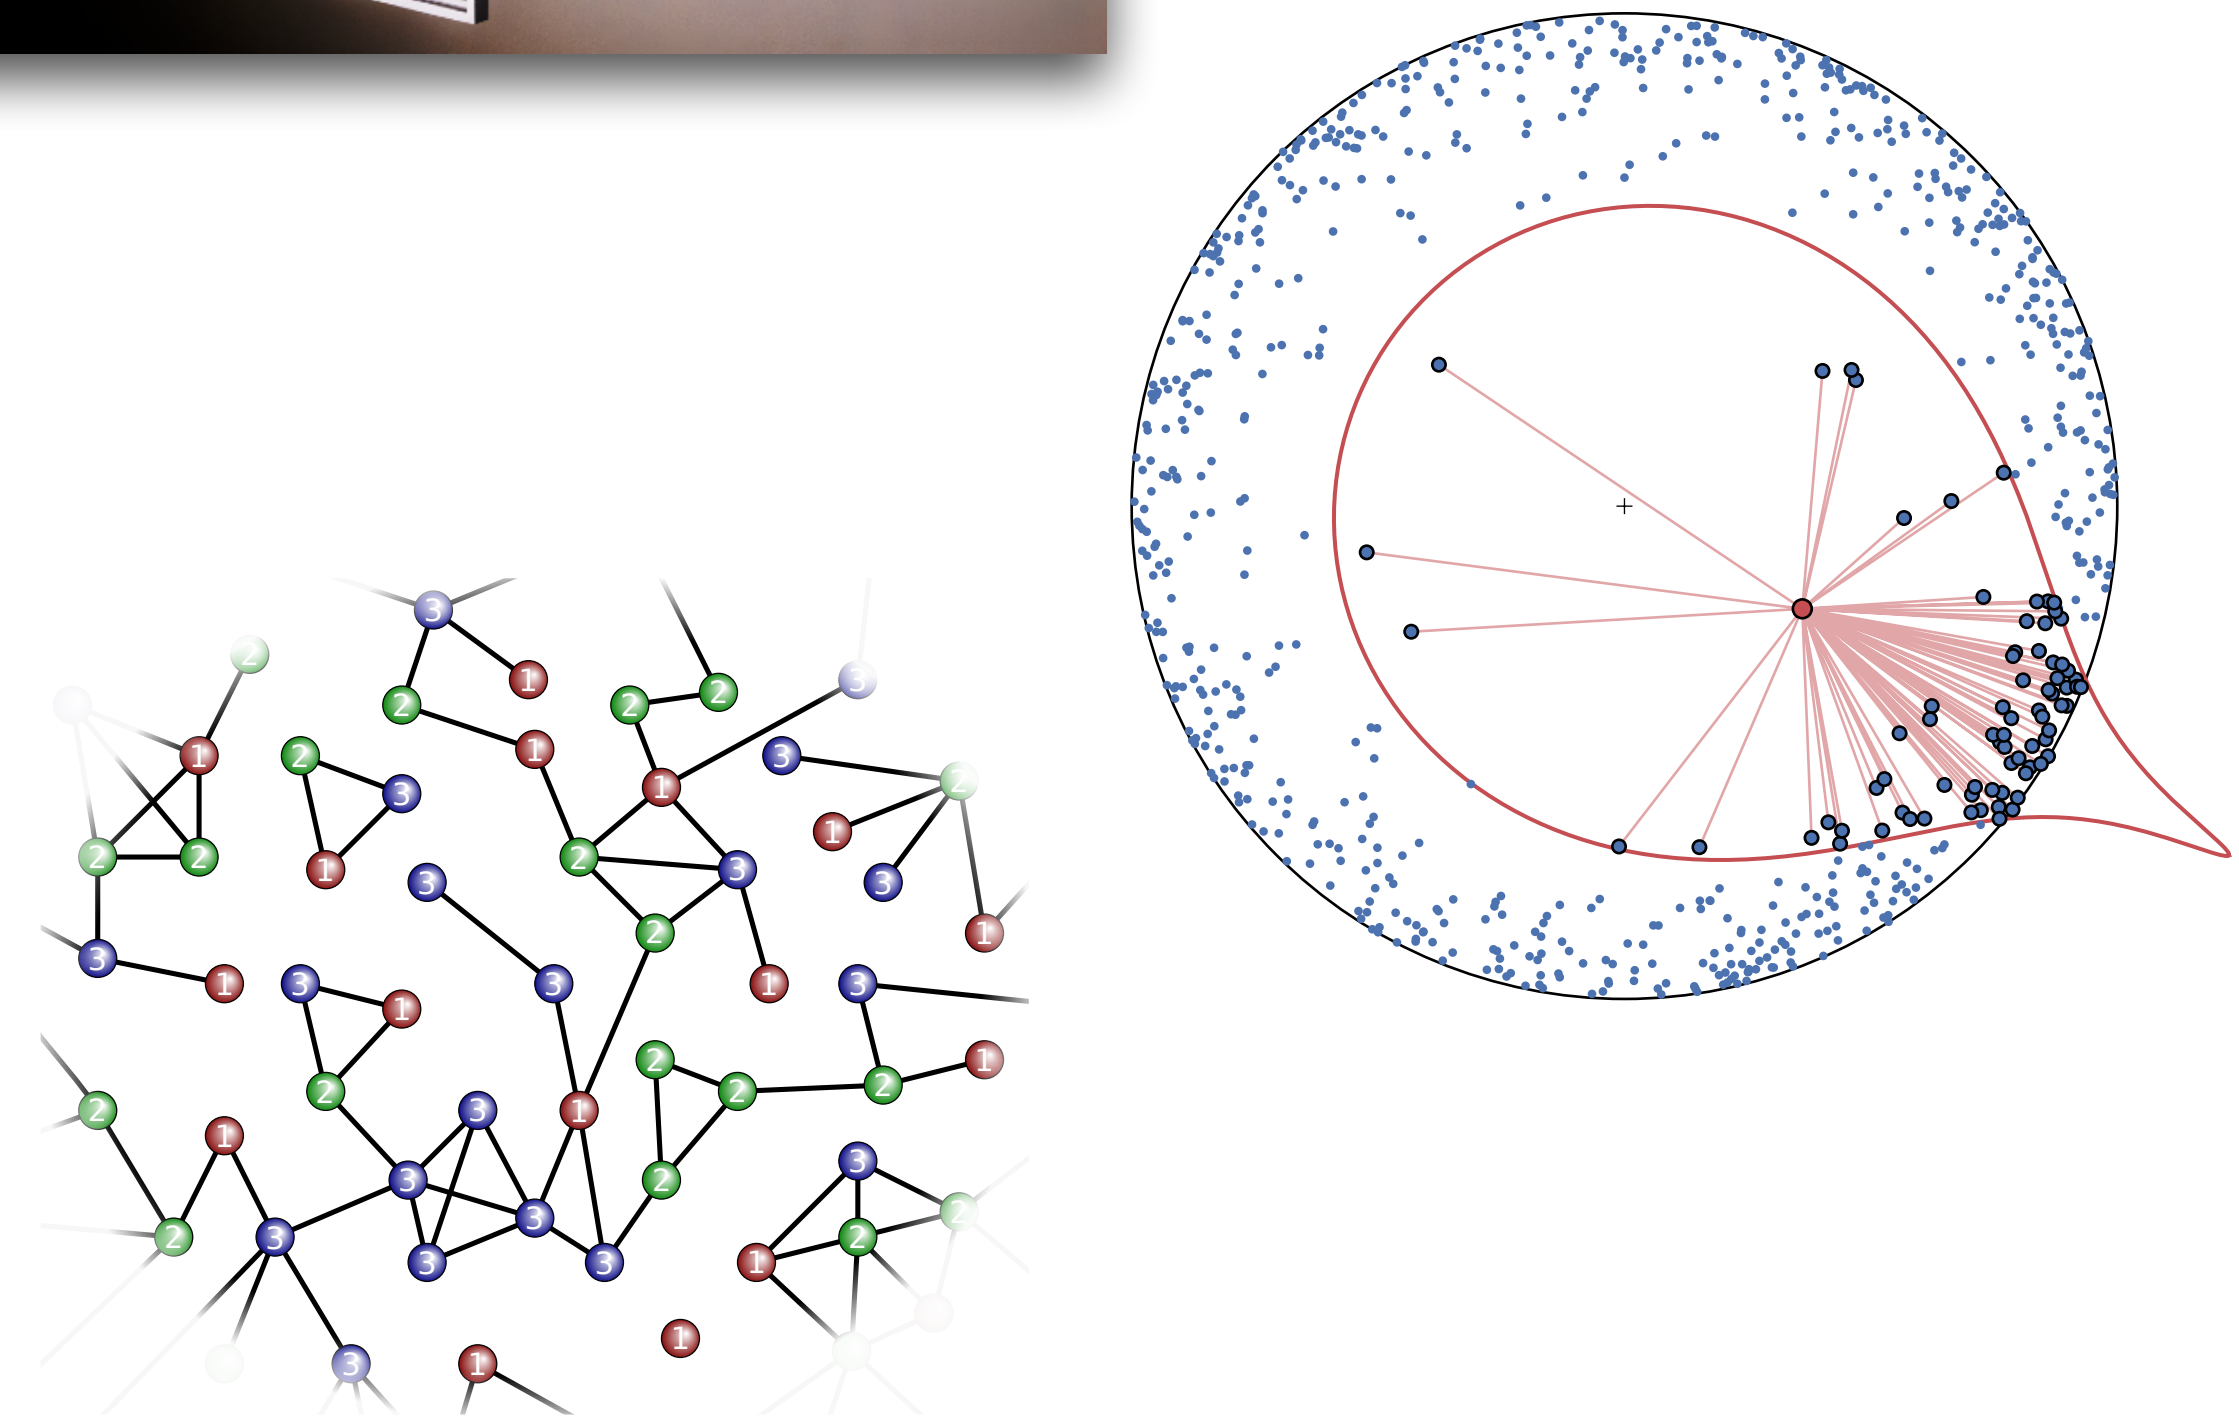

slides, papers and code available at antoineallard.info



Alliance de recherche
numérique du Canada

