


QThread

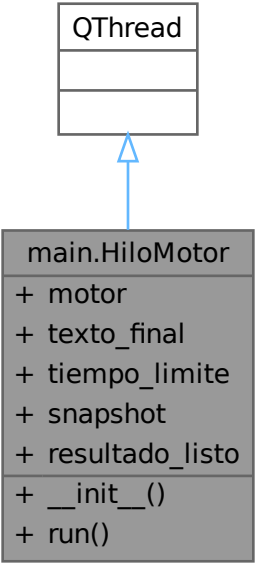

```
classDiagram
    class QThread
    class HiloMotor["main.HiloMotor"] {
        +motor
        +texto_final
        +tiempo_limite
        +snapshot
        +resultado_listo
        +__init__()
        +run()
    }
    HiloMotor --|> QThread
```

The diagram illustrates a class hierarchy. At the top is the 'QThread' class, represented by a rectangle divided into three horizontal sections. The top section contains the class name 'QThread', while the middle and bottom sections are empty. Below 'QThread' is the 'main.HiloMotor' class, represented by a larger rectangle divided into three horizontal sections. The top section contains the class name 'main.HiloMotor'. The middle section lists five attributes, each preceded by a '+' sign: 'motor', 'texto_final', 'tiempo_limite', 'snapshot', and 'resultado_listo'. The bottom section lists two methods, each preceded by a '+' sign: '__init__()' and 'run()'. A blue arrow with an open triangular head points from the top of the 'main.HiloMotor' class box to the bottom of the 'QThread' class box, indicating that 'main.HiloMotor' inherits from 'QThread'.

main.HiloMotor

- + motor
- + texto_final
- + tiempo_limite
- + snapshot
- + resultado_listo
- + __init__()
- + run()