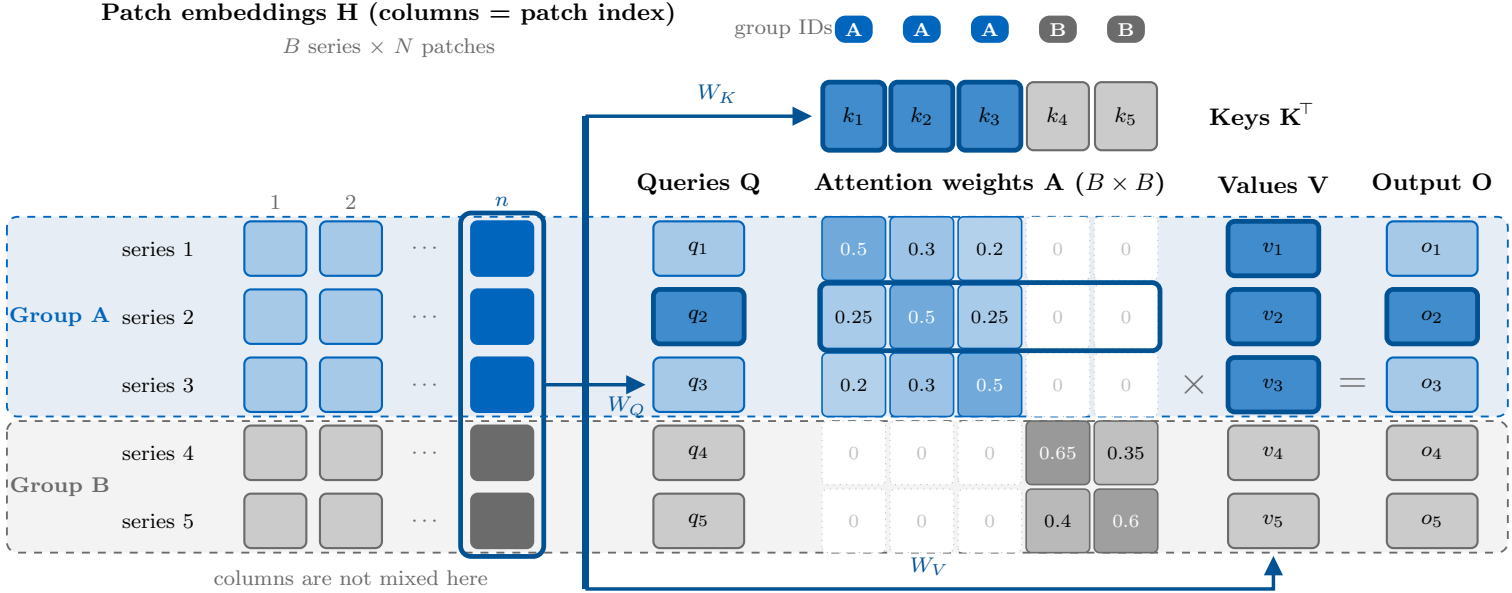


$$\mathbf{A} = \mathrm{softmax}\big(\mathbf{Q}\mathbf{K}^\top/\sqrt{d} + \mathbf{M}\big), \quad M_{ij} = 0 \text{ if } g_i = g_j, \text{ else } -\infty \quad \rightarrow \quad o_i = \textstyle\sum_{j:\, g_j = g_i} A_{ij}\, v_j$$

Applied independently for every patch index n. Each query attends only to keys of its own group, itself included, and never across groups (weight 0). No positional embedding: series in a group are unordered.