

Sections and Chapters

Anton Nørgaard

April 28, 2025

Contents

0.1	Introduction	1
1	Prerequisites for compiling and running the game	2
2	Source code documentation	5
2.0.1	Policy on when to include header files	7
0.1	Introduction	

Chapter 1

Prerequisites for compiling and running the game

This chapter details all the necessary requirements for setting up, preparing and running the game.

It worth noting that the game can **only** run on Linux operating systems as it uses certain C-libraries that only work in Unix-like operating systems.

Furthermore, at the risk of sounding arrogant and snarky, this guide assumes you are quite competent with programming, Linux and computers in general.

Getting the correct compiler

The game was and should be compiled using GCC. To my recollection, it uses GCC-specific, non c-standard features, so it is unlikely it will work otherwise.

All of this of course, assumes you have sufficient privileges to install software on the desired host.

Installing GCC via Ubuntu

Firstly, run

```
sudo apt update
```

To update the packages list. Next, run

```
sudo apt install build-essential
```

This actually installs a group of different tools, most of which you will need anyway to compile the project, like make as well.

To verify GCC has been installed, run

```
gcc --version
```

This should print out the version of GCC in use.

Additional required software

Installing ncurses

The code uses the ncurses library to draw all the characters on the screen. It is therefore necessary in order to compile the code.

Installing ncurses on systems with apt

You need to install two packages

1. libncurses5-dev (developer's libraries for ncurses)
2. libncursesw5-dev (developer's libraries for ncursesw)

To install both, run

```
sudo apt-get install libncurses5-dev libncursesw5-dev
```

Installing SQLite

Revenant also uses SQLite to manage game state. Furthermore, it needs several other components for allowing compilation itself. There are actually several valid approaches for integrating, compiling and running SQLite, but this particular setup is based on what at the time seemed the best.

Getting the SQLite code

To get the SQLite source code, go to <https://www.sqlite.org/download.html> and download whatever is specified to be "C source code as an amalgamation, version xx.yy.zz.", like in the picture below

SQLite Download Page

Source Code

sqlite-amalgamation-3440200.zip (SHA3-256: 9df894eb2297c08ab2600d85d7bcd3fd78b8c8df22c91789a714bdf3351961e) (2.58 MiB)

Alternatively, assuming you have wget and you know the version number(in the case 3.44.2), you could also run

```
wget https://www.sqlite.org/2023/sqlite-amalgamation-3440200.zip
```

Then unzip the downloaded file.

Compiling the CLI interface

The game uses the command-line interface to generate the game world and the like. To enable the command line, go into the directory

```
gcc shell.c sqlite3.c -lpthread -ldl -lm -o sqlite3
```

This

Getting, compiling and generating the actual game

Now that everything has been set up, the time has come to actually get, compile and generate the game world. To do this, simply go in to the `revenant/misc` folder and run the following shell script

```
sudo bash ./setup_gamle_world.sh
```

and then promptly sit back and relax. Chances are, this is going to take a while.

Chapter 2


Source code documentation

The purpose of this chapter is two-fold

1. It intends to explain to the player the logic behind how certain things work, for educational purposes.
2. The chapter will also serve as a personal specification / written in stone manual for how certain things are done, to ensure things are done consistently.

Setup of header files and forward declaration and the `db_reader`


A recurring issue in the code base as coding continued and complexity increased, was the often almost spontaneous discovery of circular dependencies - declarations (header files) that would depend on each other:

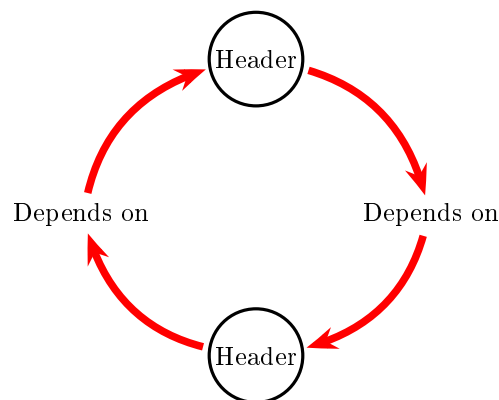


The solution to this issue was to hyper split the header files in the following manner, containing the following information

- Struct header files. These would include **only** struct declarations and constants.
- "User" header files. These files would in turn define functions and other actual code functionality. Said files would in one way or another make use of the struct header files, hence the classification as users

The idea behind this principle is that it would address the primary issue that caused said circular dependencies - namely that functionality in file A would rely on some functionality in file B that would do some sort of manipulation of structs for file A, that are defined in file A, hence causing said circular dependency:

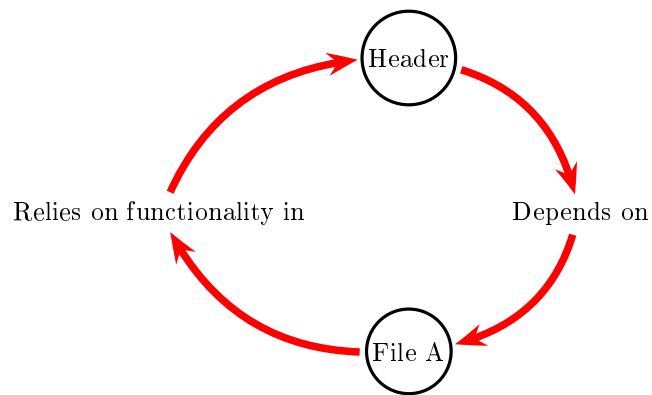


With the new setup (having separate header files for structs and functionality that relies and manipulates structs), this will no longer happen. This is because with the new setup, the "inheritance", going back to the example with the A and B files, will work as follows

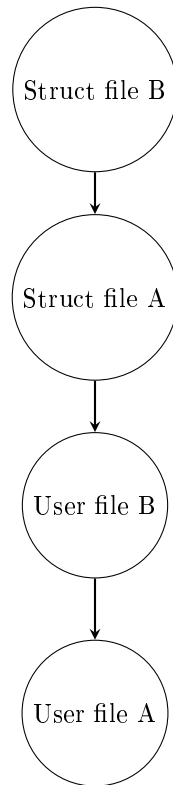

By separating the definitions of structs and the logic that uses the structs, we have managed to "break" the circular definitions. It is admittedly unknown whether this will cause further headaches down the line, but it succeeds in solving the original issue, which makes it an acceptable solution for now.

Which brings us to



2.0.1 Policy on when to include header files

When a header file is to be included in either a source code file or a header file i.e when we make a statement of the type

```
#include "some_header.h"
```

Then it is to be included only *exactly* the moment when it become relevant, that is to say, when the code first refers to functionality/a declaration, made in

the header it is including.

This is because

1. It makes it transparent why the include statement was made.
2. Furthermore, avoids cluttering with unnecessary include statements, potentially causing compiling errors and makes it more easy in reasoning what has been defined in which parts of the code.

Naming conventions for the header files

Naming conventions for the files themselves

As specified in "Setup of header files and forward declaration and the db_reader", there are header files that define only structs and constants and user files, that in some way or another uses said structs. They shall have the name the following name formats

- Header files that use structs can have whatever name they so desire, as long as they are explanatory
- Header files, that only define the structs, must end with the _struct.h, to indicate that it only defines structs and other constants

Naming for functions, structs and macros in the files, along with the files themselves

Any and all functions/macros/structs, that are defined in the same header file, must begin with the same prefix, e.g if a header file defines 10 functions and the chosen prefix is say, abc, each and every function must begin with abc_, the prefix should ideally be a descriptive acronym of the intended functionality of the header file. Mixed upper and lower case are permitted and it is not required to be consistent, whether the prefix is in uppercase or lower case.

This rule applies for both the struct header files and the user header files i.e if the user header file inherits from the struct header file, they must have the same prefix acronym, to indicate the inheritance or that the user file uses the structs defined in the struct file (see Setup of header files and forward declaration and the db_reader) for more information.

When it comes to the actual naming of the files themselves, the prefix of the file in turn decides the prefix of the various objects in the header/source files.

Management of game state and status

Keeping track of the creatures and the player

Checking for active effects of player

Creatures

In the following chapters, we will use several variables to compute various information regarding creatures in-game, their status and the way that they interact with the environment and the player. For that purpose, we will use the following definitions, some are explicitly computed/stored in-game, others are just definitions and are not explicitly declared in-game. The definitions we will use are

- min_local the smallest local coordinate value possible
- max_local the biggest local coordinate value possible
- $Player_{global\ coordinate}$ to represent a player's global coordinate, either X or Y coordinate
- $Creature_{global\ coordinate}$ to represent a creature's global coordinate, either X or Y coordinate
- The exact same variables are defined for the local coordinates
- max_moves is the maximum number of tiles a player/creature can move, before they move out of bounds of the current screen view. It is computed as $(max_local - min_local) + 1$
- $Player_{set\ to\ min}$ is a subtraction of the players global coordinate s.t its local coordinate is the minimal. It is computed as $Player_{global\ coordinate} - (Player_{local\ coordinate} - min_local)$
- $Player_{set\ to\ max}$ is an addition of the players global coordinate s.t its local coordinate is the maximal. It is computed as $Player_{global\ coordinate} + (max_local - Player_{local\ coordinate})$

With that in mind, we can now go over the different mechanics that we need to consider for the creatures in game, such as spawning, movement, death, behavior, actions and so on

Spawning creatures

When it comes to spawning creatures, there are several things that we need to compute in relation to the player. One of them is the creatures local coordinates. The kicker about this is that while a player's local coordinates can be arbitrary without any hassle, the coordinates of the creature must be aligned relative to the players so that the view the creature has on screen matches that

of the global coordinates. To do this, there are two cases that need to be considered, the trivial case and the nontrivial case.

In the trivial case, the distance between the player and the creature is s.t the distance for the particular axis, does not exceed the boundaries of the screen

In the non-trivial case, what we effectively do is reduce it to the nontrivial case. The way that we do this is by considering whether the axis-wise coordinate for the player is greater or smaller than the creature's just like in the non-trivial case. In the case that

$$Player_{global\ coordinate} > Creature_{global\ coordinate}$$

Then set the creature's local coordinate to

$$Creature_{local\ coordinate} = max_local - (Player_{set\ to\ max} - Creature_{global\ coordinate}) \mod max_moves$$

In the other case where

$$Player_{global\ coordinate} < Creature_{global\ coordinate}$$

Instead, set the creature's local coordinate to

$$Creature_{local\ coordinate} = min_local + (Player_{set\ to\ min} - Creature_{global\ coordinate}) \mod max_moves$$

The workings of this are a little hard to work around. Admittedly, this took rather a long while to figure out and I am unsure whether the computations can get simplified further. However, truth be told, I spent way too long to figure this out and so at this point that I cannot be bothered to come up with more clever solutions.

The way it works (informally) is as follows. Assume that

Controls

Keyboard Layout

This table details all the keyboard bindings for the game. Keyboard bindings with an asterisk indicate that

a-m	n-z	A-M	N-Z+ESC
a - N/A	n - N/A	A - N/A	N - N/A
b - N/A	o - N/A	B - N/A	O - N/A
c - N/A	p - N/A	C - N/A	P - N/A
d - N/A	q - N/A	D - N/A	Q - N/A
e - equip item in inventory	r - N/A	E - Show equipped items	R - N/A
f - N/A	s - N/A	F - N/A	S - N/A
g - N/A	t - N/A	G - N/A	T - N/A
h - N/A	u - N/A	H - N/A	U - N/A
i - Display current inventory	v - N/A	I - N/A	W - N/A
j - N/A	w - N/A	J - N/A	X - N/A
k - N/A	x - N/A	K - N/A	Y - N/A
l - show past 10 events	y - N/A	L - N/A	Z - N/A
m - N/A	z - N/A	M - N/A	ESC - Quit command

Table 2.1: Keyboard bindings.

a-m	n-z	A-M	N-Z+ESC	Misc.
a - animal	n - N/A	A - N/A	N - N/A	@ - player character
b - N/A	o - N/A	B - N/A	O - N/A	! - interactable npc
c - N/A	p - N/A	C - N/A	P - N/A	
d - N/A	q - N/A	D - N/A	Q - N/A	
e - N/A	r - N/A	E - N/A	R - N/A	
f - N/A	s - N/A	F - N/A	S - N/A	
g - N/A	t - trader	G - N/A	T - N/A	
h - N/A	u - N/A	H - N/A	U - N/A	
i - N/A	v - N/A	I - N/A	W - N/A	
j - N/A	w - N/A	J - N/A	X - N/A	
k - N/A	x - N/A	K - N/A	Y - N/A	
l - N/A	y - N/A	L - N/A	Z - N/A	
m - N/A	z - N/A	M - N/A	ESC - Quit command	

Table 2.2: Meaning of characters on screen.

Character meanings on map

Interacting with the world

Dialogue

Dialogue screen and interaction, dialogue-wise

As unintuitive as it is, dialogue options are **0-indexed**. This is because it gives a maximum of 10 possible options (0-9), without needing logic for a buffer and

instead just accept a single character as player input. As of time of this writing, it is hoped it is never required to have more than 10 options, because it means, as said, we can skimp on buffer logic.

Managing, reading, writing and manipulation of the game state

The database

Naming standards

Naming standard for variables

Naming of Macros In addition to the naming standards specified in section 2.0.1, the naming standards for the database components adheres to the following set of rules and conventions.

Since many values, especially in the context of dialogues are integer id based, and the sqlite interface uses indexes to refer to the values in the columns of the database, the game makes extensive use of macros, to make it clear what it is we are referring to and to reduce the likelihood of errors when index accessing .

Macros that refer to values stored in the columns have two naming formats. This is due to an inconsistency of the sqlite approach for how variables are numbered. When binding variables for queries, the leftmost variable has an index of **1**, but when retrieving values from a query, the leftmost value has an index of **0**.

Macros that refer column values in the context of a SELECT, UPDATE, DELETE, etc., have the name format of

dbr_<table name>_<column name>INDEX_QUERY

And macros that refer to extracting column values, from a row as a result of a SELECT have the name format of

dbr_<table name>_<column name>INDEX_QRESULT

Macros that indicate id's of ingame objects (creatures,npc's, items, etc) are to be named as

dbr_<table name>_<OBJECT NAME>_ID

NOTE! Per standard defined in "Naming for functions and macros in the files", variables must also be prefixed with dbr_

Naming conventions for the db_reader.c & db_reader.h files All structs, that represent or or more value(s) derived from a query, shall be named *_Qresult, to indicate it is the result of a query, analogous to the naming convention for the macros.

If there is a 1-to-1 correspondence between the value(s) returned from a query and a desired struct in said context, the dbr_reader is allowed to return said struct directly, rather than a *_Qresult struct.

Naming standard for actual database objects The naming standard for the database objects like tables, triggers, etc. Follow the rules defined in section 2.0.1.

Placement and order of declaration

Declaration order for database components To ensure readability and ease of information finding, any and all declaration of database objects are made in the misc/ game folder, using shell scripts.

The database objects are to be declared in this order

1. The table itself
2. Any triggers, indexes, constraints, etc.
3. The values in the table

Each new declaration is to be separated using a dividing line, made from #####

At convenience and as needed, each declaration can have elaborating comments

Declaration order for the db_reader.c & db_reader.h By design, the db_reader functionality will *not* include header information from other revenant components. Instead, any components the need information read in from the DB will include db_reader in its header files. By doing so, it reduces db_reader's dependency on the fields contained in the structs of the components that use db_reader, allowing it to be agnostic wrt. the type and amount of information returned from the queries.

Database schema

Column 1	Column 2	Column 3
A1	B1	C1
Merged Columns		C3
D1	D2	D3
All Columns Merged		
F1	G1	H1

In this subsection, we will list all the

Table:dia _dialogue _interactions			
Column name	Column index	Data type	Description
dialogue _folder _id	0	int	The id of the dialogue folder
current _dialogue _id	1	int	A dialogue file in the dialogue folder in question. Identified by an id
num _dialogue _options	2	int	The number of dialogue options available for the dialogue _folder _id + current _dialogue _id
Indexes, keys and constraints			
PRIMARY KEY(dialogue _folder _id, current _dialogue _id CREATE UNIQUE INDEX IF NOT EXISTS(dialogue _folder _id, current _dialogue _id			
Dependencies of dia _dialogue _interactions			
Table dependencies of dia _dialogue _interactions			
Table name			Role
dia _dialogue _selected _option _consequence _handler - 2.0.1			If any checks are to be made as a consequence of a selected dialogue options, e.g skill check, trigger check this table will also have to be read from.

Table:dia_dialogue_selected_option_consequence_handler			
Column name	Column index	Data type	Description
dialogue_folder_id	0	int	dialogue folder id of the Dia_Dialogue_Manager used for the current dialogue session.
current_dialogue_id	1	int	The current dialogue_id file being read from the dialogue folder.
selected_option	2	int	The selected dialogue option for the current dialogue_folder_id and current_dialogue_id context
consequence	3	int	The consequence for picking the selected_option
next_current_dialogue_if_successful	4	int	The next current dialogue to read in, provided the passed the checks, if any.
Indexes, keys and constraints			
PRIMARY KEY(dialogue_folder_id, current_dialogue_id, selected_option) CREATE UNIQUE INDEX IF NOT EXISTS(dialogue_folder_id, current_dialogue_id, selected_option)			
FOREIGN KEY(dialogue_folder_id, current_dialogue_id) REFERENCES dia_dialogue_interactions(dialogue_folder_id, current_dialogue_id)			
Table name			Role
selected_dialogue_option			If any checks are to be made as a consequence of a selected dialogue options, e.g skill check, trigger check this table will also have to be read from.

The world of Revenant

Places of Revenant

Settlements

Iislog

An incredibly modest

Who you are