

- Basics
  - Installation
    - Check go installation
    - Setup environment variable
  - First program
  - Launch without a binary file
  - Build a binary file
  - Install additional tools
  - Example with linter usage
  - Troubleshooting
    - Tabs and spaces
  - Variables
  - Data types
    - integer literals
  - Conditional
  - Cycles
    - For
    - Range
  - Slices
  - Functions
  - Structures
    - Anonymous struct
  - Method with structure
  - Visibility
  - Pointers
  - go routines
  - channels
    - buffer channel
  - Interfaces
  - Error handling
  - defer
  - Modules
  - Testing
    - Naming
    - Example
    - How to run
    - Table tests
    - Coverage
- Network
  - http server
- JSON
- SQL


# Basics

---

# Installation

## Check go installation

```
go version
```

A terminal window with a dark background. The prompt is '1@DESKTOP-8B6DSJ8 MINGW64 ~'. The command '\$ go version' has been entered, and the output is 'go version go1.18.2 windows/amd64'.

```
1@DESKTOP-8B6DSJ8 MINGW64 ~  
$ go version  
go version go1.18.2 windows/amd64
```

## Setup environment variable

### for linux

```
export GOPATH=$HOME/go  
export PATH=$PATH:$GOPATH/bin
```

### For windows

```
setx GOPATH %USERPROFILE%\go  
setx path "%path%;%GOPATH%\bin"
```

## First program

```
package main  
  
import "fmt"  
  
func main(){  
  
    fmt.Println("Hello, world!")  
  
}
```

- Save file as `hello.go`

## Launch without a binary file

- Launch

```
go run hello.go
```

```
1@DESKTOP-8B6DSJ8 MINGW64 /e/CODE/go/ch1
$ go run hello.go
Hello, world!
```

- While launching binary file was created in temporary directory and deleted after program was finished

## Build a binary file

```
go build -o hello_world hello.go
```

```
1@DESKTOP-8B6DSJ8 MINGW64 /e/CODE/go/ch1
$ go build hello.go

1@DESKTOP-8B6DSJ8 MINGW64 /e/CODE/go/ch1
$ ll
total 1849
-rwxr-xr-x 1 1 197121 1892352 May 28 22:01 hello.exe*
-rw-r--r-- 1 1 197121      81 May 26 10:53 hello.go
```

## Install additional tools

You can install additional tools via `go install`

For example install aggregate linter (include many popular linters)

```
go install github.com/golangci/golangci-lint/cmd/golangci-lint@v1.46.2
```

## Example with linter usage

- create module for an application

```
go mod init ch1
```

- create makefile for build. It will apply linter and create binary file

```
.DEFAULT_GOAL:= build

fmt:
    go fmt ./...
.PHONY: fmt

lint:fmt
    golint ./...
```

```

.PHONY: lint

vet:fmt
    go vet ./...
.PHONY:vet

build:vet
    go build hello.go
.PHONY:build

```

After `:` defined previous `target`, link to previous task which has to been completed before current task

- launch build

```
make
```

```

1@DESKTOP-8B6DSJ8 MINGW64 /e/CODE/go/ch1
$ make
go fmt ./...
go vet ./...
go build hello.go

```

if you don't have `make` on Windows, you can install `choko` manager and then install `make`

```

Set-ExecutionPolicy Bypass -Scope Process -Force;
[System.Net.ServicePointManager]::SecurityProtocol =
[System.Net.ServicePointManager]::SecurityProtocol -bor 3072; iex ((New-
Object
System.Net.WebClient).DownloadString('[https://community.chocolatey.org/ins
tall.ps1](https://www.google.com/url?q=https://community.chocolatey.org/install.ps1&sa=D&source=editors&ust=1675
178682544290&usg=A0vVaw1Vvl_ZL3FJM_aIM1uyGrzj)'))


choco install make

```

## Troubleshooting

### Tabs and spaces

In the process writing VS code change tab to spaces. Then I find an option

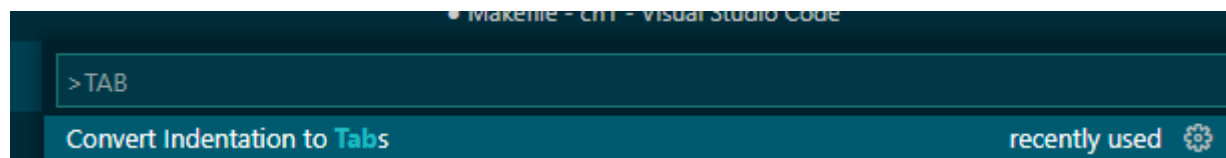

You can check indentation with halp of `cat`

```
cat -e -t -v Makefile
```

```
1@DESKTOP-8B6DSJ8 MINGW64 /e/CODE/go/ch1
$ cat -e -t -v Makefile
.DEFAULT_GOAL := build$
$
fmt:$
^Igo fmt ./...$
.PHONY:fmt$
$
lint: fmt$
^Igolint ./...$
.PHONY:lint$
$
vet: fmt$
^Igo vet ./...$
.PHONY:vet$
$
build: vet$
^Igo build hello.go$
.PHONY:build
```

Before it was like this

```
.PHONY:build
1@DESKTOP-8B6DSJ8 MINGW64 /e/CODE/go/ch1
$ cat -e -t -v Makefile
.DEFAULT_GOAL := build$
$
fmt:$
    go fmt ./...$
.PHONY:fmt$
$
lint: fmt$
    golint ./...$
.PHONY:lint$
$
vet: fmt$
    go vet ./...$
.PHONY:vet$
$
build: vet$
    go build hello.go$
.PHONY:build
```

## Variables

keyword var then name of variable then type of variable

```
var age int
```

```
package main

import "fmt"

func main() {

    var name string = "John"
    fmt.Println(name)
}
```

## Data types

### integer literals

- `0b` for binary (base 2),
- `0o` for octal (base 8), (without o is also octal but bad practice)
- `0x` for hexadecimal (base 16).
- You can use either upper- or lowercase letters for the prefix
- In integral literal you can write underscores `_` (they can't be at the beginning or end of numbers, and you can't have them next to each other)

`int`, `int8`, `int16`, `int32`, `int64`

`float32`, `float64` - floating-point

`bool` - boolean data type

## Conditional

```
if condition {
} else {
}
```

comparison operators: `==`, `!=`, `<`, `>`, `<=`, `>=`.

```
package main

import "fmt"

func main() {

    const age = 20

    if age >= 18 {
        fmt.Println("Этот человек совершеннолетний")
    } else {
        fmt.Println("Этот человек несовершеннолетний")
    }
}
```

```
}  
  
}
```

## Cycles

### For

```
package main  
  
import "fmt"  
  
func main() {  
    for i := 0; i < 5; i++ {  
        fmt.Println(i)  
    }  
}
```

### Range

```
package main  
  
import "fmt"  
  
func main() {  
    names := []string{"Ivan", "Petr", "Johan"}  
  
    for index, name := range names {  
        fmt.Println(index, name)  
    }  
}
```

```
package main  
  
import "fmt"  
  
func main() {  
  
    numbers := []int{0, 2, 3, 4}  
    for index, value := range numbers {  
        fmt.Println(index, value)  
    }  
}
```

### ignoring index

---

```
for _, value := range slice {  
    fmt.Println(value)  
}
```

ignoring value

```
for index, _ := range slice {  
    fmt.Println(index)  
}
```

## Slices

```
package main  
  
import "fmt"  
  
func main() {  
  
    numbers := []int{1, 2, 3, 4, 5}  
    numbers = append(numbers, 6)  
    subset := numbers[2:4]  
    fmt.Println("numbers:", numbers)  
    fmt.Println("subset:", subset)  
}
```

```
package main  
  
import "fmt"  
  
func main() {  
  
    names := []string{"Ivan", "Petr", "Johan"}  
    fmt.Println(names) // [Ivan Petr Johan]  
    afterAppend := append(names, "Dima")  
    fmt.Println(names) // [Ivan Petr Johan]  
    fmt.Println(afterAppend) // [Ivan Petr Johan Dima]  
}
```

## Functions

```
func add(x int, y int) int {  
    return x + y  
}
```



```
}
```

```
package main

import "fmt"

func main() {

    fmt.Println(isEven(0))
    fmt.Println(isEven(2))
    fmt.Println(isEven(145))
    fmt.Println(isEven(3))
    fmt.Println(isEven(10))
}

func isEven(number int) bool {
    return number%2 == 0
}
```

## Structures

```
package main

import "fmt"

type Person struct {
    name string
    age  int
}

func main() {

    var first Person
    first.name = "John"
    first.age = 30

    var second Person = Person{"Mary", 28}
    var third Person = Person{name: "Jim", age: 3}

    var family []Person = []Person{first, second, third}

    fmt.Println(family)
}
```

## Anonymous struct

```

my := struct {
    name      string
    age       int
    occupation string
}{"Dima", 12, "programmer"}

fmt.Println("occupation", my.occupation)

```

## Method with structure

method is outside of structure. The first part after func is receiver. So called that connected to structure.

```

package main

import "fmt"

func main() {

    var field Rectangle
    field.height = 10
    field.width = 20
    fmt.Println(field.perimeter())
}

type Rectangle struct {
    width  int
    height int
}

func (rectangle Rectangle) perimeter() int {
    return rectangle.height + rectangle.width
}

```

## Visibility

Visibility rules:

- Capitalization: If the name of a method, function, variable, or structure begins with a capital letter, then the identifier is exportable, meaning it can be accessed from other packages. This is similar to public in other programming languages.
- Lowercase Letter: If the name begins with a lowercase letter, then this identifier is non-exportable and can only be accessed within its package.

```

package mypackage

type Car struct { // Exportable structure
    Make  string // public field
}

```

```

    model string // package private field
}

func (c Car) Describe() string { // public method
    return fmt.Sprintf("%s %s", c.Make, c.model)
}

func secretFunction() { // private method
    fmt.Println("This is a secret")
}

```

## Pointers

```

var ptr *int

```

```

var x int = 10
ptr := &x
fmt.Println(*ptr)

```

```

package main

import "fmt"

func main() {

    var variable int = 10
    ptr := &variable

    *ptr = 20

    fmt.Println(variable) // 20
}

```

```

var source []string = []string{"ivan", "dima"}
var p *[]string = &source

*p = append(source, "vasya")
p = &append(source, "vasya") // wrong. does not compile

fmt.Println(*p)

```

```

package main

import "fmt"

func increment(x *int) {
    *x += 1
}

func main() {
    var a int = 5
    increment(&a)
    fmt.Println(a) // 6
}

```

```

package main

import "fmt"

func newInt() *int {
    var dummy int = 10
    return &dummy
}

func main() {
    numPtr := newInt()
    fmt.Println(*numPtr) // Выведет 10
}

```

if we will change to `fmt.Println(numPtr)` then we just print an address to memory as hex digit.  
`0xc000014088`

## go routines

it is lightweight threads.

```

package main

import (
    "fmt"
    "time"
)

func say(s string) {
    for i := 0; i < 5; i++ {
        time.Sleep(100 * time.Millisecond)
        fmt.Println(s)
    }
}

```

```
func main() {  
    go say("world")  
    say("hello")  
}
```

## channels

a way to exchange data between go routines without races. It can be described as a stream of data.

```
package main  
  
import "fmt"  
  
func sum(s []int, c chan int) {  
    sum := 0  
    for _, v := range s {  
        sum += v  
    }  
    c <- sum // put int to the channel  
}  
  
func main() {  
    s := []int{7, 2, 8, -9, 4, 0}  
  
    c := make(chan int)  
    go sum(s[:len(s)/2], c)  
    go sum(s[len(s)/2:], c)  
    x, y := <-c, <-c // blocking operation before results are ready  
  
    fmt.Println(x, y, x+y)  
}
```

## buffer channel

```
resultChan := make(chan int, 2)
```

A buffered pipe has an internal buffer that allows it to store a certain number of elements without having to read them immediately. When you create a channel using `make(chan Type, size)`, you specify the maximum number of elements that can be stored in the channel buffer.

Sending to a buffered channel:

- If a buffered channel has free buffer space, sending to the channel occurs without blocking—the sender does not wait for the receiver to start reading.
- If the channel's buffer is full, the sender blocks and waits until the buffer becomes free (when another goroutine reads from the channel).

Receiving from a buffered channel:

- If there is data in the channel, the reception occurs without blocking the recipient immediately receives the data.
- If the channel is empty, the receiver blocks and waits until data is sent to the channel.

```
package main

import (
    "fmt"
)

func calculateSum(values []int, resultChan chan int) {
    sum := 0
    for _, value := range values {
        sum += value
    }
    resultChan <- sum
}

func main() {
    numbers := []int{1, 2, 3, 4, 5, 6, 7, 8, 9, 10}
    resultChan := make(chan int, 2)

    mid := len(numbers) / 2
    go calculateSum(numbers[:mid], resultChan)
    go calculateSum(numbers[mid:], resultChan)

    sum1, sum2 := <-resultChan, <-resultChan

    fmt.Println("Total Sum:", sum1 + sum2)
}
```

## Interfaces

```
type Describer interface {
    Describe() string
}
```

both of the next structures implemented interface

```
func (p Person) Describe() string {
    return fmt.Sprintf("%s is %d years old", p.Name, p.Age)
}

func (c Car) Describe() string {
    return fmt.Sprintf("%s %s, made in %d", c.Make, c.Model, c.Year)
}
```

```
func printDescription(d Describer) {
    fmt.Println(d.Describe())
}
```

## Error handling

```
package main

import (
    "fmt"
    "errors"
)

func divide(a, b float64) (float64, error) {
    if b == 0 {
        return 0, errors.New("division by zero")
    }
    return a / b, nil
}

func main() {
    result, err := divide(10.0, 0)
    if err != nil {
        fmt.Println("Error:", err)
    } else {
        fmt.Println("Result:", result)
    }
}
```

```
package main

import (
    "fmt"
    "io"
    "os"
)

func main() {

    result, err := readFile("/home/dmitrii/.bashrc")
    if err != nil {
        fmt.Println(err.Error())
    } else {
        fmt.Println(result)
    }
}
```

```
func readFile(path string) (string, error) {  
    file, error := os.Open(path)  
  
    if error != nil {  
        return "", error  
    }  
    defer file.Close()  
  
    result, error := io.ReadAll(file)  
    if error != nil {  
        return "", error  
    }  
  
    return string(result), nil  
}
```

## defer

for closing resources.

```
func example() {  
    fmt.Println("Начало функции")  
    defer fmt.Println("Это выполнится в конце")  
    fmt.Println("Это выполнится до defer")  
}
```

```
package main  
  
import "fmt"  
  
func main() {  
    fmt.Println("Начало функции")  
  
    defer fmt.Println("Первый defer")  
    defer fmt.Println("Второй defer")  
    defer fmt.Println("Третий defer")  
  
    fmt.Println("Конец функции")  
}
```

Начало функции  
Конец функции  
Третий defer



```
Второй defer
Первый defer
```

## Modules

to create a module

```
go mod init <module-name>
```

an example file `go.mod`

```
module test

go 1.16
```

## Testing

### Naming

if file `math.go` then test should be in `math_test.go`

### Example

```
// math.go
package main

func Add(a, b int) int {
    return a + b
}
```

```
// math_test.go
package main

import "testing"

func TestAdd(t *testing.T) {
    result := Add(2, 3)
    expected := 5
    if result != expected {
        t.Errorf("Add(2, 3) = %d; want %d", result, expected)
    }
}
```

```
package main

import "errors"

func Divide(a, b float64) (float64, error) {
    if b == 0 {
        return 0, errors.New("division by zero")
    }
    return a / b, nil
}
```

```
package main

import "testing"

func TestDivideByPositiveNumber(t *testing.T) {
    var expected float64 = 3

    result, error := Divide(6, 2)

    if result != expected {
        t.Errorf("Divide(6, 2) = %f; expected %f", result, expected)
    }
    if error != nil {
        t.Error("error should be nil")
    }
}

func TestDivideByZero(t *testing.T) {

    _, error := Divide(6, 0)

    if error == nil {
        t.Error("Divide(6, 0) should return error")
    }
}
```

## How to run

```
go test
```

## with verbose

```
go test -v
```

```
dmitrii@dmitrii-ThinkPad-T15-Gen-2i:~/CODE/go/test$ go test -v
=== RUN   TestDivideByPositiveNumber
--- PASS: TestDivideByPositiveNumber (0.00s)
=== RUN   TestDivideByZero
--- PASS: TestDivideByZero (0.00s)
PASS
ok      test      0.001s
```

## Table tests

```
package main

import "testing"

func TestDivide(t *testing.T) {
    tests := []struct {
        a, b      float64
        expected float64
        err       bool
    }{
        {6, 2, 3, false},
        {10, 5, 2, false},
        {8, 0, 0, true},
        {0, 2, 0, false},
    }

    for _, tt := range tests {
        result, err := Divide(tt.a, tt.b)
        if (err != nil) != tt.err {
            t.Errorf("Divide(%f, %f) expected error: %v, got: %v", tt.a,
                tt.b, tt.err, err)
        }
        if result != tt.expected {
            t.Errorf("Divide(%f, %f) = %f; expected %f", tt.a, tt.b,
                result, tt.expected)
        }
    }
}
```

## Coverage

```
go test -cover
```

to create a html report

```
go test -coverprofile=coverage.out
go tool cover -html=coverage.out
```

# Network

---

## http server

```
package main

import (
    "fmt"
    "net/http"
)

func helloHandler(w http.ResponseWriter, r *http.Request) {
    fmt.Fprintf(w, "Hello, World!")
}

func main() {
    http.HandleFunc("/hello", helloHandler)
    fmt.Println("Starting server at port 8080")
    http.ListenAndServe(":8080", nil)
}
```

## a bit more

```
package main

import (
    "fmt"
    "net/http"
)

func helloHandler(w http.ResponseWriter, r *http.Request) {
    fmt.Fprintf(w, "Hello, World!")
}

func goodbyeHandler(w http.ResponseWriter, r *http.Request) {
    fmt.Fprintf(w, "Goodbye, World!")
}

func greetHandler(w http.ResponseWriter, r *http.Request) {
    name := r.FormValue("name")
    if name == "" {
        name = "Guest"
    }
    fmt.Fprintf(w, "Hello, %s", name)
}
```

```

}

func main() {
    http.HandleFunc("/hello", helloHandler)
    http.HandleFunc("/goodbye", goodbyeHandler)
    http.HandleFunc("/greet", greetHandler)

    fmt.Println("Starting server at port 8080")
    http.ListenAndServe(":8080", nil)
}

```

## JSON

---

```

package main

import (
    "encoding/json"
    "fmt"
    "log"
)

type User struct {
    ID      int    `json:"id"`
    Name    string `json:"name"`
    Email   string `json:"email"`
}

func main() {
    // Пример данных
    user := User{ID: 1, Name: "John Doe", Email: "john@example.com"}

    // Шаг 2: Сериализация (Marshalling)
    jsonData, err := json.Marshal(user)
    if err != nil {
        log.Fatal(err)
    }
    fmt.Println("Serialized JSON:", string(jsonData))

    // Пример JSON строки
    jsonString := `{"id":2,"name":"Jane Doe","email":"jane@example.com"}`

    // Шаг 3: Десериализация (Unmarshalling)
    var newUser User
    err = json.Unmarshal([]byte(jsonString), &newUser)
    if err != nil {
        log.Fatal(err)
    }
    fmt.Println("Deserialized User struct:", newUser)
}

```

```

package main

import (
    "encoding/json"
    "fmt"
    "log"
)

type Product struct {
    Id      int    `json:"id"`
    Name    string `json:"name"`
    Price   float64 `json:"price"`
    InStock bool    `json:"in_stock"`
}

func main() {

    var product Product = Product{Id: 12, Name: "Alex", Price: 65.65,
    InStock: false}
    jsonData, error := json.Marshal(product)
    if error != nil {
        log.Fatal(error)
        return
    }

    productInString := string(jsonData)
    fmt.Println("JSON: ", productInString)

    var productSecond Product
    error = json.Unmarshal([]byte(productInString), &productSecond)
    if error != nil {
        log.Fatal(error)
        return
    }
    fmt.Println("Deserialized Product struct", productSecond)
}

```

## SQL

---

install the driver to db

```
go get github.com/mattn/go-sqlite3
```

```

package main

import (
    "database/sql"

```

```

    "fmt"
    _ "github.com/mattn/go-sqlite3"
    "log"
)

func main() {

    db, err := sql.Open("sqlite3", "./test.db")
    if err != nil {
        log.Fatal(err)
    }
    defer db.Close()

    sqlStmt := `
CREATE TABLE IF NOT EXISTS product (
    id INTEGER NOT NULL PRIMARY KEY,
    name TEXT,
    price REAL,
    in_stock BOOLEAN
);
`;

    _, err = db.Exec(sqlStmt)
    if err != nil {
        log.Fatalf("%q: %s\n", err, sqlStmt)
    }

    _, err = db.Exec(`INSERT INTO product (name, price, in_stock) VALUES
(?, ?, ?)`, "Laptop", 999.99, true)
    if err != nil {
        log.Fatal(err)
    }

    rows, err := db.Query("SELECT id, name, price, in_stock FROM product")
    if err != nil {
        log.Fatal(err)
    }
    defer rows.Close()

    for rows.Next() {
        var id int
        var name string
        var price float64
        var in_stock bool
        err = rows.Scan(&id, &name, &price, &in_stock)
        if err != nil {
            log.Fatal(err)
        }
        fmt.Printf("ID: %d, Name: %s, Price: %.2f, InStock: %t\n", id,
name, price, in_stock)
    }
    err = rows.Err()
    if err != nil {
        log.Fatal(err)
    }
}

```

```
}
```

```
}
```