



THE UNIVERSITY OF
SYDNEY

UnHinged

Assignment 1: System & Database Design

ELEC3609: Internet Software Platforms

Thursday 1pm Group 11

Nupur Parmar	(550935849)
Tanya Russo	(530372796)
Antriksh Dhand	(510415022)
Asmi Mitra	(520466319)
Aaron Han	(490415007)

Contents

1	Introduction	2
2	Functional Requirements	3
2.1	Guest user	4
2.2	New users	6
2.3	Registered users	9
2.4	Admin users	15
2.5	Public API	19
3	Data model	21
4	Wireframes	23

1 Introduction

Finding meaningful relationships as a university student can be difficult in today's fast-paced environment. Between lectures, assignments, part-time work, and social commitments, students often struggle to meet new people outside their immediate social circles. While dating apps exist, most rely on endless swiping and superficial prompts that can feel performative and inauthentic. This creates unnecessary pressure to impress with witty one-liners rather than fostering genuine conversations, leaving many students frustrated with the current solutions.

UnHinged is a web-based dating platform designed specifically for university students who want to form authentic connections with peers at a similar stage of life. The platform enables users to build detailed profiles, share interests and preferences, and discover compatible matches based on lifestyle and values. Safety is embedded into the system through reporting features and active moderation, ensuring a respectful environment. Unlike traditional apps, *UnHinged* reduces the performance pressure associated with online dating, making it easier for students to interact naturally. By combining the best elements of existing platforms while addressing their shortcomings, *UnHinged* offers a free, secure, and student-focused alternative that empowers users to connect more meaningfully.

2 Functional Requirements

- **Guest users**

- FR-01: View up to 5 generic demo profiles.
- FR-02: Prompt guest user to register.

- **New users**

- FR-03: Register and initial profile setup.
- FR-04: Edit personal profile details.
- FR-05: Change photos and prompts.
- FR-06: View their own profile as others see it.

- **Registered users**

- FR-07: Set or update dating preferences.
- FR-08: View profiles one-by-one.
- FR-09: Connect button opens a chat.
- FR-10: Reject button goes to next profile.
- FR-11: Report another user.
- FR-12: Send text messages to matched profiles.

- **Admin users**

- FR-13: Restrict admin portal to Admin users only.
- FR-14: Admins can view a list of all users.
- FR-15: Admins can deactivate or reactivate an account.
- FR-16: Admins can go through reported users.

- **Public API**

- FR-17: Require a valid Bearer token.
- FR-18: Retrieve own personal profile details.
- FR-19: Retrieve own prompts.
- FR-20: Retrieve own photos.

2.1 Guest user

FR-1 – View up to 5 generic demo profiles

The system shall allow the guest user to view up to 5 generic demo profiles.

Validity checks on inputs

The guest must have a valid UUID.

Exact sequence of operations

1. The system shall allow the guest user to open the web application without logging in.
2. The system shall fetch 5 pre-defined profiles from the database.
3. The system shall display the profiles in random order with the predefined images and texts.
4. If the user attempts to connect with the profile, the system shall prompt the guest user to register (see FR-02).
5. Or if the user rejects the demo profile, the next profile is displayed.
6. After all 5 have been displayed, the system shall prompt with registration.

Responses to abnormal situations

The demo profile fails to load: the system shall display an error message “Profile currently unavailable, try again later.”

Effect of parameters

The guest user shall not have access to any filters, so the 5 profiles displayed shall always be the same.

Relationship of outputs to inputs

Input: request to view demo profiles.

Output: same 5 demo predefined profiles displayed.

FR-2 – Prompt guest user to register

The system shall prompt the guest user to register after viewing the demo profiles OR if they attempt to connect with a demo profile.

Validity checks on inputs

The user has viewed all 5 demo profiles OR the user has attempted to connect with a demo profile.

Exact sequence of operations

1. The system allows the guest to view all 5 user profiles.
2. The system detects completion or the user has clicked on “Connect”.
3. The system displays a registration prompt.
4. The system displays the option to proceed or exit.

Responses to abnormal situations

The system shall prompt the user again after a delay to register if the initial registration failed.

Effect of parameters

The number of demo profiles displayed controls when the registration prompt is triggered. Pressing the “Connect” button triggers the registration prompt.

Relationship of outputs to inputs

Input: viewing all 5 user profiles complete or selecting the “Connect” button.
Output: registration prompt is displayed.

2.2 New users

FR-3 – Register and initial profile setup

The system shall allow new users to register for *UnHinged* and create their profile.

Validity checks on inputs

The user must not be existing in the database, i.e. matching email address. Calculated age from the user's DOB input must be 18+. Image input 5MB max file size. Must input 6 photos. Must have 3 text prompts. Text input, max of 70 characters. Email must be unique (not existing in the database previously).

Exact sequence of operations

1. The user clicks on 'sign up' and the system prompts the user to sign up with a form.
2. Section 1: The user inputs their first and last name, and DOB.
3. Section 2: The user inputs their university email address. The user receives a verification email and must input the code they received.
4. Section 3: The user inputs their password and phone number and receives a 2FA code as an SMS.
5. Section 4: The user inputs personal information (sexuality, ethnicity, height etc.)
6. Section 5: The user inputs prompts and photos.
7. Initially the user has no preferences set.

Responses to abnormal situations

- User input does not pass validity checks: display error message.
- User is less than 18 years old: they cannot proceed with registration.

Effect of parameters

Validity of user input shall affect the full completion of user account/profile.

Relationship of outputs to inputs

Input: User details such as birthday, email, password, sexuality, university name, education, ethnicity.
Output: User profile and account.

FR-4 – Edit personal profile details

The system shall allow users to edit their personal profile details such as sexuality, location, university name, and ethnicity.

Validity checks on inputs

The user is registered and authenticated.

Exact sequence of operations

1. The system allows the user to navigate to the User Profile section from the navigation bar.
2. The user selects “Edit personal details”.
3. The user can edit details such as height, gender, sexuality, ethnicity, dating intentions, whether they drink or smoke, whether they have kids, what degree they are undertaking, etc.
4. The user selects save and the system actions changes in the database.

Responses to abnormal situations

User presses “Back”: the user shall be prompted to confirm that their changes will NOT be saved. Any changes will then not apply.

Effect of parameters

User’s desired changes shall determine the outputted profile.

Relationship of outputs to inputs

Input: User’s desired changes.

Output: Changes actioned in database.

FR-5 – Change photos and prompts

The system shall allow users to change their photos and prompts.

Validity checks on inputs Image input 5MB max file size. Requires exactly 6 photos at any time. Text input, max of 70 characters.

Exact sequence of operations

1. The system allows the user to navigate to the User Profile section from the navigation bar.
2. The user selects “Edit profile”.
3. The user can swap out photos and change their prompts.
4. The user selects save and the system actions changes in the database.

Responses to abnormal situations User presses “Back”: the user shall be prompted to confirm that their changes will NOT be saved. Any changes will then not apply.

Effect of parameters User’s desired changes shall determine the outputted profile.

Relationship of outputs to inputs Input: User’s desired changes.
Output: Changes actioned in database.

FR-6 – View their own profile as others see it

The system shall allow users to view their own profile exactly how another user would see it.

Validity checks on inputs The user is registered and authenticated.

Exact sequence of operations

1. The system allows the user to navigate to the User Profile section from the navigation bar.
2. The user selects “Preview”.
3. The system presents users with their own profile in a dynamic scrollable pane on the right.

Responses to abnormal situations No exceptional behaviors beyond standard error handling.

Effect of parameters Previously inputted profile data shall be fetched and determine the output.

Relationship of outputs to inputs Input: User clicks “Preview” button.
Output: User profile view.

2.3 Registered users

FR-7 – Set or update dating preferences

The system shall allow an authenticated user to create, view, and update their dating preferences. The system shall apply these preferences to determine the set of candidate profiles used for recommendations.

Validity checks on inputs

The user shall be authenticated and have an active account. Each preference value shall be within its allowed domain: Age range: integers 18–90, $\text{min_age} \leq \text{max_age}$. Height range (if used): within configured bounds, $\text{min_height} \leq \text{max_height}$. Values such as gender preference, ethnicity, religion, intentions, smoking, drinking and kids shall be chosen from given options.

Exact sequence of operations

1. User requests to create/update preferences.
2. System retrieves the user's current preferences (if any).
3. System validates the submitted preference payload against business rules.
4. If valid, the system updates the database with the new preferences atomically.
5. The system updates the user's recommendation criteria so that subsequent feed requests use the new preferences.

Responses to abnormal situations

Validation failure: The system shall reject the request with specific field-level errors; no changes are persisted.

Effect of parameters

The stricter the constraints (e.g. narrower age/radius), the smaller the candidate set; broader constraints increase it.

Relationship of outputs to inputs

Input: the user's selected preferences.
Output: a stored preference object reflecting the user's inputs which affects what profiles the user gets shown.

FR-8 – View profiles one-by-one

The system shall present recommended profiles to an authenticated user one at a time derived from their current candidate set.

Validity checks on inputs

The user shall be authenticated and active. The user shall have a complete profile.

Exact sequence of operations

1. User requests the next recommended profile.
2. System determines the candidate set based on current preferences.
3. The system fetches the next page of candidates (page size is configurable).
4. System records an impression for the delivered profile.
5. System returns exactly one profile.
6. Upon user action (like/reject/report), control passes to the corresponding FR; otherwise, the user may request the next profile again.

Responses to abnormal situations

Empty result (no eligible profiles): The system shall return a “no more profiles” response with guidance to adjust preferences.

Effect of parameters

User preferences (FR-07) narrow or expand the candidate set.

Relationship of outputs to inputs

- Input: “next” with valid DB cursor. Output: next profile in sequence + updated cursor.
- Input: “next” when candidate set is exhausted. Output: “no more profiles” status.

FR-9 – Connect button opens a chat

The system shall allow the current user to select the “Connect” button and enter a chat with another user immediately.

Validity checks on inputs

The current user is a registered and authenticated user. The target user is a registered and authenticated user. The current user should not have seen the recommended profile before, and should have no previous relationship with them in the database. Target user is not blocked by the current user and has not blocked the current user.

Exact sequence of operations

1. The current user requests to connect with a target user.
2. The system shall verify the target user is authenticated and registered in the database.
3. The system shall notify the target user of a like and the two users shall be connected in a chat.

Responses to abnormal situations

No exceptional behaviors beyond standard error handling.

Effect of parameters

Clicking “Connect” establishes a relationship between the two users in the database.

Relationship of outputs to inputs

Input: the current user connects with the target user.
Output: notification appearing on the target user’s page and a new chat being created.

FR-10 – Reject button goes to next profile

The system shall allow a user to reject a profile and display the next recommended user profile. Reject does not create a chat and removes the target from the current user's candidate set.

Validity checks on inputs

The current user is a registered and authenticated user. The target user is a registered and authenticated user. The current user should not have seen the recommended profile before, and should have no previous relationship with them in the database.

Exact sequence of operations

1. The system allows the user to select the “Reject” button.
2. The system shall display the next available profile.
3. The system shall remove the target user from the recommended list and not display their profile again.

Responses to abnormal situations

If the user rejects the displayed user and there are no more users in the database: the system shall notify the user they have reached the end of the database of user profiles.

Effect of parameters

Clicking “Reject” determines the final relationship status with the target user.

Relationship of outputs to inputs

Input: Rejecting a user profile.
Output: Target user is removed from the current user's candidate set.

FR-11 – Report another user

The system shall allow the current user to report another user's profile.

Validity checks on inputs

The current user is a registered and authenticated user. The displayed user is a registered and authenticated user.

Exact sequence of operations

1. The system shall allow the current user to select the "Report" button on a target user profile.
2. The system shall allow the current user to select a reason for reporting the target profile from a list of predefined choices.
3. The system shall also allow the current user to provide additional explanation as to why they have reported the target profile.
4. The system shall place the target user into a reported list for an admin user to view.
5. The system shall display the next available profile to the current user and remove the target user from their recommended users database.

Responses to abnormal situations

If the reporting system fails: schedule a retry to place the reported user under review.

Effect of parameters

The target user's account is under review and could be deactivated upon admin review.

Relationship of outputs to inputs

Input: The user sends a report request.

Output: report record created with a reason, explanation, and timestamp.

FR-12 – Send text messages to matched profiles

The system shall allow users to send text messages to connected profiles.

Validity checks on inputs

The user is a registered and authenticated user and has previously connected with the target user. The message is not empty and within 1-1000 characters.

Exact sequence of operations

1. The system shall allow users to type a message in the input field.
2. The system shall validate the message length.
3. The system shall allow users to send messages by selecting the “Send” button.
4. The system shall allow users to receive and view messages including timestamps.

Responses to abnormal situations

Message exceeds character limit: The system shall not send messages and display error messages.

Effect of parameters

Message length will affect validation.

Relationship of outputs to inputs

Input: message text typed and “Send” button is selected.
Output: message appears in chat with timestamp.

2.4 Admin users

FR-13 – Restrict admin portal to Admin users only

The system shall restrict access to the Admin portal to authenticated users with the Admin role.

Validity checks on inputs	A login attempt shall include valid credentials. The authenticated user shall have the Admin role.
Exact sequence of operations	1. User requests Admin portal URL. 2. System prompts for credentials. 3. System authenticates user and checks role. 4. System redirects to Admin homepage.
Responses to abnormal situations	• Invalid credentials or non-Admin role: deny access and display error. • Session expired: require re-authentication.
Effect of parameters	Role determines access.
Relationship of outputs to inputs	Input: credentials entered into portal request. Output: access granted to Admin homepage or access denied.

FR-14 – Admins can view a list of all users

The system shall allow Admins to view, search, and sort a table of all user accounts.

Validity checks on inputs

Requester shall be an authenticated Admin. Search and sort parameters shall match allowed fields (e.g. email, username, date_joined).

Exact sequence of operations

1. Admin opens Users tab.
2. System returns a paginated list of users.
3. Admin may apply search/sort.
4. Admin may select a user row to fetch and display a read-only profile preview.

Responses to abnormal situations

- Invalid search/sort field: return error and ignore the parameter.
- Data fetch failure: show error and allow retry.

Effect of parameters

Page size affects number of returned rows. Sort keys affect order of returned rows.

Relationship of outputs to inputs

Input: query/sort/page.
Output: corresponding user list page and optional profile preview.

FR-15 – Admins can deactivate or reactivate an account

The system shall allow Admins to change a user's account status to deactivated or active with a required reason.

Validity checks on inputs

Requester shall be an authenticated Admin. Target user shall exist; status change shall be one of either deactivate or reactivate. A non-empty reason shall be provided.

Exact sequence of operations

1. Admin selects a user and chooses to deactivate or reactivate alongside providing a reason.
2. System validates inputs.
3. System updates the user's status atomically and records the reason and timestamp.
4. System applies effects:
 - On deactivate: remove from recommendations and show deactivation notice on next login.
 - On reactivate: restore eligibility per normal rules.

Responses to abnormal situations

- Invalid user or missing reason: reject with error; no change persisted.
- Concurrent update conflict: return conflict error; no partial state.

Effect of parameters

Activated/deactivated status directly affects recommendation eligibility and login experience.

Relationship of outputs to inputs

Input: Admin submits deactivate or reactivate request with reason.
Output: Updated account status with audit record.

FR-16 – Admins can go through reported users

The system shall allow Admins to review user reports, mark them addressed, or deactivate the reported account.

Validity checks on inputs

- Actions shall target an existing report with status of either “Open” or “In-Review”.
- Deactivate action shall include a non-empty reason.

Exact sequence of operations

1. Admin opens *Reports* tab; system returns a paginated table of reports (*report_date*, *reported_user*, *reporter*, *reason*, *status*).
2. Admin selects a report to view details.
3. Admin chooses Dismiss or Deactivate Account (with reason).
4. System updates report status.

Responses to abnormal situations

Missing deactivation reason: reject with error.

Effect of parameters

Deactivation immediately affects recommendation eligibility of the reported user.

Relationship of outputs to inputs

Input: report action (dismiss or deactivate).
Output: updated report status + updated user account status.

2.5 Public API

FR-17 – Require a valid Bearer token

The system shall require a valid Bearer token for all public API endpoints.

Validity checks on inputs

- The request includes `Authorization: Bearer <token>`.
- The token is well-formed, not expired, correctly signed, and maps to an active user.

Exact sequence of operations

1. API receives request.
2. System extracts and validates the Bearer token (signature, expiry, revocation, scope).
3. If valid, system associates the request with the user identity and continues to the handler.

Responses to abnormal situations

- Missing/invalid/expired token: 401 `Unauthorized`.
- Deactivated user: 403 `Forbidden`.
- Rate limit exceeded: 429 `Too Many Requests`.

FR-18 – Retrieve own personal profile details

The system shall allow an authenticated user to retrieve their own profile details via `GET /profile`.

Validity checks on inputs

Valid Bearer token as per FR-17.

Exact sequence of operations

1. System identifies user from token.
2. System fetches the user's profile record.
3. System returns profile JSON (e.g. name, age, university, degree, does_smoke, etc.).

Responses to abnormal situations

- Profile not found: 404 `Not Found`.
- Data fetch error: 500 `Internal Server Error`.

Relationship of outputs to inputs

Input: `GET /profile`.
Output: JSON of the caller's profile.

FR-19 – Retrieve own prompts

The system shall allow an authenticated user to retrieve their prompts via GET /prompts.

Validity checks on inputs

Valid Bearer token as per FR-17.

Exact sequence of operations

1. System identifies user from token.
2. System fetches the user's prompts (ordered as on profile).
3. System returns an array of prompt objects (e.g. {id, question, answer, position}).

Responses to abnormal situations

- Profile not found: 404 Not Found.
- Data fetch error: 500 Internal Server Error.

Relationship of outputs to inputs

Input: GET /prompts.
Output: JSON of the caller's prompts.

FR-20 – Retrieve own photos

The system shall allow an authenticated user to retrieve their photos via GET /photos.

Validity checks on inputs

Valid Bearer token as per FR-17.

Exact sequence of operations

1. System identifies user from token.
2. System fetches the user's photo metadata and URLs.
3. System returns an ordered list of photos.

Responses to abnormal situations

- Profile not found: 404 Not Found.
- Data fetch error: 500 Internal Server Error.

Relationship of outputs to inputs

Input: GET /photos.
Output: JSON array of the caller's photos (ordered as on profile).

3 Data model

Figure 1 shows the ER diagram modelling the database design for *UnHinged*. At the center is the **user** entity, which stores personal details, preferences, and status, and connects to related entities such as prompts, photos, impressions (likes/rejects), chats, and messages. Administrative functions are supported through reports, moderation logs, and admin accounts, while lookup tables normalise categorical data. Overall, the schema captures both the core match-making flows (profiles, preferences, connections, chats) and the safety/moderation mechanisms (reporting, blocking, admin actions).

The ER diagram also incorporates examples of many-to-many, one-to-many, and one-to-one relationships. For example:

- **Many-to-many:** A user can send many messages to many other users, and a user can receive many messages from many other users. Hence, users and messages are in a many-to-many relationship.
- **One-to-many:** Each user can belong to exactly one faculty but each faculty can be associated with many users.
- **One-to-one:** Each user has exactly one profile photo and each photo can be the profile photo of exactly one user.

The ER diagram can also be viewed in high-resolution once logged in on [LucidChart](#).

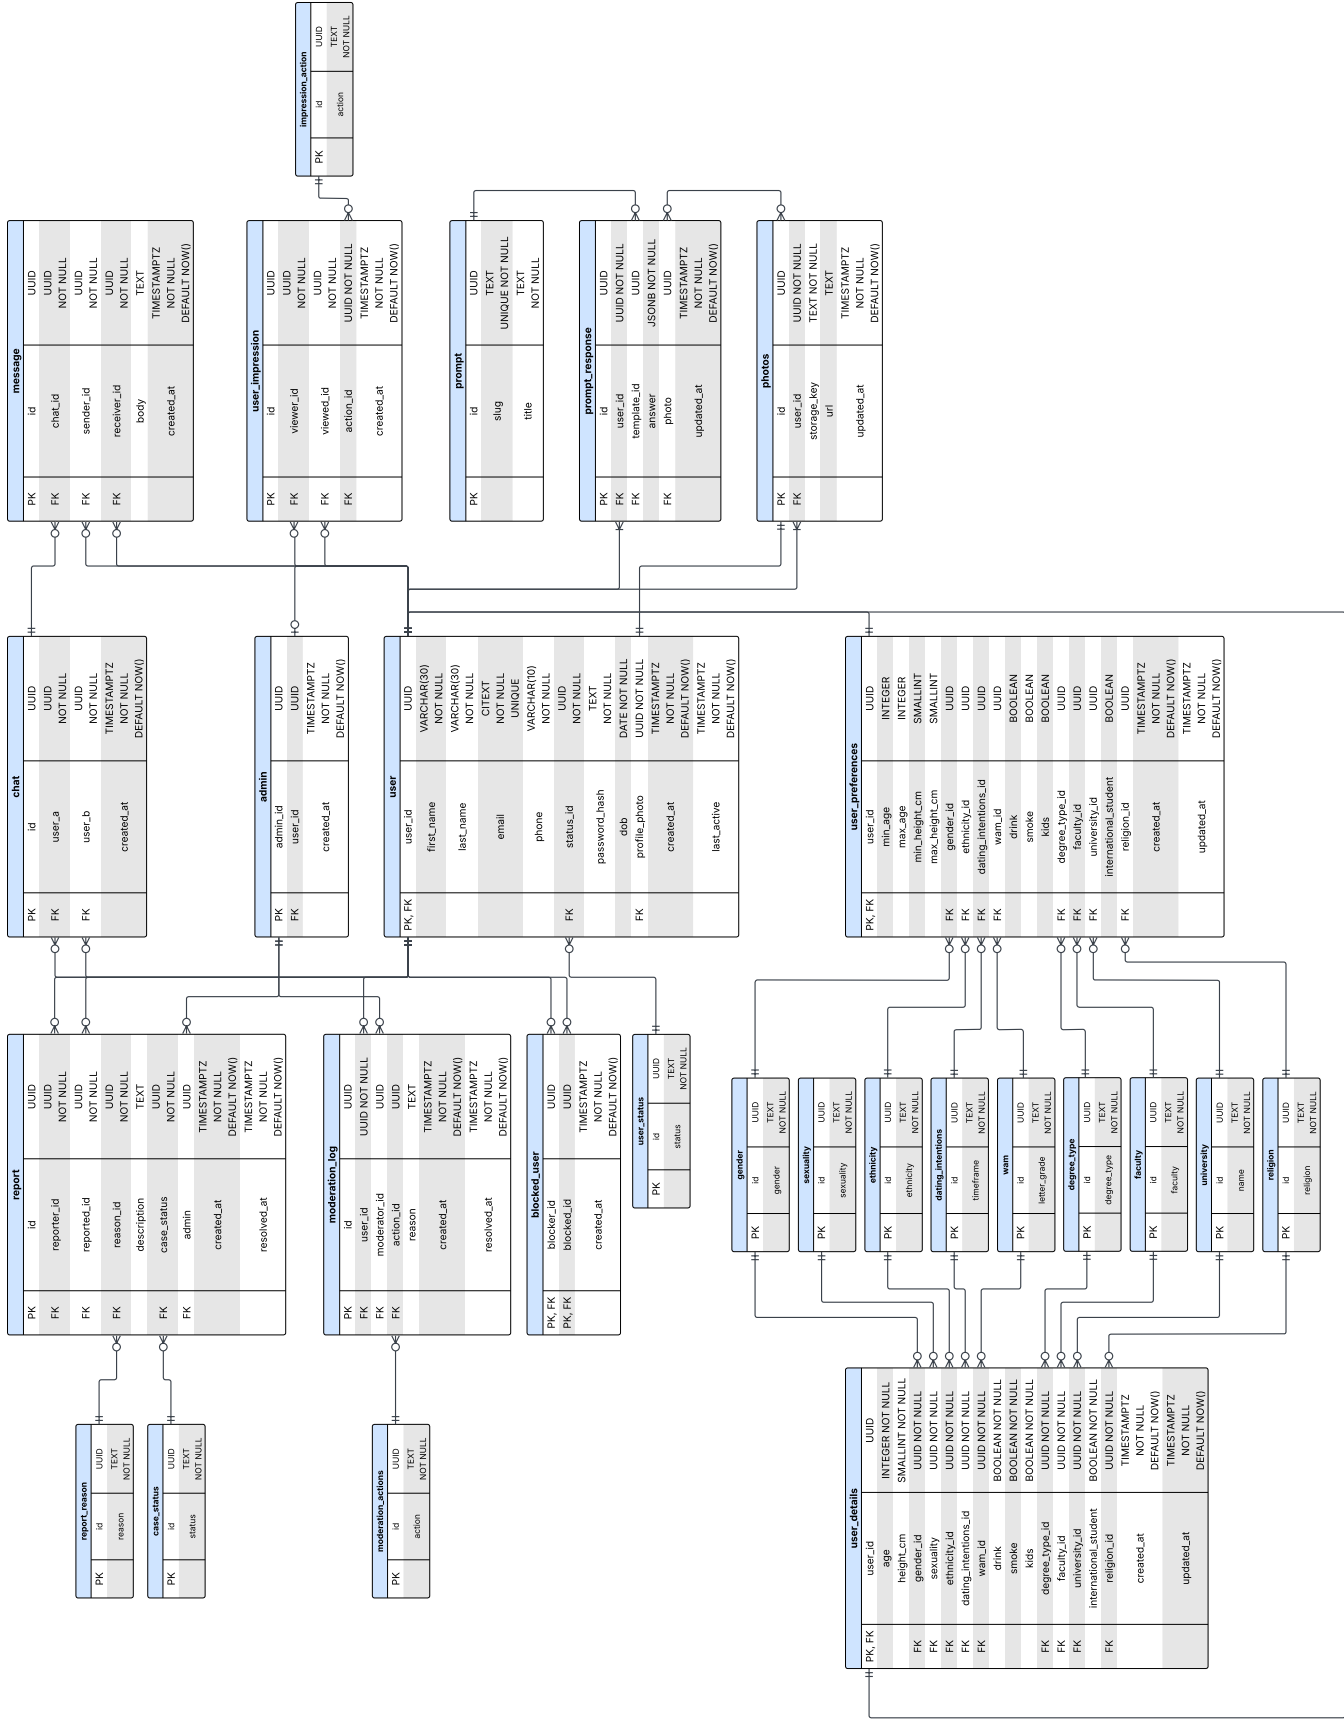



Figure 1: Entity-relationship diagram for the *UnHinged* project.


4 Wireframes

The following wireframes illustrate the main user interfaces of the *UnHinged* application, covering both guest and registered user flows as well as administrative and API management views. These mockups were created to demonstrate the core functionality of the system and to provide a clear reference for development. The figures included are:

- Figure 2: *UnHinged* landing page.
- Figure 3: Registration page.
- Figure 4: User Profile page.
- Figure 5: *UnHinged* home page.
- Figure 6: *UnHinged* home page (guest view).
- Figure 7: Chat page.
- Figure 8: Admin Panel – view and manage users.
- Figure 9: Admin Panel – preview user profiles.
- Figure 10: Admin Panel – view and address reported users.
- Figure 11: Public API helper page.

The full-resolution wireframes can be viewed on the [Figma page](#).

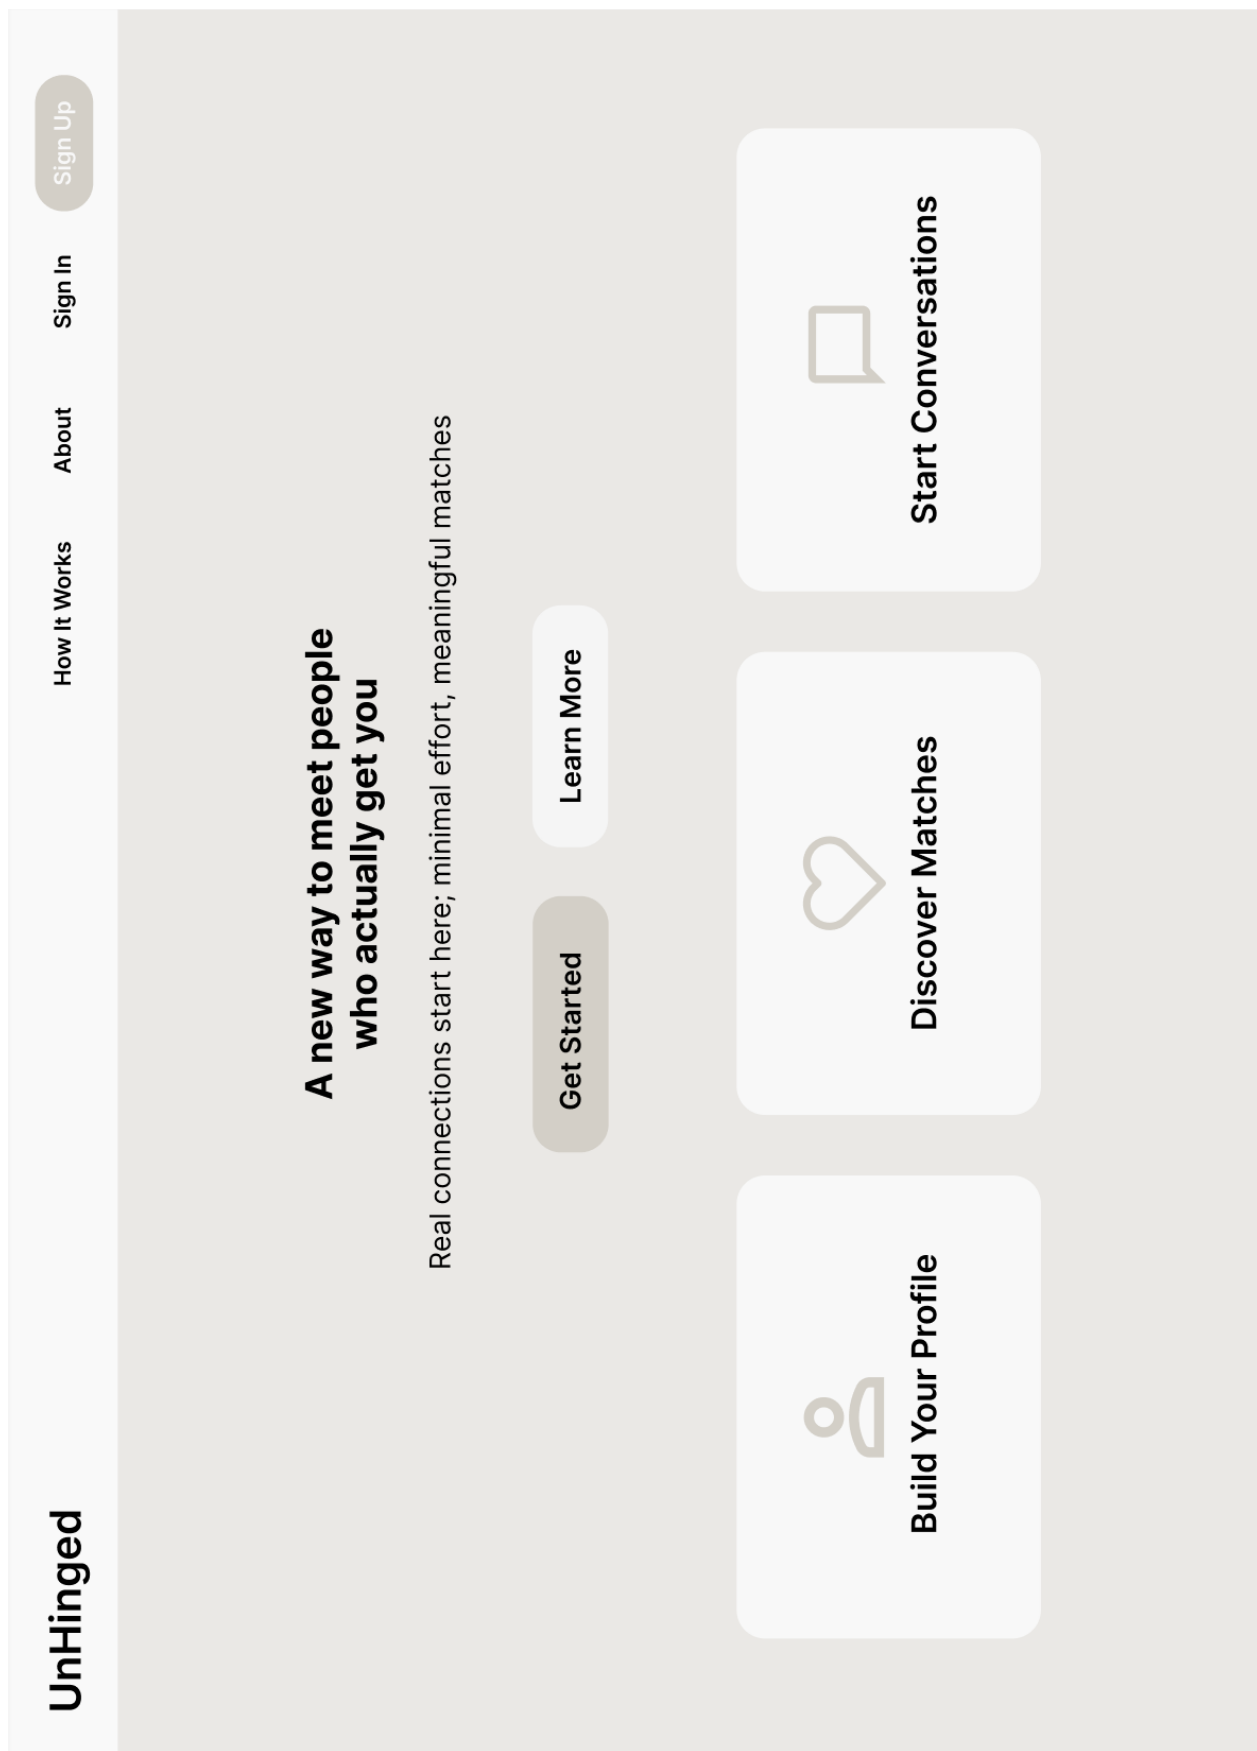Figure 2: *UnHinged* landing page

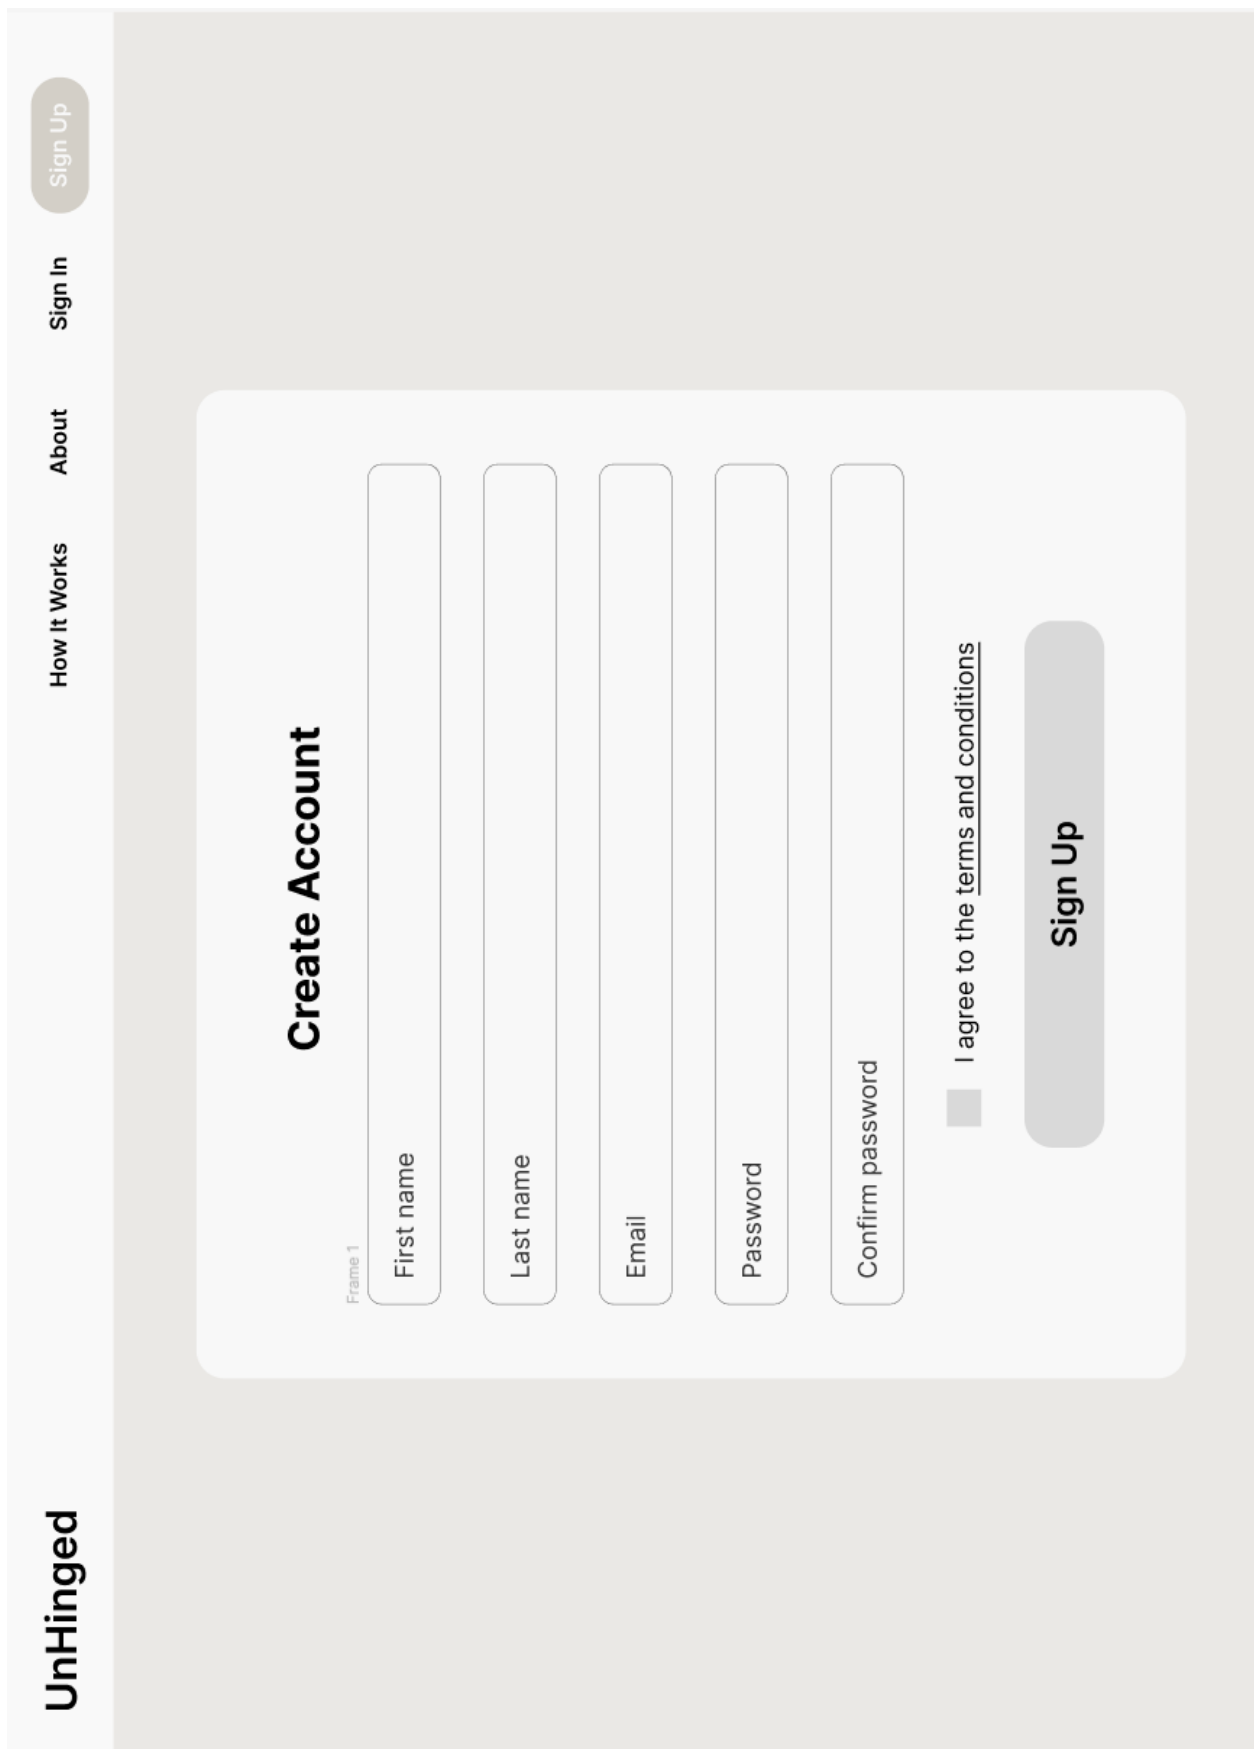

The image shows a registration page for a website called "UnHinged". The page has a light gray background. At the top left, the logo "UnHinged" is displayed in a bold, black, sans-serif font. To the right of the logo, there is a horizontal navigation bar with five links: "How It Works", "About", "Sign In", and "Sign Up". The "Sign Up" link is highlighted with a dark gray background and white text. Below the navigation bar, the main content area is a white rounded rectangle. Inside this rectangle, the title "Create Account" is centered at the top in a bold, black, sans-serif font. Below the title, there are five input fields, each with a label to its left: "First name", "Last name", "Email", "Password", and "Confirm password". The input fields are white with rounded corners and a thin gray border. Below the input fields, there is a checkbox with a small gray square to its left. To the right of the checkbox, the text "I agree to the terms and conditions" is displayed, where "terms and conditions" is underlined. Below the checkbox and text, there is a large, dark gray rounded rectangle with the text "Sign Up" in white, bold, sans-serif font.

UnHinged

How It Works About Sign In Sign Up

Create Account

First name

Last name

Email

Password

Confirm password

☐ I agree to the terms and conditions

Sign Up

Figure 3: Registration page

UnHinged

HomeMatchesMessagesLogout

Your ProfilePreview

Basic Details

Display Name

Date of Birth dd/mm/yyyy

Email

University

Degree

Preferences

Gender

Ethnicity

Age Preference

Upload Photos

+ Add Photo

+ Add Photo

+ Add Photo

+ Add Photo

+ Add Photo

+ Add Photo

Must upload 6 photos. At least one must clearly show your face.

Prompts

Select Prompt 1

One thing you should know about me...

Select Prompt 2

One thing you should know about me...

Your response (max 70 characters)

Select Prompt 3


One thing you should know about me...

Your response (max 70 characters)

You must select at least 3 prompts. Maximum 5.

Save Changes

Figure 4: User Profile page

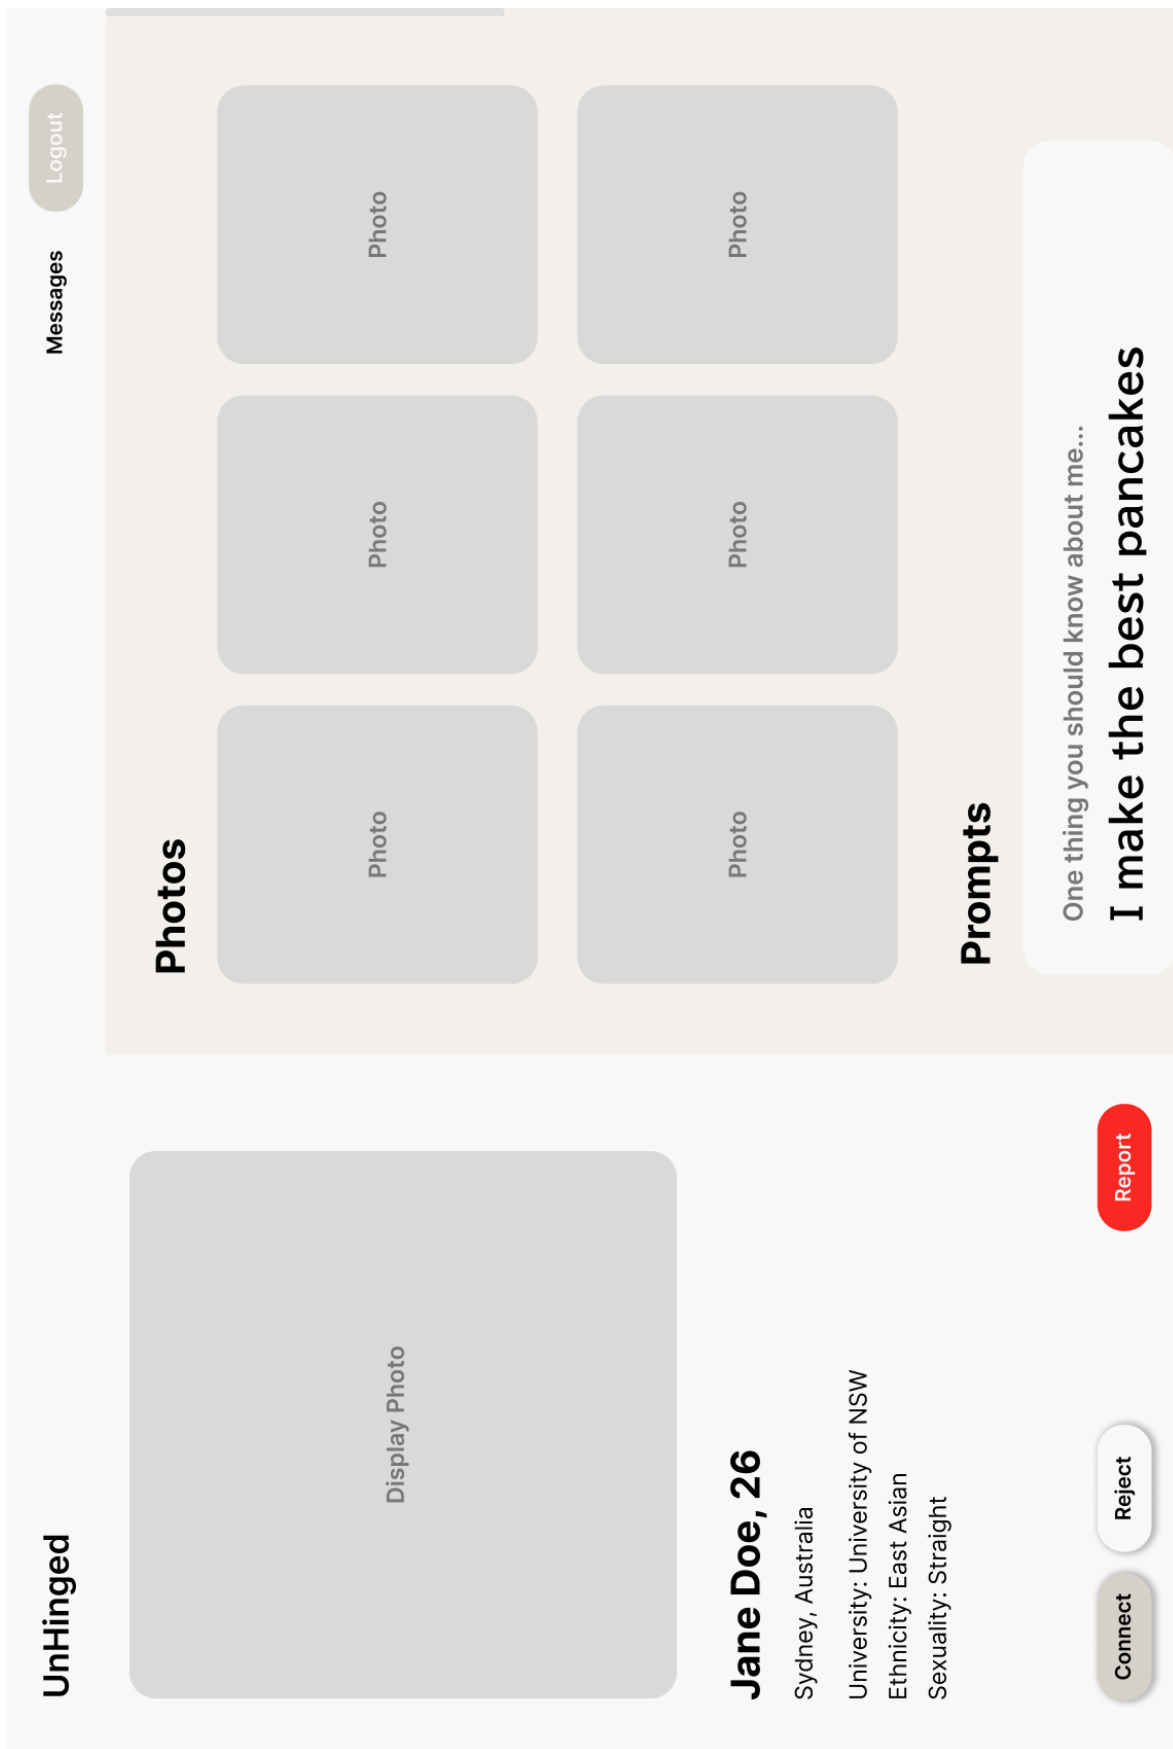Figure 5: *UnHinged* home page

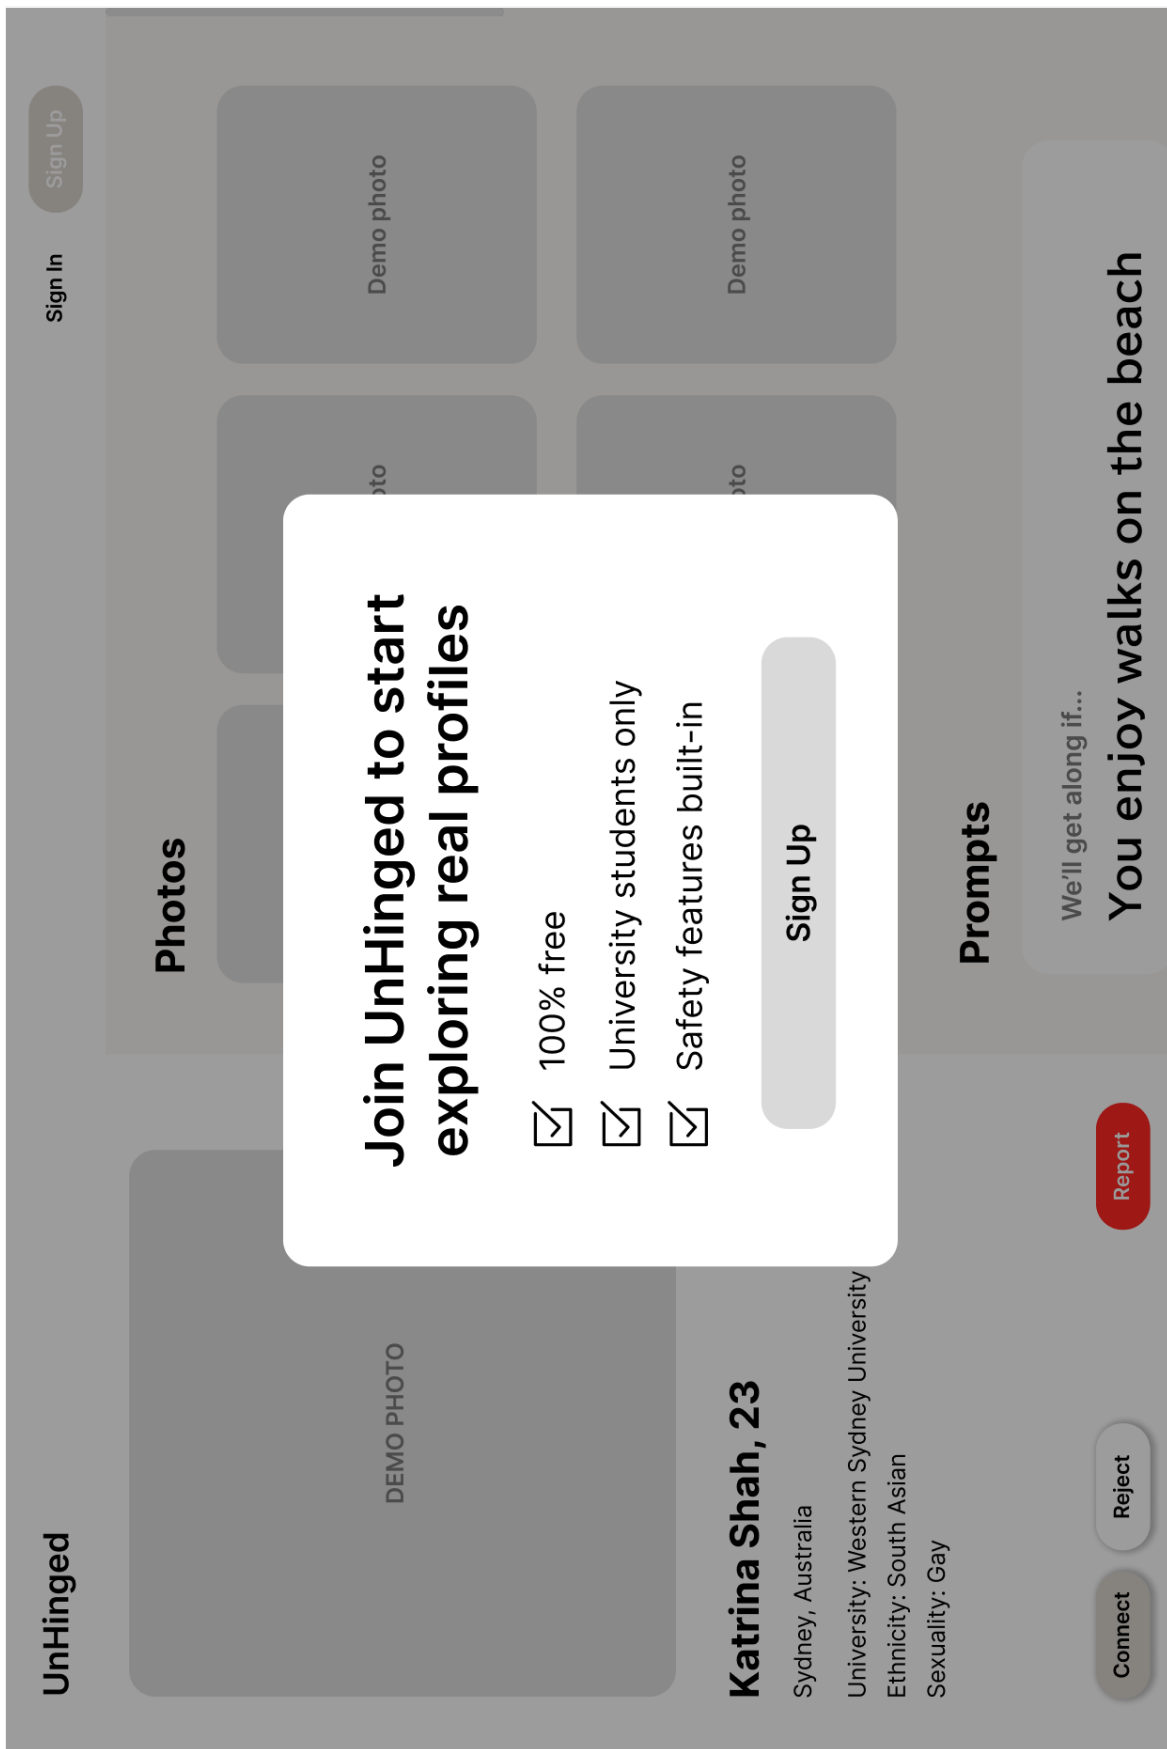


Figure 6: *UnHinged* home page: guest users will be prompted to register after viewing 5 demo profiles

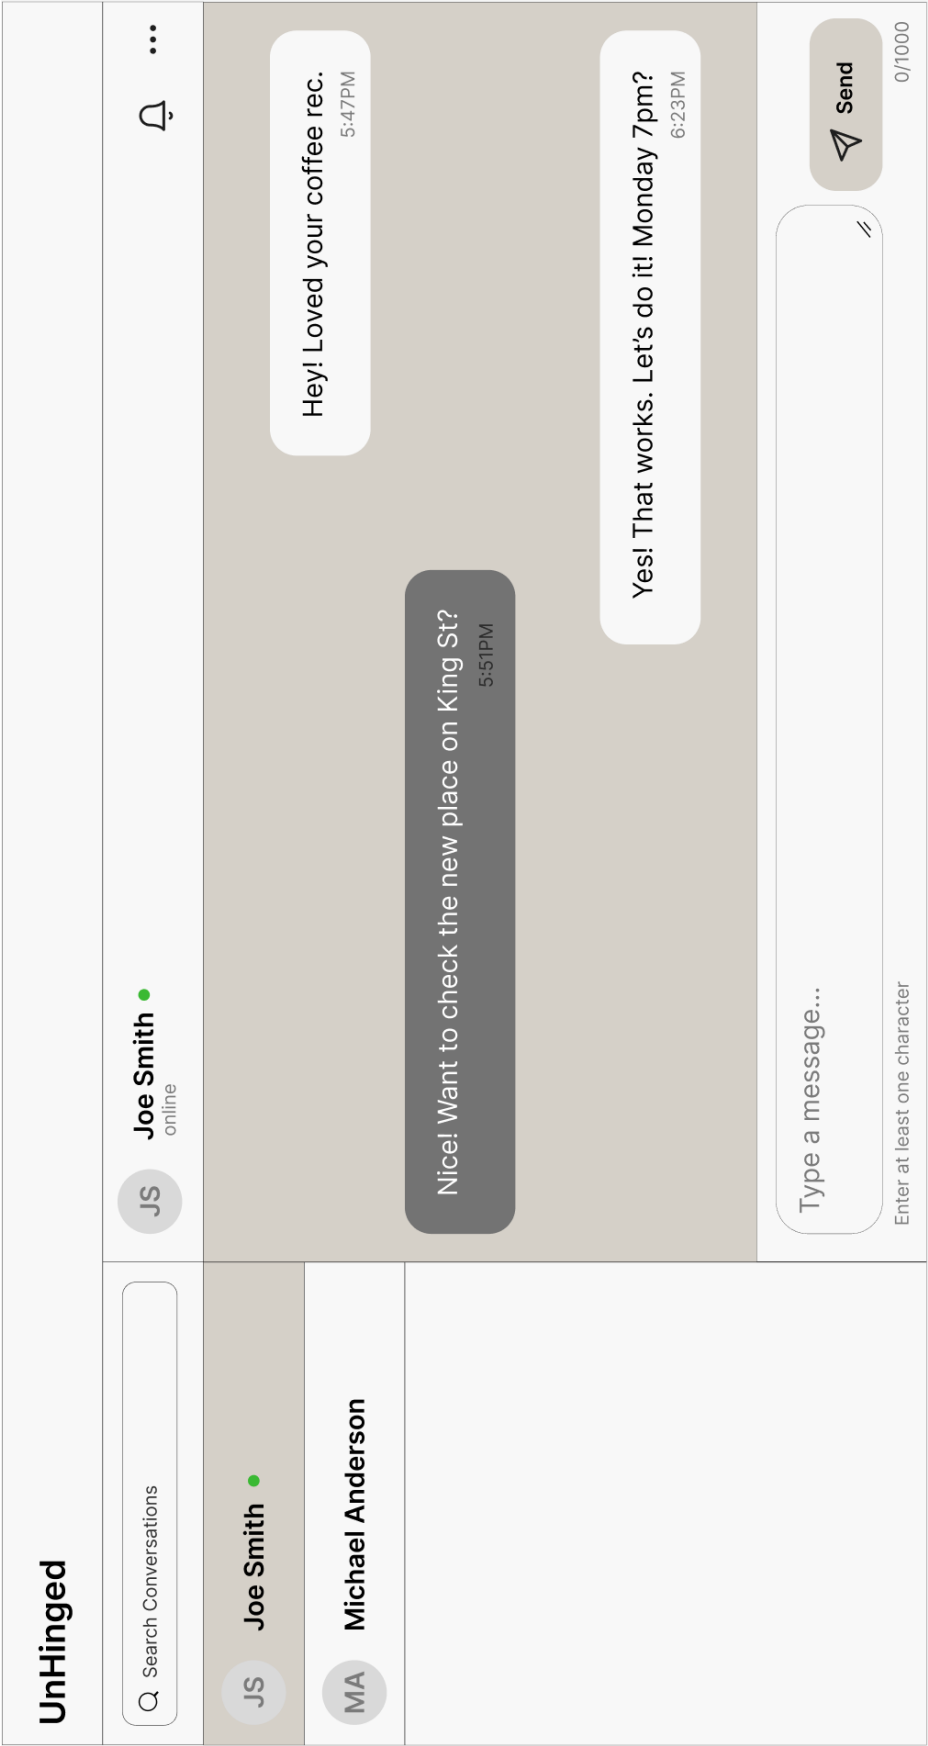


Figure 7: Chat page

Search

User Name ↑↓	Date Joined ↑↓	Last Login ↑↓	Age ↑↓	Status
Jane Doe	2025-01-15 09:23	2025-07-20 10:55	26	Active →
Jack Brown	2025-02-25 14:45	2025-06-01 1:08	34	Active →
Meredith Grey	2025-01-07 23:35	2025-08-11 16:42	19	Active →
Izzy Stevens	2025-01-10 01:22	2025-01-28 19:04	28	Inactive →
Christina Yang	2025-03-21 19:14	2025-04-28 3:44	42	Active →
Addison Mon...	2025-01-20 18:58	2025-05-05 23:11	22	Active →
Miranda Bailey	2025-04-30 03:24	2025-07-19 5:34	33	Active →
Lexie Grey	2025-03-28 03:45	2025-08-12 12:55	29	Active →

Izzy Stevens

User Name: Izzy Stevens ↗ Photos: 5 Prompts: 1 Reported: 1

Age: 26

University: UNSW
Ethnicity: American
Sexuality: Straight

Reason for action

Reactivate Account

Figure 8: Admin panel: view and manage users

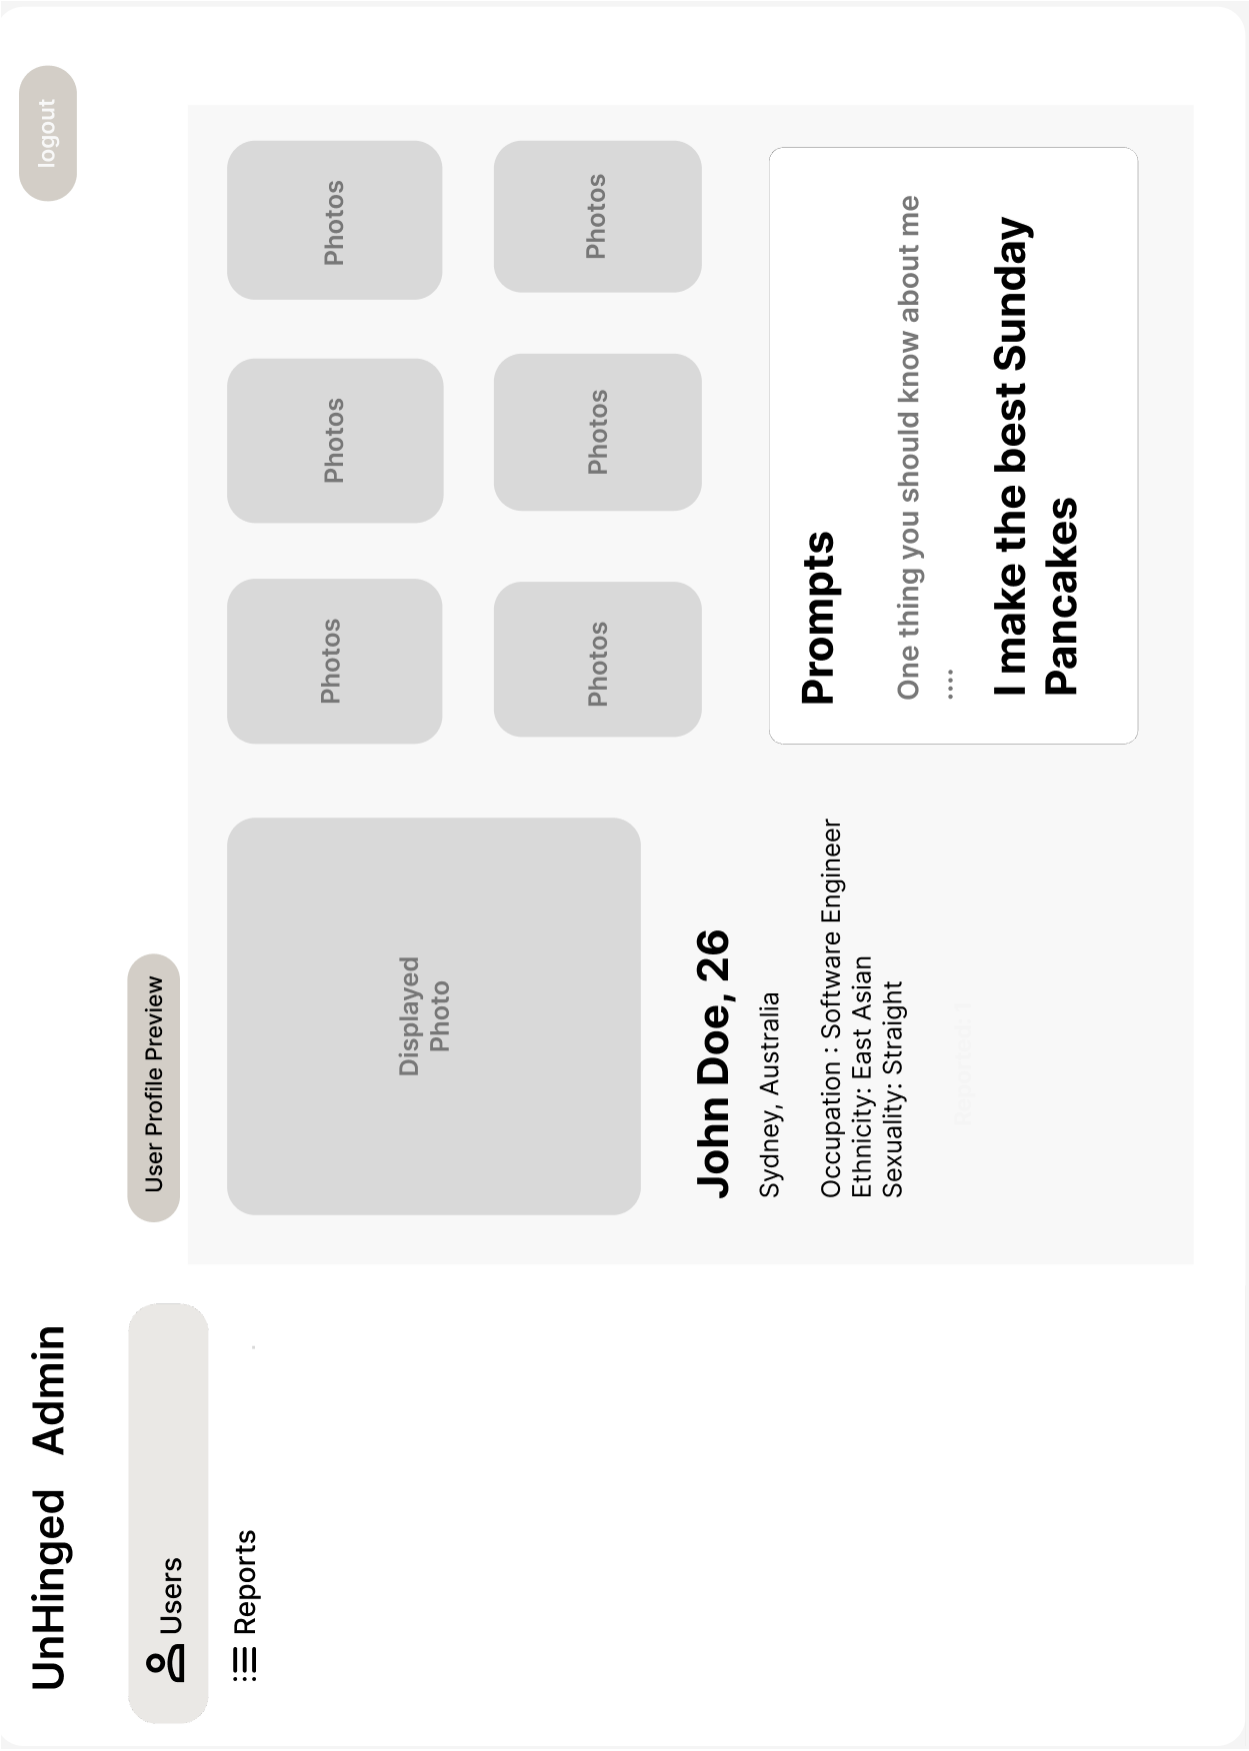


Figure 9: Admin panel: admins can preview any user profile

Report ID	Report Date	Reported User	Reported By	Reason	Status
RPT-01	2025-04-05 09:23	Jane Doe	David Johnson	Nudity	Active →
RPT-02	2025-04-05 14:45	Jack Brown	Emily Jiggins	Harrassment	Active →
RPT-03	2025-04-07 23:35	Meredith Grey	Alex Korev	Nudity	Active →
RPT-04	2025-04-10 01:22	Izzy Stevens	George O'Malley	Nudity	Active →
RPT-05	2025-04-11 19:14	Christina Yang	Preston Burke	Graphic	Active →
RPT-06	2025-04-20 18:58	Addison Mon...	Derek Shepherd	Harrassment	Active →
RPT-07	2025-05-01 03:24	Miranda Bailey	Callie Torres	Graphic	Active →
RPT-08	2025-05-02 03:45	Lexie Grey	Owen Hunt	Nudity	Active →

RPT-04

Reported User: [Izzy Stevens](#) Reported By: [George O'Malley](#) Reason: Nudity

Additional description provided by reporter

her account has nude photos on it??? wtf

Dismiss Report

Deactivate Account

Figure 10: Admin panel: view and address reported users

UnHinged • Developer API

API Settings

Base URL

Bearer Token

<> cURL

```
curl -H "Authorization : Bearer <Token>" "https://api.unHinged.com.v1/profile1.com.."
```

<> fetch()

```
const res = await fetch ("https://api.unHinged.com/v1/profile")
method : "GET",
headers: { "Authorization : 'Bearer <Token>' }
};
const json = await res.json();
```

Reset

API Request

Endpoint
GET /profile ▼

Send

Response
No request yet

Figure 11: Public API helper page