Mini Project Report - 06

Master of Computer Application
Semester – I

Sub: Front-End Frameworks and Technologies

Topic: calculator -javascript
By
Name: ANU A
Reg no.: 2511022250085

Faculty Name: VEERA RAGHAV K

Faculty Signature: _____

Department of Computer Application
Alliance University
Chandapura - Anekal Main Road, Anekal
Bengaluru - 562 106

FEBRUARY 2026

CODE

```
<!DOCTYPE html>
<html>
<head>
<title>Calculator</title>

<style>
body{
    display:flex;
    justify-content:center;
    align-items:center;
    height:100vh;
    background:#f2f2f2;
    font-family:Arial;
}

.calculator{
    background:white;
    padding:20px;
    border-radius:10px;
    box-shadow:0 0 10px rgba(0,0,0,0.3);
}

#display{
    width:100%;
    height:40px;
    font-size:20px;
    margin-bottom:10px;
    text-align:right;
    padding:5px;
}

.buttons{
    display:grid;
    grid-template-columns:repeat(4,60px);
    gap:10px;
}

button{
    height:50px;
    font-size:18px;
    border:none;
    background:#3498db;
    color:white;
    border-radius:5px;
    cursor:pointer;
}
```

```
button:hover{
   background:#2980b9;
}
</style>

</head>

<body>

<div class="calculator">

<input type="text" id="display" readonly>

<div class="buttons">

<button onclick="press('7')">7</button>
<button onclick="press('8')">8</button>
<button onclick="press('9')">9</button>
<button onclick="press('/')">/</button>

<button onclick="press('4')">4</button>
<button onclick="press('5')">5</button>
<button onclick="press('6')">6</button>
<button onclick="press('*')">*</button>

<button onclick="press('1')">1</button>
<button onclick="press('2')">2</button>
<button onclick="press('3')">3</button>
<button onclick="press('-')">-</button>

<button onclick="press('0')">0</button>
<button onclick="press('%')">%</button>
<button onclick="calculate()">=</button>
<button onclick="press('+')">+</button>

<button onclick="clearDisplay()">C</button>

</div>

</div>

<script>

const press = (value) => {
document.getElementById("display").value += value;
}

const calculate = () => {
let result = eval(document.getElementById("display").value);
document.getElementById("display").value = result;
```

```
}

const clearDisplay = () => {
document.getElementById("display").value = "";
}

</script>

</body>
</html>
```
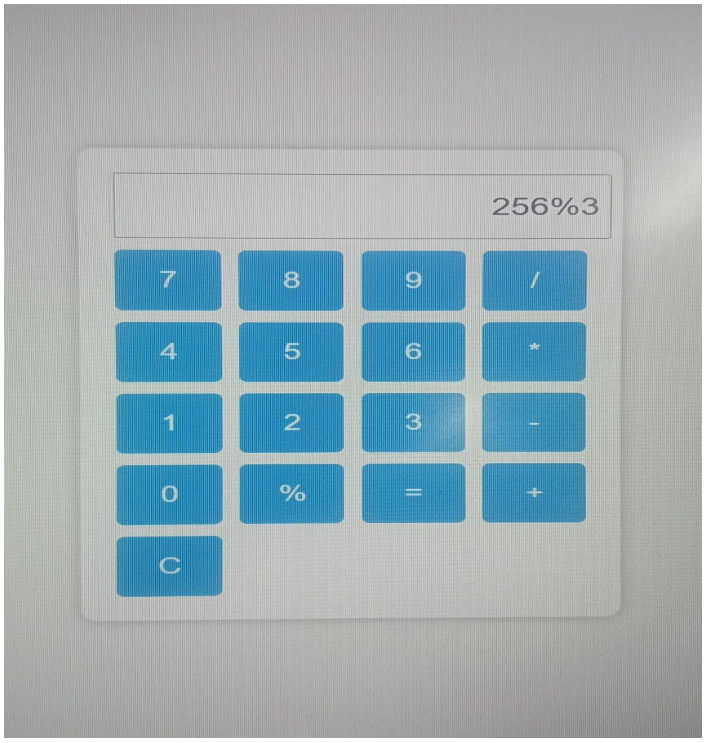
OUTPUT