


A screenshot of the Visual Studio Code editor. The top menu bar includes Apple logo, Code, File, Edit, Selection, View, Go, Run, Terminal, Window, and Help. The title bar says "index.html — HTML". The editor has two tabs: "index.html" (active) and "styles.css". The breadcrumb navigation shows the path: "index.html > html > body > div.container > div.box". The code in the editor is as follows:



```
<body>
  <div class="container">
    <div class="box">A</div>
    <div class="box">B</div>
    <div class="box">C</div>
  </div>
</body>
</html>
```

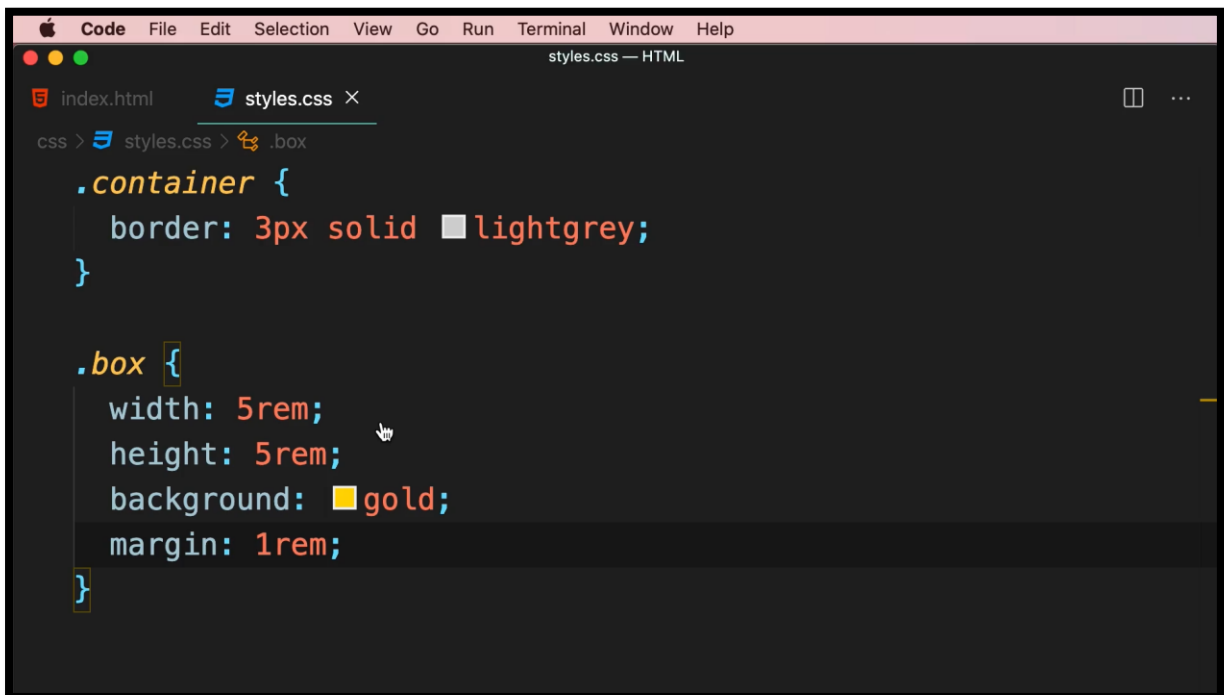


A screenshot of the Visual Studio Code editor. The top menu bar is the same as the first image. The title bar says "styles.css — HTML". The editor has two tabs: "index.html" and "styles.css" (active). The breadcrumb navigation shows the path: "css > styles.css > .box". The code in the editor is as follows:

```
.container {
  border: 3px solid lightgrey;
}

.box {
  width: 5rem;
  height: 5rem;
  background: gold;
  margin: 1rem;
}
```

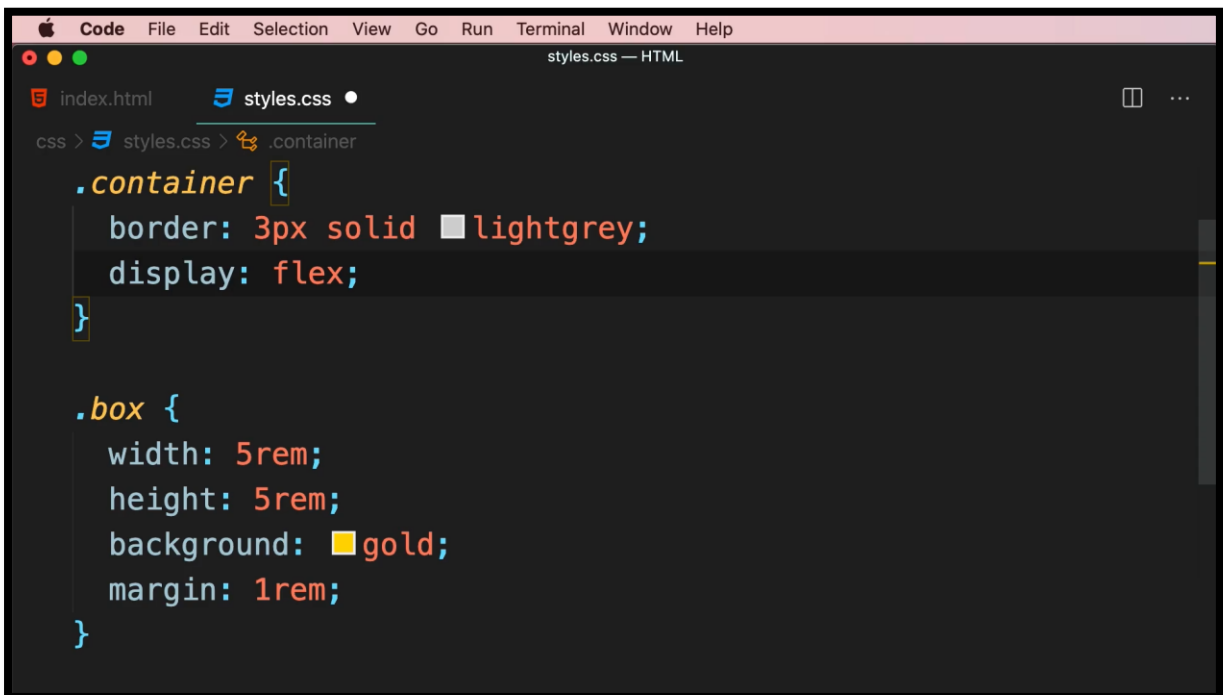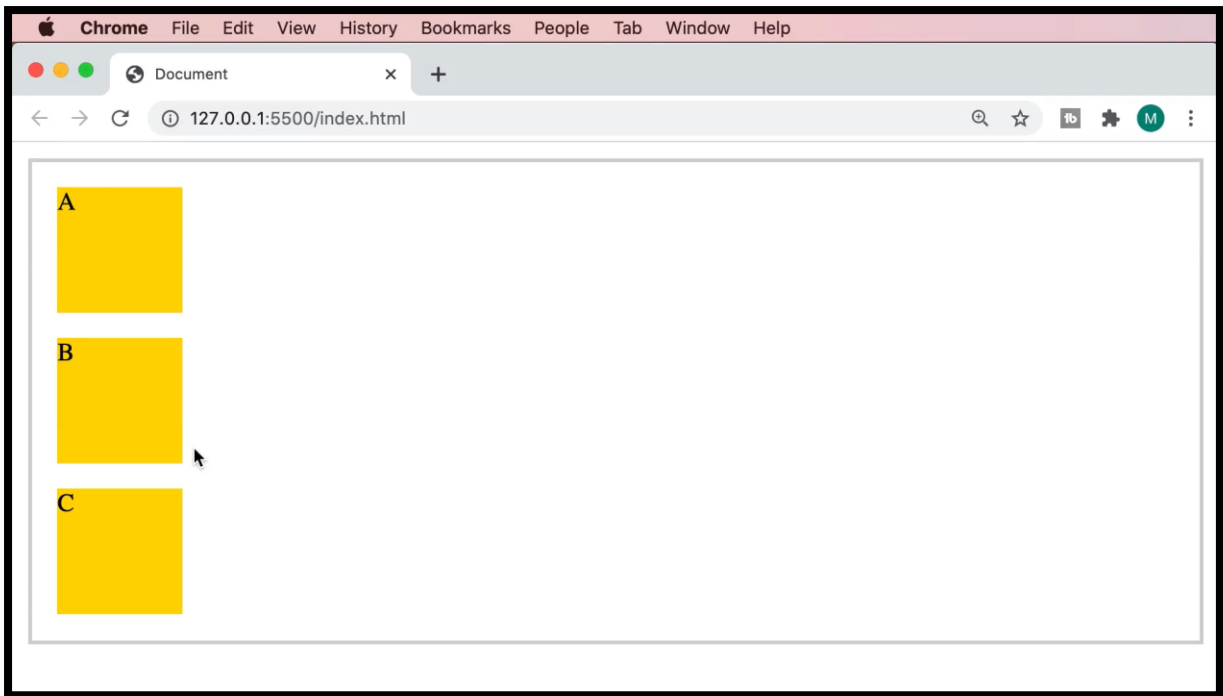

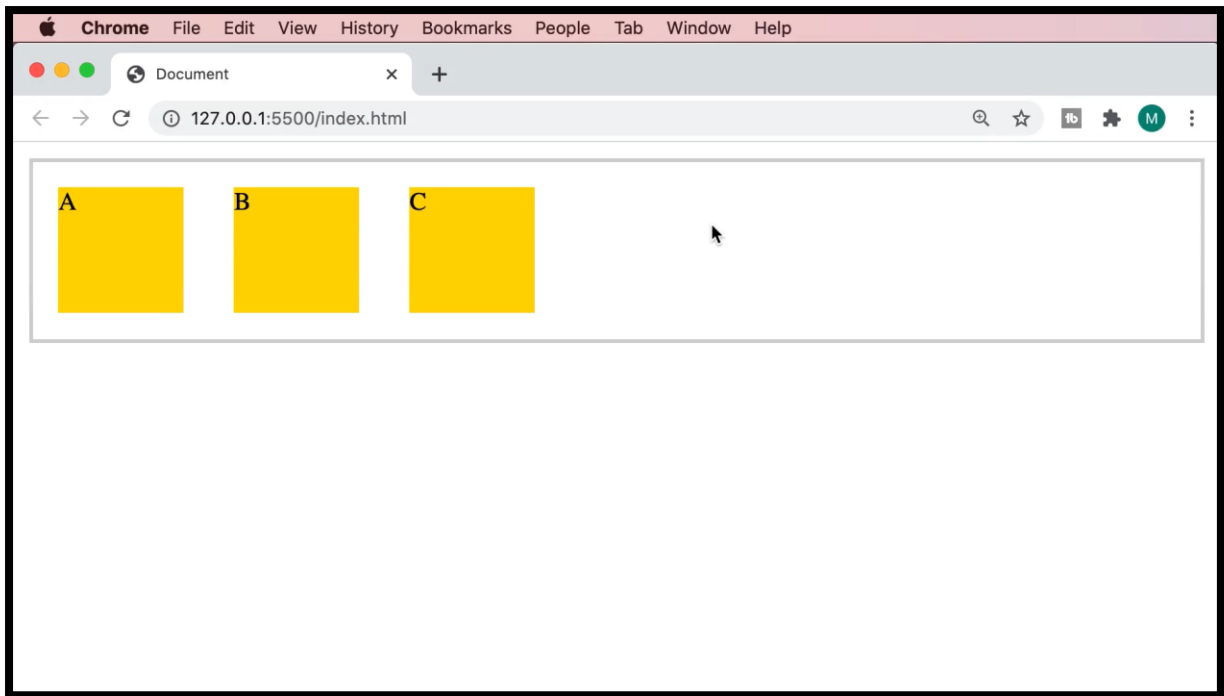

Tailwind CSS

```
<div class="container flex">
  <div class="box">A</div>
  <div class="box">B</div>
  <div class="box">C</div>
</div>
```

```
.container
{
  border: 3px solid lightgrey;
}
```

```
.box
{
  width: 5rem;
  height: 5rem;
  background: gold;
  margin: 1rem;
}
```