
P/D hand-off with Mooncake: fast enough to pay off

Same probe, MooncakeConnector over TCP (no RDMA on this box); the client acts as Mooncake's proxy

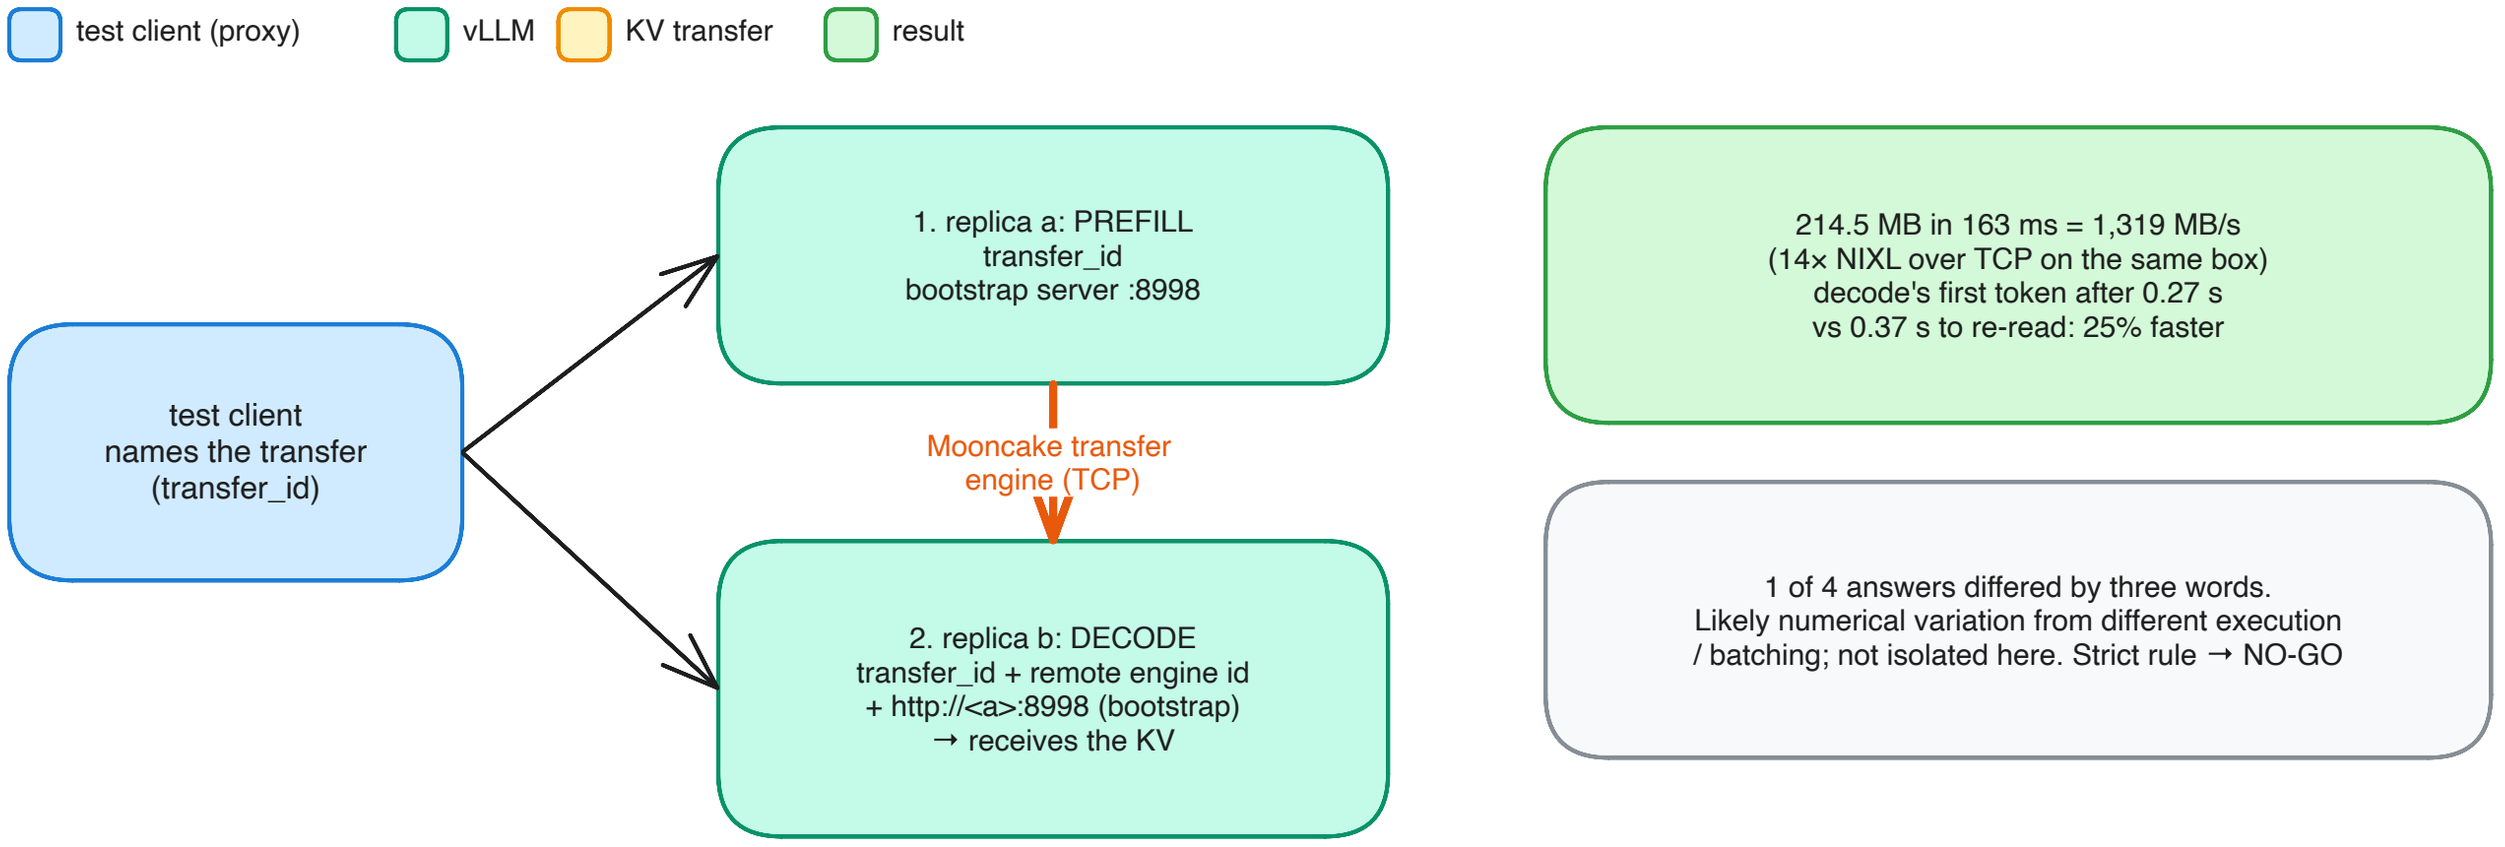

Took three attempts: Mooncake needs its caller to name the transfer and both engines' ids, and the bootstrap address must start with http://.