
The fleet: two memory-capped replicas sharing one H100

What each replica gets, and the settings every experiment shares (exceptions are noted per case)

the GPU · model weights · KV cache (capped) · runtime / free · gateway setting

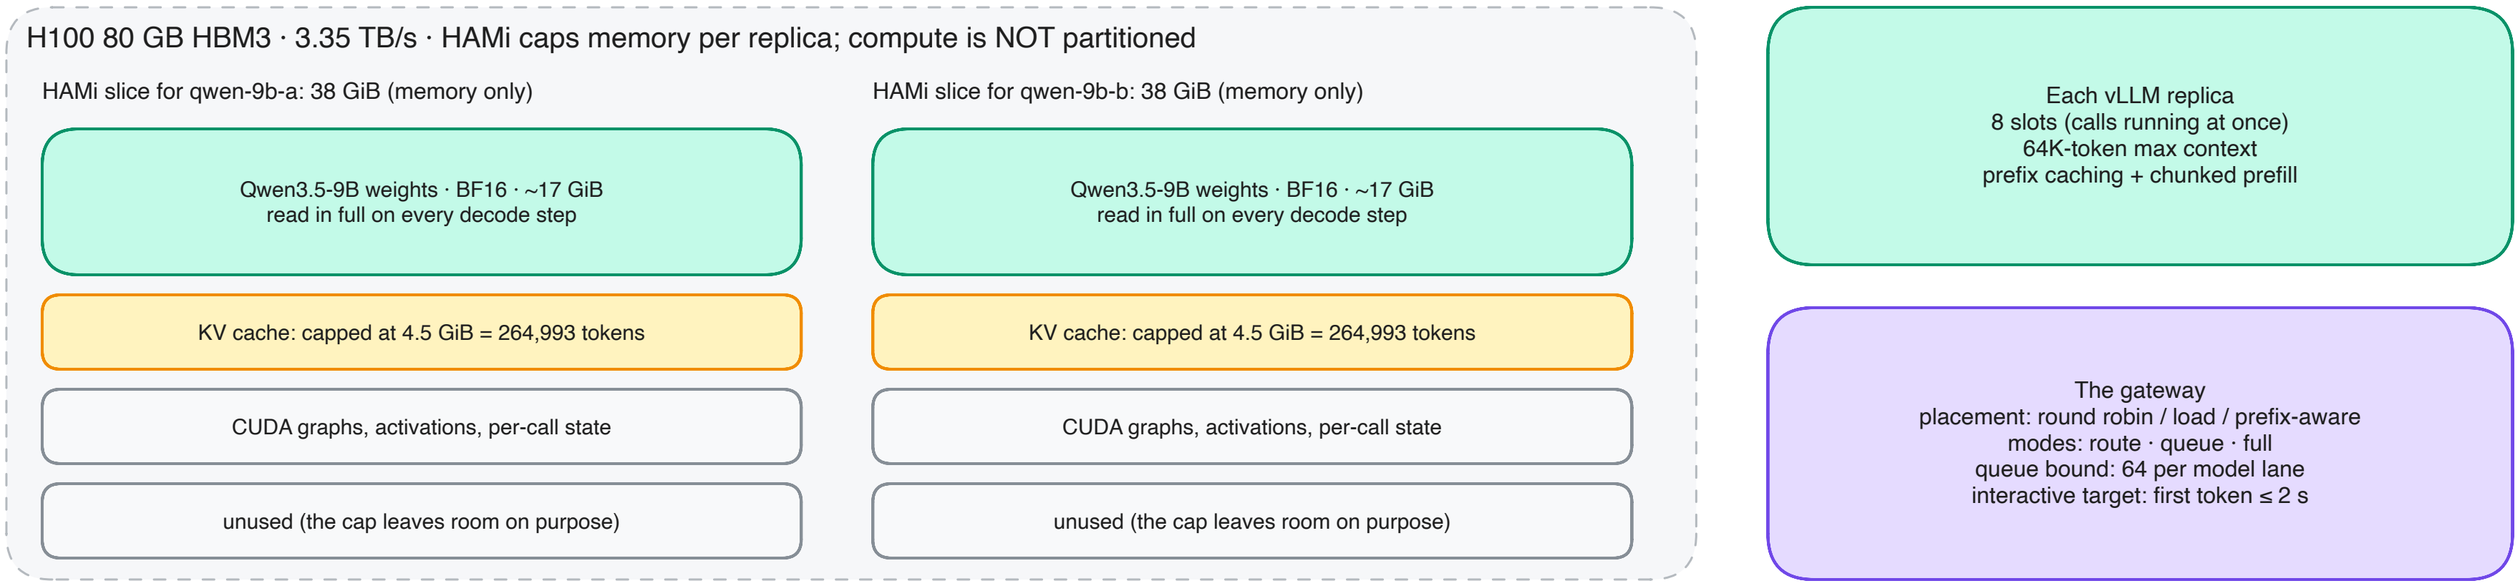

Why cap the KV cache? A slice could hold ~1M tokens, so memory would never matter. At 4.5 GiB, 40 documents overflow one replica's cache but fit in two halves: the condition under which smart placement can show anything.