

Importing the Dependencies

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression
from sklearn import metrics
```

Data Collection & Analysis

```
# loading the data from csv file to a Pandas DataFrame
insurance_dataset = pd.read_csv('/content/insurance.csv')
```

```
# first 5 rows of the dataframe
insurance_dataset.head()
```

	age	sex	bmi	children	smoker	region	charges
0	19	female	27.900	0	yes	southwest	16884.92400
1	18	male	33.770	1	no	southeast	1725.55230
2	28	male	33.000	3	no	southeast	4449.46200
3	33	male	22.705	0	no	northwest	21984.47061
4	32	male	28.880	0	no	northwest	3866.85520

```
# number of rows and columns
insurance_dataset.shape
```

```
(1338, 7)
```

```
# getting some informations about the dataset
insurance_dataset.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1338 entries, 0 to 1337
Data columns (total 7 columns):
#   Column      Non-Null Count  Dtype
---  -
0   age         1338 non-null   int64
1   sex         1338 non-null   object
2   bmi         1338 non-null   float64
3   children    1338 non-null   int64
4   smoker      1338 non-null   object
5   region      1338 non-null   object
6   charges     1338 non-null   float64
dtypes: float64(2), int64(2), object(3)
memory usage: 73.3+ KB
```

Categorical Features:

- Sex
- Smoker
- Region

```
# checking for missing values
insurance_dataset.isnull().sum()
```

```
age         0
sex         0
bmi         0
children    0
smoker      0
region      0
charges     0
dtype: int64
```


Data Analysis

```
# statistical Measures of the dataset
insurance_dataset.describe()
```


	age	bmi	children	charges
count	1338.000000	1338.000000	1338.000000	1338.000000
mean	39.207025	30.663397	1.094918	13270.422265
std	14.049960	6.098187	1.205493	12110.011237
min	18.000000	15.960000	0.000000	1121.873900
25%	27.000000	26.296250	0.000000	4740.287150
50%	39.000000	30.400000	1.000000	9382.033000
75%	51.000000	34.693750	2.000000	16639.912515
max	64.000000	53.130000	5.000000	63770.428010

```
# distribution of age value
sns.set()
plt.figure(figsize=(6,6))
sns.distplot(insurance_dataset['age'])
plt.title('Age Distribution')
plt.show()

/usr/local/lib/python3.7/dist-packages/seaborn/distributions.py:2557: FutureWarning:
warnings.warn(msg, FutureWarning)
```

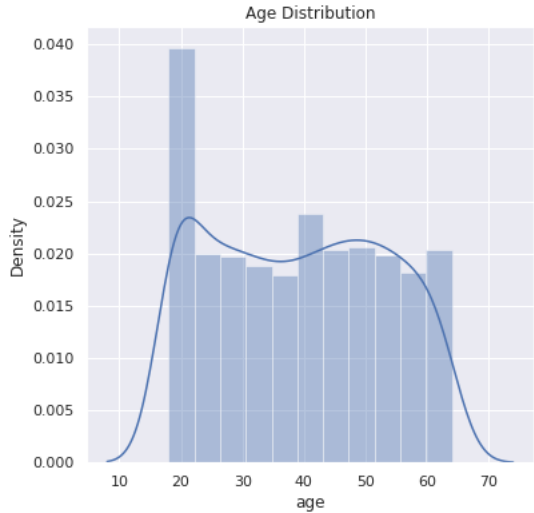

```
# Gender column
plt.figure(figsize=(6,6))
sns.countplot(x='sex', data=insurance_dataset)
plt.title('Sex Distribution')
plt.show()
```

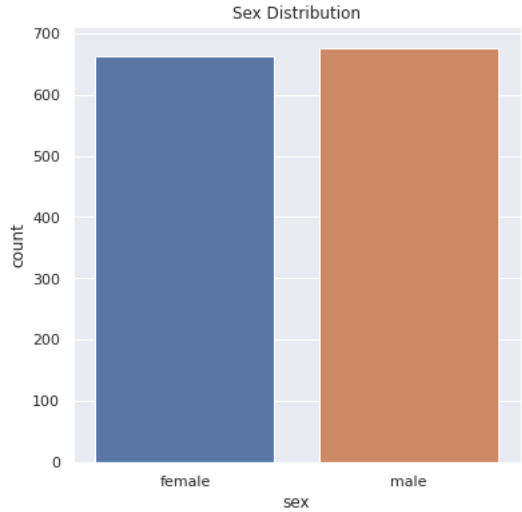


```
insurance_dataset['sex'].value_counts()

male      676
female    662
Name: sex, dtype: int64
```


```
# bmi distribution
plt.figure(figsize=(6,6))
sns.distplot(insurance_dataset['bmi'])
plt.title('BMI Distribution')
plt.show()
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/distributions.py:2557: FutureWarning:
warnings.warn(msg, FutureWarning)
```

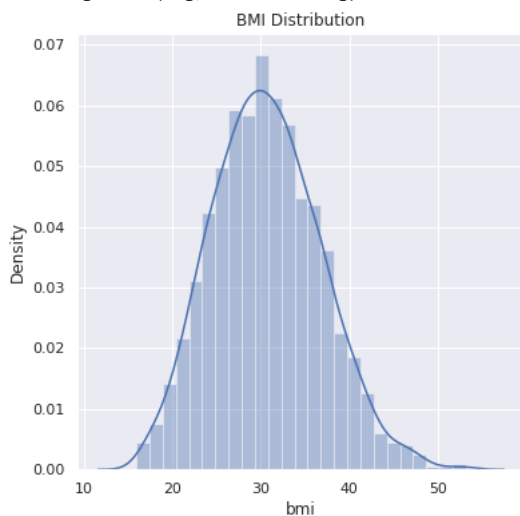

Normal BMI Range --> 18.5 to 24.9


```
# children column
plt.figure(figsize=(6,6))
sns.countplot(x='children', data=insurance_dataset)
plt.title('Children')
plt.show()
```

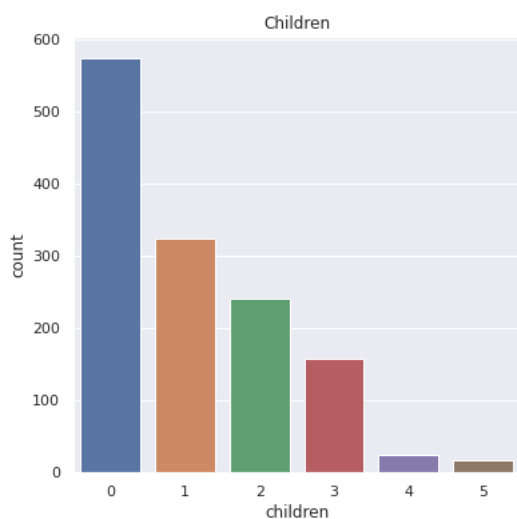

```
insurance_dataset['children'].value_counts()
```

```
0    574
1    324
2    240
3    157
4     25
5     18
Name: children, dtype: int64
```


```
# smoker column
plt.figure(figsize=(6,6))
sns.countplot(x='smoker', data=insurance_dataset)
plt.title('smoker')
plt.show()
```

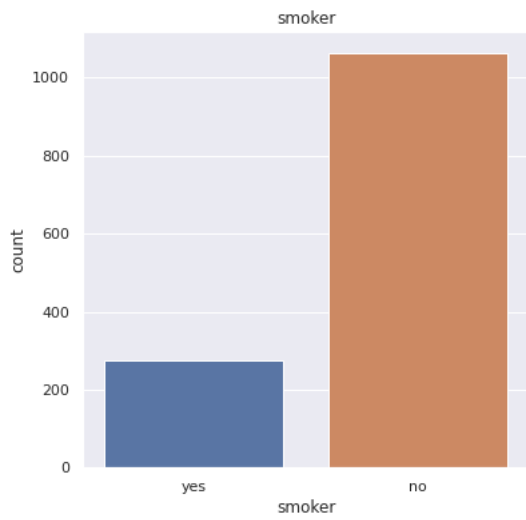

```
insurance_dataset['smoker'].value_counts()
```

```
no      1064
yes      274
Name: smoker, dtype: int64
```

```
# region column
plt.figure(figsize=(6,6))
sns.countplot(x='region', data=insurance_dataset)
plt.title('region')
plt.show()
```

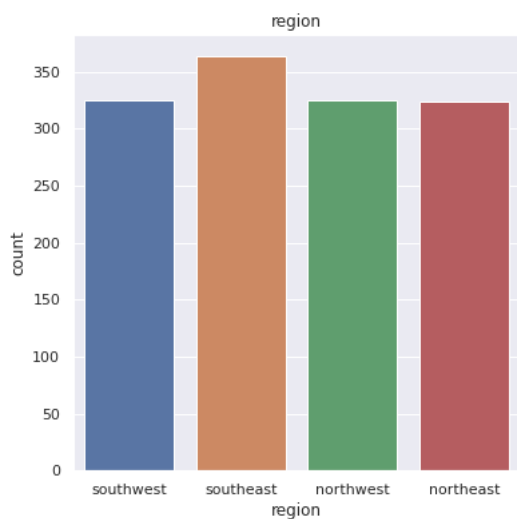


```
insurance_dataset['region'].value_counts()
```

```
southeast    364
northwest    325
southwest    325
northeast    324
Name: region, dtype: int64
```

```
# distribution of charges value
plt.figure(figsize=(6,6))
sns.distplot(insurance_dataset['charges'])
plt.title('Charges Distribution')
plt.show()
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/distributions.py:2557: FutureWarning:
warnings.warn(msg, FutureWarning)
```

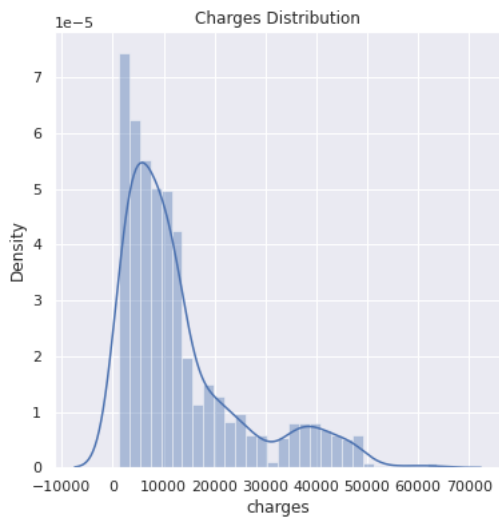

Data Pre-Processing

Encoding the categorical features

```
# encoding sex column
insurance_dataset.replace({'sex':{'male':0,'female':1}}, inplace=True)

3 # encoding 'smoker' column
insurance_dataset.replace({'smoker':{'yes':0,'no':1}}, inplace=True)

# encoding 'region' column
insurance_dataset.replace({'region':{'southeast':0,'southwest':1,'northeast':2,'northwest':3}}, inplace=True)
```

Splitting the Features and Target

```
X = insurance_dataset.drop(columns='charges', axis=1)
Y = insurance_dataset['charges']
```

```
print(X)
```

	age	sex	bmi	children	smoker	region
0	19	1	27.900	0	0	1
1	18	0	33.770	1	1	0
2	28	0	33.000	3	1	0
3	33	0	22.705	0	1	3
4	32	0	28.880	0	1	3
...
1333	50	0	30.970	3	1	3
1334	18	1	31.920	0	1	2
1335	18	1	36.850	0	1	0
1336	21	1	25.800	0	1	1
1337	61	1	29.070	0	0	3

```
[1338 rows x 6 columns]
```

```
print(Y)
```

0	16884.92400
1	1725.55230
2	4449.46200
3	21984.47061
4	3866.85520
...	...
1333	10600.54830
1334	2205.98080
1335	1629.83350
1336	2007.94500
1337	29141.36030

Name: charges, Length: 1338, dtype: float64

Splitting the data into Training data & Testing Data

```
X_train, X_test, Y_train, Y_test = train_test_split(X, Y, test_size=0.2, random_state=2)

print(X.shape, X_train.shape, X_test.shape)

(1338, 6) (1070, 6) (268, 6)
```

Model Training

Linear Regression

```
# loading the Linear Regression model
regressor = LinearRegression()

regressor.fit(X_train, Y_train)

LinearRegression(copy_X=True, fit_intercept=True, n_jobs=None, normalize=False)
```

Model Evaluation

```
# prediction on training data
training_data_prediction = regressor.predict(X_train)

# R squared value
r2_train = metrics.r2_score(Y_train, training_data_prediction)
print('R squared vale : ', r2_train)

R squared vale : 0.751505643411174
```

```
# prediction on test data
test_data_prediction = regressor.predict(X_test)
```

```
# R squared value
r2_test = metrics.r2_score(Y_test, test_data_prediction)
print('R squared vale : ', r2_test)

R squared vale : 0.7447273869684077
```

Building a Predictive System

```
input_data = (31,1,25.74,0,1,0)

# changing input_data to a numpy array
input_data_as_numpy_array = np.asarray(input_data)

# reshape the array
input_data_reshaped = input_data_as_numpy_array.reshape(1,-1)

prediction = regressor.predict(input_data_reshaped)
print(prediction)

print('The insurance cost is USD ', prediction[0])

[3760.0805765]
The insurance cost is USD 3760.0805764960587
```