


Creating Alerts and Triggering them from Splunk Enterprise (Search Head) to SOAR

Summary

This document describes the steps involved in creating the alert in Splunk Enterprise and also Checking the connectivity with the SOAR for triggering the alert when the event occurs.

1. Check the SOAR Connectivity from Splunk Enterprise


- 1) Login to **Search Head UI**,
Click on **Splunk app for SOAR Export** on the left pane or from the **Apps** menu

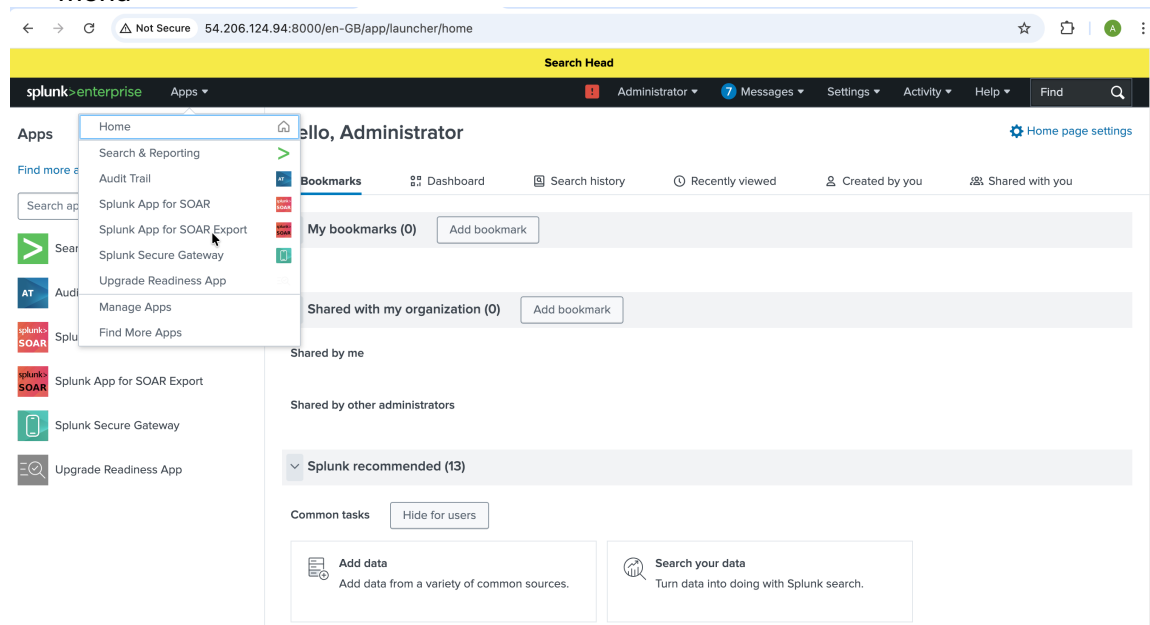


- 2) Click on **Configurations tab** > Check the **<SOAR_PublicIP>** address is there in **Server** field

If it is changed, then Click **Manage** on the right-field and Click **Edit**

Server: `https://<new_SOARPublicIP>:8443` > Save

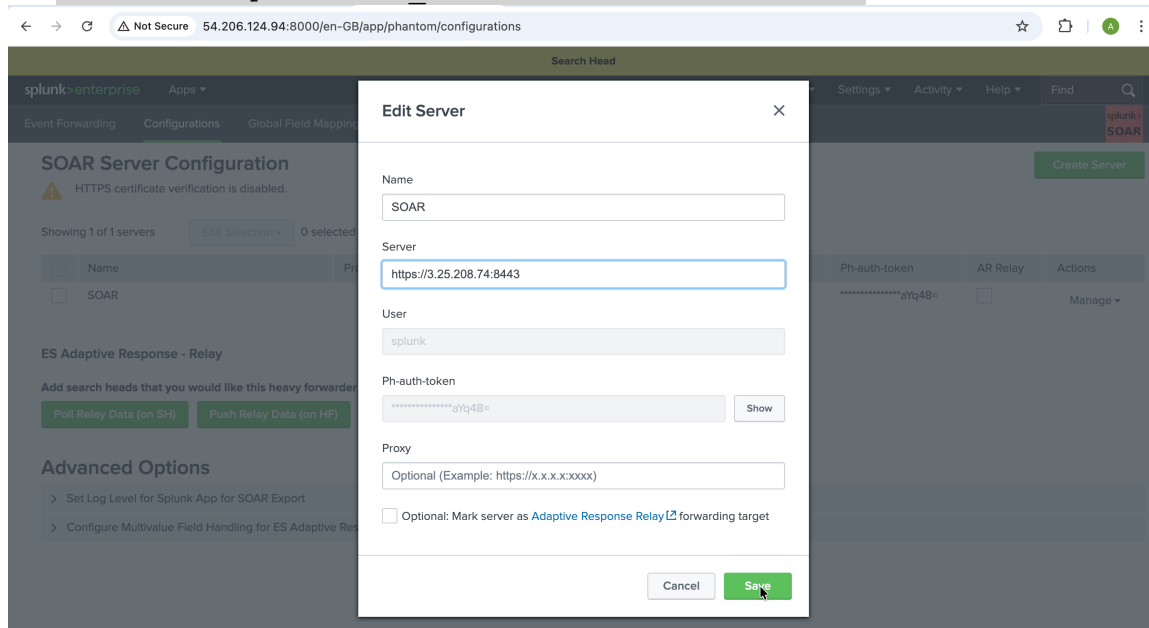


- 3) Click **Manage** > **Test connectivity** to check the connection

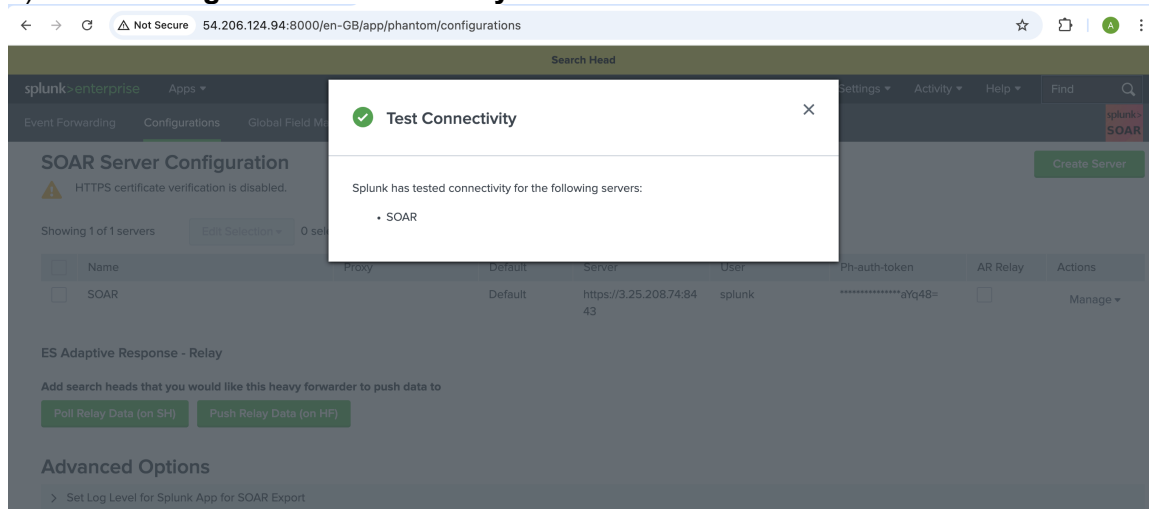


2. Create an alert and Send to SOAR

- 1) In **Search Head UI**,
Go to **Settings > Knowledge: Searches, reports and alerts**

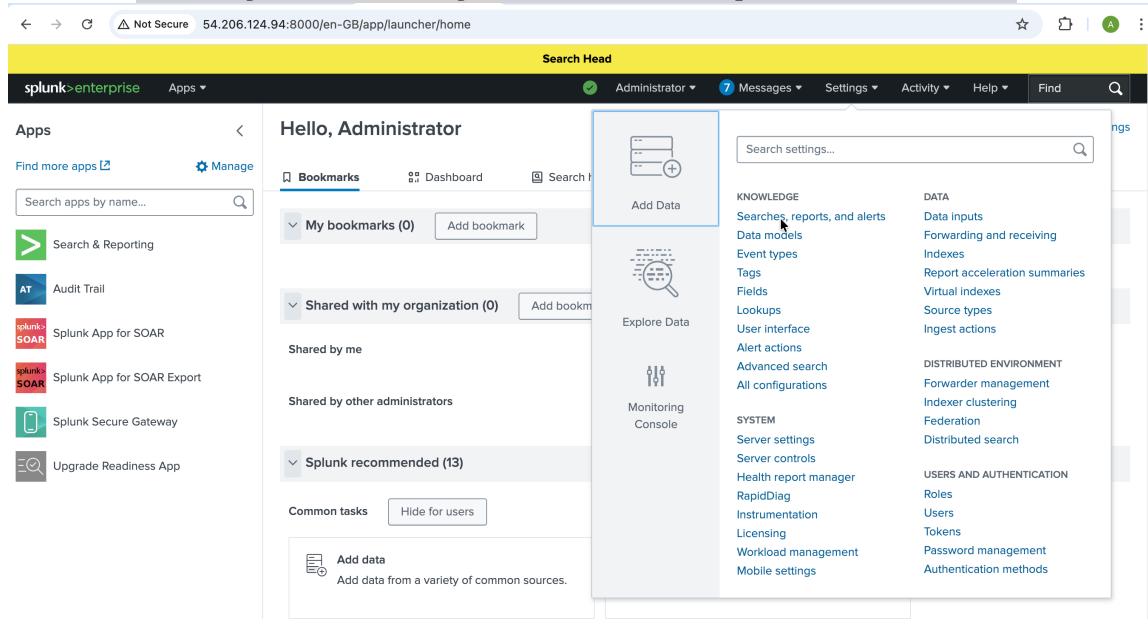

- 2) Click **New Alert** on top-right

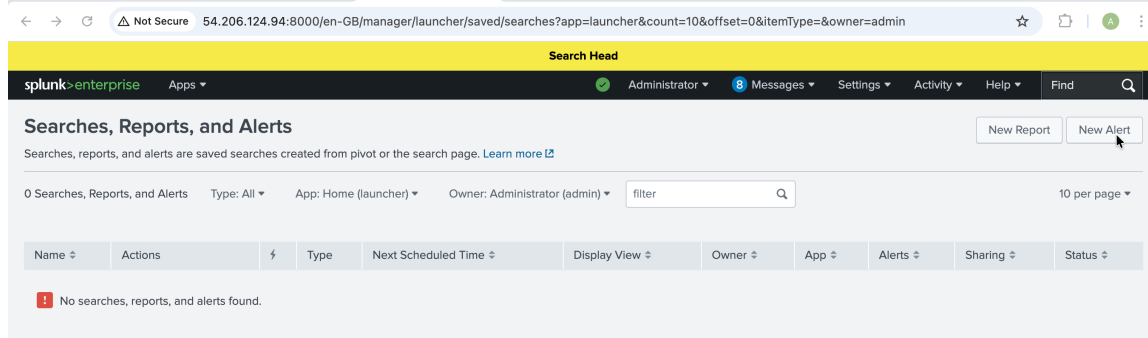

3) In the **Create Alert dialog**,

Enter the following:

Title: Bruteforceattack**Search:**

```
index="win_idx" EventCode=4625 earliest=-5m
Account_Name!="Administrator" Account_Name!="Admin"
Account_Name!="User"
| stats count by Account_Name, host,
Source_Network_Address
| where count>=3
| eval username=mindex(split(Account_Name, "@"), 0)
```

App: Splunk app for SOAR Export (phantom)**Permissions:** Private**Alert type:** Scheduled**Select** "Run on Cron Schedule" from drop-down**Time Range:** Click the drop-down > Advanced tab**Earliest:** -5m**Latest:** now > Apply**Cron Expression:** */2 * * * * (runs every 2 minutes)**Expires:** 24 hours

Edit Alert
×

Settings

Alert **Bruteforceattack**

Description
Optional

Search

```
index="win_idx" EventCode=4625 earliest=-5m
Account_Name!="Administrator" Account_Name!="Admin" Account_Name!="User"
| stats count by Account_Name, host, Source_Network_Address
| where count>=3
| eval username=mindex(split(Account_Name, "@"), 0)
```

Alert type

Scheduled

Real-time

Run on Cron Schedule ▼

Time Range

Last 5 minutes ▶

Cron Expression

*/2 * * * *

e.g. 00 18 *** (every day at 6PM). [Learn More](#)

Expires

24

hour(s) ▼

Trigger Conditions

Trigger alert when

Number of Results ▼

is greater than ▼

0

Trigger

Once

For each result

Throttle ? ☒

Suppress triggering for

10

minute(s) ▼

Trigger Actions

Cancel

Save

4) Under **Trigger Conditions**,

Trigger alert when: Number of Results > 0

Trigger: Once

Throttle: On

Suppress triggering for : 10 minutes

Trigger Actions: Click +Add Actions > Send to SOAR

SOAR Instance: SOAR (will populate in drop-down when connected)

Sensitivity: "TLP: Red" from drop-down

Severity: "Default: High" from drop-down > Save

Create Alert

×

Throttle ? ☐

Trigger Actions

+ Add Actions ▾

When triggered ▾

splunk SOAR

Send to SOAR

Remove

Note: If your Splunk SOAR connection is not successful, the system saves events to send to Splunk SOAR later. Events with key names containing periods will not be saved or sent after the connection is reestablished.

SOAR Instance

SOAR ▾ ×

*Forward results to this Server/Asset.

Sensitivity

TLP: Red ▾ ×

*Sensitivity level for these events.

Severity

Default: High ▾ ×

*Severity of these events.

Label

Label for these events.

Container Name

Search Name ▾

Container name in SOAR.

Grouping

☐ Collect artifacts into one container

Applies when ES or CIM are installed.

Worker Set

Select... ▾ ×

Select adaptive response relay worker set. Use "local" for non-adaptive response relay server.

Cancel

Save

Next Steps

Creating the Brute Force Playbook in SOAR – Refer **18_Creating_BruteForce_Playbook_SOAR_V1.pdf**.

Page 5 of 5