


Creating Brute Force Playbook in SOAR and Triggering it on Alert from Splunk Enterprise (Search Head)

Summary


This document explains in detailed steps for creating a playbook in SOAR and Configuring it before starting to test with the Brute Force use case.

1. Create a playbook in SOAR

- 1) In **SOAR UI**,
Click Home menu > Playbooks

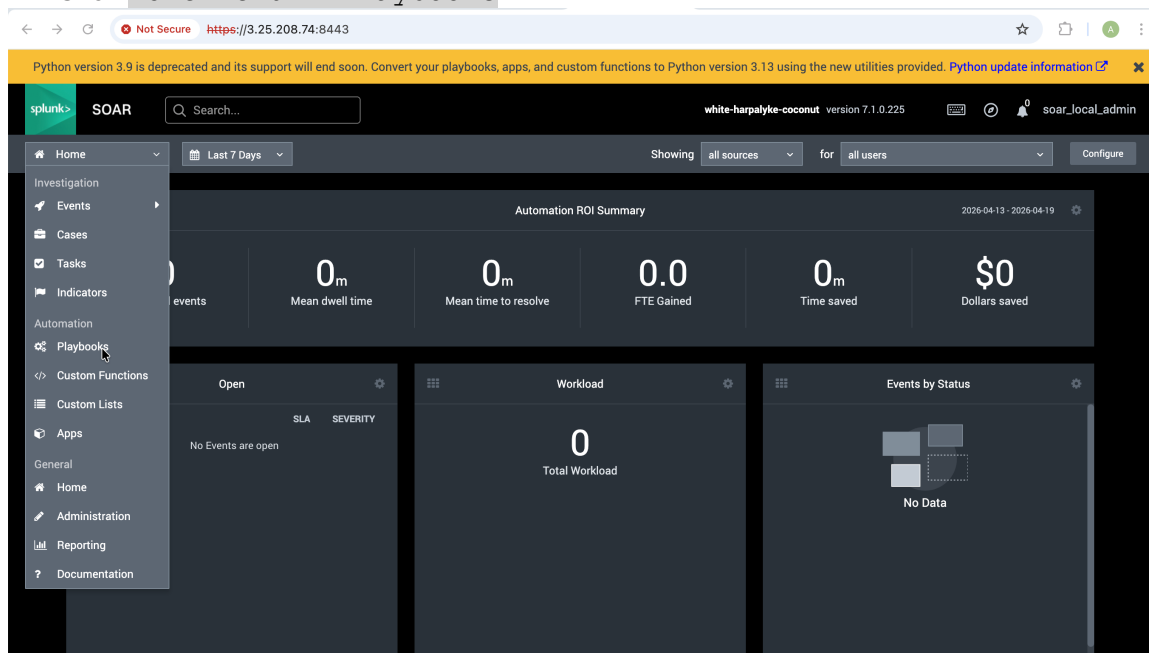


- 2) Click **+Playbook** on top-right

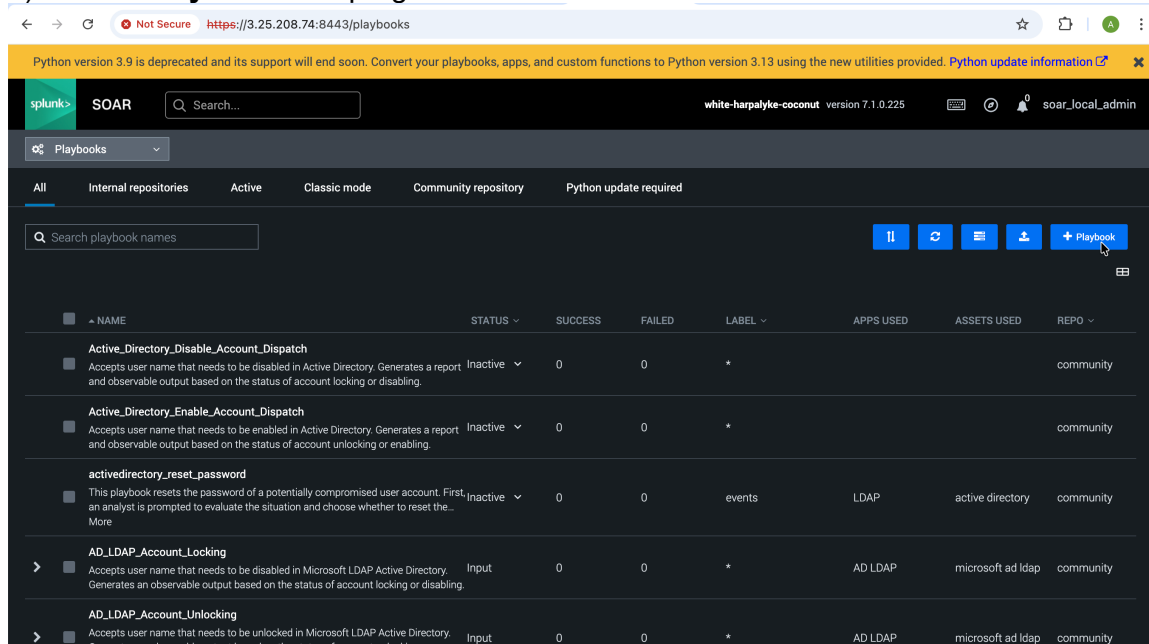


3) Select a **playbook type**

Automation > Select

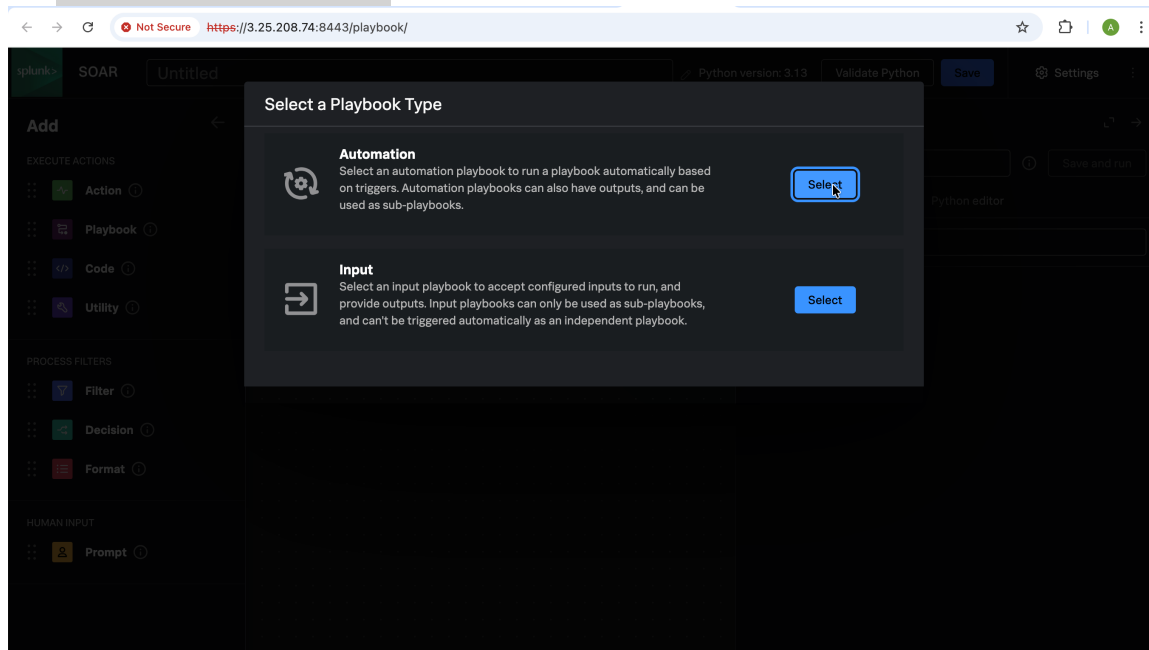


4) A playbook screen will open in new tab

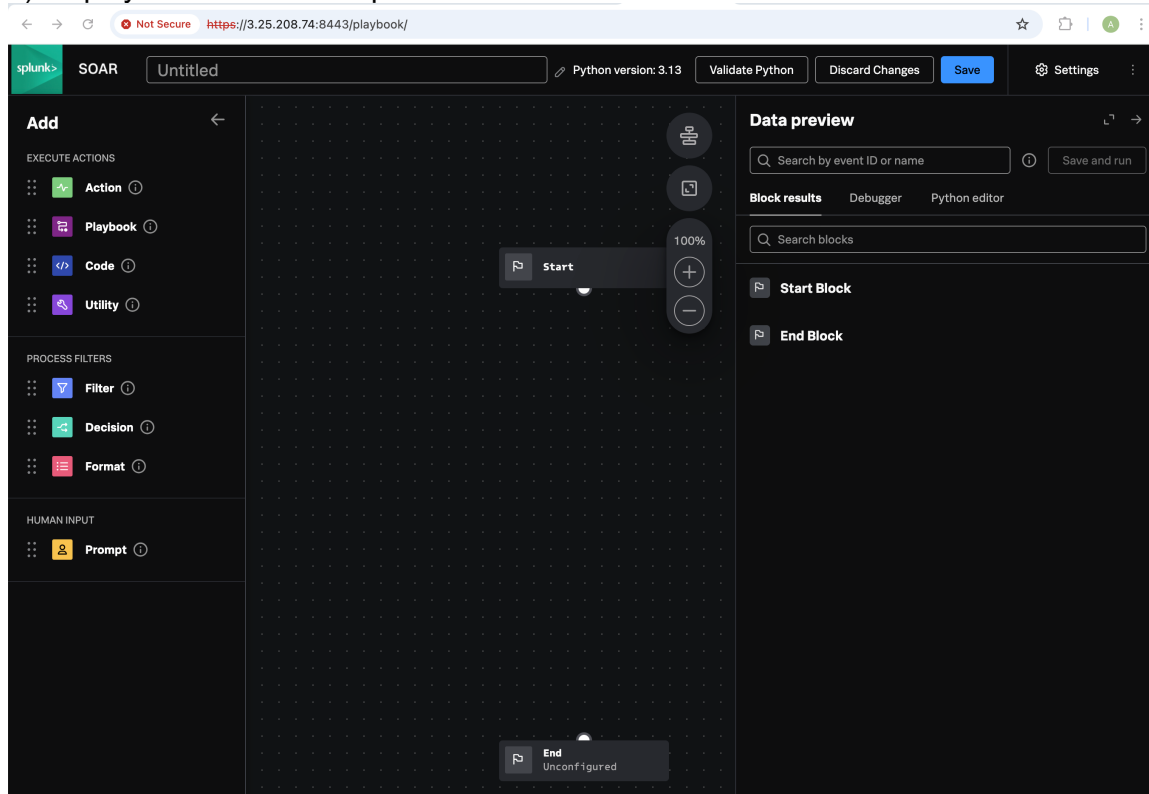


2. Make an Initial Configuration

1) Click **Settings** on top-right

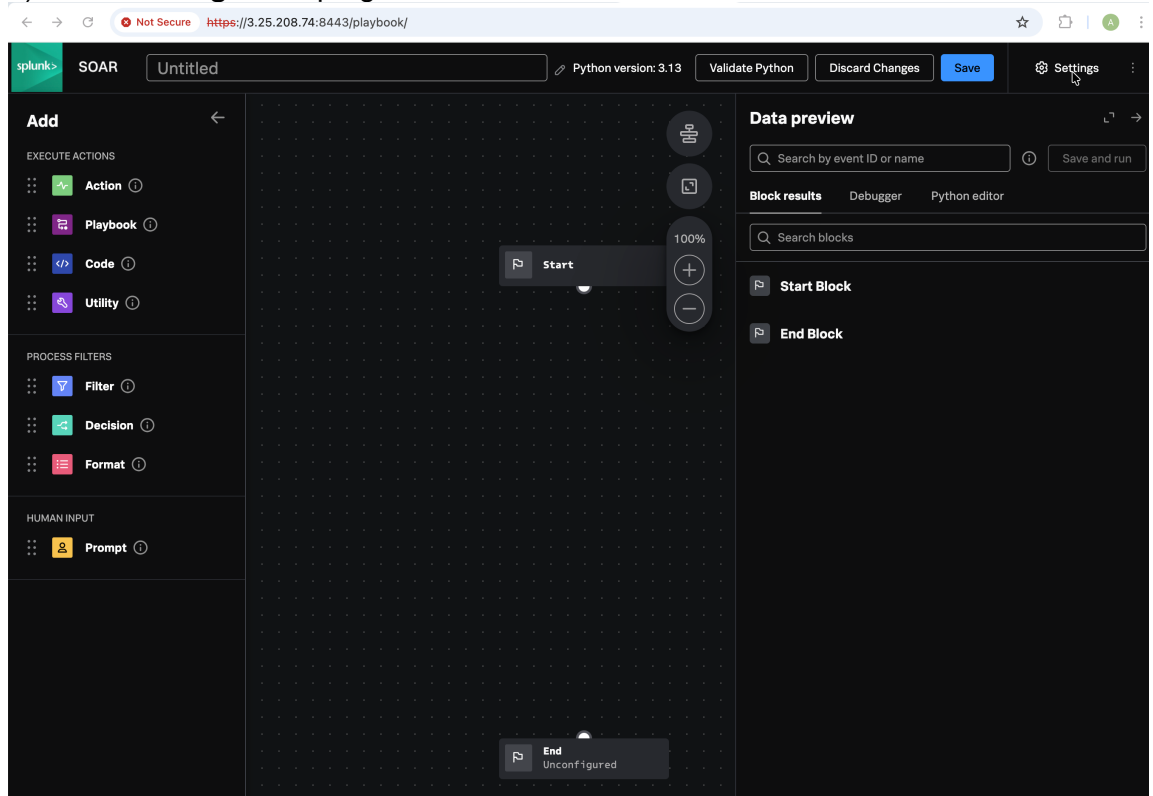


2) Do the following:


Operates on: events
Category: Uncategorized
Run as: automation
Run automatically when: Artifact created
Toggle on Logging and Active
Save as: AD_CLIENT-USER_Account_Locking > Save

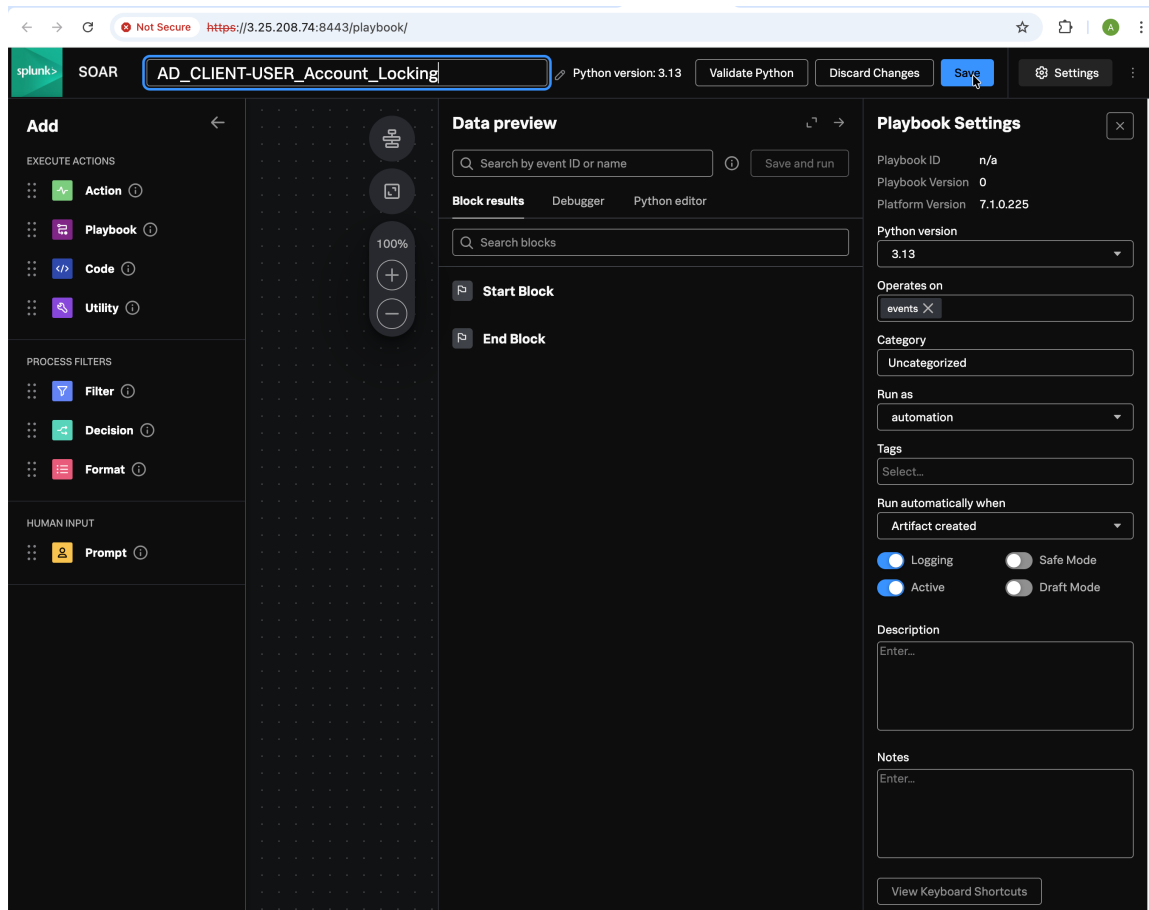

- 3) In Save Playbook dialog,
Repo to save to: local
Please enter a comment: Initial config for AD playbook >
 Save

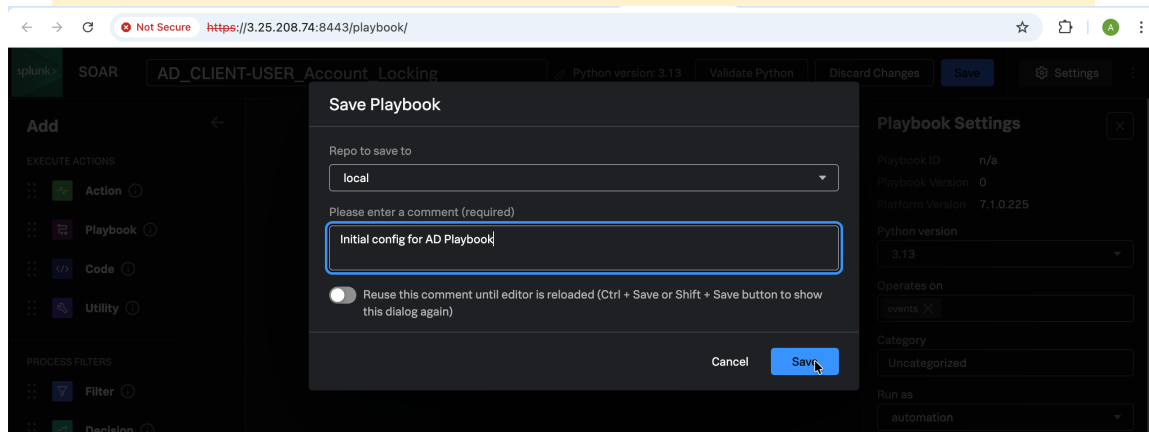


- 4) Click “X” on top-right to **close the Settings pane** on the right after saving.
You will see a **Start** and **End** on Flowchart Screen

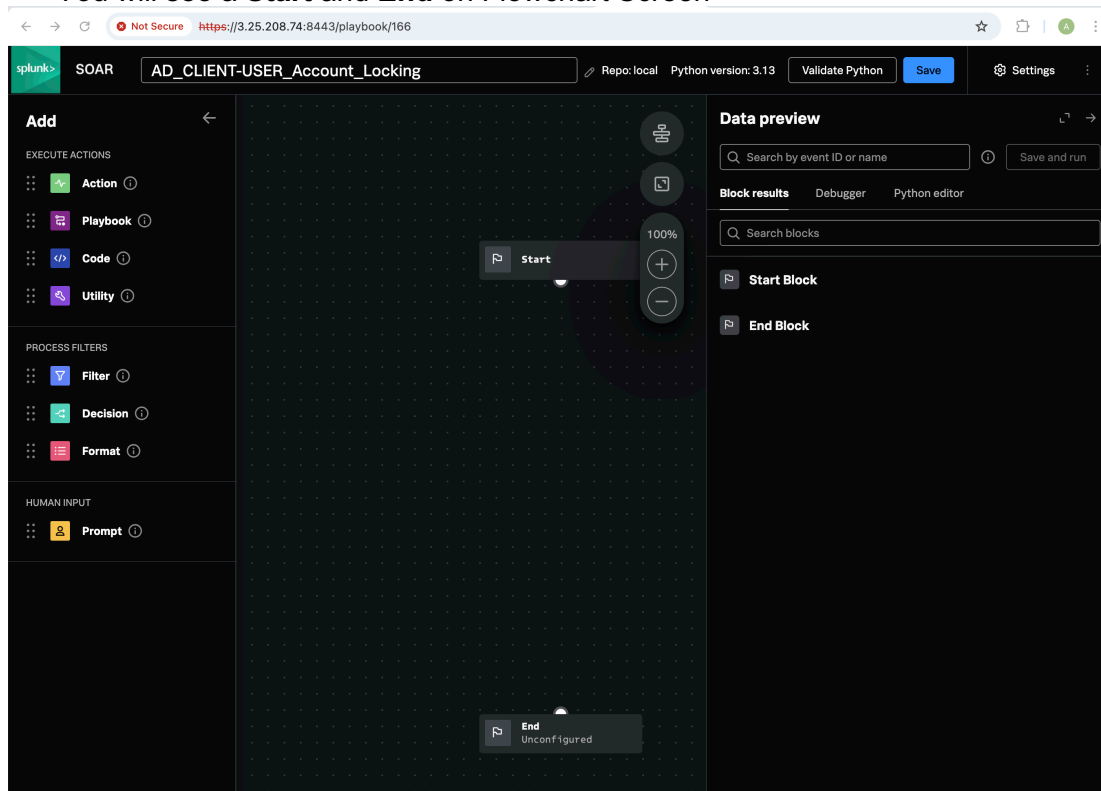


3. Add an Action block to execute

- 1) From the left pane, **Add**:
Under **Execute Actions**, Drag and drop **Action block** between **Start** and **End** Flowchart pane

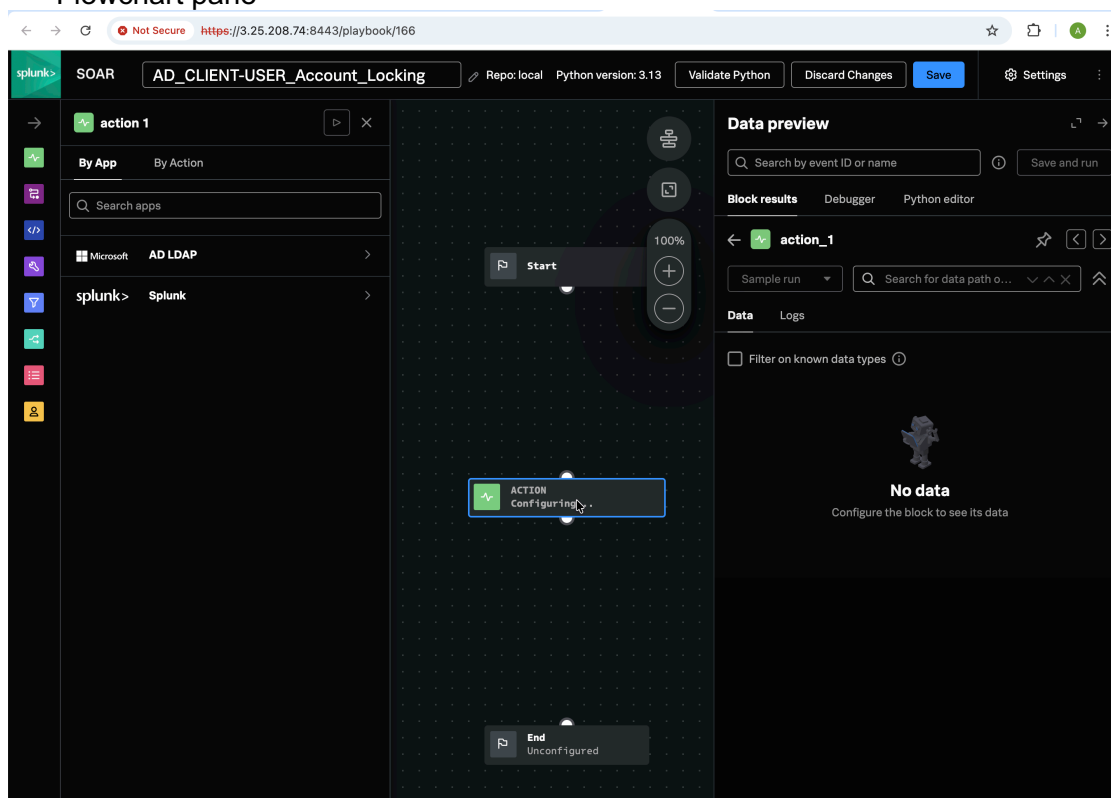

- 2) In the left pane, Click on **Microsoft AD LDAP** under **By App** tab of **action 1**
Click **disable account**

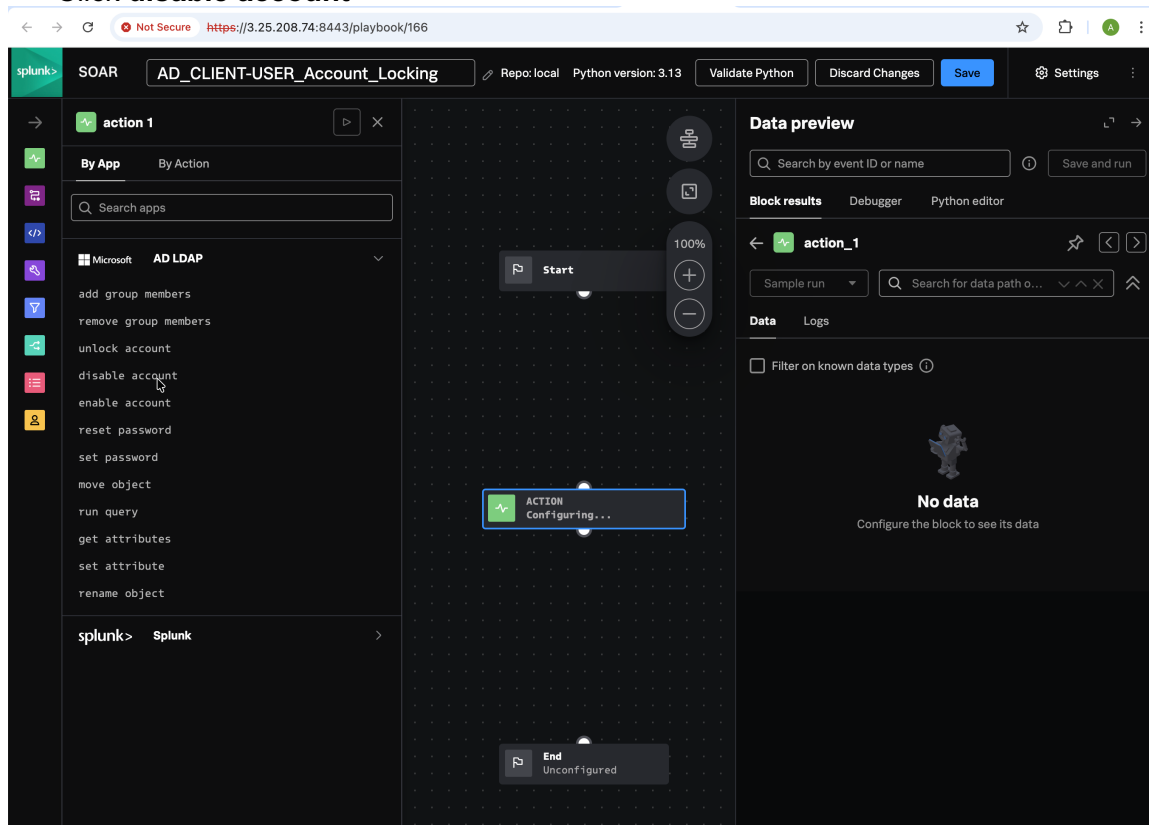


- 3) Do the following:

Asset: ad_admin

Inputs: check "use_sameaccountname"

user: artifacts > cef > + > type "username" > Save

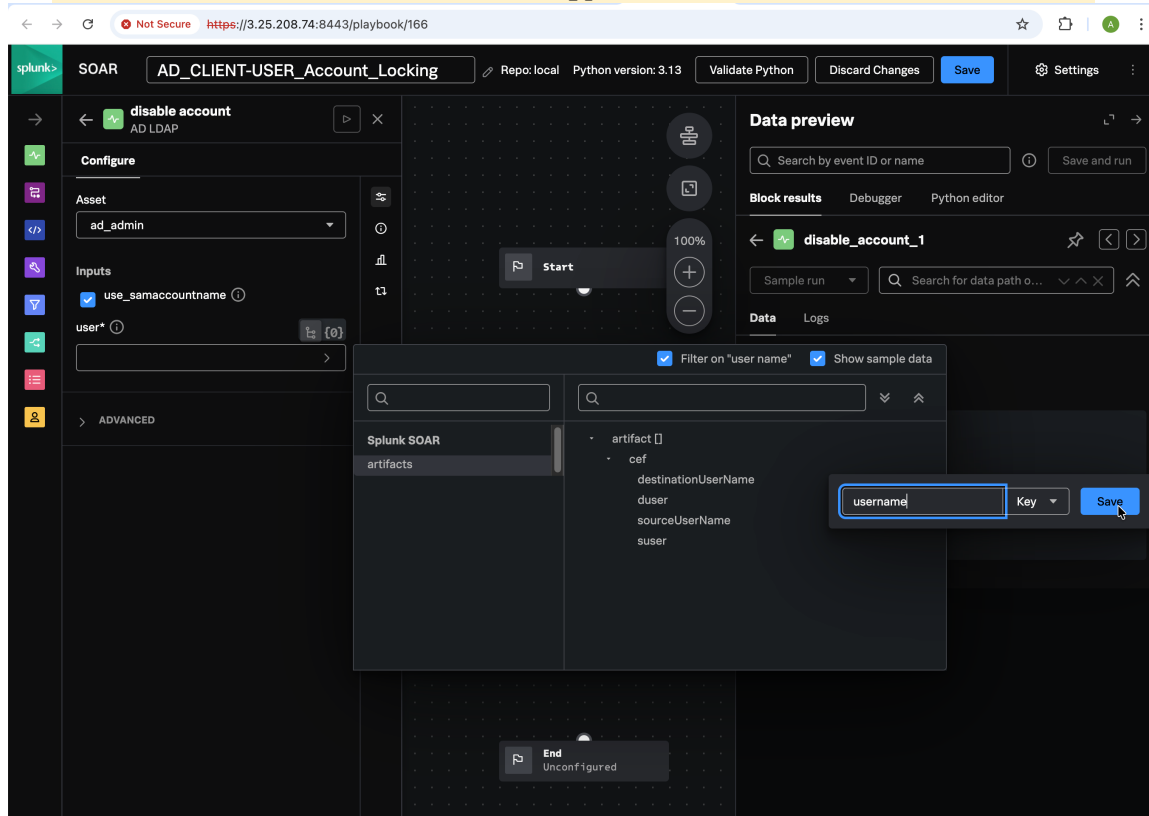

4) Select “username” (artifact:*.cef.username)

The screenshot shows the Splunk SOAR interface for the 'AD_CLIENT-USER_Account_Locking' playbook. The 'disable account' action is configured with the asset 'ad_admin'. In the 'Inputs' section, 'use_samaccountname' is checked. The 'Data preview' panel shows a search for 'disable_account_1' with a filter on 'user name'. The 'Data' section shows a list of artifacts with 'username' highlighted.

- 5) Under **Advanced**,
Scope: Select All Artifacts
Reviewer: Reviewer user or role > Apply

The screenshot shows the Splunk SOAR interface for the 'AD_CLIENT-USER_Account_Locking' playbook. The 'disable account' action is configured with the asset 'ad_admin'. In the 'Inputs' section, 'use_samaccountname' is checked. The 'Advanced' section is expanded, showing 'Scope' set to 'All Artifacts' and 'Reviewer' set to 'Reviewer user or role'. The 'Data preview' panel shows a search for 'disable_account_1' with a filter on 'user name'. The 'Data' section shows a list of artifacts with 'username' highlighted.

6) Drag and Draw lines between **Start > Action > End**

The screenshot shows the Splunk SOAR interface for a playbook named "AD_CLIENT-USER_Account_Locking". The left sidebar shows the "Add" section with options like "Action", "Playbook", "Code", "Utility", "Filter", "Decision", "Format", and "Prompt". The main canvas shows a flowchart with a "Start" node, an "ACTION disable account" node, and an "End Unconfigured" node. The right panel shows the "Data preview" for the "disable_account_1" action, displaying inputs like "use_samaccountname: true" and "user: artifact:*.*.cef.username", and results including "status: success" and "account_status: disabled".

7) Click on **Save**

Repo: local

Comment: Final Config of AD playbook > Save

The screenshot shows the "Save Playbook" dialog box in the Splunk SOAR interface. The "Repo to save to" dropdown is set to "local". The "Please enter a comment (required)" text box contains the text "Final config of AD Playbook". There is a checkbox labeled "Reuse this comment until editor is reloaded (Ctrl + Save or Shift + Save button to show this dialog again)" which is currently unchecked. The "Save" button is highlighted.

Next Steps

Simulating Brute Force attack on Windows Client using Domain User Account Credentials and Verifying Playbook execution – Refer [19_Implementing_BruteForce_Attack_WinClient_V1.pdf](#).