


Connecting Splunk Components Part 1 – Connect Search Head with Indexer

Summary


This document shows the steps involved in connecting the Search Head Component with the Indexer Component of Splunk.

1. Create New Admin User in Indexer (Service Credentials)


1) Login to the Indexer as Administrator

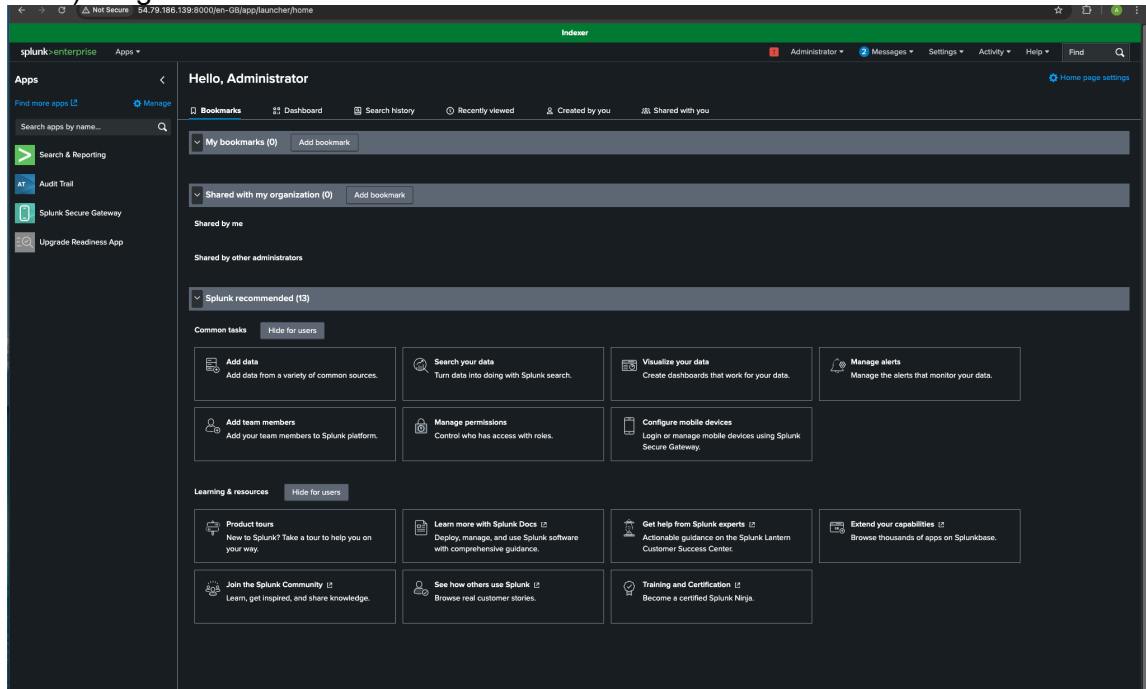

2) Navigate to Settings > Users and Authentication: Users

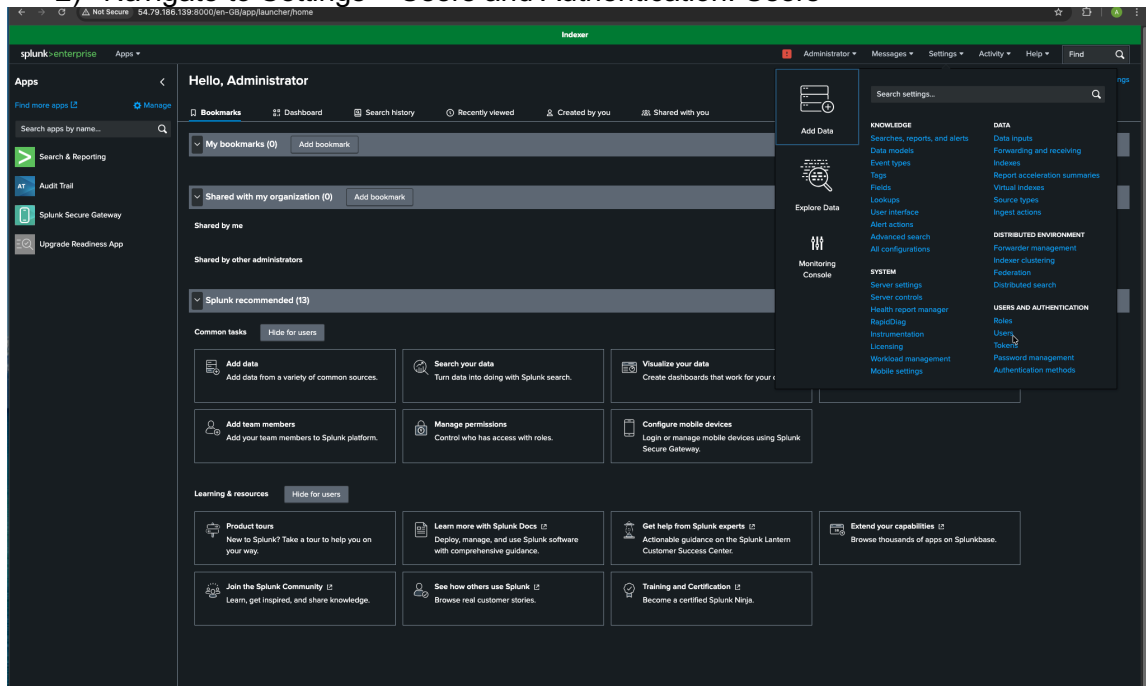

3) Click on “New User” in Users Page

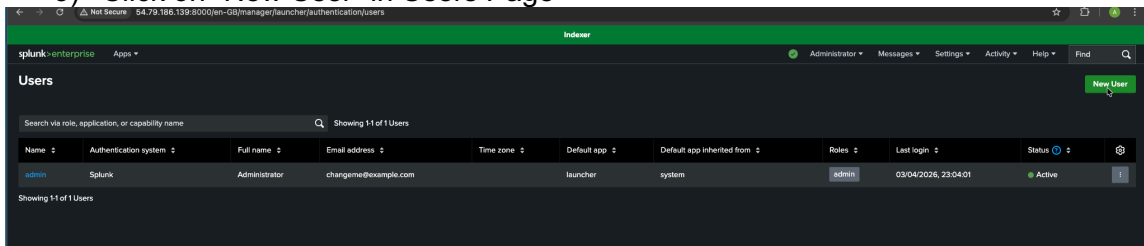

4) Do the following:


Name: <Username> (Ex: splunk_service_user)

Password: Set and Confirm Password (\$!unk\$er_u\$er123)


Assign Roles: Select “admin” from available items

Uncheck the second checkbox – “Require password change on next login”

Check the third checkbox – “I acknowledge that users assigned to roles with the fsh_manage capability can send search results data outside the compliant environment.” > Create

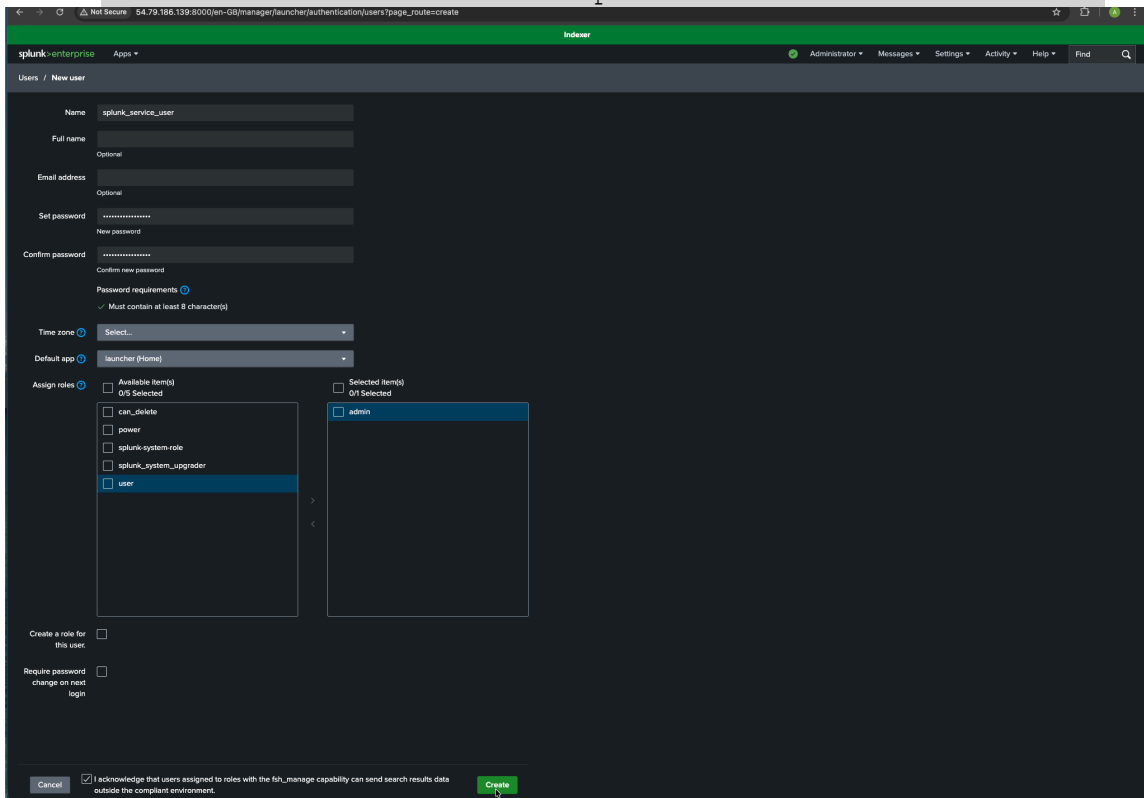


5) Verify if Admin User is Created

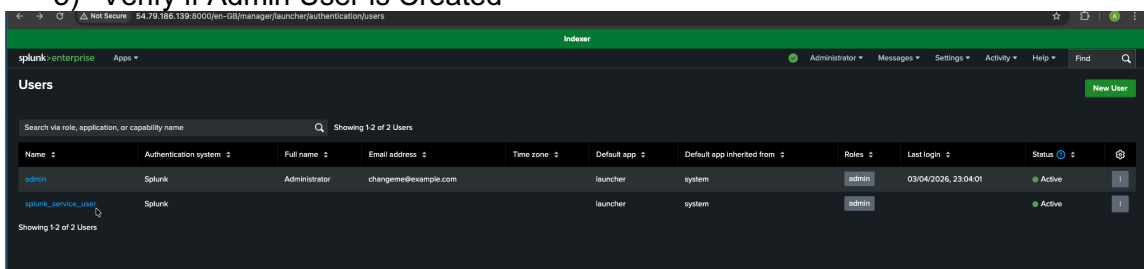


2. Add Indexer as Search Peer in Search Head


1) Login to Search Head UI as Administrator

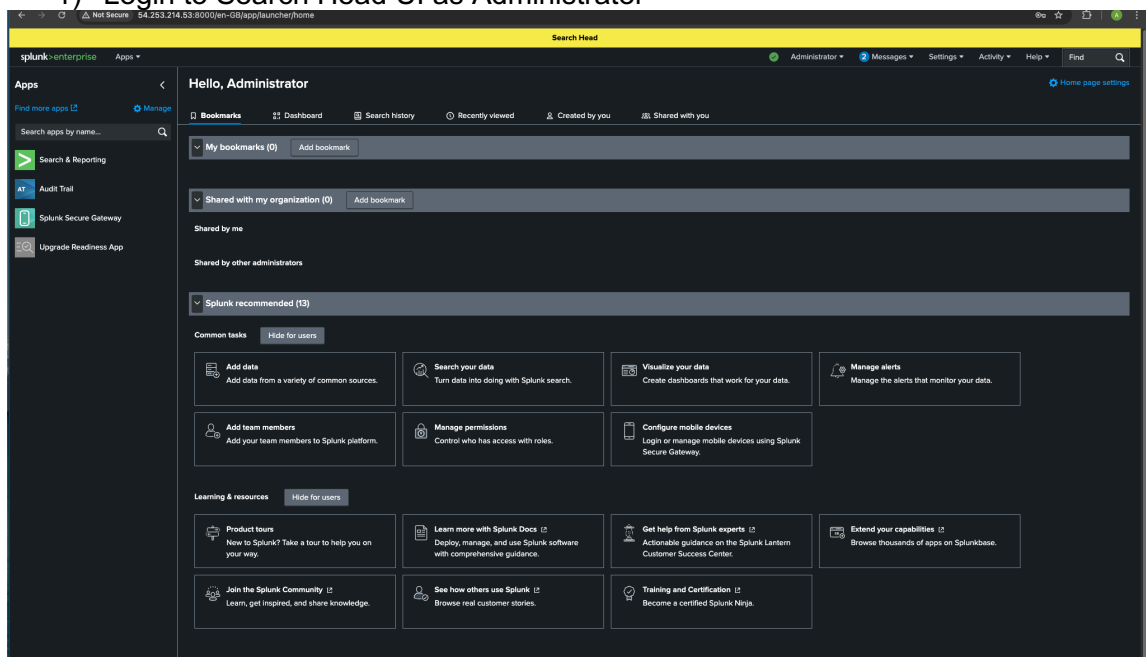


2) Go to Settings > Distributed Environment: Distributed Search

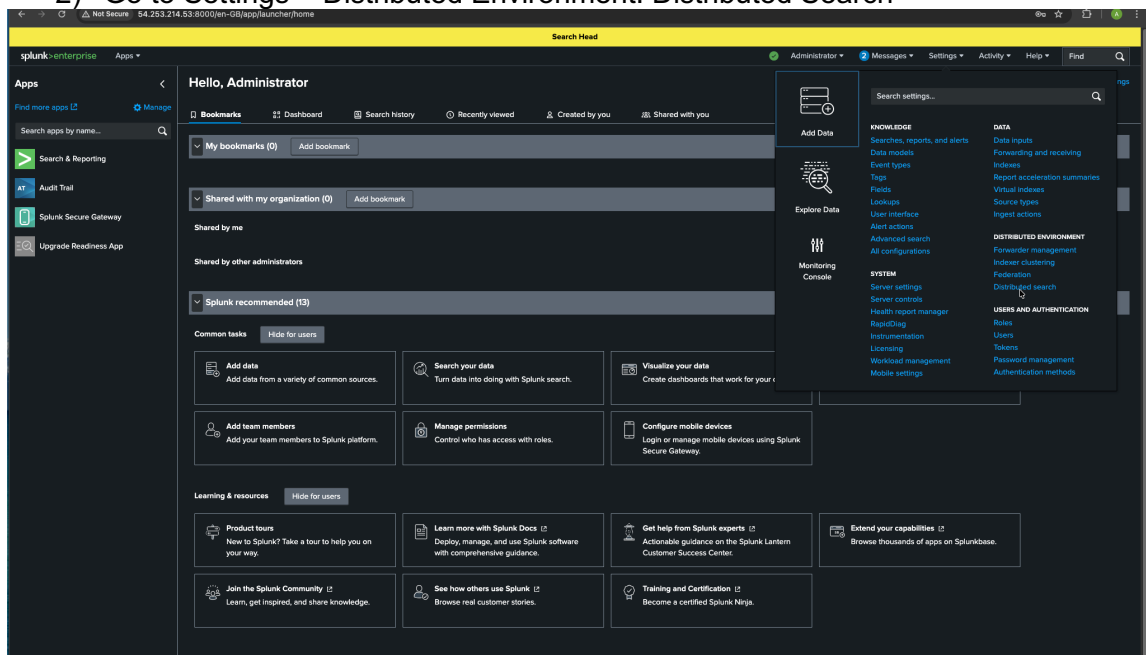

3) Choose Search Peers

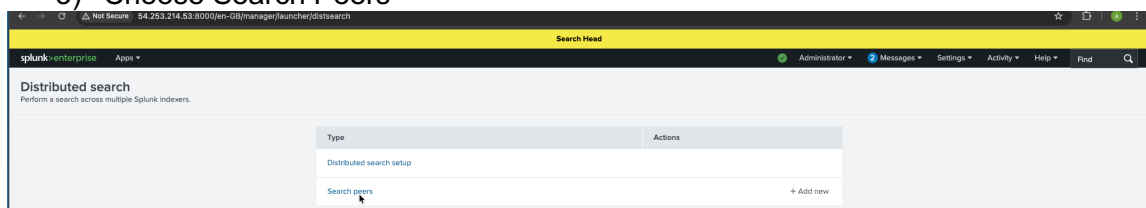

4) In Search Peers Page, Click New Search Peer

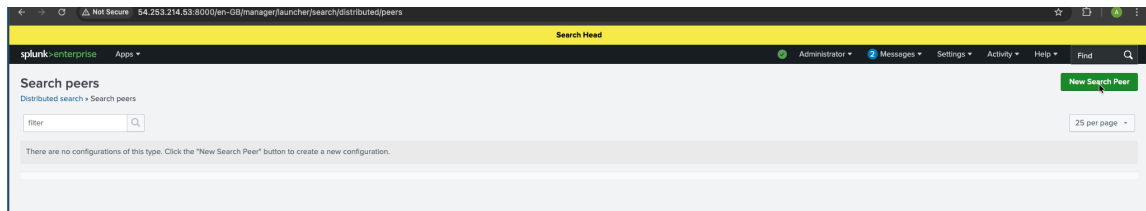


5) Enter the following:

Peer URI: `https://<Indexer_PrivateIP>:8089`


Remote username: `<indexer_uname>` (Ex: `splunk_service_user`)

Remote password: `<indexer_upwd>` (Ex: `$p!unk$er_u$er123`)

Confirm Password: `<indexer_ucpwd>` (Ex: `$p!unk$er_u$er123`) > Save

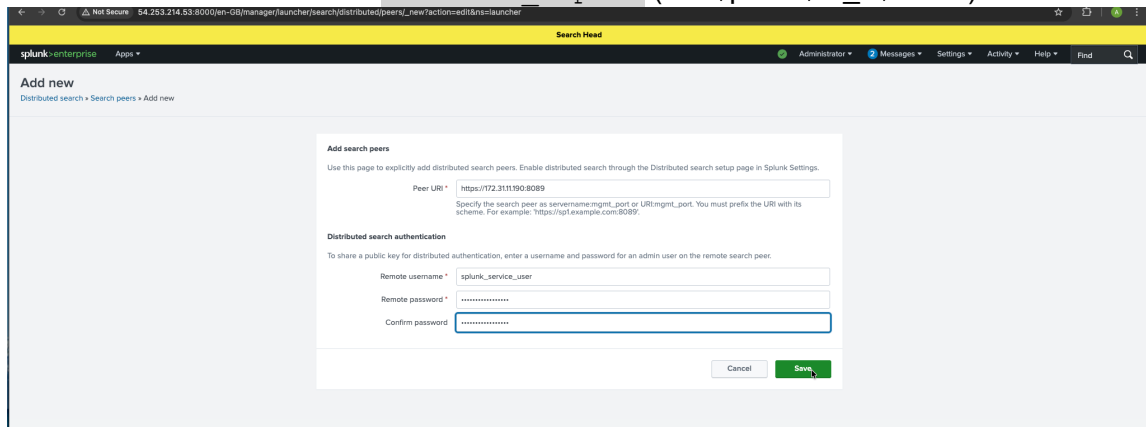


6) Search Peer added

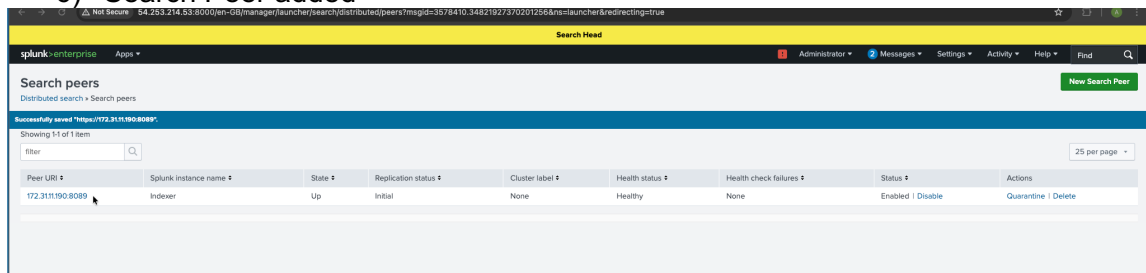


3. Verify the Connection between Search Head and Indexer

1) Go to Search and Reporting app on the Search Head

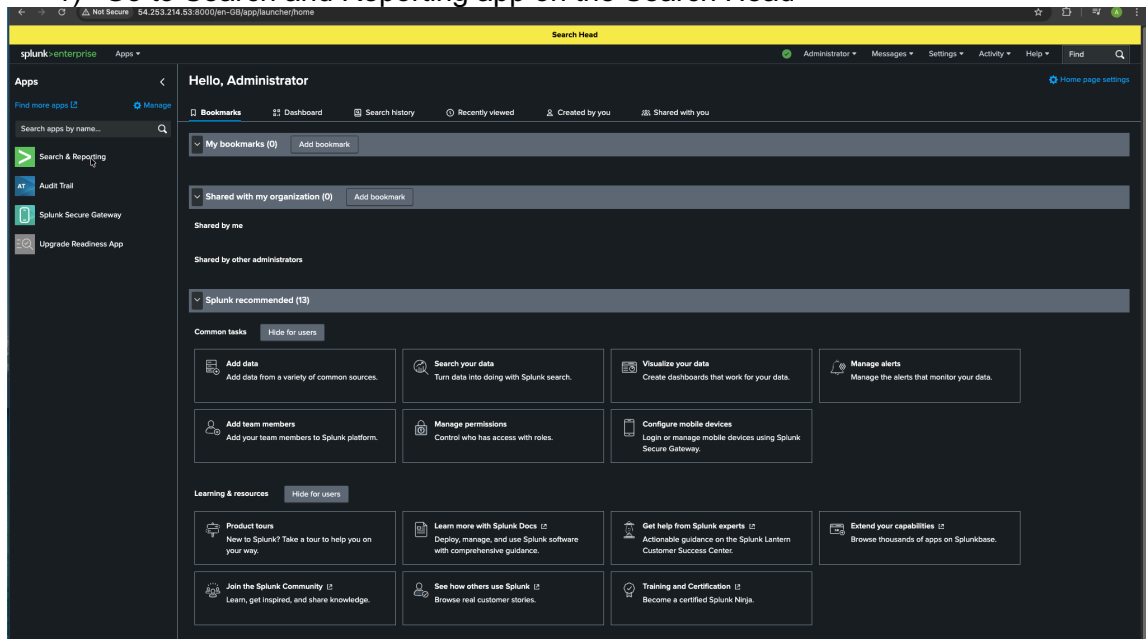


2) Run the following query to check the connectivity:

`index="_internal"`

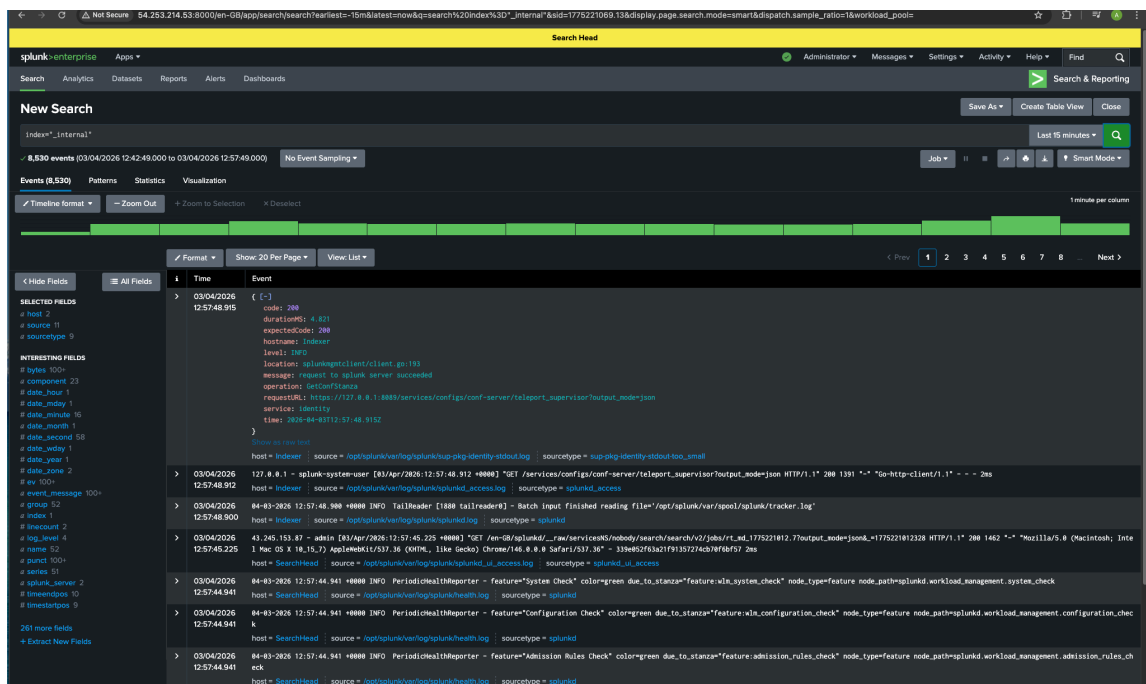

3) If the search results contain **logs from two different hosts** (the IP addresses of the Search Head and Indexer), then the connection is successful.

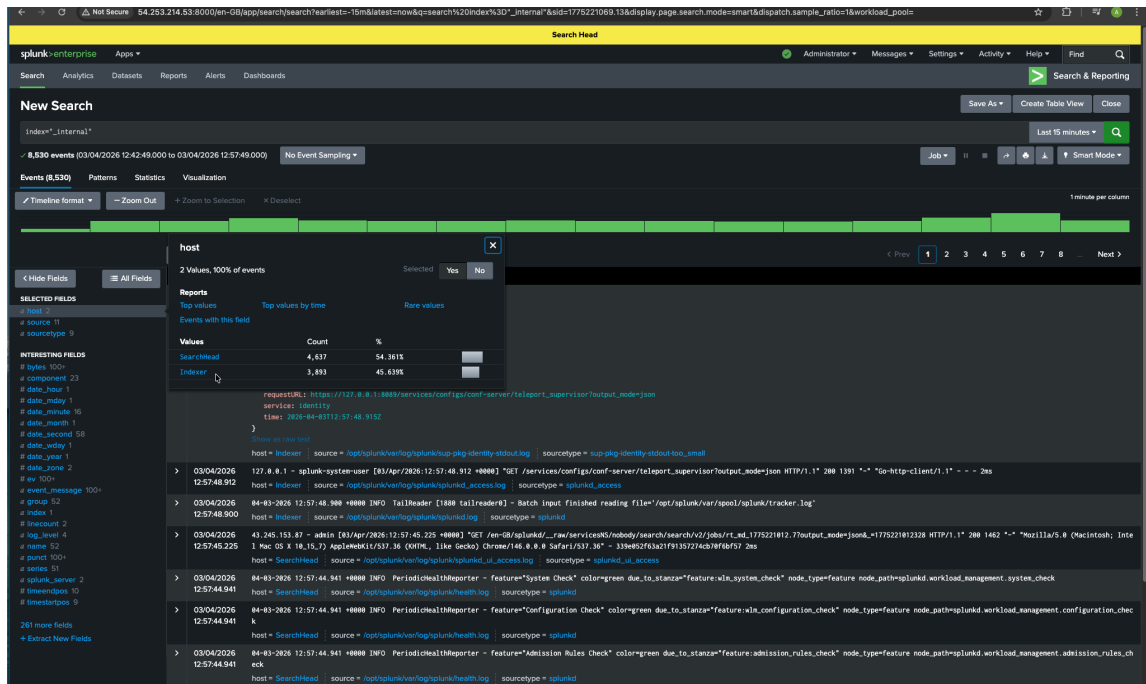

4. Next Steps

Connect Heavy Forwarder (Intermediate) with Indexer – Refer [06_Connect_HeavyForwarder_with_Indexer_V1.pdf](#).