


Connecting Splunk Components Part 2 – Connect Heavy (Intermediate) Forwarder with the Indexer

Summary


This document describes the steps involved in connecting the Intermediate Forwarder with the Indexer.

1. Enable Receiving Port in Indexer


1) Login to the Indexer UI

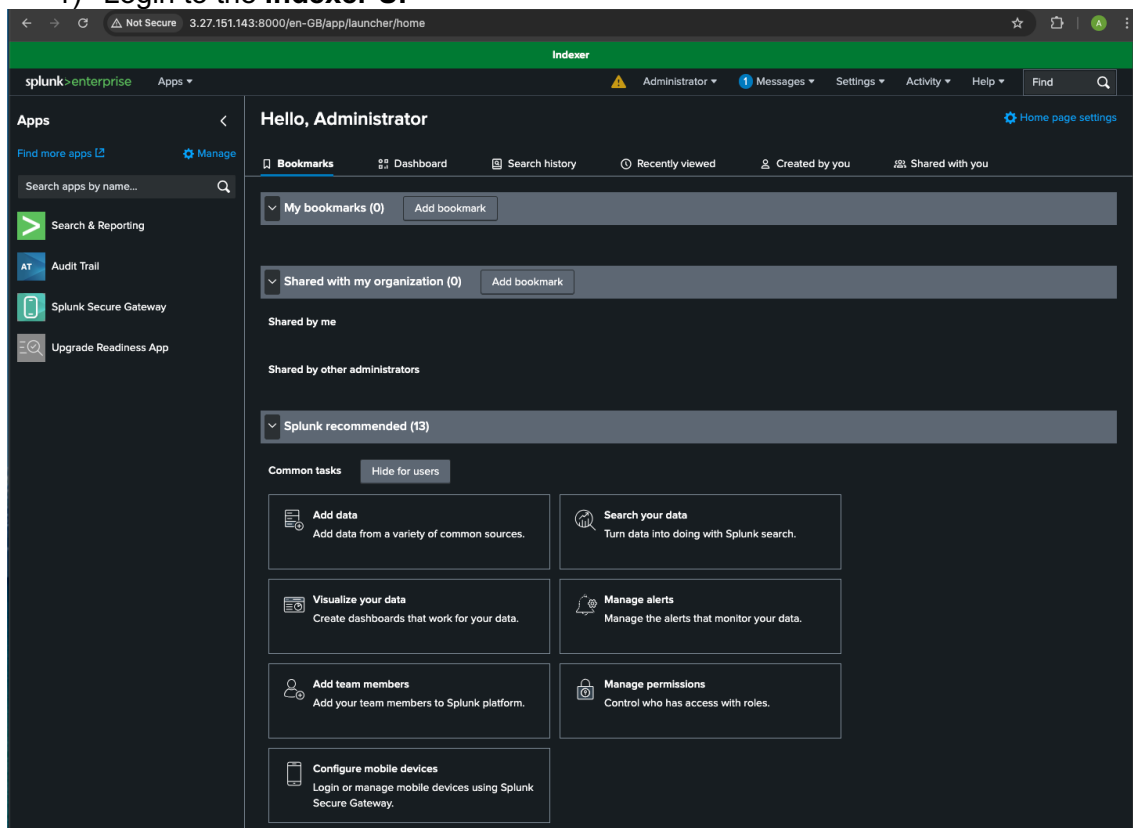

2) Go to Settings > Data: Forwarding and Receiving

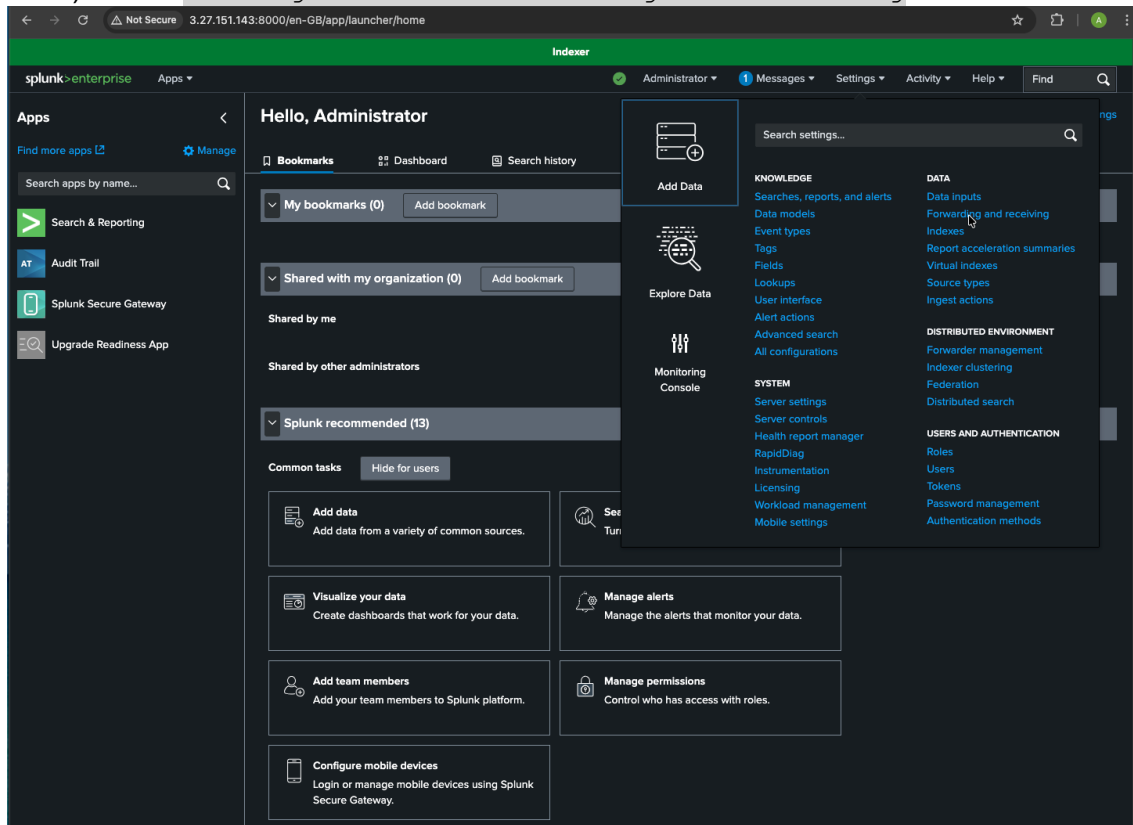

3) Under Receive Data, Click Add New in the Configure Receiving section

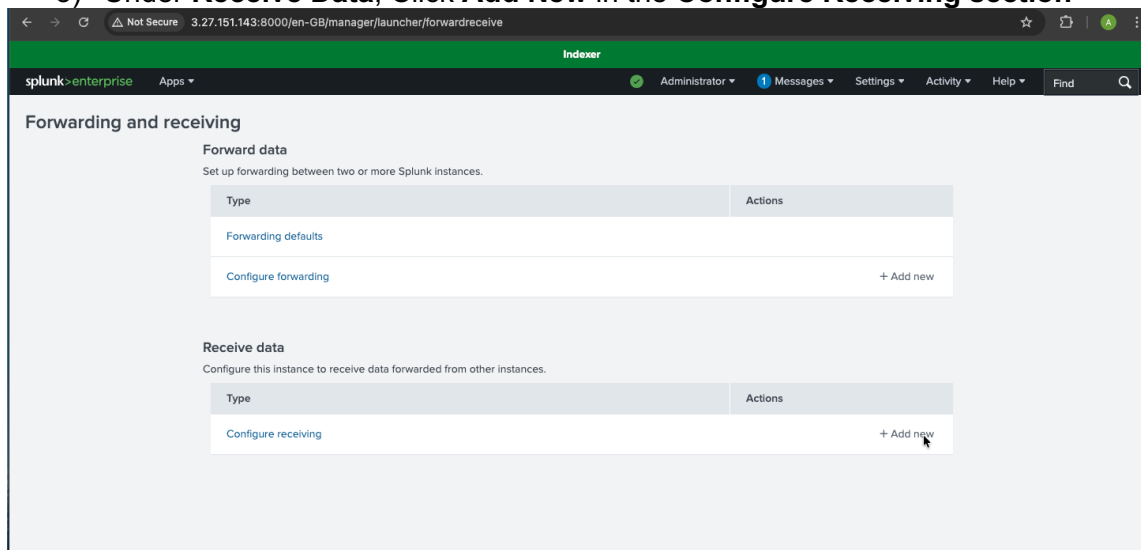

- 4) In the **New Receiving Port** Page:
Listen on this port: 9997 > Save

The screenshot shows the Splunk Enterprise web interface for the Indexer. The page title is 'Add new' with a breadcrumb 'Forwarding and receiving > Receive data > Add new'. A modal dialog titled 'Configure receiving' is open, asking to 'Set up this Splunk instance to receive data from forwarder(s)'. It contains a text input field labeled 'Listen on this port' with the value '9997'. Below the field, it says 'For example, 9997 will receive data on TCP port 9997.' At the bottom right of the dialog are 'Cancel' and 'Save' buttons. The 'Save' button is green and has a mouse cursor over it.


- 5) Port **9997** is enabled on the Indexer to receive data from the Heavy Forwarder.

The screenshot shows the 'Receive data' page in the Splunk Enterprise web interface. A green button 'New Receiving Port' is in the top right. A blue banner states 'Successfully saved "9997"'. Below, it says 'Showing 1-1 of 1 item'. There is a search filter box and a '25 per page' dropdown. A table lists the configuration:


Listen on this port	Status	Actions
9997	Enabled Disable	Delete

2. Enable Forwarding in Intermediate Forwarder


1) Login to the Heavy Forwarder UI

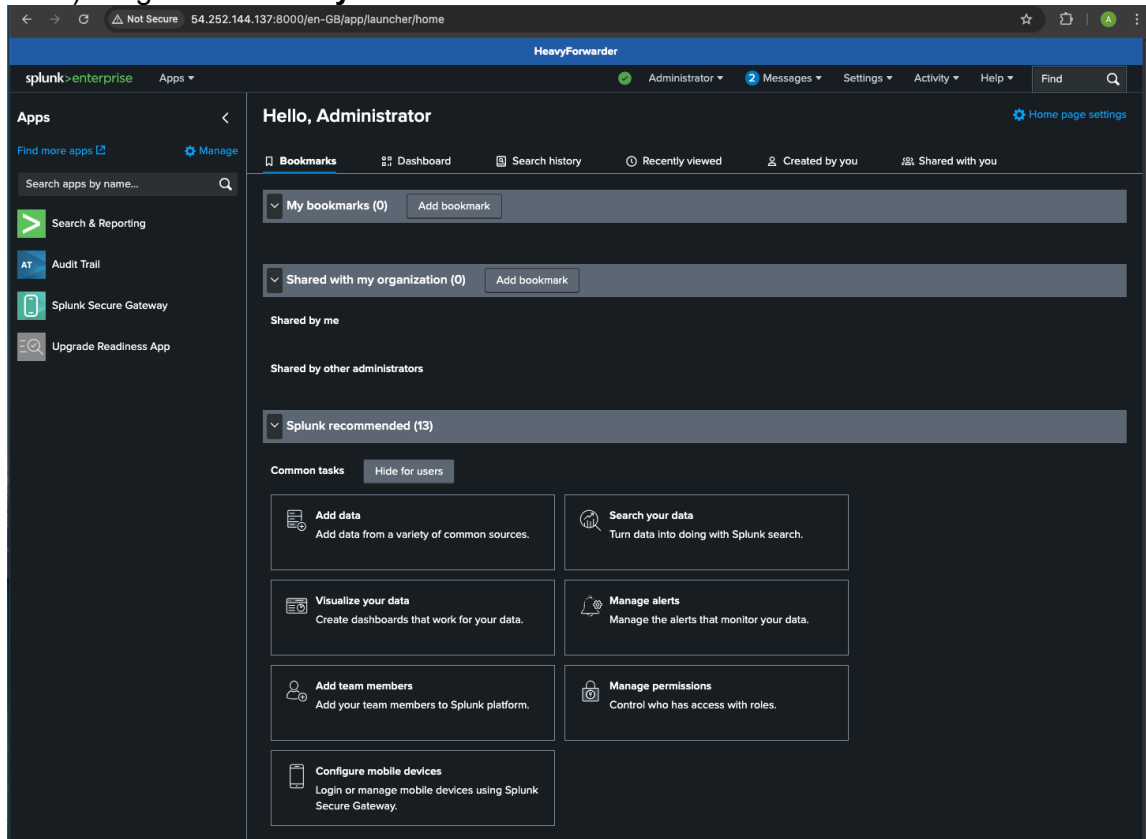

2) Go to Settings > Data: Forwarding and Receiving


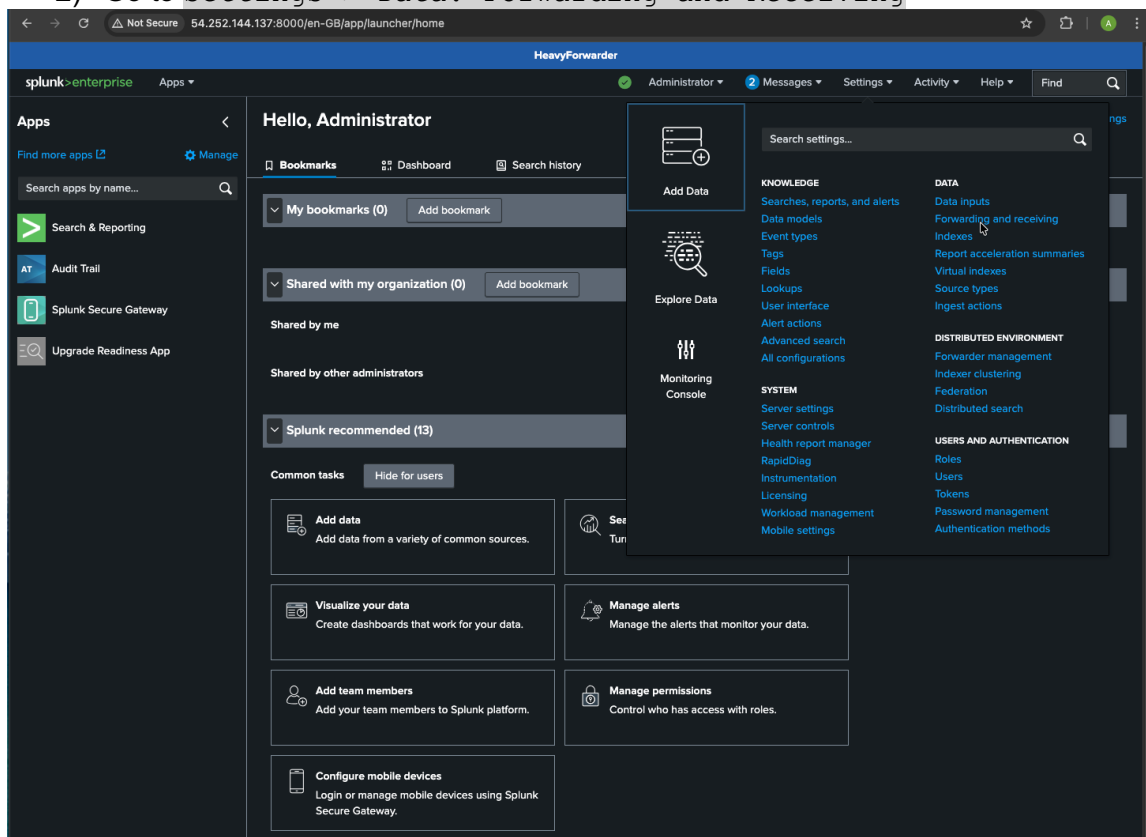


3) Under **Forward Data**, Click **Add New** in the **Configure Forwarding** section

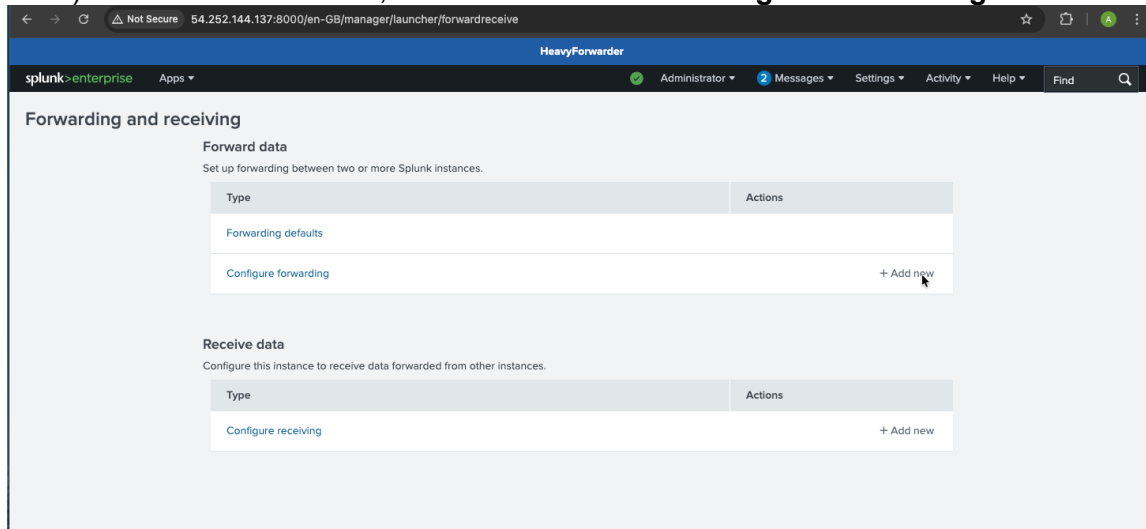

4) In the **New Forwarding Host** dialog:

Host: <Indexer PrivateIP>:9997 > Save

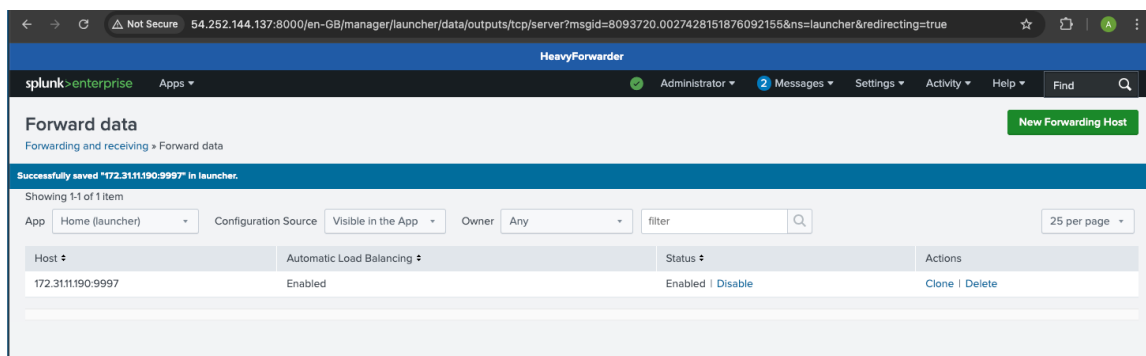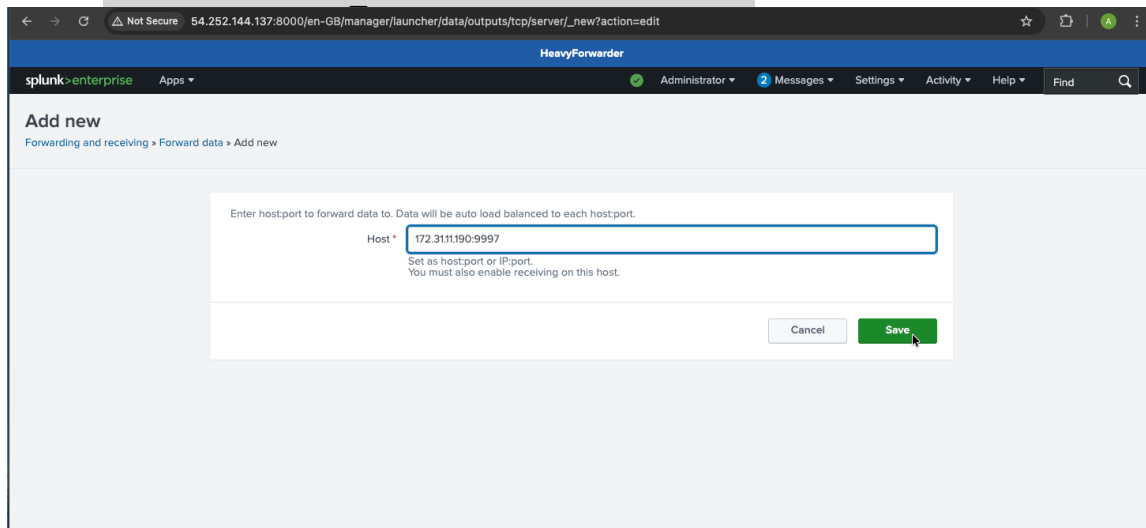

3. Verify the connection

- 1) In **Indexer UI**, Go to **Search and Reporting app**, run the following:
`index=_internal`

Check the **host** in **Selected Fields Section** on left pane. You should see both **Indexer** and **Heavy Forwarder** hostname/IP address listed there. This confirms the Indexer and Heavy Forwarder are connected successfully.

The screenshot shows the Splunk Enterprise Indexer Search and Reporting app interface. The search bar contains the query `index=_internal`. The search results show 5,390 events. The 'host' field is selected in the 'Selected Fields' section on the left. The 'Reports' table shows the following data:

Values	Count	%
Indexer	4,731	87.77%
HeavyForwarder	659	12.22%

- 2) In **Search Head UI**,
 Check the **host** in **Selected Fields Section** on left pane. You should see all three components (**Search Head**, **Indexer** and **Heavy Forwarder**) **hostname/IP addresses** listed there. This confirms that all 3 components are connected successfully.

The screenshot shows the Splunk Enterprise Search Head Search and Reporting app interface. The search bar contains the query `index=_internal`. The search results show 12,065 events. The 'host' field is selected in the 'Selected Fields' section on the left. The 'Reports' table shows the following data:

Values	Count	%
Indexer	4,259	35.3%
SearchHead	4,837	33.46%
HeavyForwarder	3,769	31.23%

4. Next Steps

Onboarding data from the Linux Server – Refer [07_Onboarding_data_from_Linux_Server_V1.pdf](#).