

All the elements of num are made of English alphabets and digits.

Output Format

Print ten space-separated integers in a single line denoting the frequency of each digit from 0 to 9.

Sample Input 0

a11472o5t6

Sample Output 0

0 2 1 0 1 1 1 1 0 0

Explanation 0

In the given string:

- 1 occurs two times.
- . 2, 4, 5, 6 and 7 occur one time each.

The remaining digits 0, 3, 8 and 9 don't occur at all.

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
 2
    int main()
3 ₹ {
4
        char str[1000];
        scanf("%s",str);
5
        int hash[10]=\{0,0,0,0,0,0,0,0,0,0,0,0\};
 6
        int temp;
        for(int i=0;str[i]!='\0';i++)
8
9 1
        {
            temp=str[i]-'0';
10
11
            if(temp<=9&&temp>=0)
12 v
            {
13
                 hash[temp]++;
14
            }
15
16
        for(int i=0;i<=9;i++)</pre>
17 v
        {
18
            printf("%d ",hash[i]);
19
        }
20 }
```

		Input	Expected	Got	
w4n88j12n1	~	a11472o5t6	0 2 1 0 1 1 1 1 0 0	0 2 1 0 1 1 1 1 0 0	~
	~	lw4n88j12n1	0 2 1 0 1 0 0 0 2 0	0 2 1 0 1 0 0 0 2 0	~
v888861256338ar0ekk 1 1 1 1 2 0 1 2 0 5 0 1 1 1 2 0 1 2 0 5 0 v	~	1v888861256338ar0ekk	1 1 1 2 0 1 2 0 5 0	1 1 1 2 0 1 2 0 5 0	~

Question **2**Correct
Marked out of 1.00
Flag question

Today, Monk went for a walk in a garden. There are many trees in the garden and each tree has an English alphabet on it. While Monk was walking, he noticed that all trees with vowels on it are not in good state. He decided to take care of them. So, he asked you to tell him the count of such trees in the garden.

Note : The following letters are vowels: 'A', 'E', 'I', 'O', 'U', 'a', 'e', 'i', 'o' and 'u'.

Input:

The first line consists of an integer T denoting the number of test cases.

Each test case consists of only one string, each character of string denoting the alphabet (may be lowercase or uppercase) on a tree in the garden.

Output:

For each test case, print the count in a new line.

Constraints:

```
1 \le T \le 10

1 \le length of string \le 10^5
```

SAMPLE INPUT

2 nBBZLaosnm

JHklsnZtTL

SAMPLE OUTPUT


1

Explanation

In test case 1, a and o are the only vowels. So, count=2

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
 2
    int main()
3 ₹ {
        int t;
scanf("%d",&t);
4
 5
        while(t--)
 6
7 ,
             char str[100000];
8
9
             int count=0;
             scanf("%s",str);
for(int i=0;str[i]!='\0';i++)
10
11
12 🔻
                 char c=str[i];
13
                 if((c=='a')||(c=='e')||(c=='i')||(c=='o')||(c=='u')||(c=='A')||(c=='E')||(c==
14
15
                 count++;
16
17
             printf("%d\n",count);
18
```

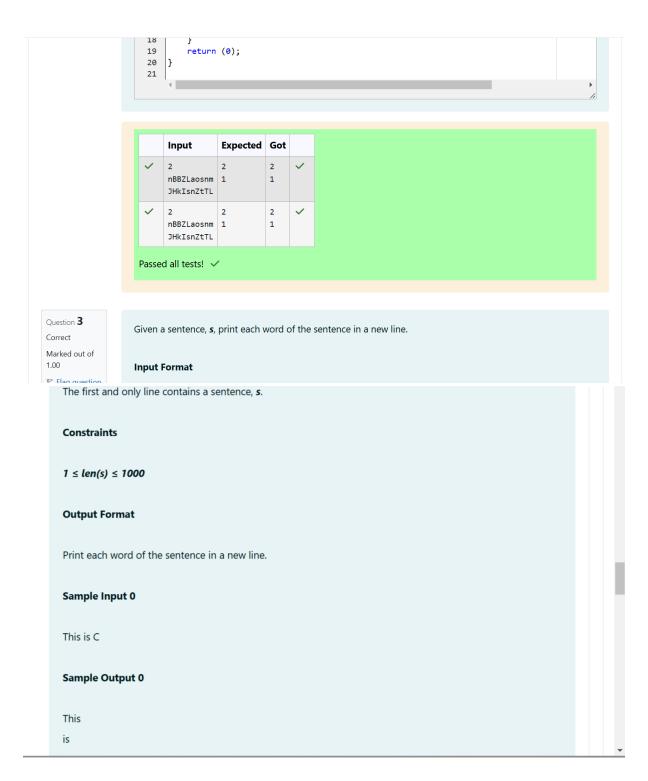

C

Explanation 0

In the given string, there are three words ["This", "is", "C"]. We have to print each of these words in a new line.

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
     int main()
{
 2
 3 ₹
          char s[1000];
scanf("%[^\n]s",s);
for(int i=0;s[i]!='\0';i++)
 4
 5
 6
 7
               if(s[i]!=' ')
printf("%c",s[i]);
 8
 9
               else
10
               printf("\n");
11
          }
12
13 }
```

	Input	Expected	Got	
~	This is C	This is C	This is C	~
~	Learning C is fun	Learning C is fun	Learning C is fun	~

Passed all tests! 🗸

Question **4**Correct Marked out of 1.00

Flag question

Input Format

You are given two strings, \boldsymbol{a} and \boldsymbol{b} , separated by a new line. Each string will consist of lower case Latin characters ('a'-'z').

Output Format

```
In the first line print two space-separated integers, representing the length of a and b respectively.

In the second line print the string produced by concatenating a and b (a + b).

In the third line print two strings separated by a space, a' and b'. a' and b' are the same as a and b, respectively, except that their first characters are swapped.

Sample Input

abcd

ef

Sample Output

4 2

abcdef

ebcd af

Explanation

a = "abcd"
```

```
b = "ef"
|a| = 4
|b| = 2
a + b = "abcdef"
a' = "ebcd"
b' = "af"
Answer: (penalty regime: 0 %)
    1 #include<stdio.h>
    2 int main()
    3 ₹ {
            char str1[10],str2[10],t;
    4
    5
            int i=0,j=0;
    6
            int count1=0, count2=0;
            scanf("%s",str1);
scanf("%s",str2);
while(str1[i]!='\0')
    7
    8
    9
   10 🔻
   11
                 count1++;
   12
                 i++;
   13
   14
            while(str2[j]!='\0')
   15
   16 🔻
            {
   17
                 count2++:
```

```
while(str2[j]!='\0')
 15
 16 🔻
           {
 17
               count2++;
 18
               j++;
 19
          }
          printf("%d %d\n",count1,count2);
printf("%s%s\n",str1,str2);
 20
 21
          t=str1[0];
str1[0]=str2[0];
 22
 23
          str2[0]=t;
printf("%s %s",str1,str2);
 24
 25
 26 }
      Input Expected Got
     abcd 4 2
                         4 2
      ef
             abcdef
                         abcdef
             ebcd af
                        ebcd af
Passed all tests! 🗸
                                                                                                Finish review
```