

Case Study Report

Case Study No.: 1

Experiment Title:

Demonstrate inline, internal, and external JavaScript; use console methods; create a webpage showing user info and a welcome message.

Software/Tools Required:

Text Editor (Visual Studio Code, Notepad++, etc.)

Web Browser (Google Chrome, Mozilla Firefox, Microsoft Edge, etc.)

Experiment Program Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>SIT Nagpur - IT Department</title>

  <!-- Internal CSS for styling matching the template -->
  <style>
    body {
      font-family: 'Segoe UI', Tahoma, Geneva, Verdana, sans-
serif;
      background-color: #f3f4f6;
      display: flex;
      justify-content: center;
      align-items: center;
      height: 100vh;
      margin: 0;
    }
    .card {
      background: white;
      padding: 40px;
      border-radius: 12px;
      box-shadow: 0 4px 15px rgba(0, 0, 0, 0.05);
      text-align: center;
      max-width: 500px;
      width: 100%;
      border-top: 8px solid #064e3b;
    }
    h1 {
      color: #1f2937;
      font-size: 2.5rem;
      margin-bottom: 5px;
    }
    h2 {
      color: #065f46;
```

```

        font-size: 1.3rem;
        font-weight: 500;
        margin-top: 0;
        margin-bottom: 25px;
    }
    p {
        color: #6b7280;
        font-size: 1rem;
        line-height: 1.6;
        margin-bottom: 30px;
    }
    .btn {
        background-color: #0ea5e9;
        color: white;
        border: none;
        padding: 12px 28px;
        font-size: 1rem;
        font-weight: 600;
        border-radius: 6px;
        cursor: pointer;
        transition: background-color 0.2s ease;
    }
    .btn:hover {
        background-color: #0284c7;
    }
</style>

<!-- Internal JavaScript -->
<script>
    // Console methods demo inside internal script
    console.log("Internal JS loaded. Webpage initialized.");
    console.error("This is a simulated system check tracking errors
(None found).");

    // Welcome message on window load
    window.onload = function() {
        console.log("Webpage fully loaded and rendered.");
    };
</script>
</head>
<body>

    <div class="card">
        <h1>SIT Nagpur</h1>
        <h2>Information Technology Department</h2>
        <p>Welcome to our official department webpage. Click below to
view student details.</p>


        <!-- Inline JavaScript to trigger external function and a
console tracking log -->
        <button class="btn" onclick="console.log('Button clicked.');"
displayStudentInfo();">
            View Student Information
        </button>
    </div>

    <!-- Linking External JavaScript -->
    <script src="script.js"></script>

```

```
</body>
</html>
```

Output:

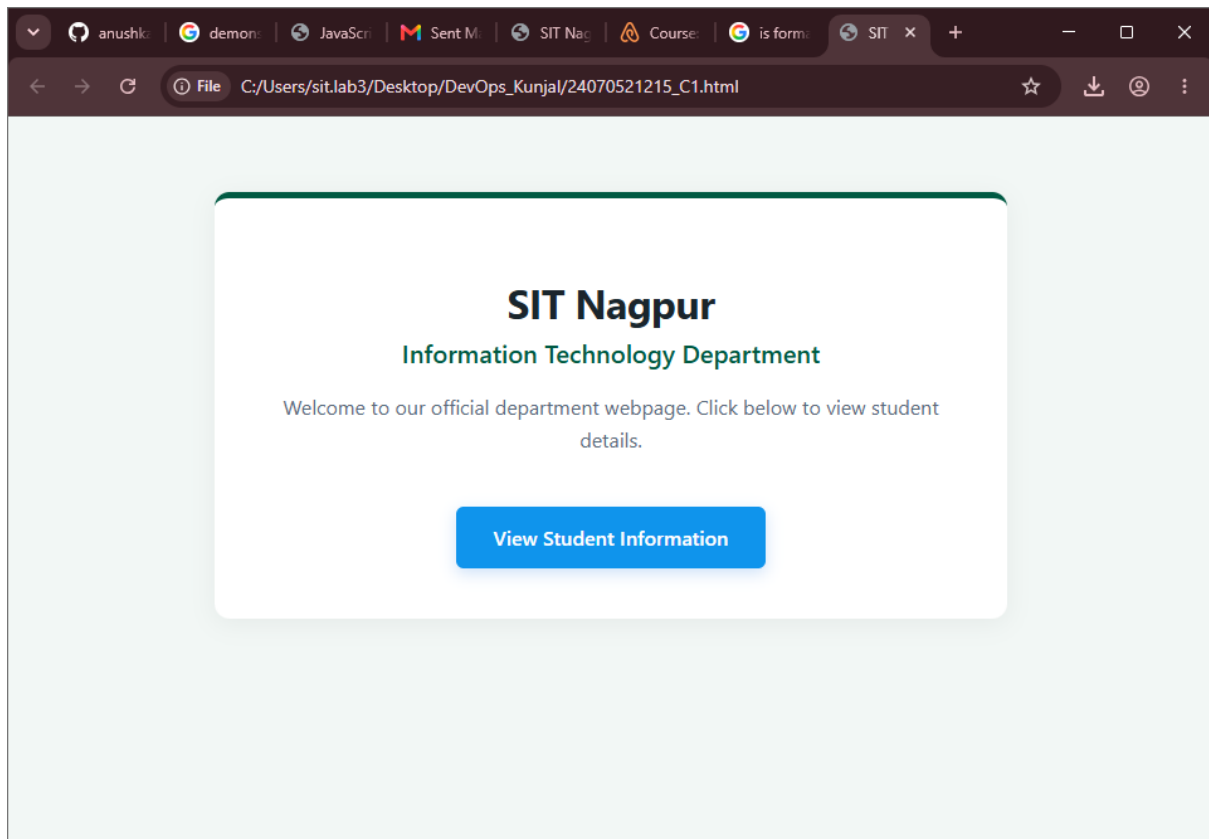

Result/Conclusion:

The structural setup demonstrates the integration of multiple JavaScript deployment styles successfully. Inline execution handled direct event tracking, internal scripting captured loading workflows with console diagnostics (`log`, `warn`, `error`), and external logic kept data processing code clean and modular. The final webpage accurately mirrors the standard department interface design while executing basic functional feedback objects.
