ASSIGNMENT – 2 : GIT COMMANDS

Commands used for local Git repository setup and GitHub connection

1. git --version

Function: This command checks whether Git is installed on the computer and displays the version of Git currently installed. It is useful for verifying the Git installation before starting Git operations.

2. git init

Function: This command initializes a new Git repository in the current project folder. It creates the hidden .git directory, which allows Git to track changes and maintain the project's version history.

3. git status

Function: This command displays the current state of the Git repository. It shows the active branch and indicates which files are untracked, modified, staged, or ready to be committed.

4. git add .

Function: This command adds all new and modified files from the current folder to the Git staging area. Staging prepares the selected files to be included in the next commit.

5. git commit -m "Initial commit"

Function: This command permanently records the staged changes in the local Git repository. The message "Initial commit" describes this first saved version of the project.

6. git branch -M main

Function: This command changes the name of the current branch to main. The main branch is commonly used as the primary branch for a project.

7. git remote -v

Function: This command displays the remote repositories connected to the local Git repository. It helps verify the fetch and push URLs used to communicate with GitHub.

8. git remote add origin <GitHub-URL>

Function: This command connects the local Git repository to a GitHub repository. The name origin is used as the standard short name for the remote GitHub repository.

9. git push -u origin main

Function: This command uploads the local main branch and its committed files to the GitHub repository. The -u option establishes a tracking relationship between the local main branch and origin/main, making future pushes easier.

```
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git --version
git version 2.55.0.windows.3
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git init
Reinitialized existing Git repository in C:/Users/hp/OneDrive/Documents/Programming/web development/.git/
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   ass 1/dashboard.html
        new file:   ass 1/login.html
        new file:   ass 1/signup.html
        new file:   ass 2/abc.html
        new file:   ass 3/index.html
        new file:   ass 3/script.js
        new file:   ass 3/style.css
        new file:   ass 4/index.html
        new file:   ass 4/script.js
        new file:   ass 4/style.css

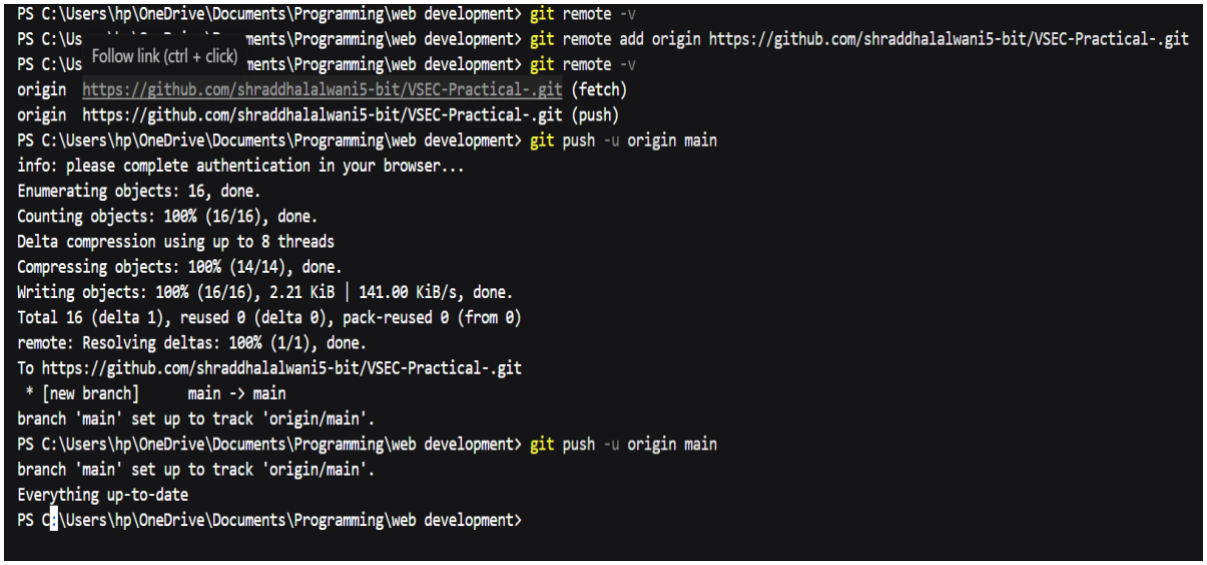
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git add .
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   ass 1/dashboard.html
        new file:   ass 1/login.html
        new file:   ass 1/signup.html
```

```
  (use "git rm --cached <file>..." to unstage)
        new file:   ass 1/dashboard.html
        new file:   ass 1/login.html
        new file:   ass 1/signup.html
        new file:   ass 2/abc.html
        new file:   ass 3/index.html
        new file:   ass 3/script.js
        new file:   ass 3/style.css
        new file:   ass 4/index.html
        new file:   ass 4/script.js
        new file:   ass 4/style.css

PS C:\Users\hp\OneDrive\Documents\Programming\web development> git commit -m "Initial commit"
[master (root-commit) dfbc946] Initial commit
 10 files changed, 189 insertions(+)
 create mode 100644 ass 1/dashboard.html
 create mode 100644 ass 1/login.html
 create mode 100644 ass 1/signup.html
 create mode 100644 ass 2/abc.html
 create mode 100644 ass 3/index.html
 create mode 100644 ass 3/script.js
 create mode 100644 ass 3/style.css
 create mode 100644 ass 4/index.html
 create mode 100644 ass 4/script.js
 create mode 100644 ass 4/style.css
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git branch -M main
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git status
On branch main
nothing to commit, working tree clean
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git status
On branch main
nothing to commit, working tree clean
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git remote -v
```


PS C:\Users\hp\OneDrive\Documents\Programming\web development> git remote -v
PS C:\Us ments\Programming\web development> git remote add origin https://github.com/shraddhalalwani5-bit/VSEC-Practical-.git
PS C:\Us Follow link (ctrl + click) ments\Programming\web development> git remote -v
origin https://github.com/shraddhalalwani5-bit/VSEC-Practical-.git (fetch)
origin https://github.com/shraddhalalwani5-bit/VSEC-Practical-.git (push)
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git push -u origin main
info: please complete authentication in your browser...
Enumerating objects: 16, done.
Counting objects: 100% (16/16), done.
Delta compression using up to 8 threads
Compressing objects: 100% (14/14), done.
Writing objects: 100% (16/16), 2.21 KiB | 141.00 KiB/s, done.
Total 16 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/shraddhalalwani5-bit/VSEC-Practical-.git
* [new branch] main -> main
branch 'main' set up to track 'origin/main'.
PS C:\Users\hp\OneDrive\Documents\Programming\web development> git push -u origin main
branch 'main' set up to track 'origin/main'.
Everything up-to-date
PS C:\Users\hp\OneDrive\Documents\Programming\web development>