


Chapter 16: Security



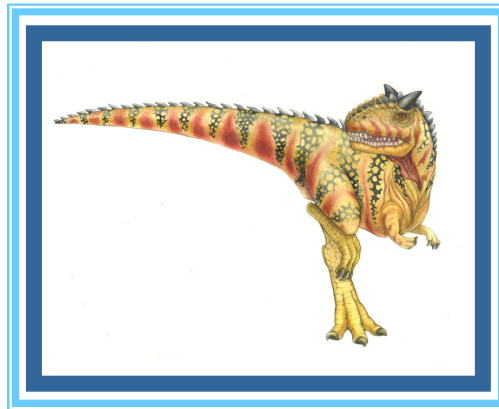

Chapter 16: Security

- The Security Problem
- Program Threats
- System and Network Threats
- Cryptography as a Security Tool
- User Authentication
- Implementing Security Defenses
- Firewalling to Protect Systems and Networks
- Computer-Security Classifications
- An Example: Windows 7





Objectives

- Discuss security threats and attacks
- Explain the fundamentals of encryption, authentication, and hashing
- Examine the uses of cryptography in computing
- Describe the various countermeasures to security attacks





The Security Problem

- System **secure** if resources used and accessed as intended under all circumstances
 - Unachievable
- **Intruders** (**crackers**) attempt to breach security
- **Threat** is potential security violation
- **Attack** is attempt to breach security
- Attack can be accidental or malicious
- Easier to protect against accidental than malicious misuse





Security Violation Categories

- **Breach of confidentiality**
 - Unauthorized reading of data
- **Breach of integrity**
 - Unauthorized modification of data
- **Breach of availability**
 - Unauthorized destruction of data
- **Theft of service**
 - Unauthorized use of resources
- **Denial of service (DOS)**
 - Prevention of legitimate use





Security Violation Methods

- **Masquerading** (breach **authentication**)
 - Pretending to be an authorized user to escalate privileges
- **Replay attack**
 - As is or with **message modification**
- **Man-in-the-middle attack**
 - Intruder sits in data flow, masquerading as sender to receiver and vice versa
- **Session hijacking**
 - Intercept an already-established session to bypass authentication
- **Privilege escalation**
 - Common attack type with access beyond what a user or resource is supposed to have





Security Measure Levels

- Impossible to have absolute security, but make cost to perpetrator sufficiently high to deter most intruders
- Security must occur at four levels to be effective:
 - **Physical**
 - ▶ Data centers, servers, connected terminals
 - **Application**
 - ▶ Benign or malicious apps can cause security problems
 - **Operating System**
 - ▶ Protection mechanisms, debugging
 - **Network**
 - ▶ Intercepted communications, interruption, DOS
- Security is as weak as the weakest link in the chain
- Humans a risk too via **phishing** and **social-engineering** attacks
- But can too much security be a problem?






Program Threats

- Many variations, many names
- **Trojan Horse**
 - Code segment that misuses its environment
 - Exploits mechanisms for allowing programs written by users to be executed by other users
 - **Spyware, pop-up browser windows, covert channels**
 - Up to 80% of spam delivered by spyware-infected systems
- **Trap Door**
 - Specific user identifier or password that circumvents normal security procedures
 - Could be included in a compiler
 - How to detect them?





Four-layered Model of Security

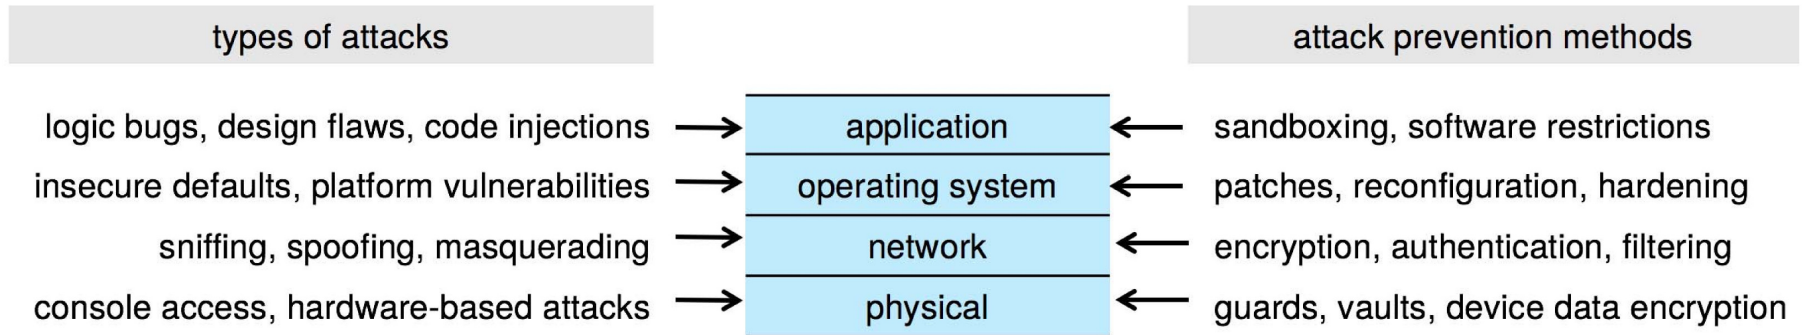



Program Threats (Cont.)

- **Malware** - Software designed to exploit, disable, or damage computer
- **Trojan Horse** – Program that acts in a clandestine manner
 - **Spyware** – Program frequently installed with legitimate software to display ads, capture user data
 - **Ransomware** – locks up data via encryption, demanding payment to unlock it
- Others include trap doors, logic bombs
- All try to violate the Principle of Least Privilege

THE PRINCIPLE OF LEAST PRIVILEGE

“The principle of least privilege. Every program and every privileged user of the system should operate using the least amount of privilege necessary to complete the job. The purpose of this principle is to reduce the number of potential interactions among privileged programs to the minimum necessary to operate correctly, so that one may develop confidence that unintentional, unwanted, or improper uses of privilege do not occur.”—Jerome H. Saltzer, describing a design principle of the Multics operating system in 1974: <https://pdfs.semanticscholar.org/1c8d/06510ad449ad24fbdd164f8008cc730cab47.pdf>.

- Goal frequently is to leave behind Remote Access Tool (RAT) for repeated access





C Program with Buffer-overflow Condition

```
#include <stdio.h>

#define BUFFER SIZE 256

int main(int argc, char *argv[])
{
    char buffer[BUFFER SIZE];
    if (argc < 2)
        return -1;
    else {
        strcpy(buffer, argv[1]);
        return 0;
    }
}
```

- **Code review** can help – programmers review each other's code, looking for logic flows, programming flaws





Code Injection


- **Code-injection attack** occurs when system code is not malicious but has bugs allowing executable code to be added or modified
 - Results from poor or insecure programming paradigms, commonly in low level languages like C or C++ which allow for direct memory access through pointers
 - Goal is a buffer overflow in which code is placed in a buffer and execution caused by the attack
 - Can be run by script kiddies – use tools written but exploit identifiers






Code Injection (cont.)

- Outcomes from code injection include:

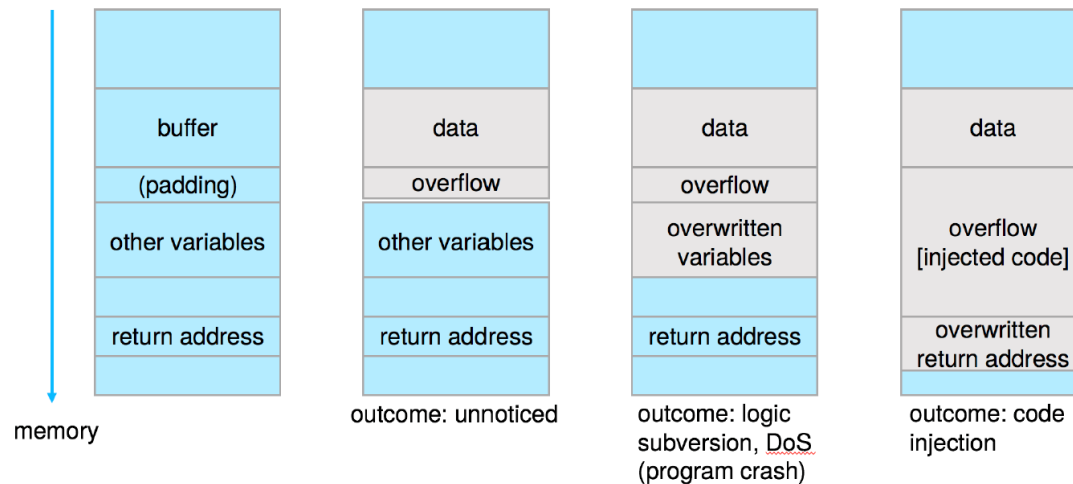

- Frequently use trampoline to code execution to exploit buffer overflow:

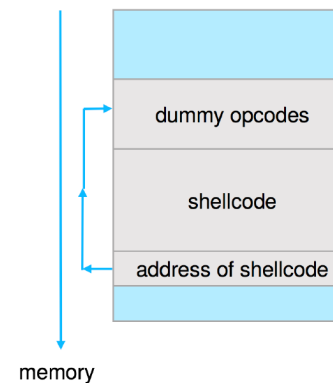



Program Threats (Cont.)

■ Viruses

- Code fragment embedded in legitimate program
- Self-replicating, designed to infect other computers
- Very specific to CPU architecture, operating system, applications
- Usually borne via email or as a macro
- Visual Basic Macro to reformat hard drive

```
Sub AutoOpen()  
Dim oFS  
    Set oFS = CreateObject(''Scripting.FileSystemObject'')  
    vs = Shell(''c:command.com /k format c:''', vbHide)  
End Sub
```






Program Threats (Cont.)

- **Virus dropper** inserts virus onto the system
- Many categories of viruses, literally many thousands of viruses
 - File / parasitic
 - Boot / memory
 - Macro
 - Source code
 - Polymorphic to avoid having a **virus signature**
 - Encrypted
 - Stealth
 - Tunneling
 - Multipartite
 - Armored





A Boot-sector Computer Virus

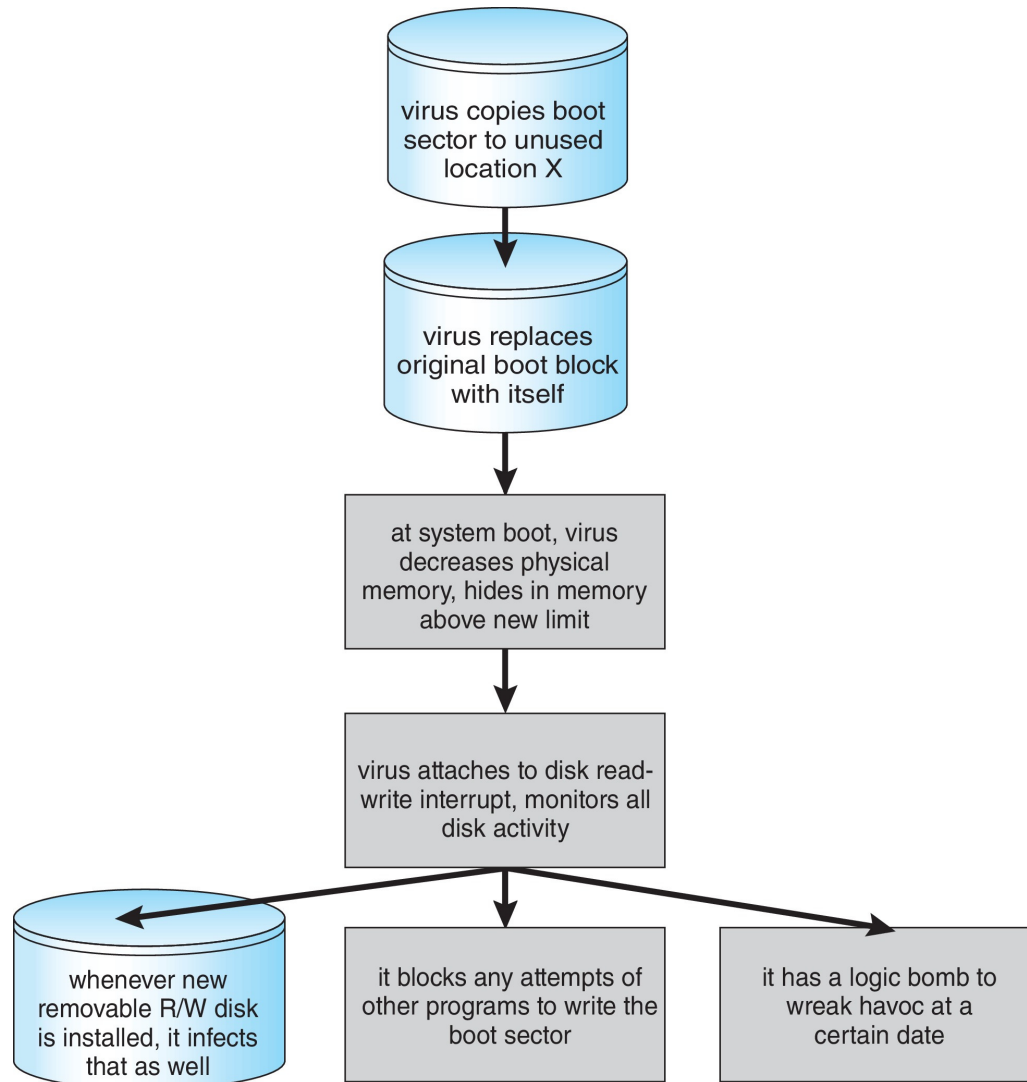



The Threat Continues

- Attacks still common, still occurring
- Attacks moved over time from science experiments to tools of organized crime
 - Targeting specific companies
 - Creating botnets to use as tool for spam and DDOS delivery
 - **Keystroke logger** to grab passwords, credit card numbers
- Why is Windows the target for most attacks?
 - Most common
 - Everyone is an administrator
 - ▶ Licensing required?
 - **Monoculture** considered harmful





System and Network Threats

- Some systems “open” rather than **secure by default**
 - Reduce **attack surface**
 - But harder to use, more knowledge needed to administer
- Network threats harder to detect, prevent
 - Protection systems weaker
 - More difficult to have a shared secret on which to base access
 - No physical limits once system attached to internet
 - ▶ Or on network with system attached to internet
 - Even determining location of connecting system difficult
 - ▶ IP address is only knowledge





System and Network Threats (Cont.)

- **Worms** – use **spawn** mechanism; standalone program
- Internet worm
 - Exploited UNIX networking features (remote access) and bugs in *finger* and *sendmail* programs
 - Exploited trust-relationship mechanism used by *rsh* to access friendly systems without use of password
 - **Grappling hook** program uploaded main worm program
 - ▶ 99 lines of C code
 - Hooked system then uploaded main code, tried to attack connected systems
 - Also tried to break into other users accounts on local system via password guessing
 - If target system already infected, abort, except for every 7th time





System and Network Threats (Cont.)

■ Port scanning

- Automated attempt to connect to a range of ports on one or a range of IP addresses
- Detection of answering service protocol
- Detection of OS and version running on system
- `nmap` scans all ports in a given IP range for a response
- `nessus` has a database of protocols and bugs (and exploits) to apply against a system
- Frequently launched from **zombie systems**
 - ▶ To decrease trace-ability





System and Network Threats (Cont.)

■ Denial of Service

- Overload the targeted computer preventing it from doing any useful work
- **Distributed Denial-of-Service (DDoS)** come from multiple sites at once
- Consider the start of the IP-connection handshake (SYN)
 - ▶ How many started-connections can the OS handle?
- Consider traffic to a web site
 - ▶ How can you tell the difference between being a target and being really popular?
- Accidental – CS students writing bad `fork()` code
- Purposeful – extortion, punishment


■ Port scanning

- Automated tool to look for network ports accepting connections
- Used for good and evil





Standard Security Attacks

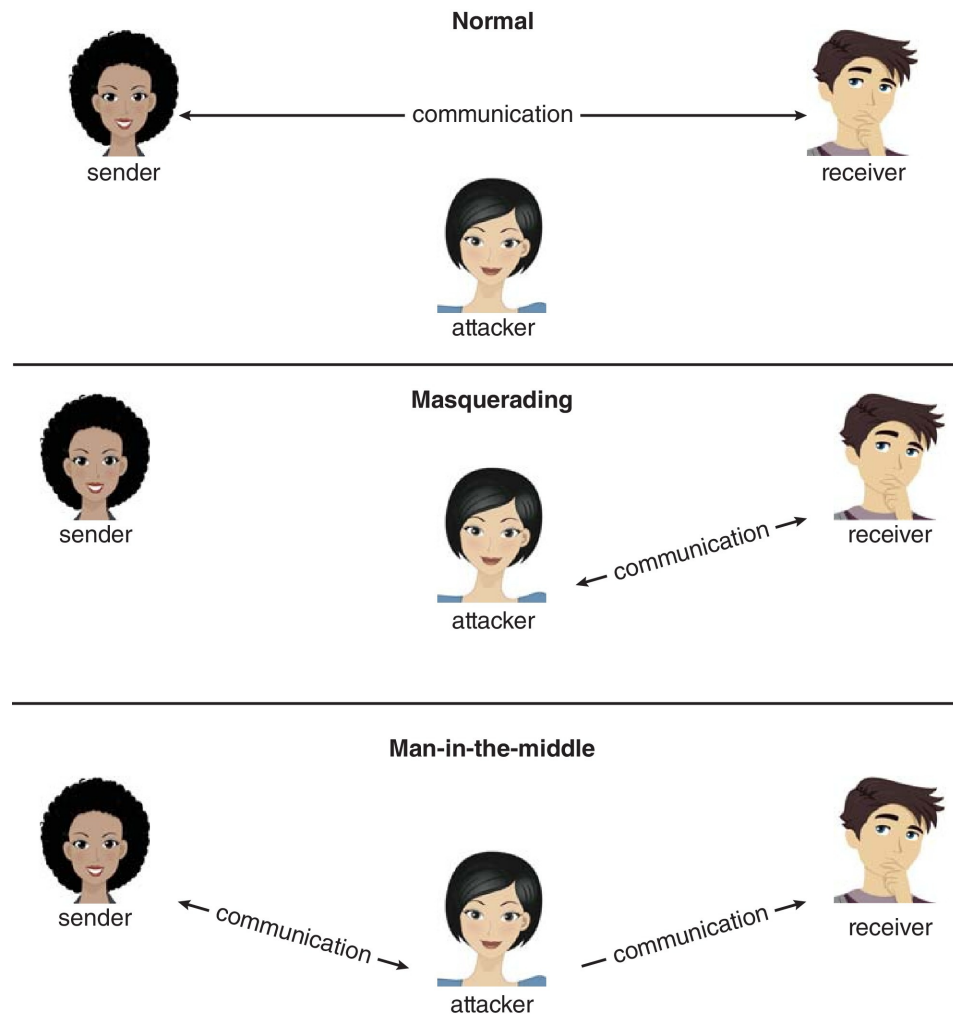



Cryptography as a Security Tool

- Broadest security tool available
 - Internal to a given computer, source and destination of messages can be known and protected
 - ▶ OS creates, manages, protects process IDs, communication ports
 - Source and destination of messages on network cannot be trusted without cryptography
 - ▶ Local network – IP address?
 - Consider unauthorized host added
 - ▶ WAN / Internet – how to establish authenticity
 - Not via IP address





Cryptography

- Means to constrain potential senders (*sources*) and / or receivers (*destinations*) of *messages*
 - Based on secrets (**keys**)
 - Enables
 - ▶ Confirmation of source
 - ▶ Receipt only by certain destination
 - ▶ Trust relationship between sender and receiver
- Encryption
- Authentication
 - Digital signature
 - Digital certificate





Digital Certificates

- Proof of who or what owns a public key
- Public key digitally signed a trusted party
- Trusted party receives proof of identification from entity and certifies that public key belongs to entity
- **Certificate authority** are trusted party – their public keys included with web browser distributions
 - They vouch for other authorities via digitally signing their keys, and so on





User Authentication

- Crucial to identify user correctly, as protection systems depend on user ID
- User identity most often established through **passwords**, can be considered a special case of either keys or capabilities
- Passwords must be kept secret
 - Frequent change of passwords
 - History to avoid repeats
 - Use of “non-guessable” passwords
 - Log all invalid access attempts (but not the passwords themselves)
 - Unauthorized transfer
- Passwords may also either be encrypted or allowed to be used only once






Implementing Security Defenses

- **Defense in depth** is most common security theory – multiple layers of security
- **Security policy** describes what is being secured
- Vulnerability assessment compares real state of system / network compared to security policy
- Intrusion detection endeavors to detect attempted or successful intrusions
 - **Signature-based** detection spots known bad patterns
 - **Anomaly detection** spots differences from normal behavior
 - ▶ Can detect **zero-day** attacks
 - **False-positives** and **false-negatives** a problem
- Virus protection
 - Searching all programs or programs at execution for known virus patterns
 - Or run in **sandbox** so can't damage system
- Auditing, accounting, and logging of all or specific system or network activities
- Practice **safe computing** – avoid sources of infection, download from only “good” sites, etc



Chapter 17: Protection

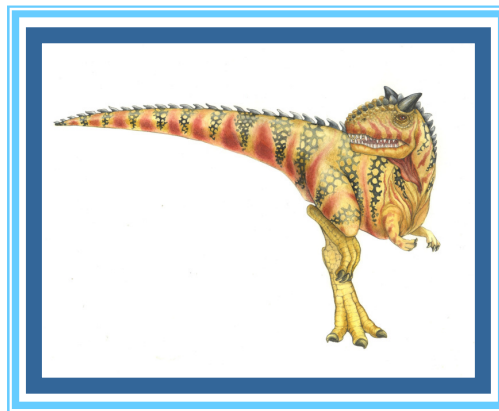



Chapter 17: Protection

- Goals of Protection
- Principles of Protection
- Protection Rings
- Domain of Protection
- Access Matrix
- Implementation of Access Matrix
- Revocation of Access Rights
- Role-based Access Control
- Mandatory Access Control (MAC)
- Capability-Based Systems
- Other Protection Implementation Methods
- Language-based Protection





Objectives

- Discuss the goals and principles of protection in a modern computer system
- Explain how protection domains combined with an access matrix are used to specify the resources a process may access
- Examine capability and language-based protection systems
- Describe how protection mechanisms can mitigate system attacks





Goals of Protection

- In one protection model, computer consists of a collection of objects, hardware or software
- Each object has a unique name and can be accessed through a well-defined set of operations
- Protection problem - ensure that each object is accessed correctly and only by those processes that are allowed to do so





Principles of Protection

- Guiding principle – **principle of least privilege**
 - Programs, users and systems should be given just enough **privileges** to perform their tasks
 - Properly set **permissions** can limit damage if entity has a bug, gets abused
 - Can be static (during life of system, during life of process)
 - Or dynamic (changed by process as needed) – **domain switching, privilege escalation**
 - **Compartmentalization** a derivative concept regarding access to data
 - ▶ Process of protecting each individual system component through the use of specific permissions and access restrictions





Access Matrix

- View protection as a matrix (**access matrix**)
- Rows represent domains
- Columns represent objects
- **Access** (i, j) is the set of operations that a process executing in Domain $_i$ can invoke on Object $_j$

domain \ object	F_1	F_2	F_3	printer
D_1	read		read	
D_2				print
D_3		read	execute	
D_4	read write		read write	



End of Chapter 17

