PART -A

Problem

Submissions

Leaderboard

Discussions

collections.Counter()

A counter is a container that stores elements as dictionary keys, and their counts are stored as dictionary values.

Sample Code

```
>>> from collections import Counter
>>>
>>> myList = [1,1,2,3,4,5,3,2,3,4,2,1,2,3]
>>> print Counter(myList)
Counter({2: 4, 3: 4, 1: 3, 4: 2, 5: 1})
>>>
>>> print Counter(myList).items()
[(1, 3), (2, 4), (3, 4), (4, 2), (5, 1)]
>>>
>>> print Counter(myList).keys()
[1, 2, 3, 4, 5]
>>>
>>> print Counter(myList).values()
[3, 4, 4, 2, 1]
```

Task

$Raghu$ is a shoe shop owner. His shop has X number of shoes.

He has a list containing the size of each shoe he has in his shop.

There are N number of customers who are willing to pay x_i amount of money only if they get the shoe of their desired size.

Your task is to compute how much money $Raghu$ earned.

Input Format

Upload Code as File | Test against custom input | Run Code | Submit C

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases

Sample Test case 0

Input (stdin) Download

```
10
2 3 4 5 6 8 7 6 5 18
6
6 55
6 45
6 55
4 40
18 60
10 50
```

Your Output (stdout)

```
200
```

Caption

PART -B

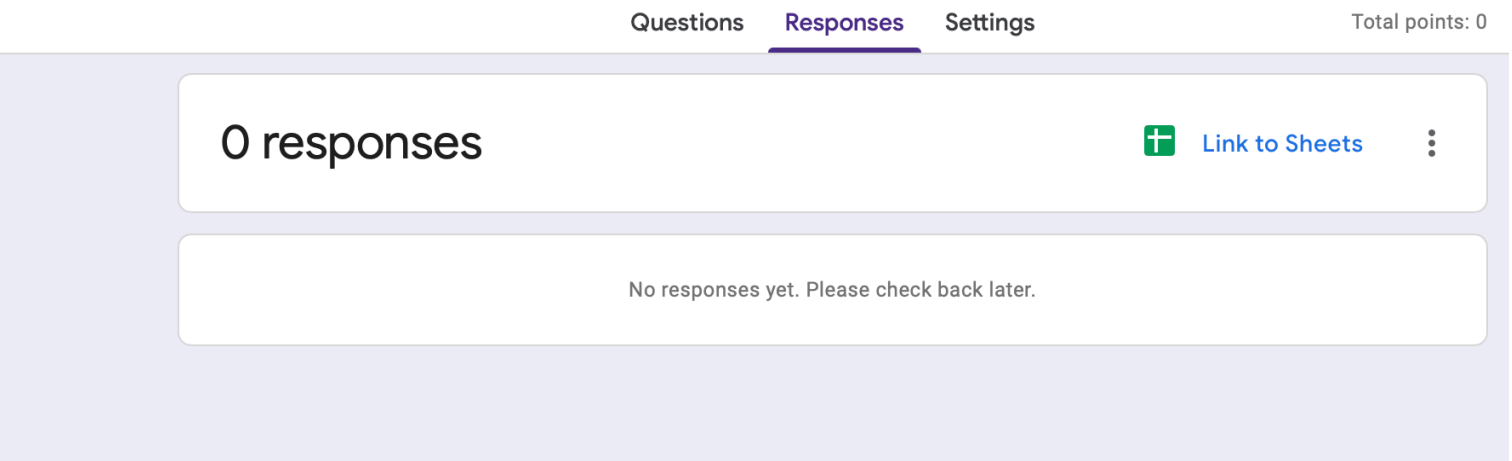

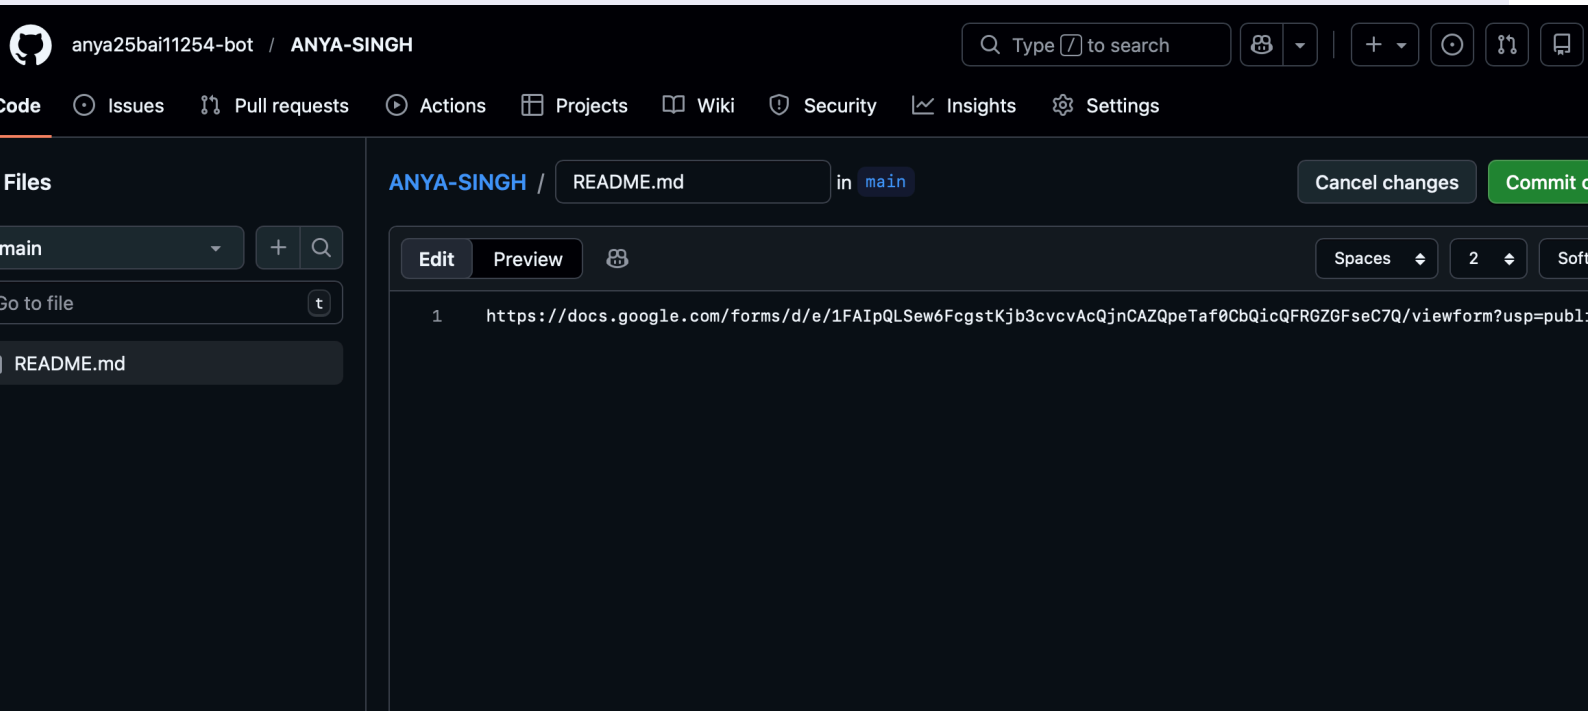

Caption