

Ejercicio Conexión Postman – Mongo

Andrés Jesús Ospino Stevenson

En el presente documento se encuentran todas las funciones del controlador y un GET para revisar que Postman efectivamente tenga conexión con el servidor.

Contenidos del Documento

1.	GET http://localhost:3005	2
2.	POST http://localhost:3005/api/tareas	3
3.	GET http://localhost:3005/api/tareas/6917322c697600069c983063	5
4.	PUT http://localhost:3005/api/tareas/6917322c697600069c983063	6
5.	DELETE http://localhost:3005/api/tareas/6917322c697600069c983063	8
6.	PATCH http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/completar	9
7.	PATCH http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/reabrir	12
8.	GET http://localhost:3005/api/tareas/stats	14
9.	GET http://localhost:3005/api/tareas/prioridad/alta	17

1. GET <http://localhost:3005>

The screenshot shows a web browser interface for a REST client. The address bar displays `http://localhost:3005`. Below the address bar, the method `GET` is selected, and the URL `http://localhost:3005` is entered. The response is displayed in the 'Body' tab, showing a JSON object. The JSON object contains a message, version, endpoints, and query parameters.

```
2  "message": "🚀 API de Gestión de Tareas",
3  "version": "1.0.0",
4  "endpoints": {
5    "tareas": {
6      "obtenerTodas": "GET /api/tareas",
7      "obtenerPorId": "GET /api/tareas/:id",
8      "crear": "POST /api/tareas",
9      "actualizar": "PUT /api/tareas/:id",
10     "eliminar": "DELETE /api/tareas/:id",
11     "completar": "PATCH /api/tareas/:id/completar",
12     "reabrir": "PATCH /api/tareas/:id/reabrir",
13     "estadisticas": "GET /api/tareas/stats",
14     "porPrioridad": "GET /api/tareas/prioridad/:prioridad"
15   }
16 },
17 "parametrosQuery": {
18   "filtros": "completada, prioridad, categoria, buscar",
19   "paginacion": "page, limit",
20   "ordenamiento": "sortBy"
```

2. POST <http://localhost:3005/api/tareas>

POST http://localhost:3005/ap + ...

HTTP http://localhost:3005/api/tareas

POST http://localhost:3005/api/tareas

Params Authorization Headers (8) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary JSON

```
1 {
2   "titulo": "Tarea de prueba",
3   "descripcion": "Esta es una prueba",
4   "prioridad": "alta",
5   "categoria": "trabajo"
6 }
```

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON

```
1 {
2   "success": true,
3   "message": "Tarea creada exitosamente",
4   "data": {
5     "titulo": "Tarea de prueba",
6     "descripcion": "Esta es una prueba",
7     "prioridad": "alta",
8     "categoria": "trabajo",
9     "estado": "pendiente",
10    "_id": "6917322c697600069c983063",
11    "fetchAt": "2025-11-14T13:44:12.607Z",
12    "__v": 0
13  }
14 }
```

ro... x

tareass

+

root > tareas_db > tareas

Documents 1

Aggregations

Schema

Indexes 1

Validation

⌚ ▼

Type a query: { field: 'value' } or [Generate query](#) ✨

+ ADD DATA ▼

📄 EXPORT DATA ▼

✎ UPDATE

🗑 DELETE

```
_id: ObjectId('6917322c697600069c983063')
titulo: "Tarea de prueba"
descripcion: "Esta es una prueba"
prioridad: "alta"
categoria: "trabajo"
estado: "pendiente"
fetchedAt: 2025-11-14T13:44:12.607+00:00
__v: 0
```

3. GET <http://localhost:3005/api/tareas/6917322c697600069c983063>

GET http://localhost:3005/api/ + ...

 http://localhost:3005/api/tareas/6917322c697600069c983063

GET  http://localhost:3005/api/tareas/6917322c697600069c983063

Params Authorization Headers (6) Body Pre-request Script Tests Settings

Query Params

	Key	
	Key	\
	Key	\

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON  

```
1  {
2    "success": true,
3    "data": {
4      "_id": "6917322c697600069c983063",
5      "titulo": "Tarea de prueba",
6      "descripcion": "Esta es una prueba",
7      "prioridad": "alta",
8      "categoria": "trabajo",
9      "estado": "pendiente",
10     "fetchAt": "2025-11-14T13:44:12.607Z",
11     "__v": 0
12   }
13 }
```

4. PUT <http://localhost:3005/api/tareas/6917322c697600069c983063>

PUT http://localhost:3005/api/ + ...

 http://localhost:3005/api/tareas/6917322c697600069c983063

PUT ▼ http://localhost:3005/api/tareas/6917322c697600069c983063

Params Authorization Headers (8) **Body** ● Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary **JSON** ▼

```
1 {
2   "titulo": "Tarea actualizada",
3   "descripcion": "Esta es la descripción actualizada",
4   "prioridad": "media",
5   "categoria": "personal"
6 }
```

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize **JSON** ▼ 

```
1 {
2   "success": true,
3   "message": "Tarea actualizada exitosamente",
4   "data": {
5     "_id": "6917322c697600069c983063",
6     "titulo": "Tarea actualizada",
7     "descripcion": "Esta es la descripción actualizada",
8     "prioridad": "media",
9     "categoria": "personal",
10    "estado": "pendiente",
11    "fetchAt": "2025-11-14T13:44:12.607Z",
12    "__v": 0
13  }
14 }
```

ro... X

tareas

+

root > tareas_db > tareas

Documents 1 Aggregations Schema Indexes 1 Validation

⌚ ▼

 Type a query: { field: 'value' } or [Generate query](#) ⚡

+ ADD DATA ▼

📄 EXPORT DATA ▼

✎ UPDATE

🗑 DELETE

```
_id: ObjectId('6917322c697600069c983063')
titulo: "Tarea actualizada"
descripcion: "Esta es la descripción actualizada"
prioridad: "media"
categoria: "personal"
estado: "pendiente"
fetchAt: 2025-11-14T13:44:12.607+00:00
__v: 0
```

5. DELETE <http://localhost:3005/api/tareas/6917322c697600069c983063>

DEL <http://localhost:3005/api/> + ...

 <http://localhost:3005/api/tareas/6917322c697600069c983063>

DELETE  <http://localhost:3005/api/tareas/6917322c697600069c983063>

Params Authorization Headers (8) Body ● Pre-request Script Tests

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON  

```
1
2  "success": true,
3  "message": "Tarea eliminada exitosamente",
4  "data": {}
5
```

root  tareas +

root > tareas_db > tareas

Documents 1 Aggregations Schema Indexes 1 Validation

 Type a query: { field: 'value' } or [Generate query](#) 

 ADD DATA  EXPORT DATA  UPDATE  DELETE



This collection has no data


It only takes a few seconds to import data from a JSON or CSV file.

[Import data](#)

6. PATCH <http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/completar>

Primero creamos una tarea con estos atributos:

```
{
  "titulo": "Tarea para completar",
  "descripcion": "Esta es una prueba",
  "prioridad": "alta",
  "categoria": "trabajo"
}
```

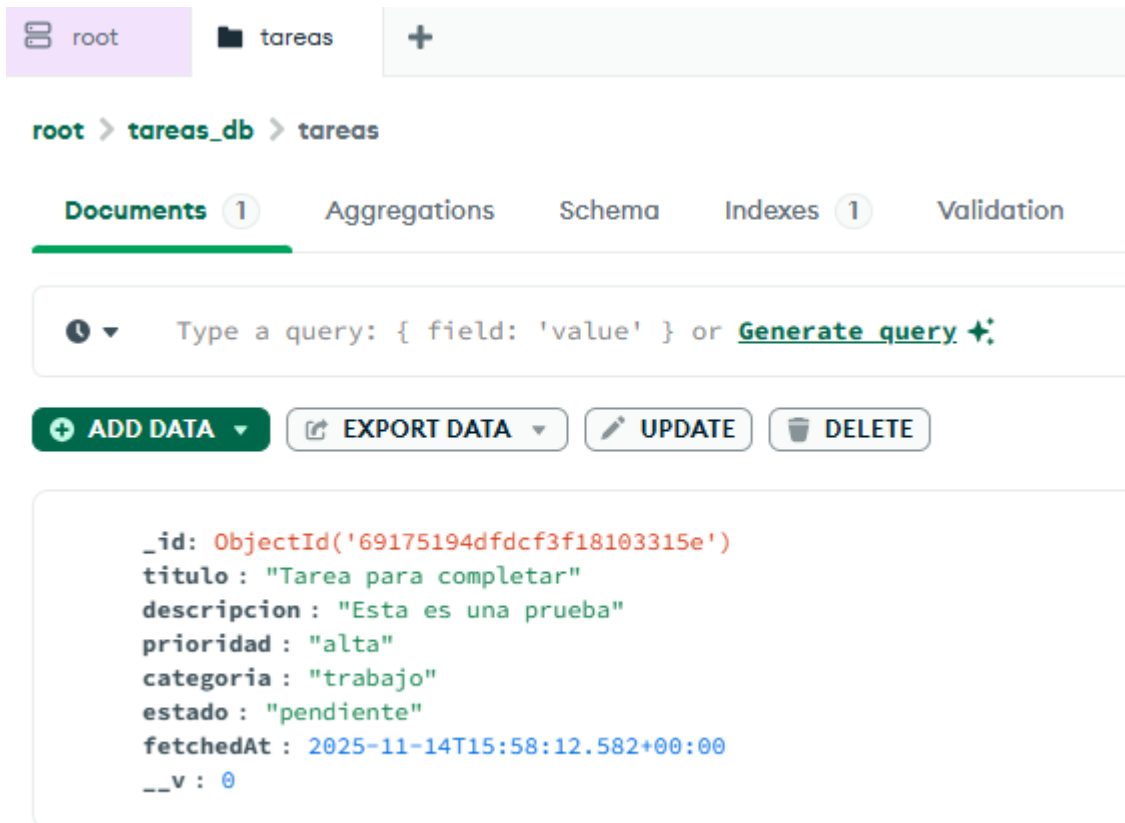

The screenshot shows the MongoDB Compass interface. At the top, there's a breadcrumb navigation: **root** > **tareas_db** > **tareas**. Below this, there are tabs for **Documents** (1), **Aggregations**, **Schema**, **Indexes** (1), and **Validation**. The **Documents** tab is active. Below the tabs, there's a search bar with a clock icon and the text "Type a query: { field: 'value' } or [Generate query](#)". Below the search bar, there are four buttons: **ADD DATA** (with a plus icon), **EXPORT DATA** (with a document icon), **UPDATE** (with a pencil icon), and **DELETE** (with a trash icon). Below these buttons, there's a document preview showing the following fields and values:

```
_id: ObjectId('69175194dfdcf3f18103315e')
titulo: "Tarea para completar"
descripcion: "Esta es una prueba"
prioridad: "alta"
categoria: "trabajo"
estado: "pendiente"
fetchAt: 2025-11-14T15:58:12.582+00:00
__v: 0
```

Ya creada, ejecutamos el patch para completarla.

PATCH http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/completar

+ ...



http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/completar

PATCH



http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/completar

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary **JSON**

```
1 {
2   "titulo": "Tarea para completar",
3   "descripcion": "Esta es una prueba",
4   "prioridad": "alta",
5   "categoria": "trabajo"
6 }
```

Body

Cookies

Headers (8)

Test Results

Pretty

Raw

Preview

Visualize

JSON



```
1 {
2   "success": true,
3   "message": "Tarea completada",
4   "data": {
5     "_id": "69175194dfdcf3f18103315e",
6     "titulo": "Tarea para completar",
7     "descripcion": "Esta es una prueba",
8     "prioridad": "alta",
9     "categoria": "trabajo",
10    "estado": "completada",
11    "fetchAt": "2025-11-14T15:58:12.582Z",
12    "__v": 0
13  }
14 }
```

root

tareass

+

root > tareass_db > tareass

Documents 1

Aggregations

Schema

Indexes 1

Validation

ⓘ ▼

Type a query: { field: 'value' } or [Generate query](#) ✨

+ ADD DATA ▼

EXPORT DATA ▼

UPDATE

DELETE

```
_id: ObjectId('69175194dfdcf3f18103315e')
titulo: "Tarea para completar"
descripcion: "Esta es una prueba"
prioridad: "alta"
categoria: "trabajo"
estado: "completada"
fetchAt: 2025-11-14T15:58:12.582+00:00
__v: 0
```

7. PATCH <http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/reabrir>

PATCH <http://localhost:3005/a> + ...

 <http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/reabrir>

PATCH [▼](#) <http://localhost:3005/api/tareas/69175194dfdcf3f18103315e/reabrir>

Params Authorization Headers (8) **Body** ● Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary **JSON** ▼

1 

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize **JSON** ▼ 

```
1  {
2    "success": true,
3    "message": "Tarea reabierta",
4    "data": {
5      "_id": "69175194dfdcf3f18103315e",
6      "titulo": "Tarea para completar",
7      "descripcion": "Esta es una prueba",
8      "prioridad": "alta",
9      "categoria": "trabajo",
10     "estado": "en progreso",
11     "fetchAt": "2025-11-14T15:58:12.582Z",
12     "__v": 0
13   }
14 }
```

root

tareas

+

root > tareas_db > tareas

Documents 1

Aggregations

Schema

Indexes 1

Validation

🕒 ▼

Type a query: { field: 'value' } or [Generate query](#) ⚡

➕ ADD DATA ▼

📄 EXPORT DATA ▼

✎ UPDATE

🗑 DELETE

```
_id: ObjectId('69175194dfdcf3f18103315e')
titulo: "Tarea para completar"
descripcion: "Esta es una prueba"
prioridad: "alta"
categoria: "trabajo"
estado: "en progreso"
fetchAt: 2025-11-14T15:58:12.582+00:00
__v: 0
```

8. GET <http://localhost:3005/api/tareas/stats>

Para este inciso y el siguiente usaremos 5 tareas de ejemplo con estos atributos:

```
{
  "titulo": "Tarea 1",
  "descripcion": "Descripcion 1",
  "prioridad": "alta",
  "categoria": "trabajo"
}
{
  "titulo": "Tarea 2",
  "descripcion": "Descripcion 2",
  "prioridad": "media",
  "categoria": "personal"
}
{
  "titulo": "Tarea 3",
  "descripcion": "Descripcion 3",
  "prioridad": "baja",
  "categoria": "estudios"
}
{
  "titulo": "Tarea 4",
  "descripcion": "Descripcion 4",
  "prioridad": "media",
  "categoria": "otros"
}
{
  "titulo": "Tarea 5",
  "descripcion": "Descripcion 5",
  "prioridad": "alta",
  "categoria": "personal"
}
```

tareas

+

root > tareas_db > tareas

Open MongoDB shell

Documents 2

Aggregations

Schema

Indexes 1

Validation

ⓘ

Type a query: { field: 'value' } or [Generate query](#)

Explain

Reset

Find

</>

Options

ADD DATA

EXPORT DATA

UPDATE

DELETE

25

1 - 5 of 5

↺

↻

↷


≡

{ }

⌕

tareas

	titulo String	descripcion String	prioridad String	categoria String	estado String				
1	f1801c80...	"Tarea 1"	"Descripcion 1"	"alta"	"trabajo"	"pendiente"			
2	81801c80...	"Tarea 2"	"Descripcion 2"	"media"	"personal"	"pendiente"			
3	d1801c80...	"Tarea 3"	"Descripcion 3"	"baja"	"estudios"	"pendiente"			
4	51801c80...	"Tarea 4"	"Descripcion 4"	"media"	"otros"	"pendiente"			
5	b1801c80...	"Tarea 5"	"Descripcion 5"	"alta"	"personal"	"pendiente"			

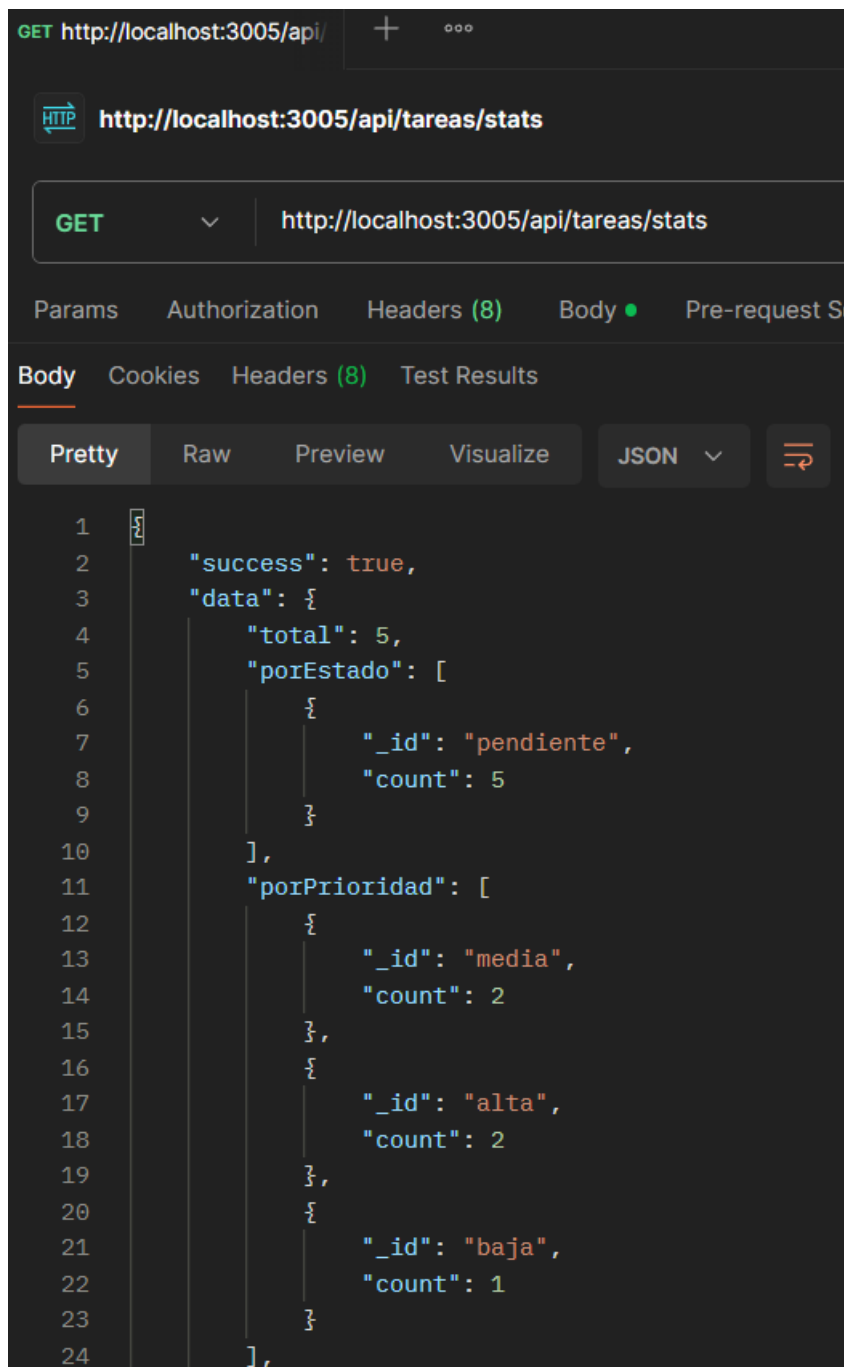

GET http://localhost:3005/api/ + ...

HTTP http://localhost:3005/api/tareas/stats

GET http://localhost:3005/api/tareas/stats

Params Authorization Headers (8) Body ● Pre-request S

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON

```
1 {
2   "success": true,
3   "data": {
4     "total": 5,
5     "porEstado": [
6       {
7         "_id": "pendiente",
8         "count": 5
9       }
10    ],
11    "porPrioridad": [
12      {
13        "_id": "media",
14        "count": 2
15      },
16      {
17        "_id": "alta",
18        "count": 2
19      },
20      {
21        "_id": "baja",
22        "count": 1
23      }
24    ]
25  }
26 }
```

```
GET http://localhost:3005/api/ + ...

HTTP http://localhost:3005/api/tareas/stats

GET http://localhost:3005/api/tareas/stats


Params Authorization Headers (8) Body ● Pre-request S

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON ↕

21         "_id": "baja",
22         "count": 1
23     },
24 ],
25     "porCategoria": [
26         {
27             "_id": "estudios",
28             "count": 1
29         },
30         {
31             "_id": "trabajo",
32             "count": 1
33         },
34         {
35             "_id": "personal",
36             "count": 2
37         },
38         {
39             "_id": "otros",
40             "count": 1
41         }
42     ]
43 }
44 }
```


9. GET <http://localhost:3005/api/tareas/prioridad/alta>

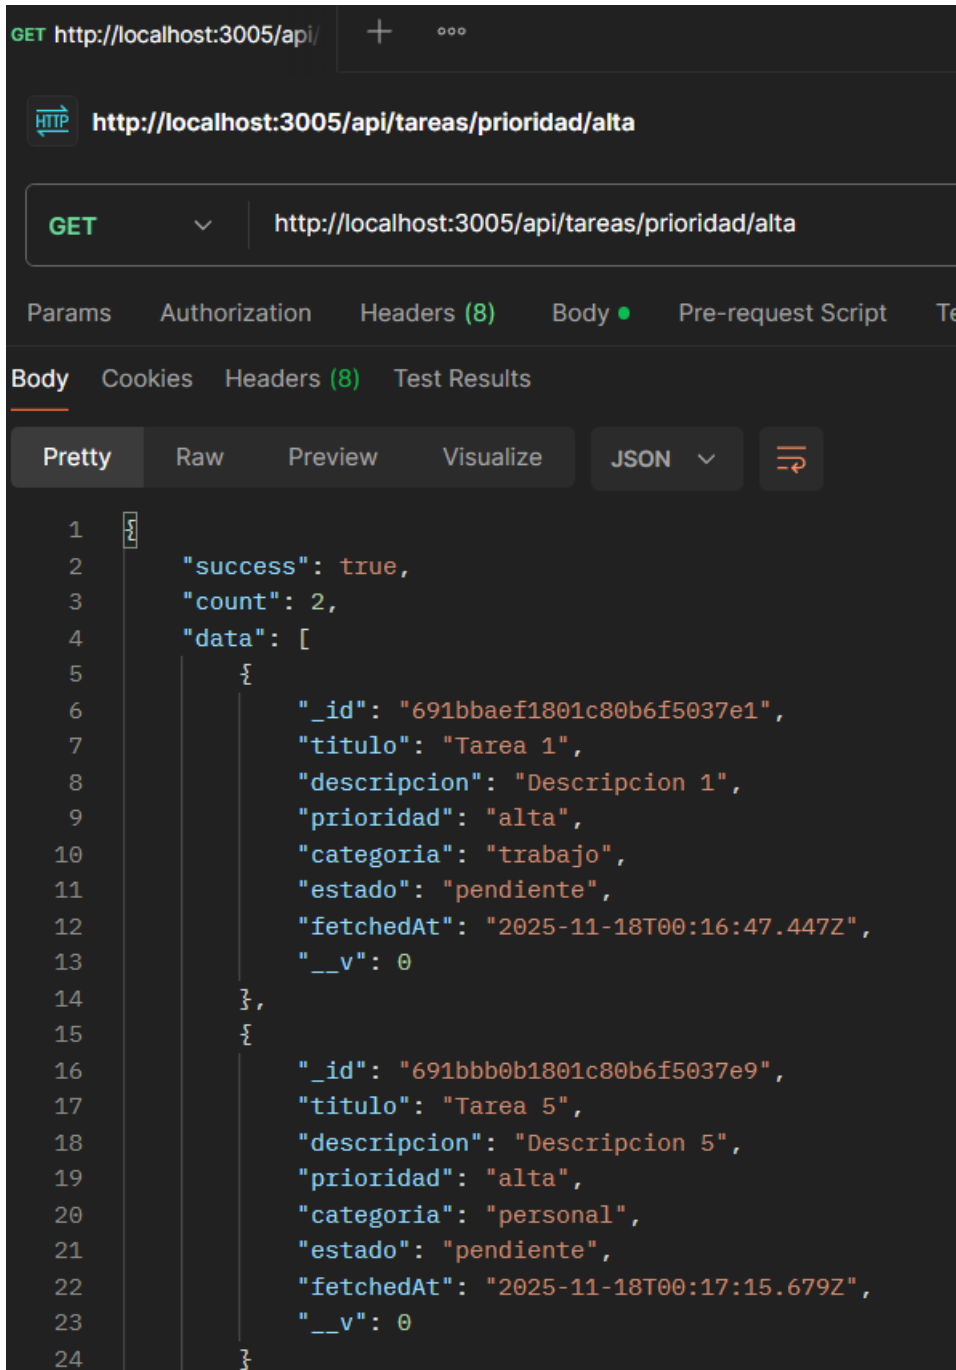

The screenshot shows a web browser's developer tools interface. The top bar indicates a GET request to `http://localhost:3005/api/`. Below this, the specific endpoint `http://localhost:3005/api/tareas/prioridad/alta` is selected. The 'Body' tab is active, displaying the response in 'Pretty' JSON format. The response is a successful GET request with a status of 200. The JSON body contains a 'success' flag set to true, a 'count' of 2, and a 'data' array with two task objects. Each task object includes an '_id', 'titulo', 'descripcion', 'prioridad', 'categoria', 'estado', 'fetchedAt', and '__v' (version) field.

```
1 {
2   "success": true,
3   "count": 2,
4   "data": [
5     {
6       "_id": "691bbaef1801c80b6f5037e1",
7       "titulo": "Tarea 1",
8       "descripcion": "Descripcion 1",
9       "prioridad": "alta",
10      "categoria": "trabajo",
11      "estado": "pendiente",
12      "fetchedAt": "2025-11-18T00:16:47.447Z",
13      "__v": 0
14    },
15    {
16      "_id": "691bbb0b1801c80b6f5037e9",
17      "titulo": "Tarea 5",
18      "descripcion": "Descripcion 5",
19      "prioridad": "alta",
20      "categoria": "personal",
21      "estado": "pendiente",
22      "fetchedAt": "2025-11-18T00:17:15.679Z",
23      "__v": 0
24    }
25  ]
26 }
```