

IZITOAST

v1.3.0

Elegant, responsive, flexible and lightweight notification plugin with no dependencies.

EXAMPLES

[Info](#)[Success](#)[Warning](#)[Error](#)[Question](#)[Progress](#)[Custom I](#)[Custom II](#)[Star](#)

1,386

[Download](#)[Tweet](#)[Like 747](#)[Share](#)

A plugin for perky developers.



Fast



Responsive



Animated



Lightweight



Customizable



Free

Changelog

✓ All modern browsers are supported. (Tested in Chrome, Firefox, Opera, Safari, IE10+ and Edge).

🐞 Bugs or suggestions for improvements? create a issue [here](#).

1.3.0 (Updated on Mar 10, 2018)

NEW closeOnClick option - Implemented ✓

NEW Inputs option - Implemented ✓

NEW Html structure improving - Implemented ✓

BUG TypeScript Interfaces - Fixed ✓

BUG Issue #97 - Fixed ✓

BUG Progress control / Issue #108 - Fixed ✓



1.2.0

- NEW Question type - **Implemented ✓**
- NEW Progress Bar improving (FPS optimizations) - **Implemented ✓**
- NEW progressBarEasing option - **Implemented ✓**
- NEW overlay, overlayClose and overlayColor options - **Implemented ✓**
- NEW closeOnEscape option - **Implemented ✓**
- NEW Progress Bar methods (start, reset, pause and resume) - **Implemented ✓**
- NEW TypeScript Interfaces - **Implemented ✓**
- NEW Gulpfile - **Added ✓**
- BUG Timeout with pauseOnHover and resetOnHover cannot be used without progressBar - **Fixed ✓**
- BUG Timeout for displaying each internal button - **Fixed ✓**



1.1.5

- NEW Html structure improving - **Implemented ✓**
- BUG Css min height of toast - **Fixed ✓**
- BUG Corrected nomenclature in new event function - **Fixed ✓**
- BUG Condition of showing progress bar or not - **Fixed ✓**

1.1.4

- BUG Progress Bar resetOnHover - **Fixed ✓**

1.1.2 / 1.1.3



- NEW** toastOnce option - **Implemented ✓**
- NEW** Info Icon and icons for the Dark theme - **Implemented ✓**
- NEW** Theme option (*light or dark*) - **Implemented ✓**
- NEW** options onOpening, onOpened, onClosing and onClosed - **Implemented ✓**
- NEW** Listeners iziToast-opening/opened/closing/closed - **Implemented ✓**
- NEW** id option - **Implemented ✓**
- NEW** maxWidth option - **Implemented ✓**
- NEW** Multiple classes in the option - **Implemented ✓**
- NEW** FontSize and LineHeight options for title and message - **Implemented ✓**
- NEW** Improvements in Listener iziToast-opening/opened/closing/closed (ClosedBy and all other toast settings) - **Implemented ✓**
- NEW** CustomEvent polyfill - **Implemented ✓**
- BUG** Incompatibility with iziModal animations - **Fixed ✓**
- BUG** RTL alignments - **Fixed ✓**
- BUG** Balloon Toast arrow color does not change when a background is set - **Fixed ✓**

1.1.0 / 1.1.1

- NEW** Drag/Touch support - **Implemented ✓**
- NEW** ClosedBy param ('drag' or 'button') - **Implemented ✓**
- NEW** Targetfirst option - **Implemented ✓**
- NEW** Background & message color options - **Implemented ✓**
- NEW** Write HTML elements in toast messages - **Implemented ✓**
- BUG** Leap in animation when used Target - **Fixed ✓**
- BUG** zIndex, unexpected behavior - **Fixed ✓**
- BUG** box-shadow of balloon toast with progressBar not applied correctly - **Fixed ✓**



1.0.2

- NEW Original stylus source files - **Implemented ✓**
- NEW Folder structure - **Modified ✓**
- NEW Larger zIndex and Option to set it - **Implemented ✓**
- BUG Flip animation - **Fixed ✓**
- BUG Wrong positioning of internal elements - **Fixed ✓**

1.0.1

- NEW Internet Explorer 10+ support - **Implemented ✓**

Start

↪ NPM › install

```
1 | npm install izitoast --save
```

Bower › install

```
1 | bower install izitoast
```



HTML › Include the CSS files from the dist folder in the *head* section:

```
1 | <!-- <link rel="stylesheet" href="iziToast.min.css"> -->
```

HTML › Include the JS file before the *scripts*

```
1 | <!-- <script src="iziToast.min.js" type="text/javascript"></script> -->
```

JS › Basic example

```
1 | iziToast.show({  
2 |   title: 'Hey',  
3 |   message: 'What would you like to add?'  
4 |});
```

ICONS › Tested and recommended

One need only incorporate the CSS of icons and use the corresponding class.

↪ Icomoon

↪ Fontawesome

Options

Default Options (51)



```
1  iziToast.show({
2    id: null,
3    class: '',
4    title: '',
5    titleColor: '',
6    titleSize: '',
7    titleLineHeight: '',
8    message: '',
9    messageColor: '',
10   messageSize: '',
11   messageLineHeight: '',
12   backgroundColor: '',
13   theme: 'light', // dark
14   color: '', // blue, red, green, yellow
15   icon: '',
16   iconText: '',
17   iconColor: '',
18   image: '',
19   imageWidth: 50,
20   maxWidth: null,
21   zIndex: null,
22   layout: 1,
23   balloon: false,
24   close: true,
25   closeOnEscape: false,
26   closeOnClick: false,
27   rtl: false,
28   position: 'bottomRight', // bottomRight, bottomLeft, topRight, topLeft, topCenter, bottomCe
29   target: '',
30   targetFirst: true,
31   toastOnce: false,
32   timeout: 5000,
33   animateInside: true,
34   drag: true,
35   pauseOnHover: true,
36   resetOnHover: false,
37   progressBar: true,
38   progressBarColor: '',
39   progressBarEasing: 'linear',
```



```
40     overlay: false,
41     overlayClose: false,
42     overlayColor: 'rgba(0, 0, 0, 0.6)',
43     transitionIn: 'fadeInUp',
44     transitionOut: 'fadeOut',
45     transitionInMobile: 'fadeInUp',
46     transitionOutMobile: 'fadeOutDown',
47     buttons: {},
48     inputs: {},
49     onOpening: function () {},
50     onOpened: function () {},
51     onClosing: function () {},
52     onClosed: function () {}
53 });


```

ARGUMENT	DEFAULT VALUE	DESCRIPTION
class	"	The class that will be applied to the toast. It may be used as a reference.
title	"	Title of the toast.
titleColor	"	Title color.
titleSize NEW	"	Title fontSize.
titleLineHeight NEW	"	Title lineHeight.
message	"	Message of notification.
messageColor	"	Message color.
messageSize NEW	"	Message fontSize.

messageLineHeight	"	Message lineHeight.
	NEW	
backgroundColor	"	Background color of the Toast
theme	"	It can be light or dark or set another class. Create and use like this ".iziToast-theme-name"
color	"	It can be #hexadecimal, pre-defined themes like blue , red , green and yellow or set another class. Create and use like this ".iziToast-color-name"
icon	"	Icon class (font-icon of your choice, Icomoon , Fontawesome etc.).
iconText	"	Icon text (font-icon using text, Material Icons , etc.).
iconColor	"	Icon color.
image	"	Cover image. Example
imageWidth	50	Width of cover image. Example 100px
maxWidth	NEW null	set maxWidth of toast. Example 500px
zindex	99999	The z-index CSS attribute of the toast
layout	1	Example Small e Example Medium . It can be 1 or 2 , or use another layout, creating the class like this: ".iziToast-layout3"
balloon	false	Applies a balloon like toast. Example .
close	true	Show "x" close button
closeOnEscape	false	Allows to close toast using the Esc key.
	NEW	



<code>closeOnClick</code> <small>NEW</small>	<code>false</code>	Allows to close toast clicking on it.
<code>rtl</code>	<code>false</code>	RTL option
<code>position</code>	<code>'bottomRight'</code>	Where it will be shown. It can be <code>bottomRight</code> , <code>bottomLeft</code> , <code>topRight</code> , <code>topLeft</code> , <code>topCenter</code> , <code>bottomCenter</code> or <code>center</code> .
<code>target</code>	<code>"</code>	Fixed place where you want to show the toasts. Example
<code>targetFirst</code>	<code>true</code>	Add toast to first position.
<code>toastOnce</code> <small>NEW</small>	<code>false</code>	Waits for another toast to be closed on 'onClosed' function. You'll need an ID to use it.
<code>timeout</code>	<code>5000</code>	Amount in milliseconds to close the toast or false to disable.
<code>drag</code>	<code>true</code>	Drag Feature. Is used to close the toast.
<code>pauseOnHover</code>	<code>true</code>	Pause the toast timeout while the cursor is on it. Example
<code>resetOnHover</code>	<code>false</code>	Reset the toast timeout while the cursor is on it. Example
<code>progressBar</code>	<code>true</code>	Enable timeout progress bar.
<code>progressBarColor</code>	<code>"</code>	Progress bar color.
<code>progressBarEasing</code> <small>NEW</small>	<code>'linear'</code>	Animation Easing of progress bar.
<code>overlay</code> <small>NEW</small>	<code>false</code>	Enables display the Overlay layer on the page.
<code>overlayClose</code> <small>NEW</small>	<code>false</code>	Allows to close toast clicking on the Overlay.
<code>overlayColor</code> <small>NEW</small>	<code>'rgba(0, 0, 0,</code>	Overlay background color.



0.6)'

animateInside	<code>true</code>	Enable animations of elements in the toast. Example True and Example False .
buttons	<code>{}</code>	You can specify an array of buttons. Example
inputs	<code>{}</code>	You can specify an array of inputs. Example
transitionIn	<code>'fadeInUp'</code>	Default toast open animation. It can be: <code>bounceInLeft</code> , <code>bounceInRight</code> , <code>bounceInUp</code> , <code>bounceInDown</code> , <code>fadeIn</code> , <code>fadeInDown</code> , <code>fadeInUp</code> , <code>fadeInLeft</code> , <code>fadeInRight</code> or <code>flipInX</code> .
transitionOut	<code>'fadeOut'</code>	Default toast close animation. It can be: <code>fadeOut</code> , <code>fadeOutUp</code> , <code>fadeOutDown</code> , <code>fadeOutLeft</code> , <code>fadeOutRight</code> , <code>flipOutX</code>
transitionInMobile	<code>'fadeInUp'</code>	Default toast opening mobile transition.
transitionOutMobile	<code>'fadeOutDown'</code>	Default toast closing mobile transition.
onOpening <small>NEW</small>	<code>function() {}</code>	Callback function triggered when opening the toast.
onOpened <small>NEW</small>	<code>function() {}</code>	Callback function triggered when onOpened the toast.
onClosing <small>NEW</small>	<code>function() {}</code>	Callback function triggered when closing the toast.
onClosed <small>NEW</small>	<code>function() {}</code>	Callback function triggered when closed the toast.

Methods

Settings

is used to set default values.



```
1 iziToast.settings({
2   timeout: 10000,
3   resetOnHover: true,
4   icon: 'material-icons',
5   transitionIn: 'flipInX',
6   transitionOut: 'flipOutX',
7   onOpening: function(){
8     console.log('callback abriu!');
9   },
10  onClosing: function(){
11    console.log("callback fechou!");
12  }
13});
```

Show

Opens the toast. (Example with buttons).

```
1 iziToast.show({
2   theme: 'dark',
3   icon: 'icon-person',
4   title: 'Hey',
5   message: 'Welcome!',
6   position: 'center', // bottomRight, bottomLeft, topRight, topLeft, topCenter, bottomCenter
7   progressBarColor: 'rgb(0, 255, 184)',
8   buttons: [
9     ['<button>Ok</button>', function (instance, toast) {
10       alert("Hello world!");
11     }, true], // true to focus
12     ['<button>Close</button>', function (instance, toast) {
13       instance.hide({
14         transitionOut: 'fadeOutUp',
15         onClosing: function(instance, toast, closedBy){
16           console.info('closedBy: ' + closedBy); // The return will be: 'closedBy: buttonName'
17         }
18       }, toast, 'buttonName');
19     }]
20   ],
21   onOpening: function(instance, toast){
```

Example

```
22     console.info('callback abriu!');  
23 },  
24 onClosing: function(instance, toast, closedBy){  
25     console.info('closedBy: ' + closedBy); // tells if it was closed by 'drag' or 'button'  
26 }  
27 );
```

Hide Closes the specific toast.

```
1 var toast = document.querySelector('.iziToast'); // Selector of your toast  
2  
3 iziToast.hide(toast);  
4  
5 // Or make new settings  
6  
7 iziToast.hide({  
8     transitionOut: 'fadeOutUp'  
9 }, toast);
```

Progress Control progress bar time.

```
1 var toast = document.querySelector('.iziToast'); // Selector of your toast  
2  
3 iziToast.progress({}, toast).reset(); // Reset progress bar time  
4  
5 iziToast.progress({}, toast).pause(); // Pause progress bar time  
6  
7 iziToast.progress({}, toast).resume(); // Resume progress bar time  
8  
9 iziToast.progress({}, toast).start(); // Start progress bar time  
10  
11 // Full example  
12 iziToast.progress(options, toast, callback).start();
```



Destroy

Destroy all toasts.

```
1 | iziToast.destroy();
```

You can use four predefined types that have icon and different colors.

Info

```
1 | iziToast.info({
2 |   title: 'Hello',
3 |   message: 'Welcome!',
4 |});
```

Example

Success

```
1 | iziToast.success({
2 |   title: 'OK',
3 |   message: 'Successfully inserted record!',
4 |});
```

Example

Warning

```
1 | iziToast.warning({
2 |   title: 'Caution',
3 |   message: 'You forgot important data',
4 |});
```

Example



Error

```
1 iziToast.error({
2   title: 'Error',
3   message: 'Illegal operation',
4 });
```

Example

Question

```
1 iziToast.question({
2   timeout: 20000,
3   close: false,
4   overlay: true,
5   toastOnce: true,
6   id: 'question',
7   zIndex: 999,
8   title: 'Hey',
9   message: 'Are you sure about that?',
10  position: 'center',
11  buttons: [
12    ['<button><b>YES</b></button>', function (instance, toast) {
13
14      instance.hide({ transitionOut: 'fadeOut' }, toast, 'button');
15
16    }, true],
17    ['<button>NO</button>', function (instance, toast) {
18
19      instance.hide({ transitionOut: 'fadeOut' }, toast, 'button');
20
21    }],
22  ],
23  onClosing: function(instance, toast, closedBy){
24    console.info('Closing | closedBy: ' + closedBy);
25  },
26  onClosed: function(instance, toast, closedBy){
```

Example



```
27     console.info('Closed | closedBy: ' + closedBy);
28 }
29});
```

Inputs

```
1 iziToast.info({
2   timeout: 20000,
3   overlay: true,
4   toastOnce: true,
5   id: 'inputs',
6   zIndex: 999,
7   title: 'Inputs',
8   message: 'Examples',
9   position: 'center',
10  drag: false,
11  inputs: [
12    ['<input type="checkbox">', 'change', function (instance, toast, input, e) {
13      console.info(input.checked);
14    }],
15    ['<input type="text">', 'keyup', function (instance, toast, input, e) {
16      console.info(input.value);
17    }, true],
18    ['<input type="number">', 'keydown', function (instance, toast, input, e) {
19      console.info(input.value);
20    }],
21  ],
22});
```

Example



Events



Open

Capture when the toast is opening.

```
1 // You can compare by any option (id, class..)
2
3 document.addEventListener('iziToast-open', function(data){
4     if(data.settings.class == 'test'){ // data.detail will have all toast settings.
5         console.info('EventListener iziToast-open');
6     }
7});
```


Close

Capture when the toast is closing.

```
1 document.addEventListener('iziToast-close', function(data){
2     if(data.settings.class == 'test'){
3         console.info('EventListener iziToast-close');
4         console.info(data.detail.closedBy);
5     }
6});
```

Made with  by Marcelo Dolce.



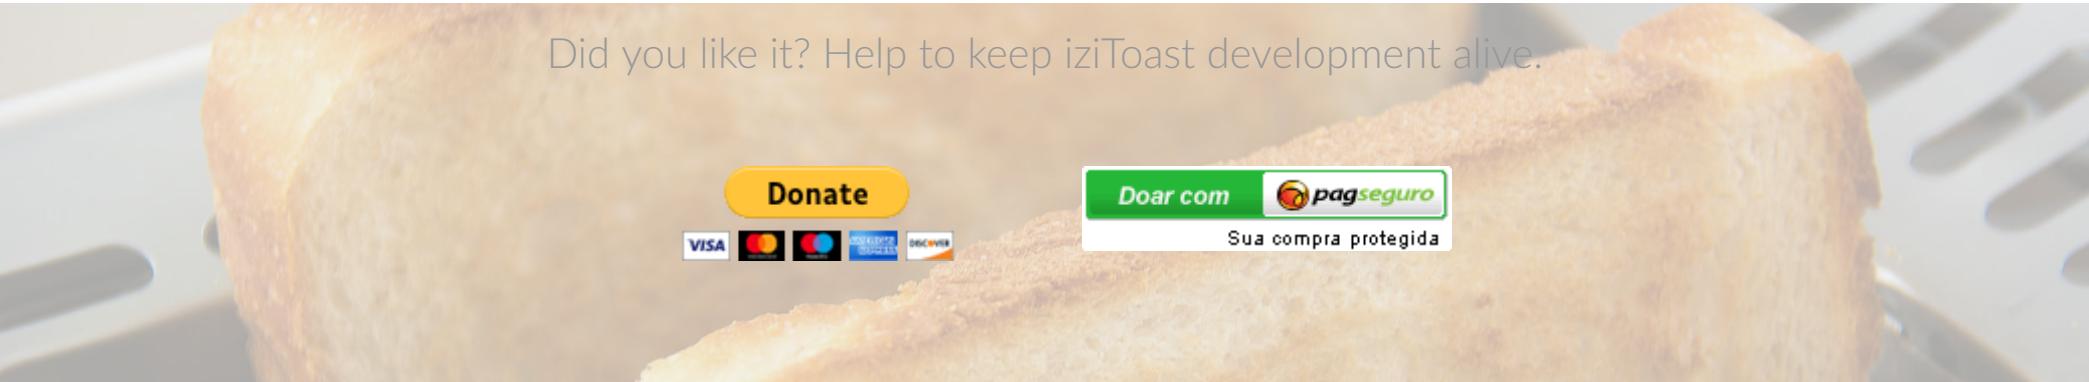

Did you like it? Help to keep iziToast development alive.

Donate



Doar com



Sua compra protegida

64 Comments

iziToast

1 Login

Recommend 25

Share

Sort by Best



Join the discussion...

LOG IN WITH



OR SIGN UP WITH DISQUS [?](#)

Name



Nicholas Lima • 2 years ago

Parabéns. Ficou muito bom!

30 ^ | v • Reply • Share ›



Okokoh Benjamin Ekuma • 7 months ago

do we have cdn

7 ^ | v • Reply • Share ›



Tiago Silva Pereira • 2 years ago

Top D++++ cara!!! Muito bom mesmo



3 ^ | v • Reply • Share ›

 **Megga Tym** • a year ago

Egg-cellent

2 ^ | v • Reply • Share ›

 **Luciano** • a year ago

Do you have any examples with HTML in the message?


2 ^ | v • Reply • Share ›

 **Leandro Iannece** ➔ Luciano • 8 months ago

You just need to add the HTML tags inside the 'message' option.


```
iziToast.show({  
    message: 'Back to <b>HomePage</b>',  
});
```

^ | v • Reply • Share ›

 **Sahib Singh** • a month ago

Unable to set 'closeOnClick' in the setting of toast ,, giving error that 'closeOnClick' doesnot exist, I have cheked the version and its latest.
please help..


1 ^ | v • Reply • Share ›

 **anoBoy** • 5 months ago

Awesome,

ASK : how to add a link if a image or button onclick ?

1 ^ | v • Reply • Share ›

 **Envy Hion** • a year ago

C'est tout simplement excellent: Good Work

1 ^ | v • Reply • Share ›





Anthony Alaribe • a year ago

THanks man. THis saved me hours of work

1 ^ | v • Reply • Share >



John McClane • a year ago

This is the best notification plugin that I have found. Congratullations!

1 ^ | v • Reply • Share >



Mrityunjaykumar Gupta • a year ago

awesome plugins

1 ^ | v • Reply • Share >



BadAllOff Shamil • a year ago

Excellent and marvellously looking! Wrote the gem to be able to integrate into the Rails without pain <https://github.com/BadAllOf...>

Thank you!

1 ^ | v • Reply • Share >



Marcelo Dolce Mod → BadAllOff Shamil • a year ago

Thanks man!

^ | v • Reply • Share >



Bellarmine Bulinda → Marcelo Dolce • 9 months ago

Hey. A basic example with html would be highly appreciated. Please!

^ | v • Reply • Share >



Leandro Iannece → Bellarmine Bulinda • 8 months ago

You just need to add the HTML tags inside the 'message' option.

```
iziToast.show({  
    message: 'Back to <b>HomePage</b>',  
});
```



^ | v • Reply • Share >



Bellarmino Bulinda → Leandro Iannece • 8 months ago

Thanks @Leandro. But would be great if I got a full simplified application to get started.

^ | v • Reply • Share >



Kai • a year ago

Lovely plugins, but the demos are broken.

1 ^ | v • Reply • Share >



Marcelo Dolce Mod → Kai • a year ago

Fixed @Kai, thank you!


1 ^ | v • Reply • Share >



Jonatan Passo de O. Brandao • a year ago

Boa tarde, estou tentando criar uma class para eu customizar fontes e tudo mais, mas não entendi como usar. Tipo eu fui no próprio arquivo de css do iziToast.css e criei uma class chamada .iziFontes, mas mesmo cou colocando o atributo na chamada do izi ele não pega... como devo usar este atributo class?

1 ^ | v • Reply • Share >



Marcelo Dolce Mod → Jonatan Passo de O. Brandao • a year ago

Olá @Jonatan Passo de O. Brandao, Você deseja estilizar um toast específico ou todos?

Se for todos pode fazer da seguinte forma (exemplo):

```
.iziToast strong, .iziToast p{  
font-family: arial;  
}
```

Se for um específico, só utilizar a option class: 'classe'
e depois no css (exemplo):

```
.classe strong, .classe p{  
font-family: arial;  
}
```

1 ^ | v • Reply • Share >





el capitancr • a year ago
incroyablement bien
1 ⤵ • Reply • Share ›



Danjava • a year ago
Wonderful!!!
1 ⤵ • Reply • Share ›




Oriol Jiménez • a year ago
Hi, it's awesome, it would be perfect if it allows to notify on desktop
<https://developer.mozilla.o...>
1 ⤵ • Reply • Share ›



BadAllOff Shamil • a year ago
Awesome _// Looks and feels really nice
1 ⤵ • Reply • Share ›



Rafael Andrade • 2 years ago
Fenomenal
1 ⤵ • Reply • Share ›



Willy Camargo • 2 years ago
Muito bom, parabéns! =)
1 ⤵ • Reply • Share ›



Juacy Willian • 2 years ago
muito bom mesmo... parabens
1 ⤵ • Reply • Share ›



xereda • 2 years ago





Que demais!!!!

1 ^ | v • Reply • Share >



Renan Oliveira • 2 years ago

TOP D+!!!!

1 ^ | v • Reply • Share >



Neto Neto • 2 years ago

congratulations!!!!

Amazing plugin!!!!

1 ^ | v • Reply • Share >



Gabriel Falkoski • 2 years ago

Muito Bom! Extremamente funcional e, ainda assim, lindo. Parabéns!


1 ^ | v • Reply • Share >



Appie Baw (안피) • 20 days ago

Good !

^ | v • Reply • Share >



Asaf Aviv • a month ago

is there a way to color the Close button ?

and topRight position covers the navbar is there a way to move it alittle bit down ?

^ | v • Reply • Share >



Richie-Rich Powell • a month ago

There are an awful lot of animations with this and iziModal, most of which - I presume - could be combined. Could you somehow merge the animations of your two scripts so that we're not including them twice?

^ | v • Reply • Share >



Al Faris • 2 months ago



Afrans • 2 months ago

Awesome plugin, Terima kasih means Thank You in indonesian.

^ | v • Reply • Share >



Jadson Firmao • 2 months ago

Gostei muito desse toast. No entanto não consegui configurar o input dentro dele, é como se não reconhecesse inputs.



^ | v • Reply • Share >



clluiz • 2 months ago

There is a way to show a message inside a HTML element?

^ | v • Reply • Share >



Jonathan Lepage • 3 months ago

can be also cool if you can add
balloonPosX: Number,

^ | v • Reply • Share >



Jonathan Lepage • 3 months ago

iziToast.destroy(); don't take the the default easing assigned, or maybe add iziToast.closeAll();

^ | v • Reply • Share >



Aslam Mohammed • 3 months ago

Brilliant

^ | v • Reply • Share >



Aslam Mohammed • 3 months ago

Elegant



^ v • Reply • Share ›



Rimon Integral • 4 months ago

Didn't find the example of Question. The code show only Yes and no button.... Do you have any example of question with input fields??

```
iziToast.question({  
  timeout: 20000,  
  close: false,  
  overlay: true,  
  toastOnce: true,  
  id: 'question',  
  zIndex: 999,  
  title: 'Hey',  
  message: 'Are you sure about that?',  
  position: 'center',  
  buttons: [  
    '<button>YES</button>', function (instance, toast) {  
  
      instance.hide({ transitionOut: 'fadeOut' }, toast, 'button');  
  
    }, true],  
    '<button>NO</button>', function (instance, toast) {
```

see more

^ v • Reply • Share ›



Marcos Augusto ➔ Rimon Integral • 2 months ago

The instance.hide function has changed, now is something like this:

```
iziToast.hide(toast, {  
  transitionOut: 'fadeOutUp'  
});
```

issue: <https://github.com/dolce/iz...>



^ v • Reply • Share >



Christopher Martinez • 4 months ago

Can you post more examples of using the new inputs?

^ v • Reply • Share >



Moshe Avni • 4 months ago

best vanilla toastr out there. thanks!

^ v • Reply • Share >



Apsantos Dev • 5 months ago

Fantástico \o/ Parabéns Marcelo!

Inspirador, não somente na parte de UX/UI mas também pela documentação.
A organização das versões, utilização, GitHub etc.



Um ótimo exemplo de como desenvolver um projeto com qualidade.

Obrigado por compartilhar! =]

^ v • Reply • Share >



Md Zahedul Hoque • 7 months ago

anyone can help me how to use with Ajax message or PHP message call this, any Video?

^ v • Reply • Share >



Nick Green • 7 months ago

the version of npm is 1.1.5 that's not the last one, please update it

^ v • Reply • Share >



Marcelo Dolce Mod → Nick Green • 6 months ago

v1.2.0 published

^ v • Reply • Share >




Load more comments

 [Subscribe](#)

 [Add Disqus to your site](#)

 [Disqus' Privacy Policy](#)

DISQUS

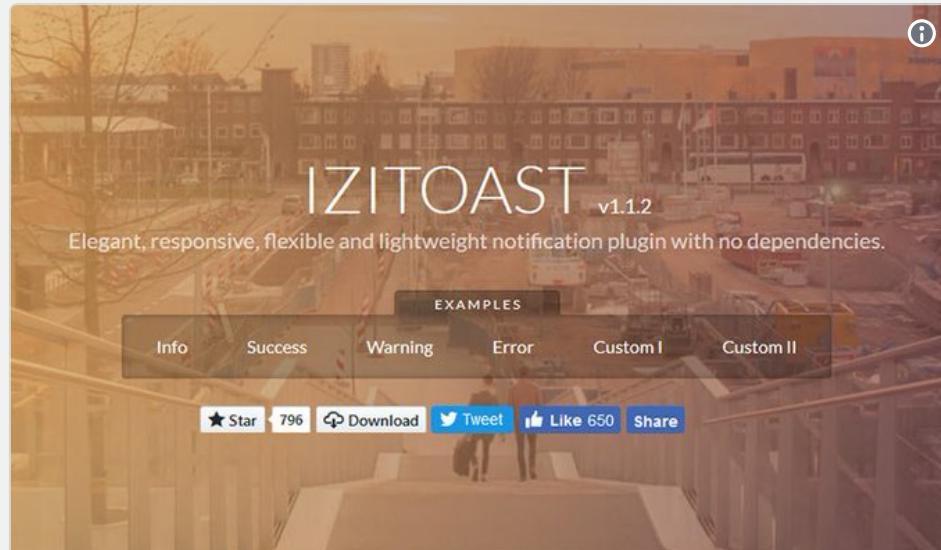

jQuery Rain
@jquery_rain

iziToast : Flexible & Lightweight Notification
Plugingoo.gl/uQJvJY #javascript

12:20 - 20 de mai de 2017

 24  16 pessoas estão falando sobre isso




 **Speckyboy**
@speckyboy

iziToast - Elegant, responsive, flexible and lightweight
notification plugin with no dependencies
izitoast.marcelodolce.com

20:01 - 21 de nov de 2016

 46  22 pessoas estão falando sobre isso



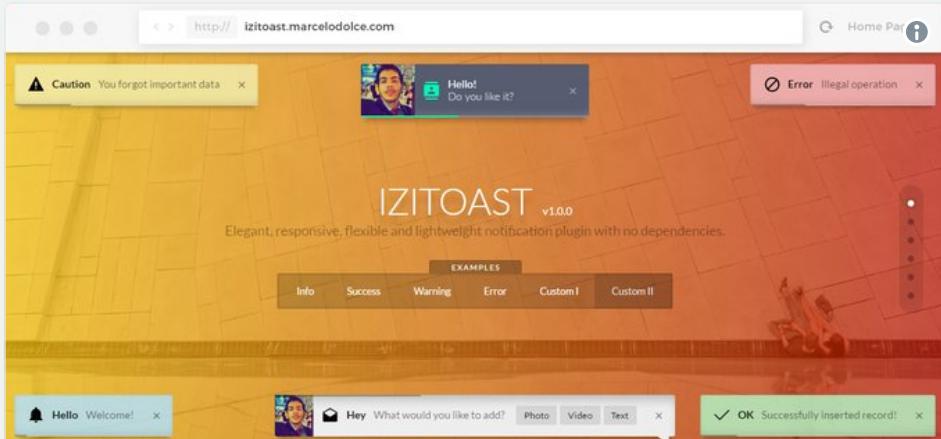

 **Marcelo Dolce**
@marcelodolce



#IZIToast.js - Elegant, responsive, flexible and lightweight notification [#plugin](#) with no dependencies.

[#javascriptizitoast.marcelodolce.com](#)

16:52 - 18 de nov de 2016

 14  Veja outros Tweets de Marcelo Dolce

 **Tutorialzine**
@Tutorialzine



iziToast - No-dependencies JavaScript library for awesome looking notification popups izitoast.marcelodolce.com

16:36 - 21 de nov de 2016



iziToast.js

Elegant, responsive, flexible and lightweight notification plugin with no dependencies.

izitoast.marcelodolce.com

 28  Veja outros Tweets de Tutorialzine



[Home](#) • [Documentation](#) • [Repository](#)

Copyright 2018 - All rights reserved.

