

Deep Learning in Medical Imaging^[1]

Roxane Licandro
licandro@caa.tuwien.ac.at


Agenda

- Medical Data Acquisition
- Neural Networks History
- Medical Applications
- Network Exploration
- Summary


Medical Data Acquisition

Medical Imaging – Modality

- Computer Tomography (CT)
- Magnet Resonance Imaging (MRI)
- Positron Emission Tomography (PET)/CT
- Histological Images
- Flow Cytometry, Biomarkers
- Ultrasound
- X-Ray




Flow Cytometry

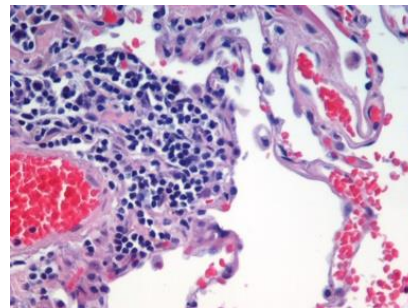


Histological Image

https://en.wikipedia.org/wiki/File:Emphysema_H_and_E.jpg

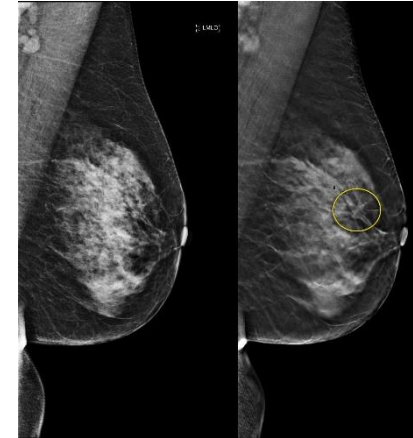

X-Ray Mammography

<http://img.medscapestatic.com/pi/meds/ckb/35/15935.jpg>

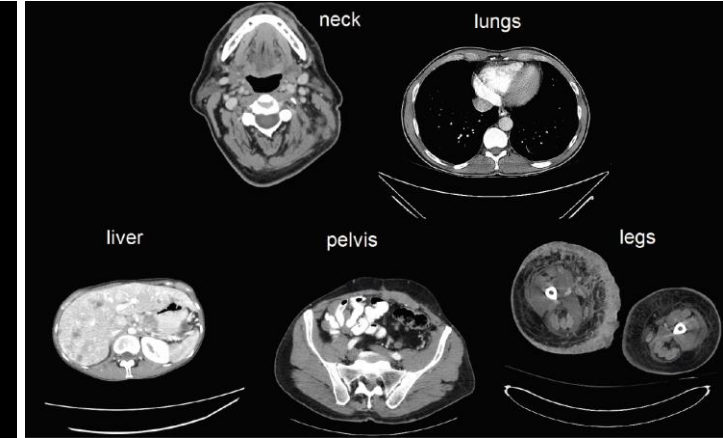


CT Images

Roth et al. ISBI 2015



Ultrasound

https://en.wikipedia.org/wiki/Ultrasound#/media/File:CRL_Crown_rump_length_12_weeks_ecografia_Dr._Wolfgang_Moroder.jpg

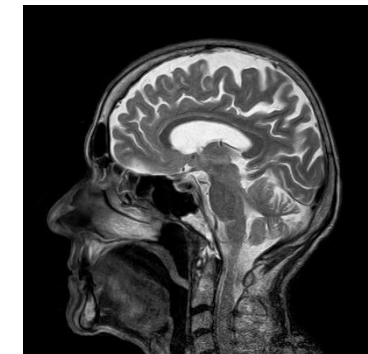

MRI

<https://pixabay.com/de/mri-magnetresonanztomographie-sch%C3%A4del-782459/>



First X-Ray - Roentgen

Medical Imaging - Challenges


- Subject specific variances
- Small study populations/datasets
- Developmental differences
- Heterogeneity of pathology
- Treatment response
- Annotation needs experts

Neural Networks History


Neural Networks in Medical Imaging in the Past

- Convolution neural network (CNN)

- Lung nodule detection 1993 [2], micro calcification mammography 1995 [3]
- Classification of breast tissue 1996 [4]

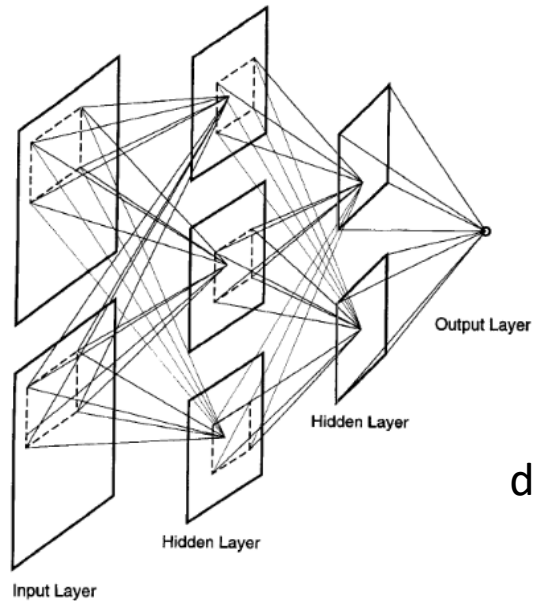


mass

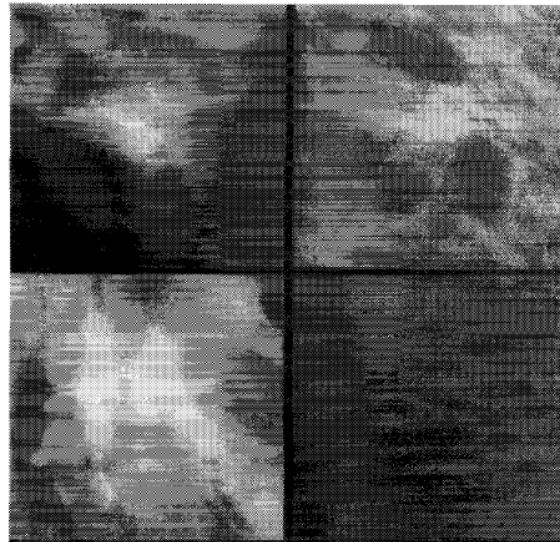

Mixed dense
fatty tissue

Fatty
tissue

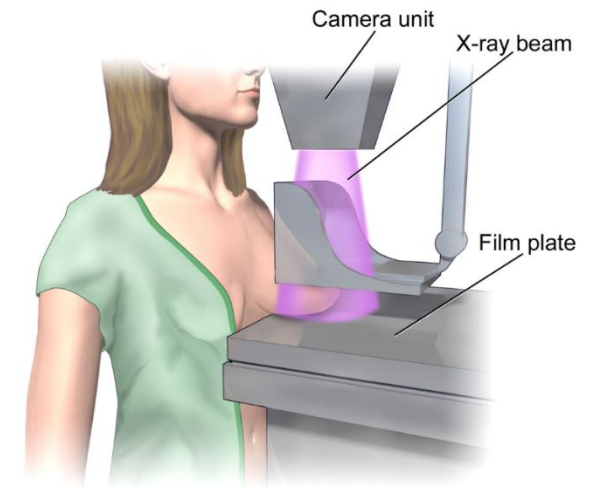

Mammogram


Blausen.com staff. "Blausen gallery 2014". Wikiversity Journal of Medicine. DOI:10.15347/wjm/2014.010. ISSN 20018762.

Sahiner et al. 1996 [4]

Neural Networks in Medical Imaging in the Past

- Convolution neural network (CNN)

- Lung nodule detection 1993 [2], micro calcification mammography 1995 [3]
- Classification of breast tissue 1996 [4]

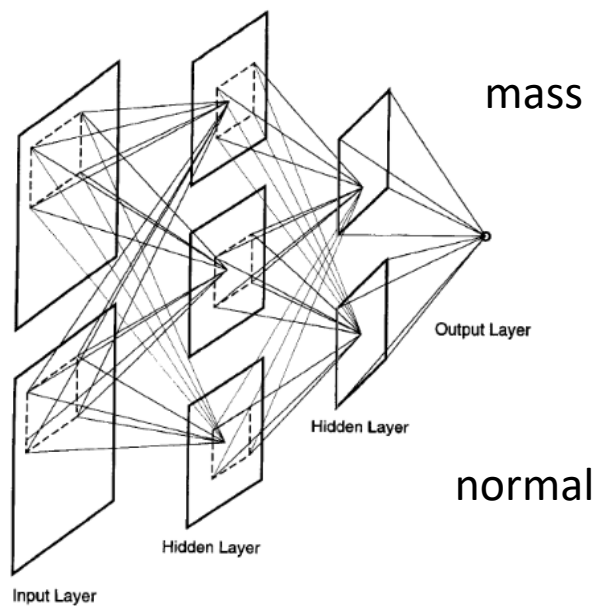

Sahiner et al. 1996 [4]


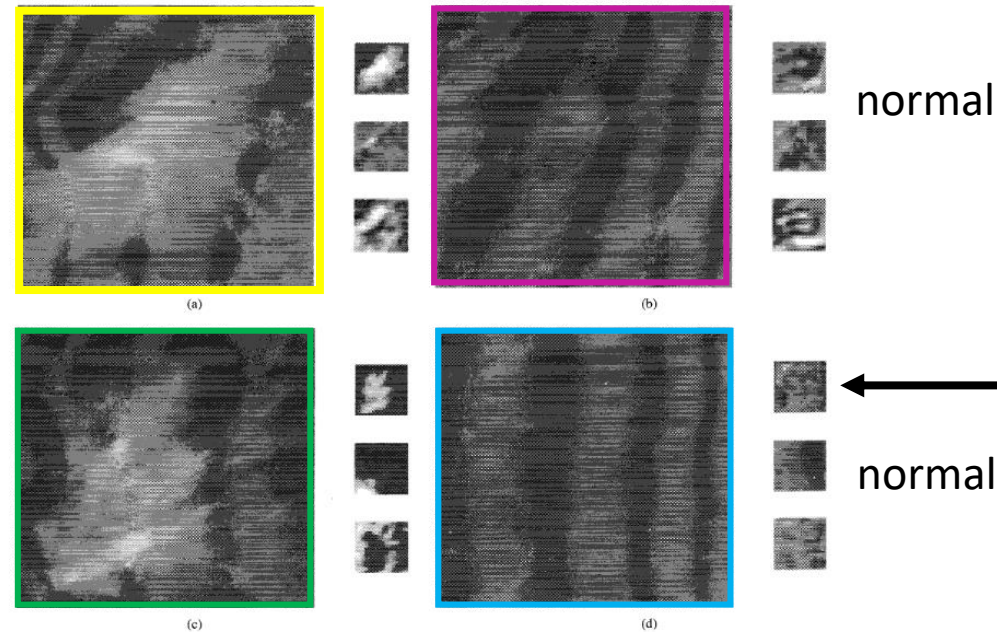


Fig. 11. Background corrected image, subsampled image, GLDS mean texture-image at $d_0 = 4$, and SGLD correlation texture-image at $d_0 = 16$ for (a) a mass ROI, as shown in Fig. 4(b), and (b)-(d) three nonmass ROI's extracted from the same mammogram.

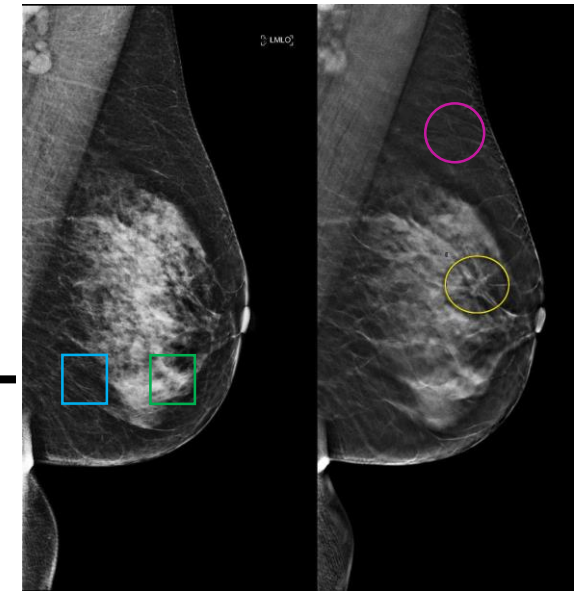

<http://img.medscapestatic.com/pi/meds/ckb/35/15935.jpg>

Neural Networks in Medical Imaging Today

- **Deep CNN**

- „Computationally expensive“ – acceleration using GPU
- Highly parallelizable
- Deep architecture for feature extraction

- **Deep CNN Training**

- Large amount of training data and labels
- Large computational and memory resources
- Overfitting and convergence as possible complication

Neural Networks in Medical Imaging Today

- **Supervised**

- Annotation required
- Majority of works supervised CNNs
- Dimensionality of input data (2D, 2.5D, 3D)
- Application: Segmentation, detection and labeling

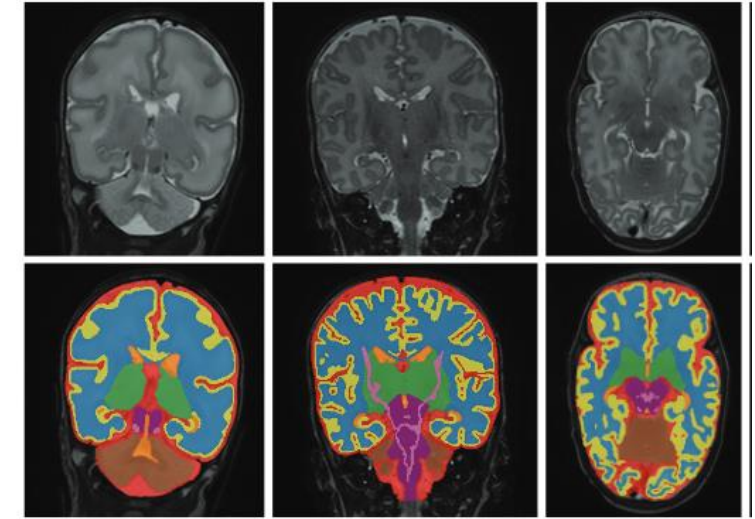


Image from Moeskops et al. [9]

- **Unsupervised**

- No annotation required
- Large computational and memory resources
- Overfitting and convergence as possible complication
- Application: Image encoding, representation and preprocessing

Can deep networks be used effectively for medical tasks?

How can we use the training data most efficiently?

Medical Applications

Medical Applications

- Pathology Detection and Computer Aided Diagnoses
- Segmentation and Shape Modelling
- Classification
- Action Recognition


Medical Applications

- Pathology Detection and Computer Aided Diagnoses
- Segmentation and Shape Modelling
- Classification
- Action Recognition

Medical Applications – Pathology Detection


- 2D CNN

- 2D Patch of image data centered on the location of pathology
- Setio et al. [5] pulmonary nodules, 3D CT scans of chest,

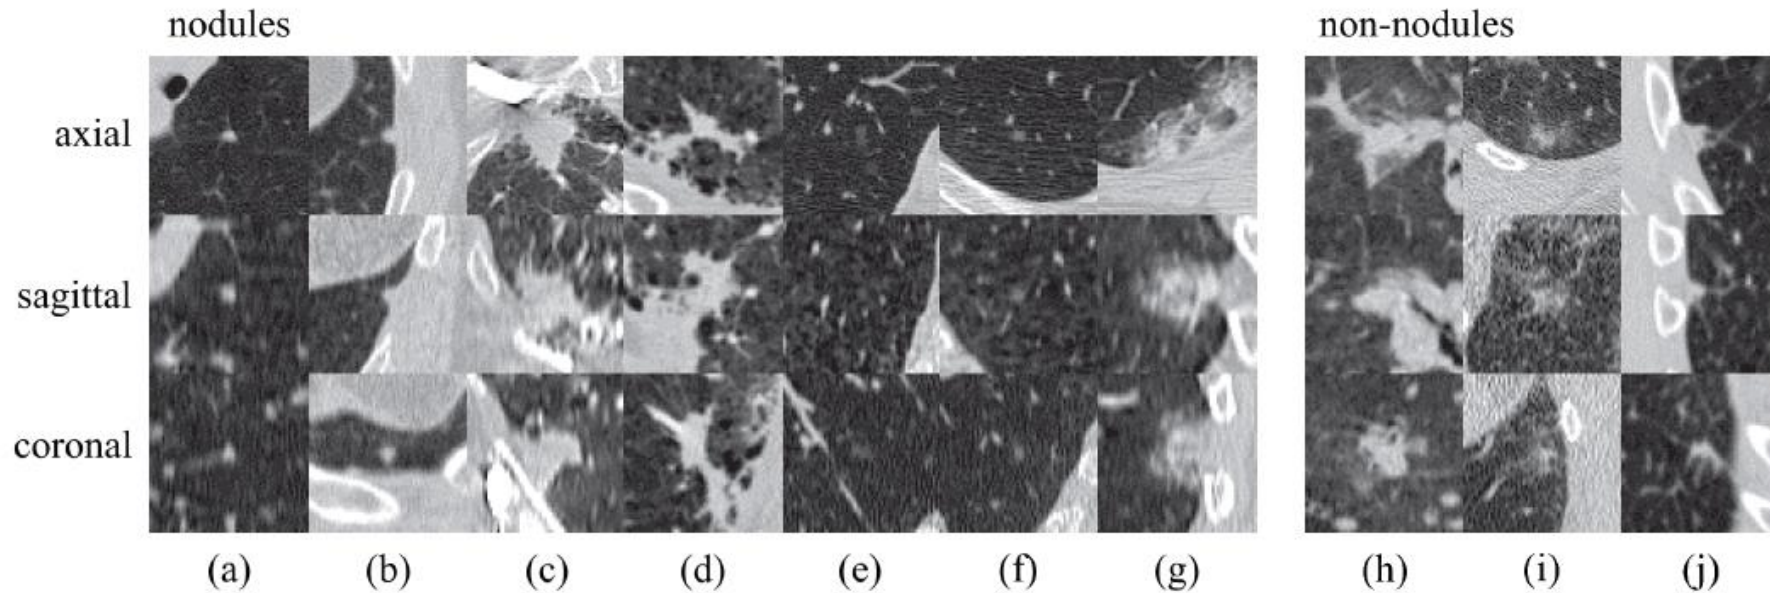

Setio et al. [5], Detection of pulmonary nodules


Image taken from Setio et al. [5]

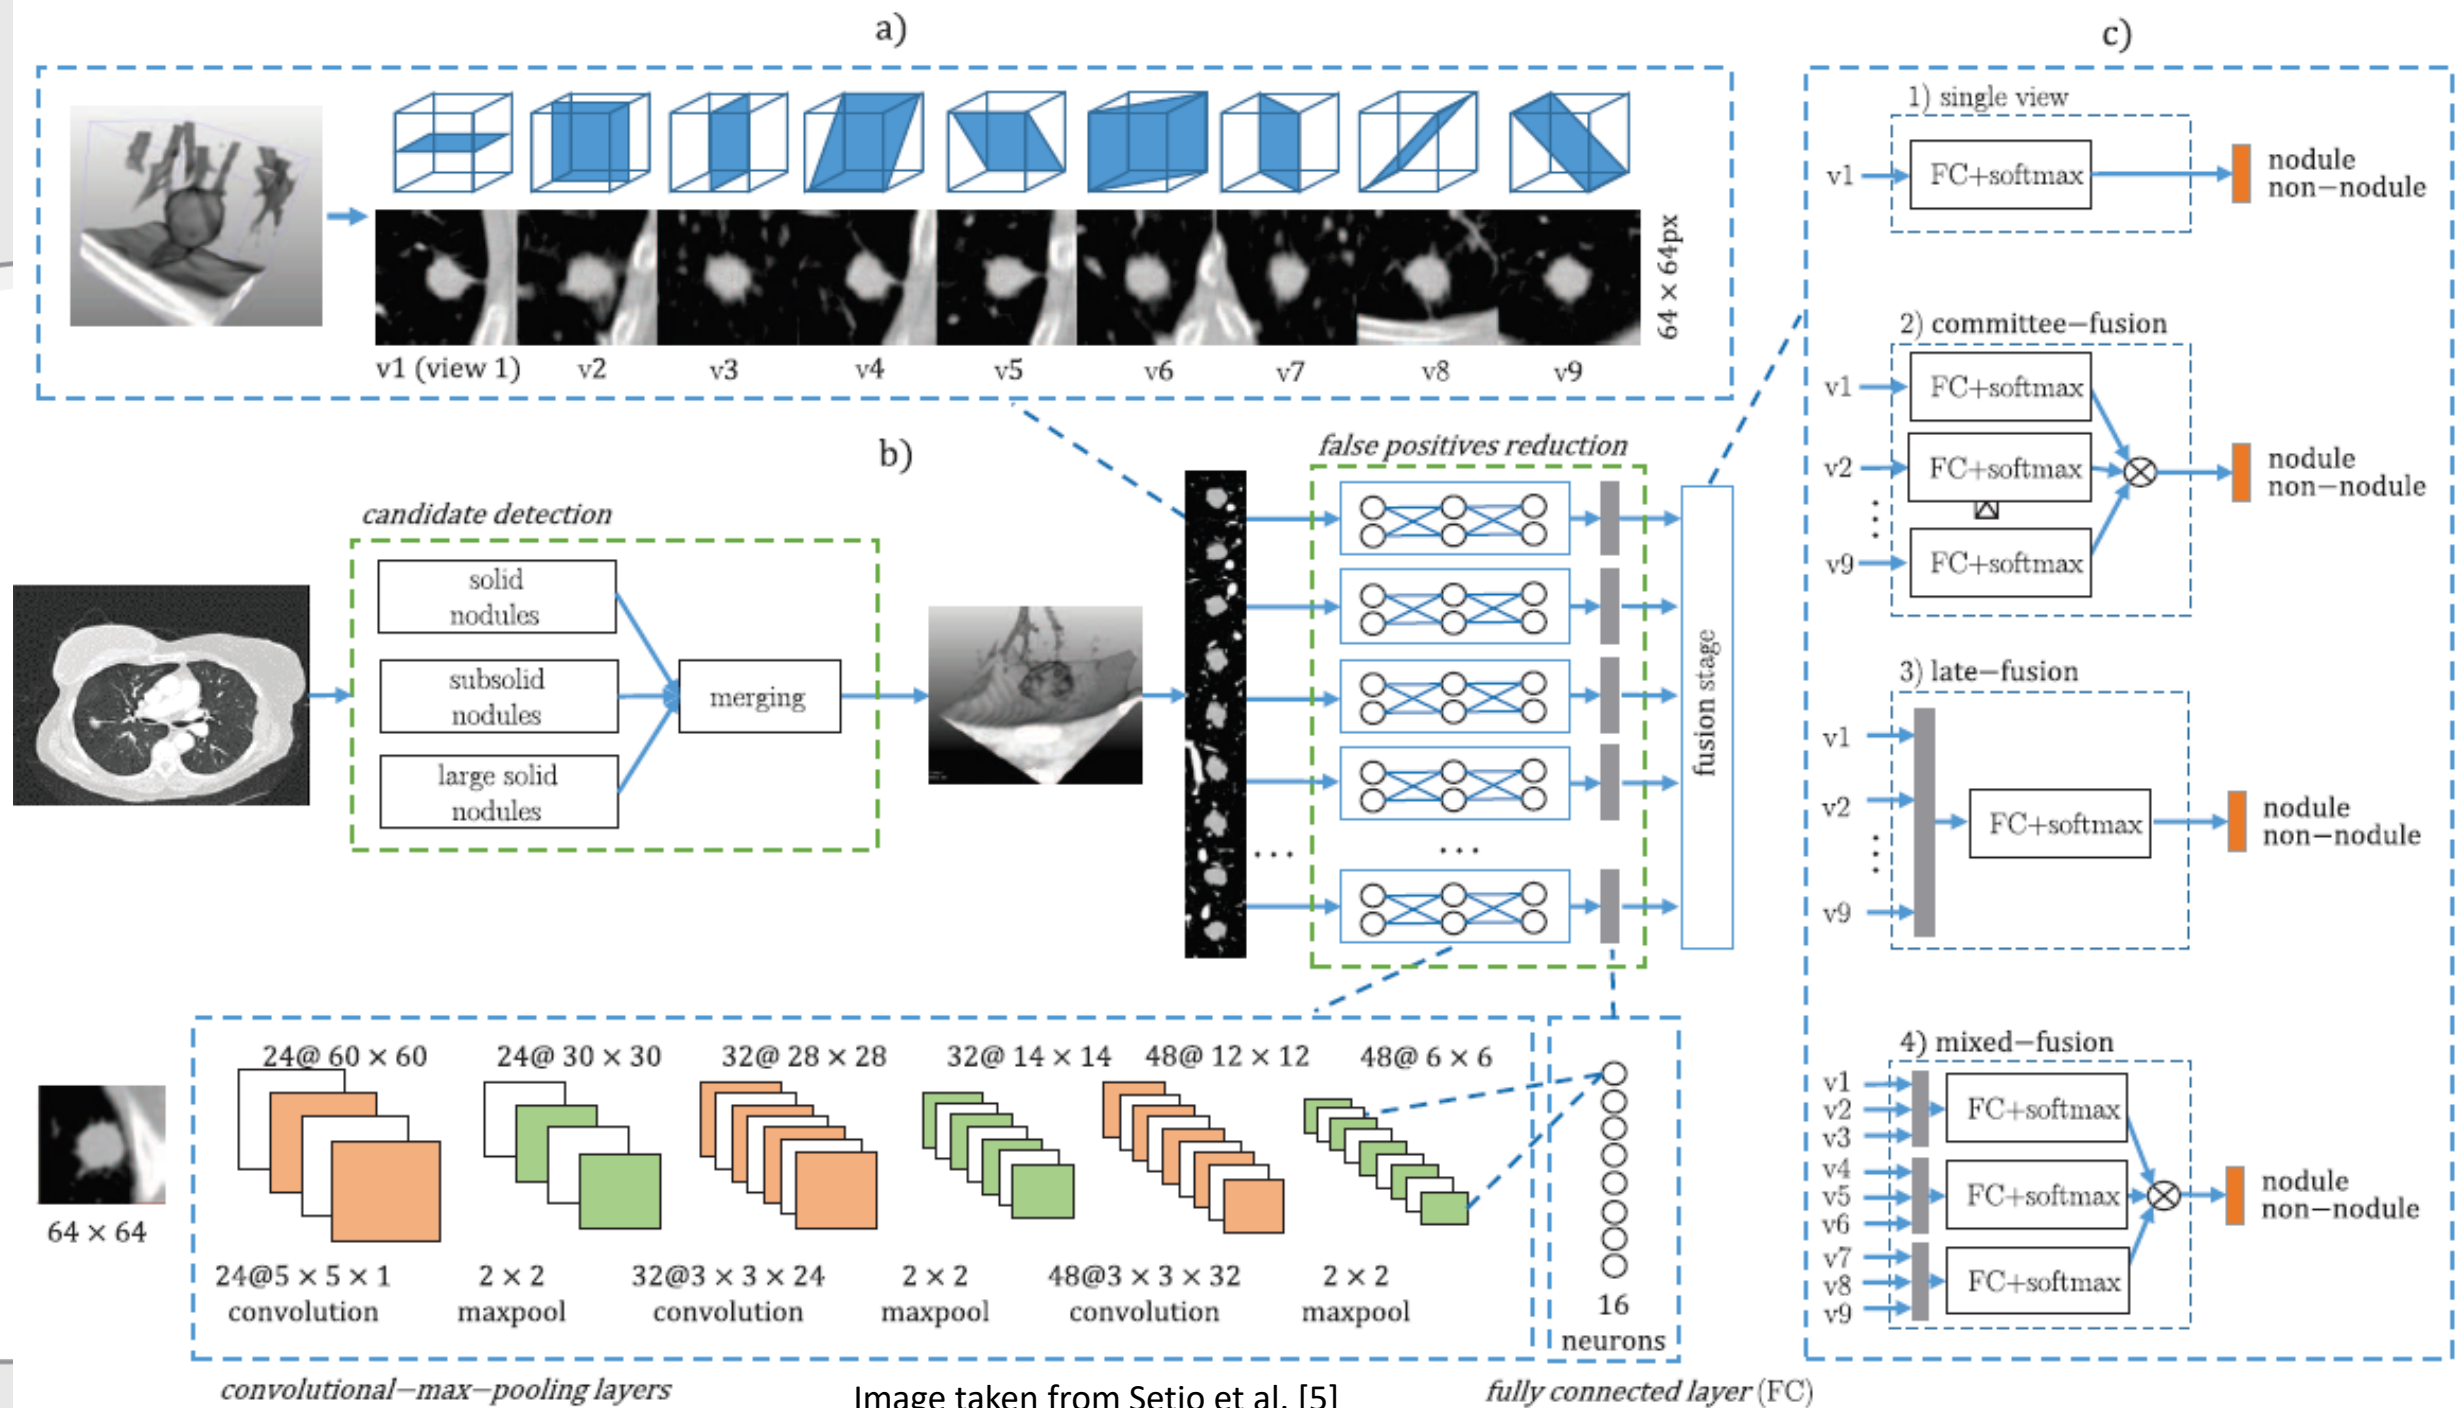

Medical Applications – Pathology Detection

- 2.5 D CNN

- 3 orthogonal directions
- 100 Randomly rotated views
- 13 – 14% increase of sensitivity

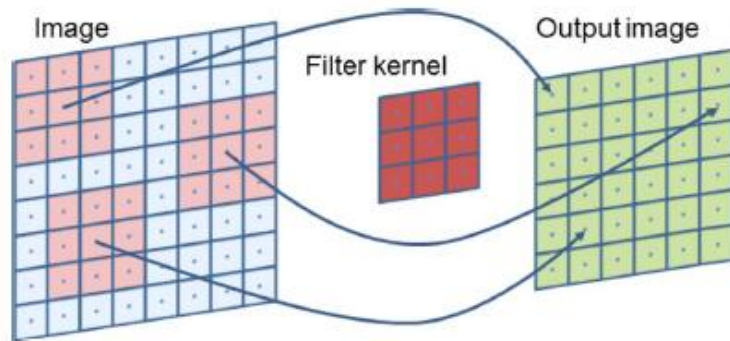

Images taken from Roth et al. [6]


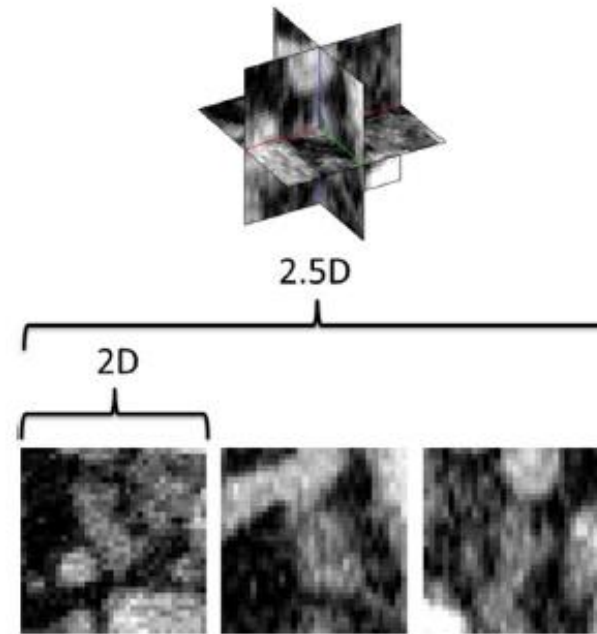





Fig. 4. CADe locations can be either observed as 2D image patches or using a 2.5D approach, that samples the image using three orthogonal views. Here, a lymph node in CT is shown as the input to our method.

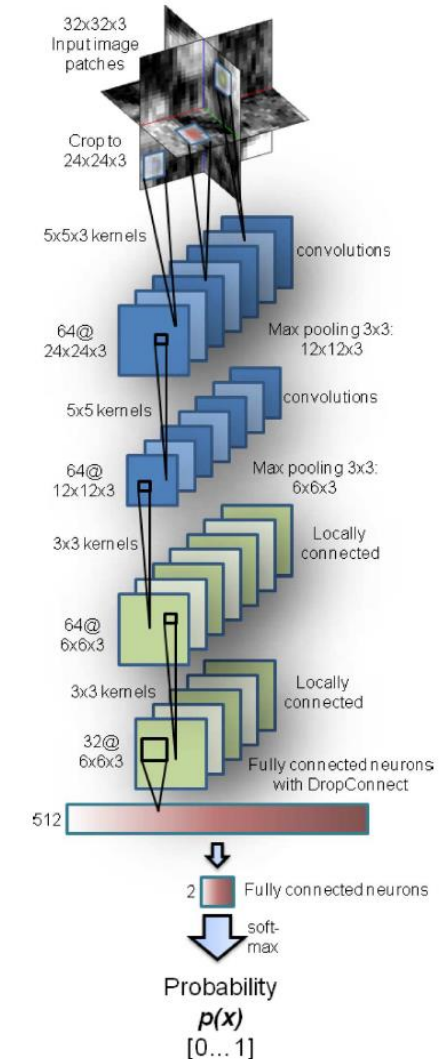

Roth et al. [6] colonic polyps, spine metastasis, enlarged lymphnodes from CT





Medical Applications – Pathology Detection

- 3D CNN

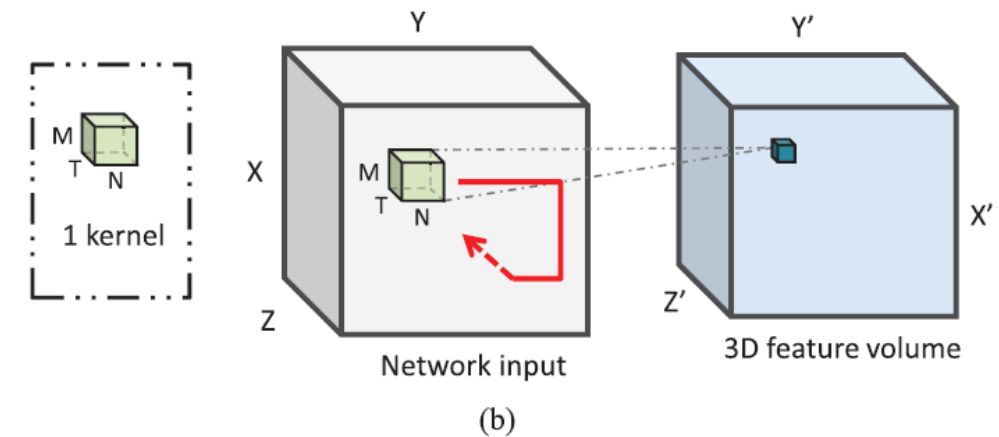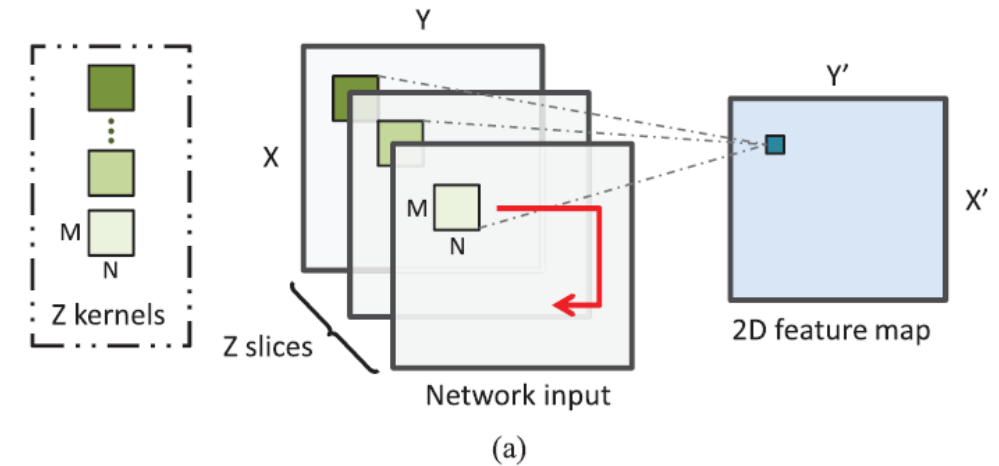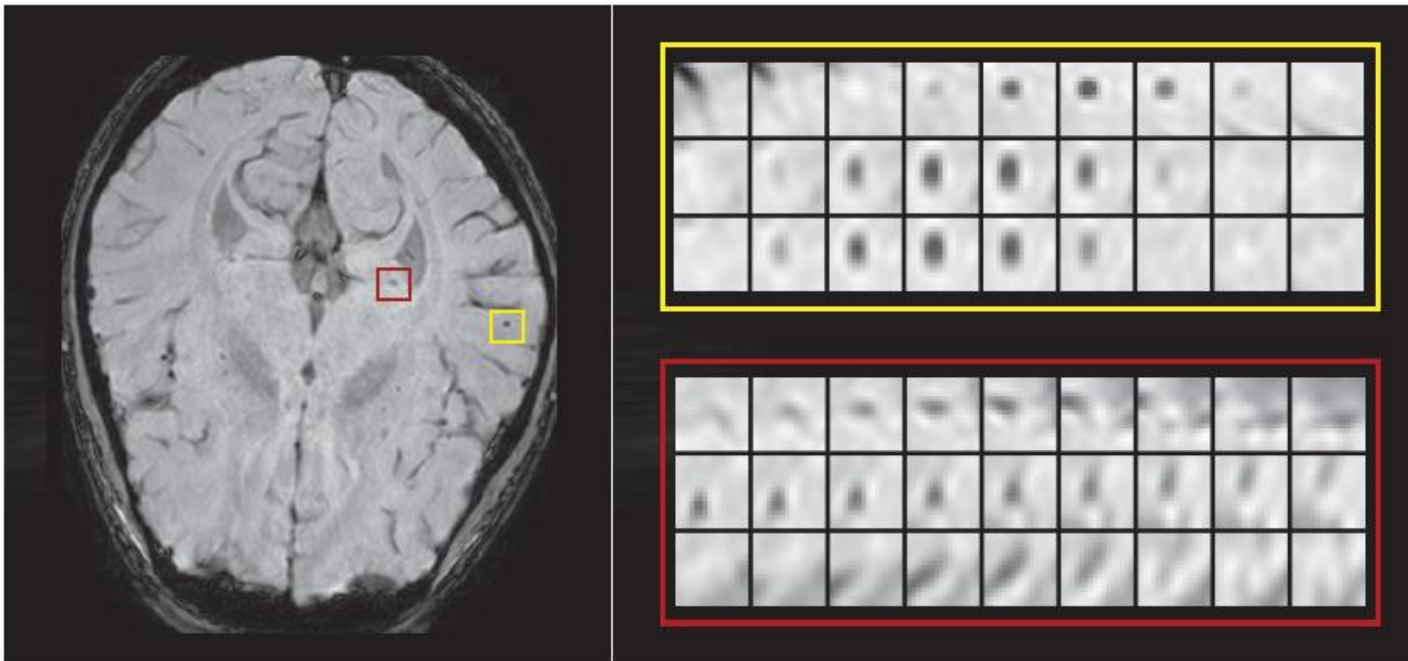

Images taken from Dou et al. [7]

Dou et al. [7] cerebral microbleeds MRI scans

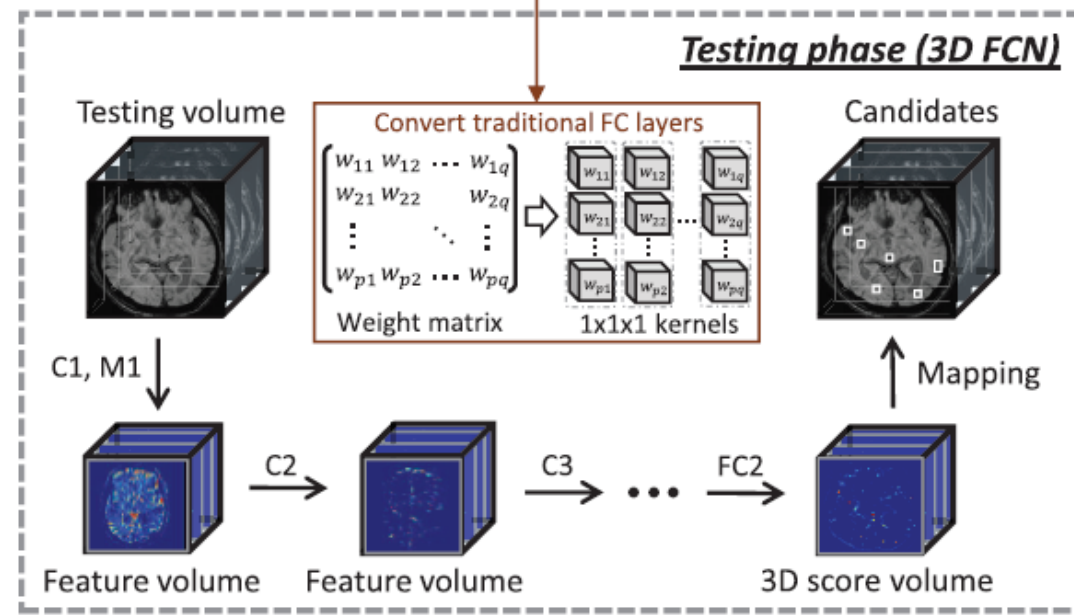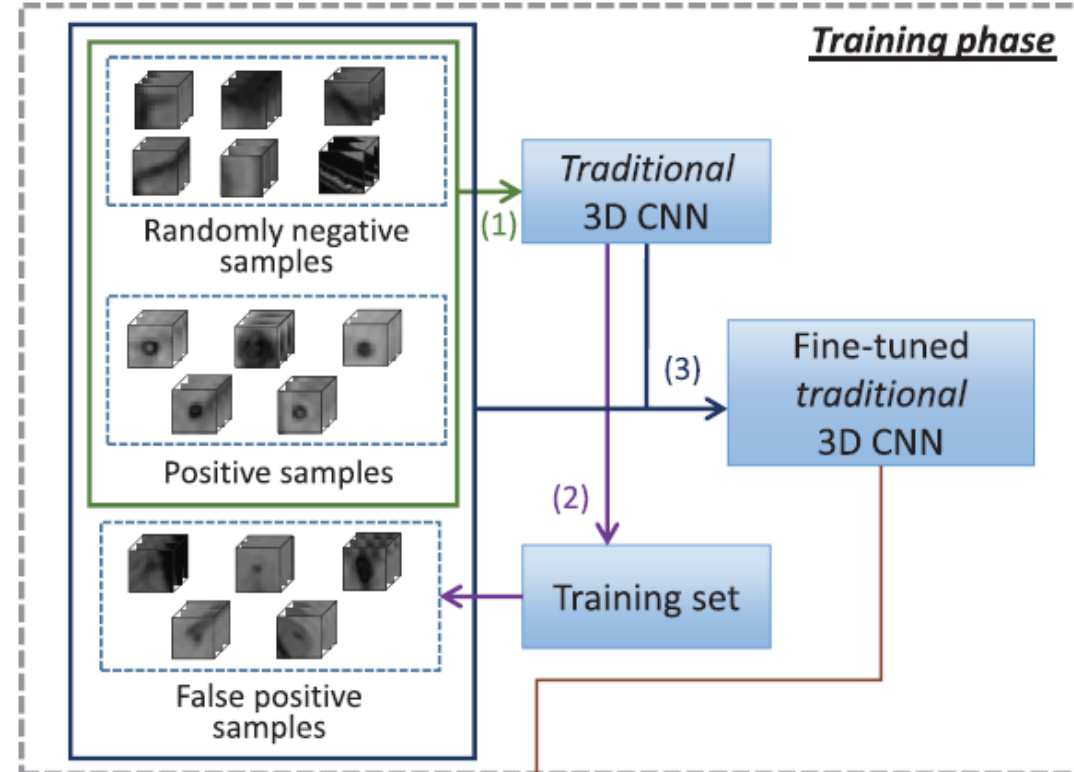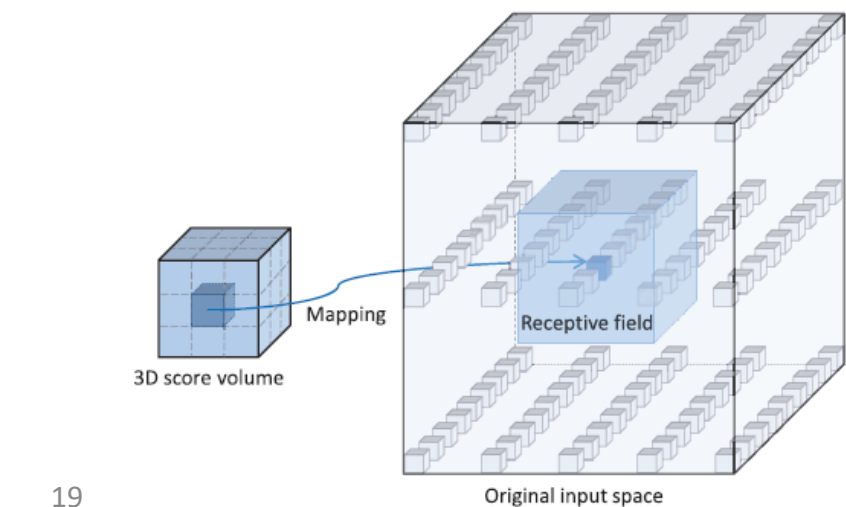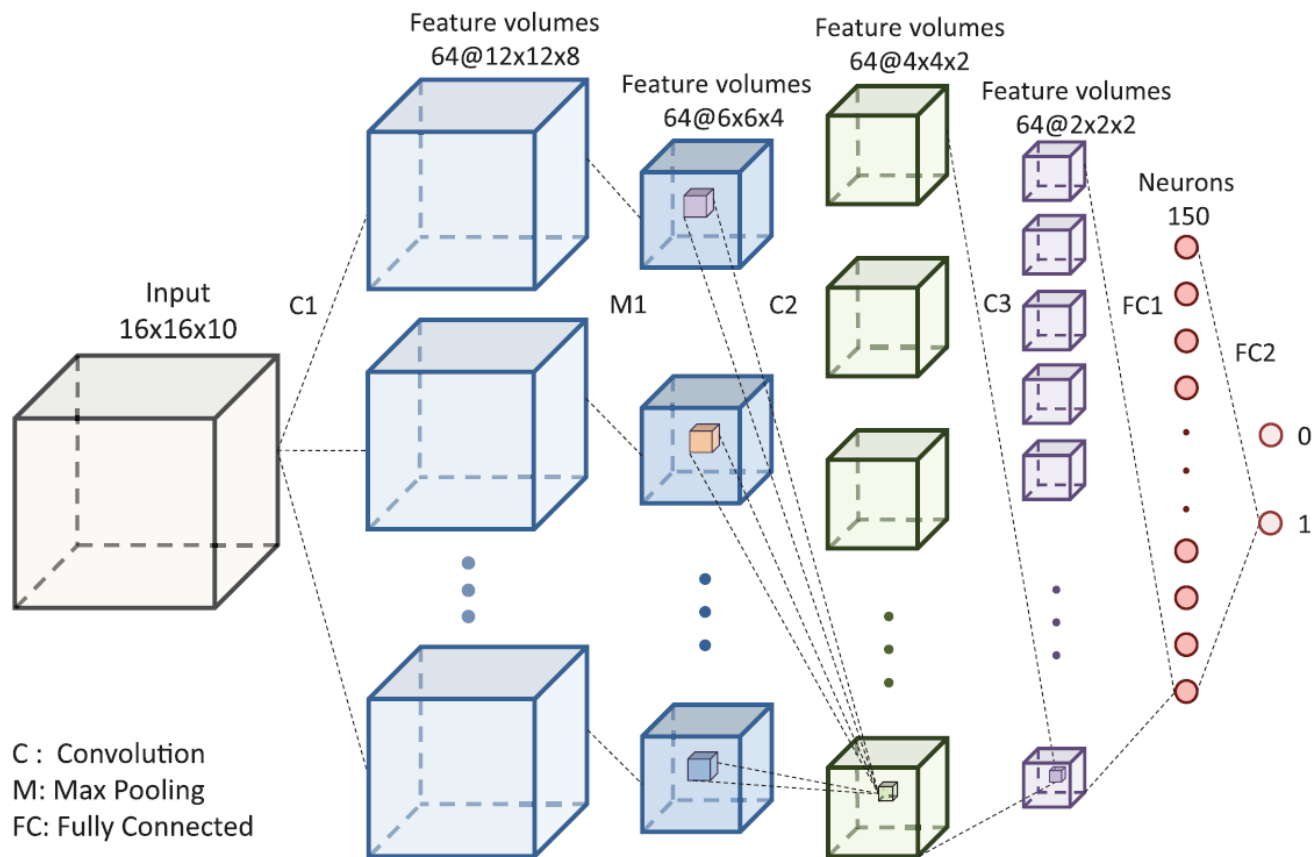


Medical Applications


- Pathology Detection
- Segmentation and Shape Modelling
- Classification
- Action Recognition

Medical Application - Segmentation


- Ensemble of Deep CNNs, 3D patches
- DRIVE database 40 images, 60K patches
- Independent training

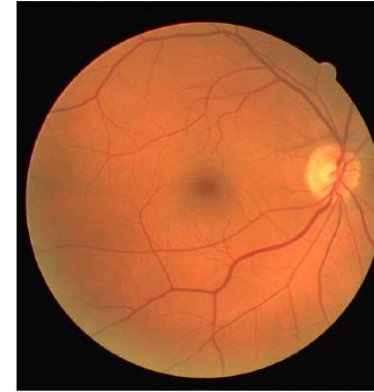

(a) Fundus image

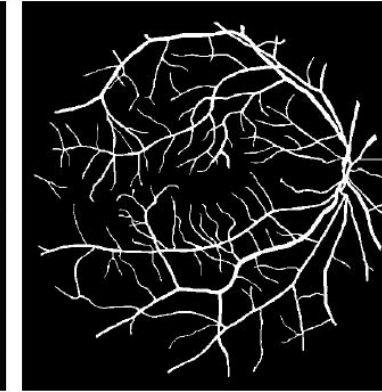


(b) Ground truth

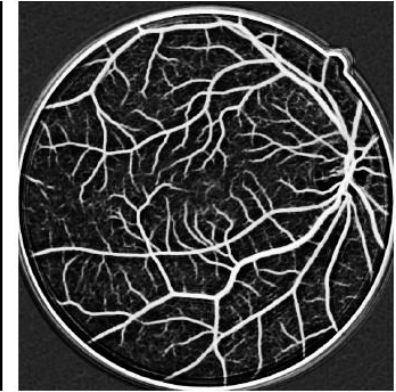

(c) Detected vessels



Segmentation of retinal vessels

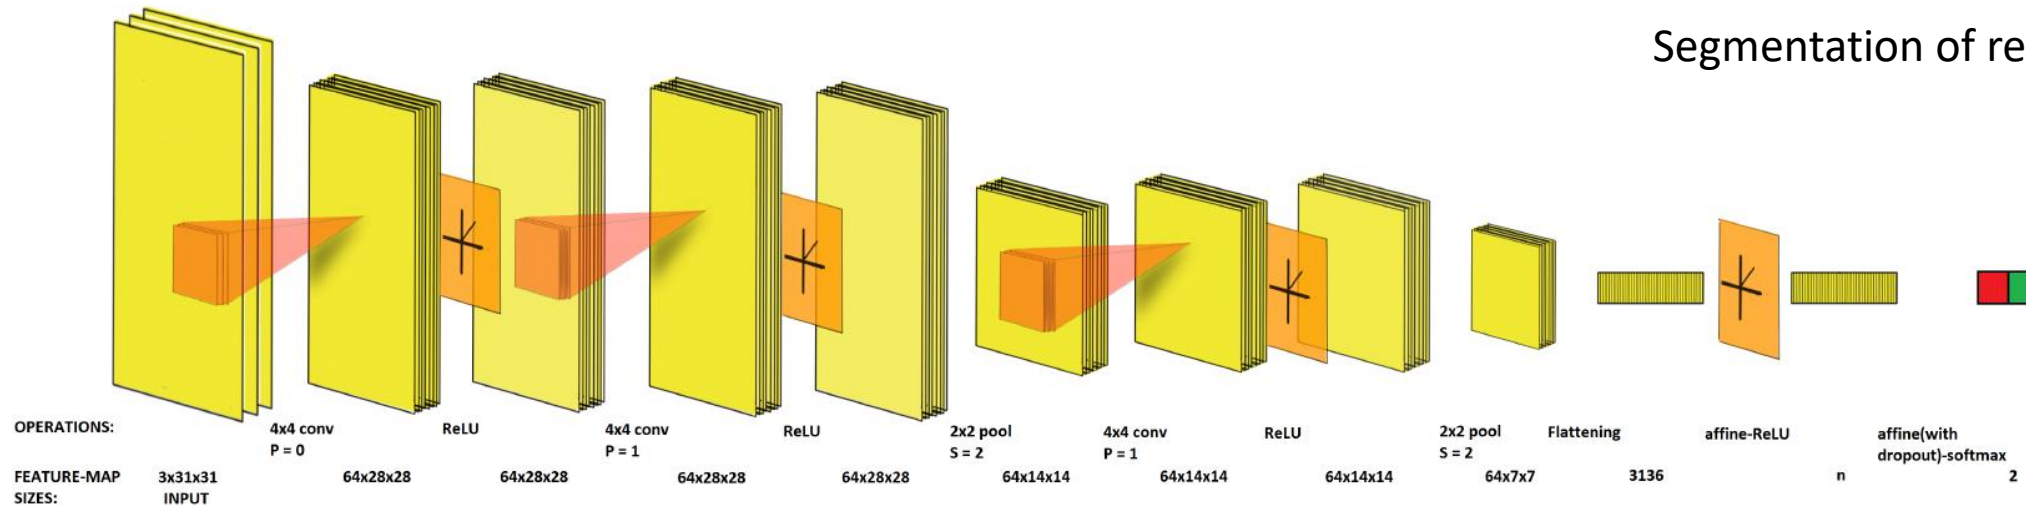

Maji 2016 [8] arXiv Retinal Vessel Detection

Medical Application - Segmentation

- Multi-Scale CNN
- 22 neonatal
- 20 ageing adult
- 15 young adults

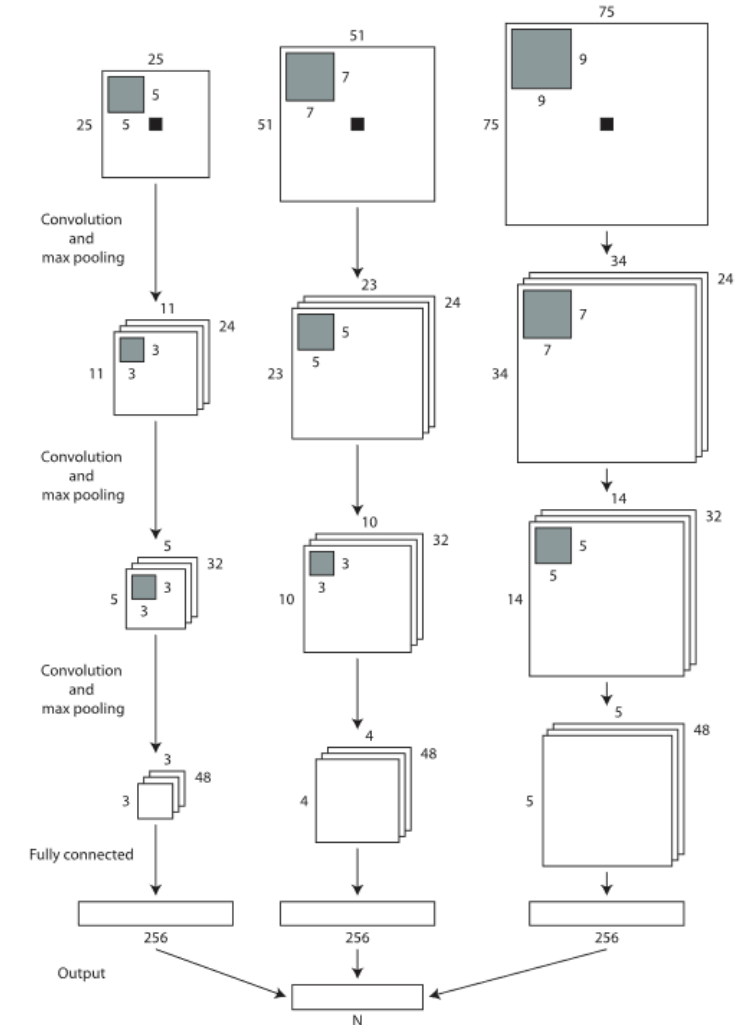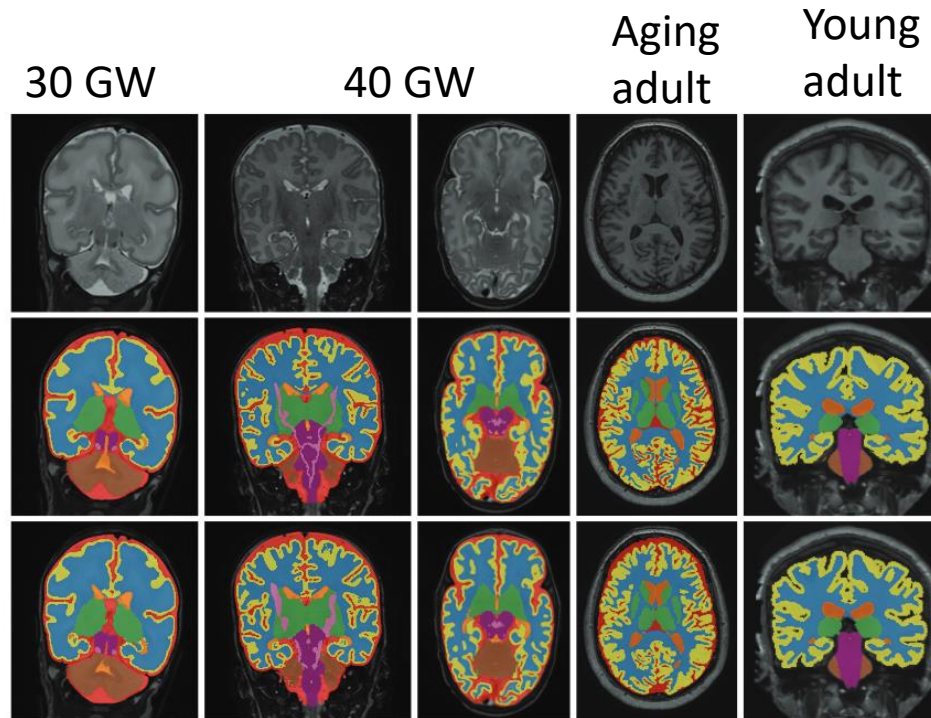

Moeskops et al. [9] Brain segmentation

Single soft max layer

Medical Application - Segmentation

- Multi-Scale CNN

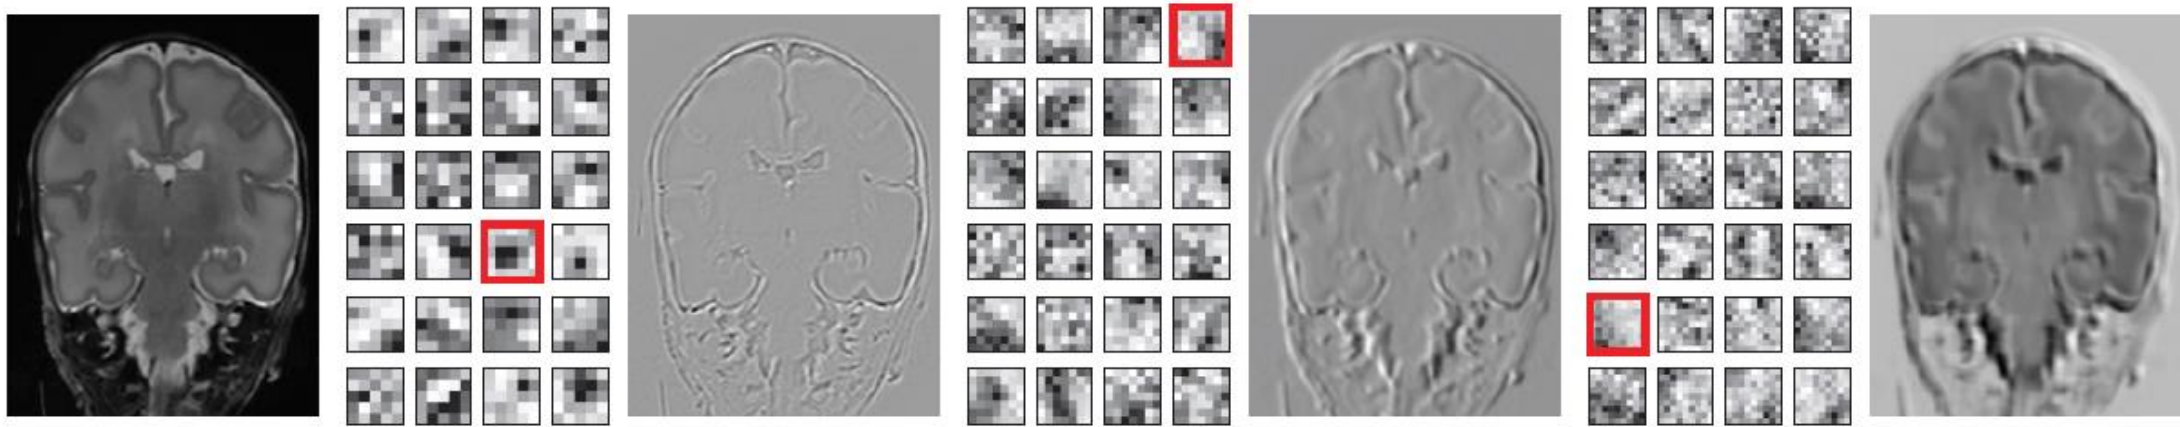


Fig. 2. Trained convolution kernels in the first layer after 10 epochs using the 5 training images acquired at 30 weeks PMA, and the kernels indicated in red applied to a test image. From left to right: the T_2 -weighted test image, the kernels of 5×5 voxels, the image convolved with the indicated 5×5 kernel, the kernels of 7×7 voxels, the image convolved with the indicated 7×7 kernel, the kernels of 9×9 voxels, and the image convolved with the indicated 9×9 kernel.




Moeskops et al. [9] Brain segmentation

Medical Applications

- Pathology Detection and Computer Aided Diagnoses
- Segmentation and Shape Modelling
- Classification
- Action Recognition




Medical Application - Classification

- Stacked layout of Auto-Encoders (SAE)
- Cell type specific antigen pattern
- 10^6 cells per patients
- 10 features

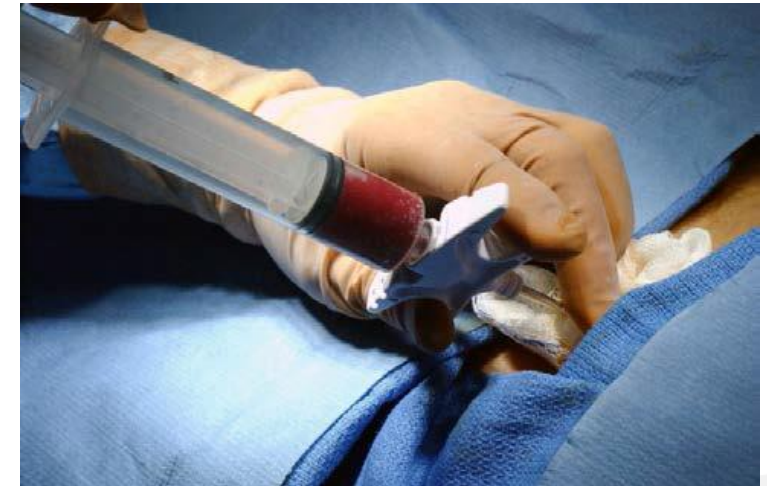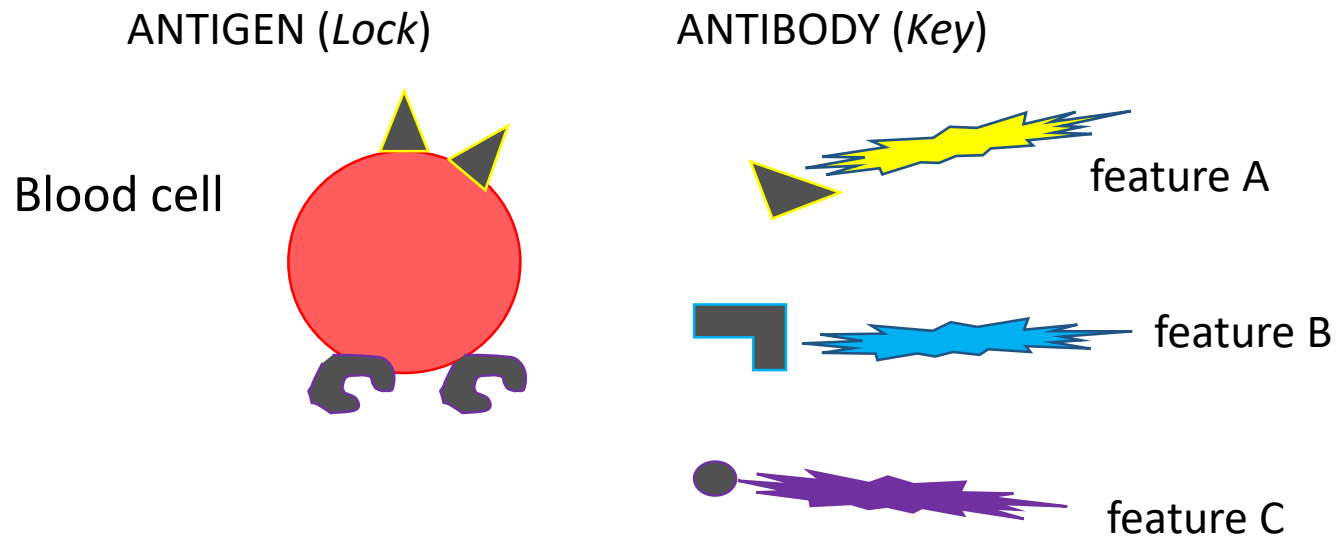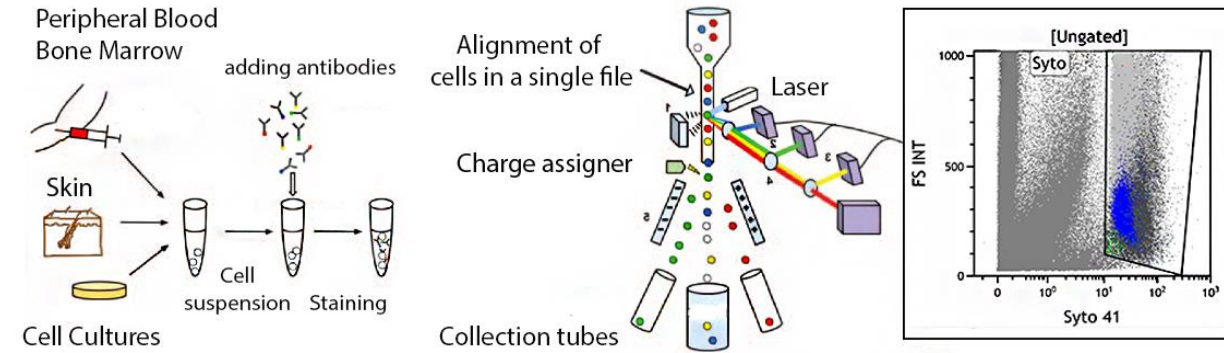


Medical Application - Classification

- Stacked layout of Auto-Encoders (SAE)
- Cell type specific antigen pattern
- 10^6 cells per patients
- 10 features

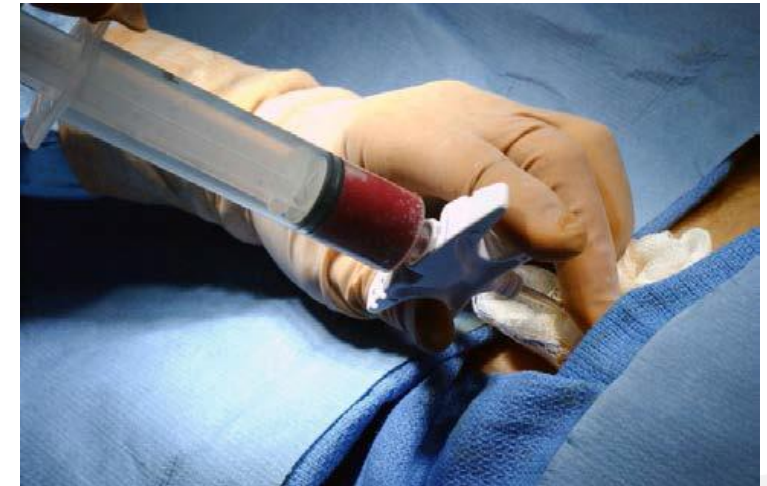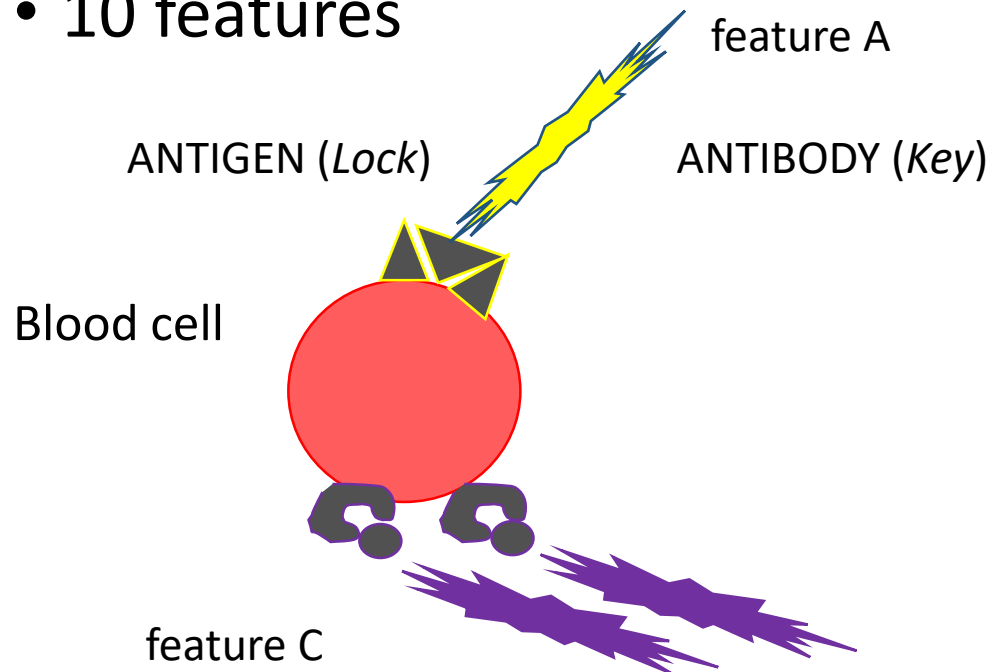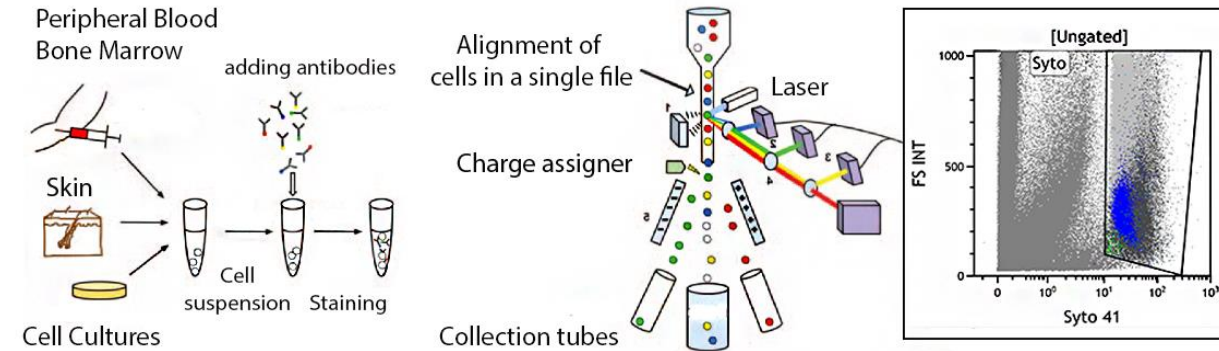


Medical Application - Classification


- Stacked layout of Auto-Encoders (SAE)
- Cell type specific antigen pattern
- 10^6 cells per patients
- 10 features

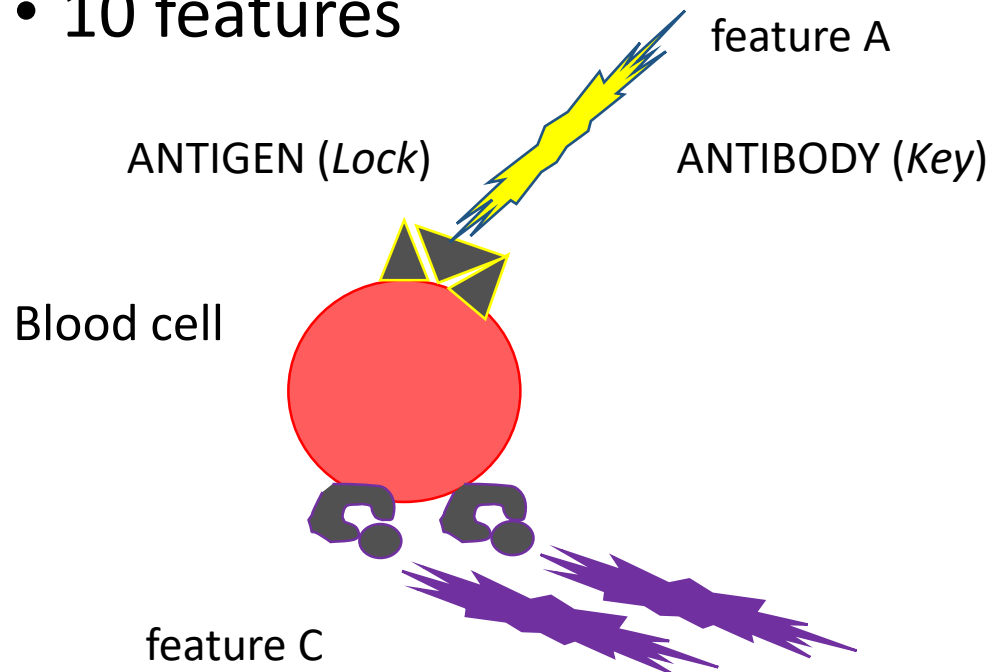

UNSUPERVISED PHASE

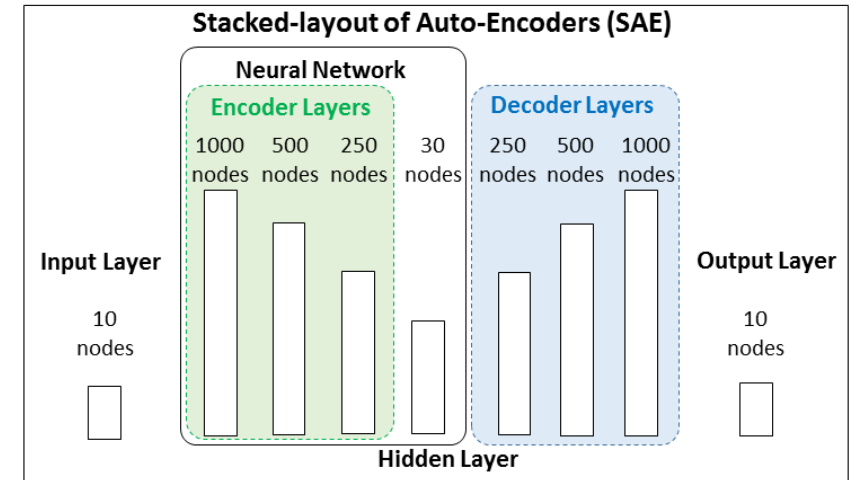

SUPERVISED PHASE

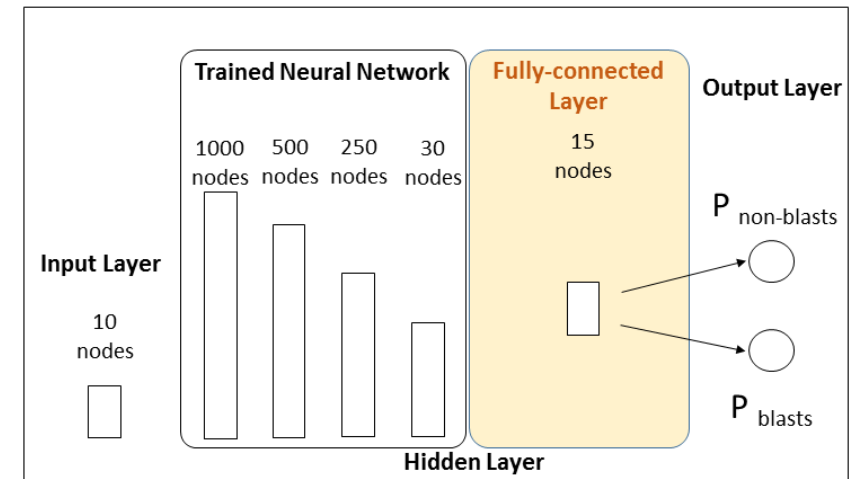

Licandro et al. CBMI 2016

Medical Applications

- Pathology Detection and Computer Aided Diagnoses
- Segmentation and Shape Modelling
- Classification
- Action Recognition

Medical Applications - Action Recognition

- Recognizing Surgical Activities using RNN
 - Kinematic signals over time (position, velocity, gripper angle)
 - Joint segmentation and classification of surgical activity (10 gestures)
 - JIGSAWS, MISTIC public benchmark surgical activity dataset (*da Vinci*)

DiPietro et al. [11]




SURGICAL ROBOT *Da Vinci* - <http://www.robocatz.com/images/News-Da-Vinci-Surgical-Robot-5.jpg>

Medical Applications - Action Recognition

- Recognizing Surgical Activities using RNN

- Kinematic signals over time (position, velocity, gripper angle)
- Joint segmentation and classification surgical activity (10 gestures)
- JIGSAWS, MISTIC public benchmark surgical activity dataset (*da Vinci*)

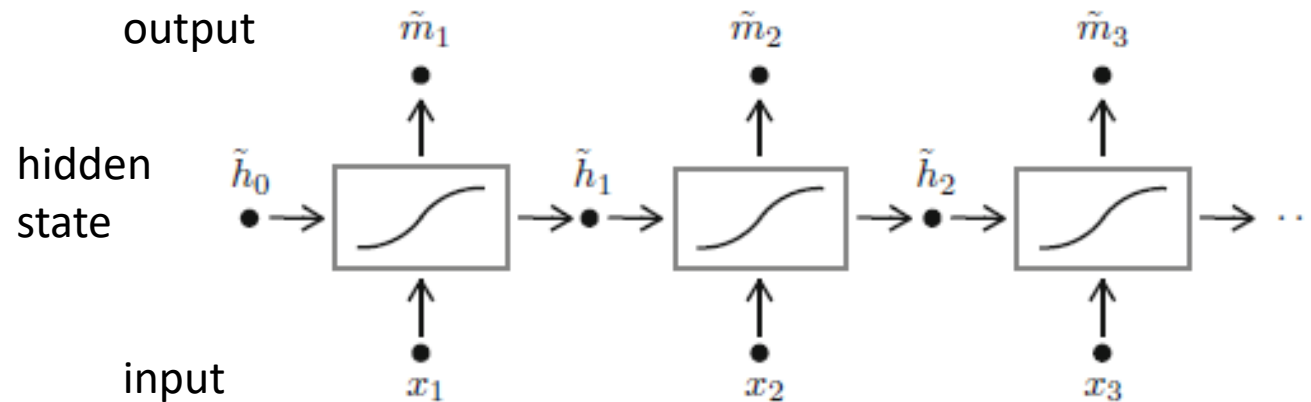

(a) A recurrent neural network.

DiPietro et al. [11]

Images take from [11] – JIGSAWS and MISTIC datasets



4-throw suturing task





What can we do in cases where data are not available?

What are the key components to use deep CNNs in medical imaging applications?


Transfer Learning

- Supervised pre-trained CNN models used for a new medical task
- Data for pre-training
 - Different medical domain
 - Natural image dataset (e.g. ImageNet)
- Output extracted from layers considered as features
- Input to pattern classifier

Transfer Learning

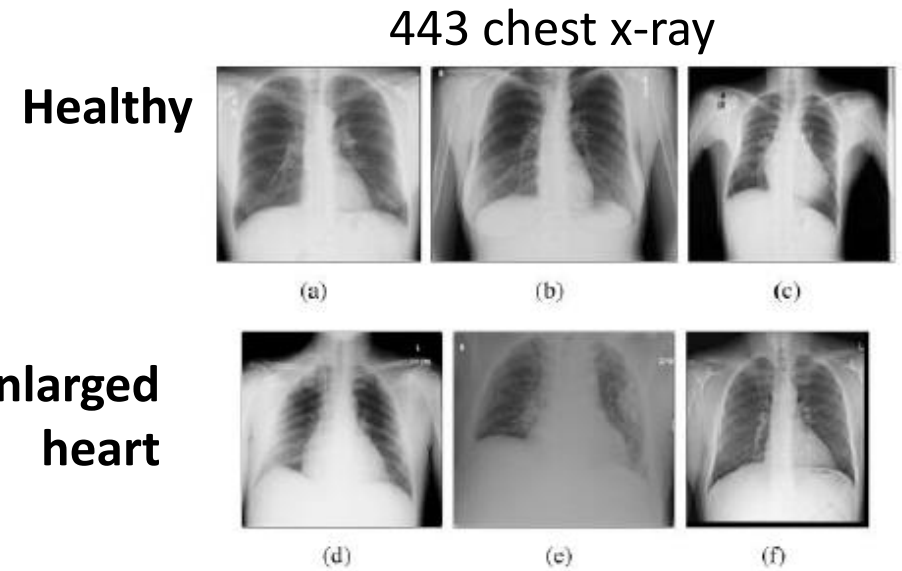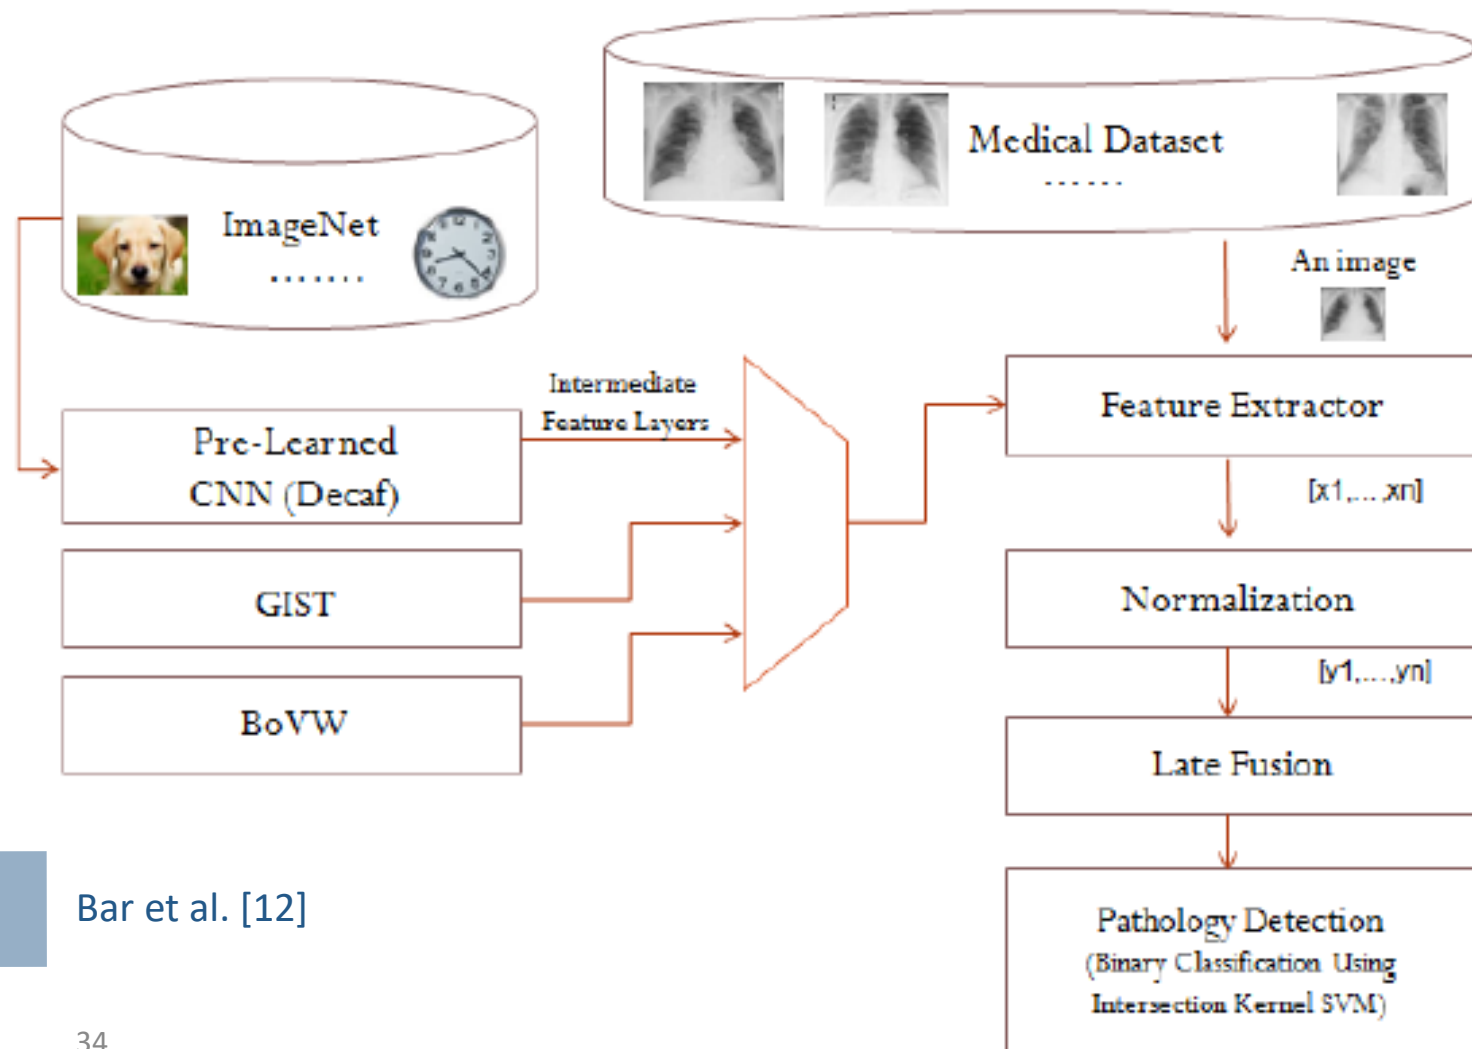

Decaf pre-trained CNN model
Subset of image from ImageNet
>1M images, >1K categories

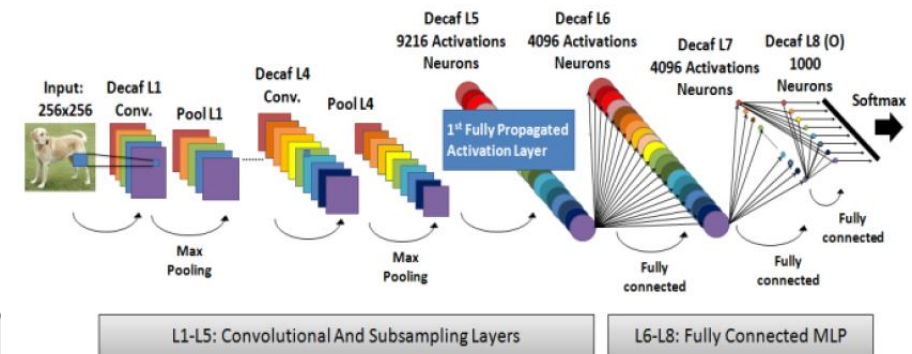


Fine Tuning

- Medium sized dataset exists for the task
- Pre-trained CNN used as initialization of the network
- Input of subsequent supervised training
- Deep fine-tuning, shallow fine-tuning [Tajbakhsh et al. \[13\]](#)

Fine-Tuning

- Thoraco-abdominal lymph node detection
- ImageNet pre-trained
- CifarNet, AlexNet, GoogLeNet
- Preprocess of input
- Adaptations
 - Pooling parameters
 - Filtersize
 - Stride parameters

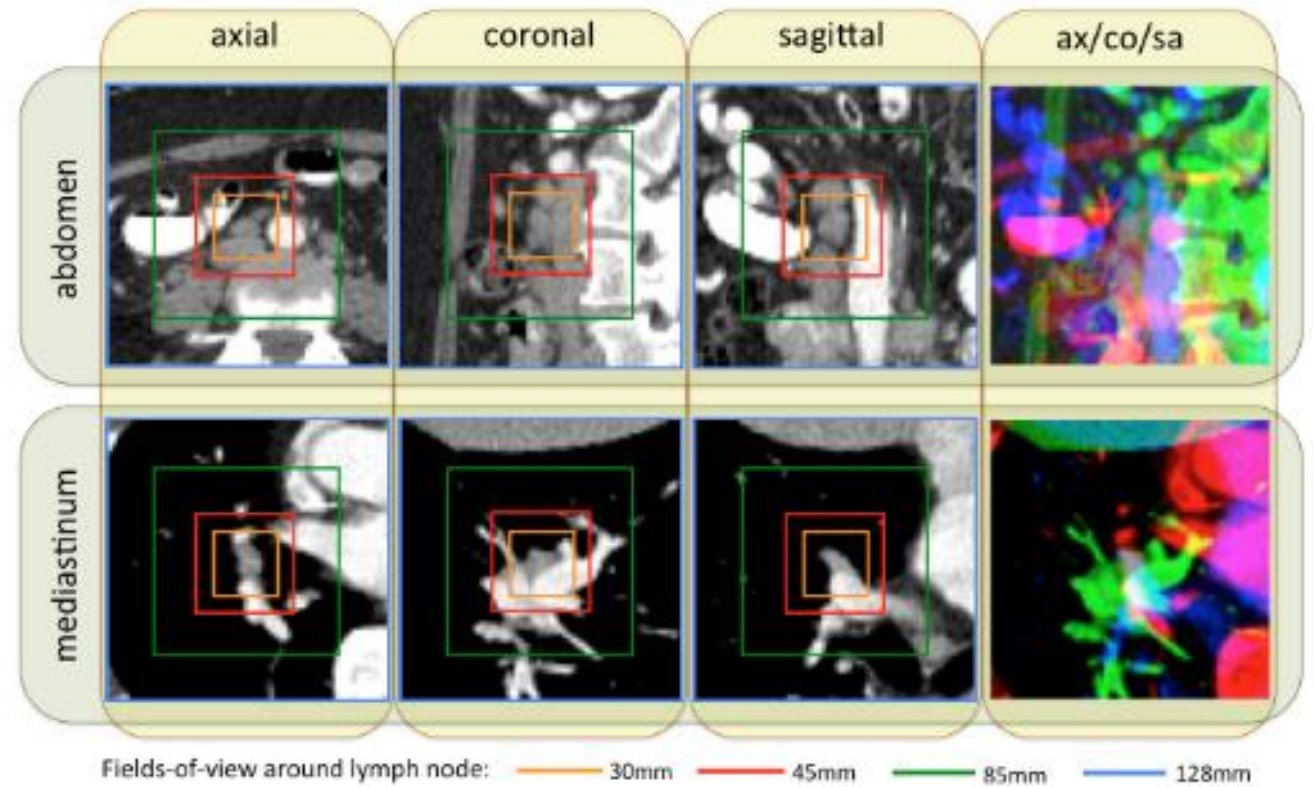

Shin et al. [17]

Are there alternative methods for acquiring and annotating data?

Expert vs. Non-Expert

- Annotation


- Cost intensive
- Time consuming
- Lack of publicly available ground-truth data

- Crowdsourcing - Non Experts

- Noisy annotations of single non experts
- Disagreement between users
- CNN – learning input from the crowds
- Aggregation layer added
- Crowd of nonprofessional, inexperienced users can perform as well as the medical experts [14, 15, 16]

Public available medical datasets

- VISCERAL <http://visceral.eu/>
- The Cancer Imaging Archive <http://www.cancerimagingarchive.net>
- Ongoing benchmark studies and challenges
 - <http://www.grand-challenge.org>
 - Precise definition of task to be solved is given
 - Evaluation metrics are defined
 - Standardized and fair comparison
- <https://www.kaggle.com/c/diabetic-retinopathy-detection>

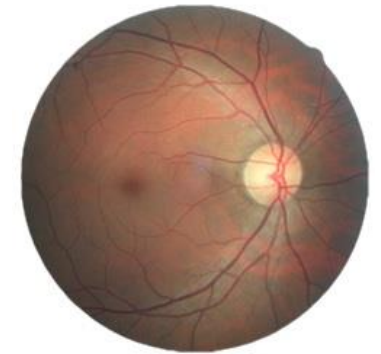

Summary

- Evolution of Deep Learning in Medicine
- 2D/2.5D/3D CNN, Stacked Auto Encoder, Recurrent Neural Nets
- Accuracy of result important
- Most approaches are supervised
- Alternative to experts - crowdsourcing
- Transfer learning and training
- Trend towards BigData, challenges at conferences, public data sets

References

- [1] Greenspan et al., „Deep Learning in Medical Imaging: Overview and future promise of an exciting new technique“, IEEE Trans. Med. Imag., vol 35, no. 5, pp. 1153 – 1159, May 2016.
- [2] S.-C.B. Lo, J.S.J. Lin, M.T. Freedman, and S.K. Mun, „ Computer-assisted diagnoses of lung nodule detection using artificial convolution neural-network,“ Proc. SPIE Med. Imag., Image Process., vol. 1989, pp. 859-869, 1993.
- [3] H.-P. Chan, S.-C. B. Lo, B. Sahiner, K.L. Lam, and M. A. Helvie, „Computer Aided detection of mammographic microcalcifications: Pattern recognition with an artificial neural network.“, Med. Phys., vol. 22, no. 10, pp. 1555-67, 1995.
- [4] B. Shiner et al., „Classification of mass and normal breast tissue: A convolution neural network classifier with spatial domain and texture images,“ IEEE Trans. Med. Imag., vol. 15, no. 5. pp. 598-610, Oct. 1996.
- [5] A. Setio et al., „Pulmonary nodule detection in CT images using multiview convolutional networks,“ IEEE Trans. Med. Imag., vol. 35, no. 5, pp. 1160–1169, May 2016
- [6] H. Roth et al., „Improving computer-aided detection using convolutional neural networks and random view aggregation,“ IEEE Trans. Med. Imag., vol. 35, no. 5, pp. 1170–1181, May 2016
- [7] Q. Dou et al., „Automatic detection of cerebral microbleeds from MR images via 3D convolutional neural networks,“ IEEE Trans. Med. Imag., vol. 35, no. 5, pp. 1182–1195, May 2016
- [8] Maji et al., „Ensemble of Deep Convolutional Neural Networks for Learning to Detect Retinal Vessels in Fundus Images“, arXiv: 1603.04833v1, March 2016
- [9] P. Moeskops et al., „Automatic segmentation of MR brain images with a convolutional neural network,“ IEEE Trans. Med. Imag., vol. 35, no. 5, pp. 1252–1261, May 2016
- [10] Licandro R., Rota P., Reiter M., Kampel M., „ Flow Cytometry Based Automatic MRD Assessment in Acute Lymphoblastic Leukaemia: Longitudinal Evaluation of Time-Specific Cell Population Models“, 14th International Workshop on Content-based Multimedia Indexing, Bucharest (Romania), June 2016
- [11] DiPietro et al., „Recognizing Surgical Activities with Recurrent Neural Networks, Proceedings MICCAI 2016, Springer, S. Ourselin, Part I, pp 551-558, 2016
- [12] Y. Bar, I. Diamant, L. Wolf, and H. Greenspan, „Deep learning with non-medical training used for chest pathology identification“ Proc. SPIE Med. Imag. Computer-Aided Diagnosis, vol. 9414, 2015.
- [13] N. Tajbakhsh et al., „Convolutional neural networks for medical image analysis: Full training or fine tuning?,“ IEEE Trans. Med. Imag., vol. 35, no. 5, pp. 1299–1312, May 2016.
- [14] T. B. Nguyen et al., „Distributed human intelligence for colonic polyp classification in computer-aided detection for CT colonography,“ Radiology, vol. 262, no. 3, pp. 824–833, 2012.
- [15] M. T. McKenna et al., „Strategies for improved interpretation of computer-aided detections for CT colonography utilizing distributed human intelligence,“ Med. Image Anal., no. 6, pp. 1280–1292, 2012.
- [16] S. Albarqouni, C. Baur, F. Achilles, V. Belagiannis, S. Demirci, and N. Navab, „Agg-Net: Deep learning from crowds for mitosis detection in breast cancer histology images,“ IEEE Trans. Med. Imag., vol. 35, no. 5, pp. 1313–1321, May 2016.
- [17] H.-C. Shin et al., „Deep convolutional neural networks for computeraided detection: CNN architectures, dataset characteristics and transfer learning,“ IEEE Trans. Med. Imag., vol. 35, no. 5, pp. 1285–1298, May 2016



Thank you

Roxane Licandro
licandro@caa.tuwien.ac.at