



TDML Round Trip Parse/Unparse

- By default TDML tests run in roundTrip = "onePass" mode

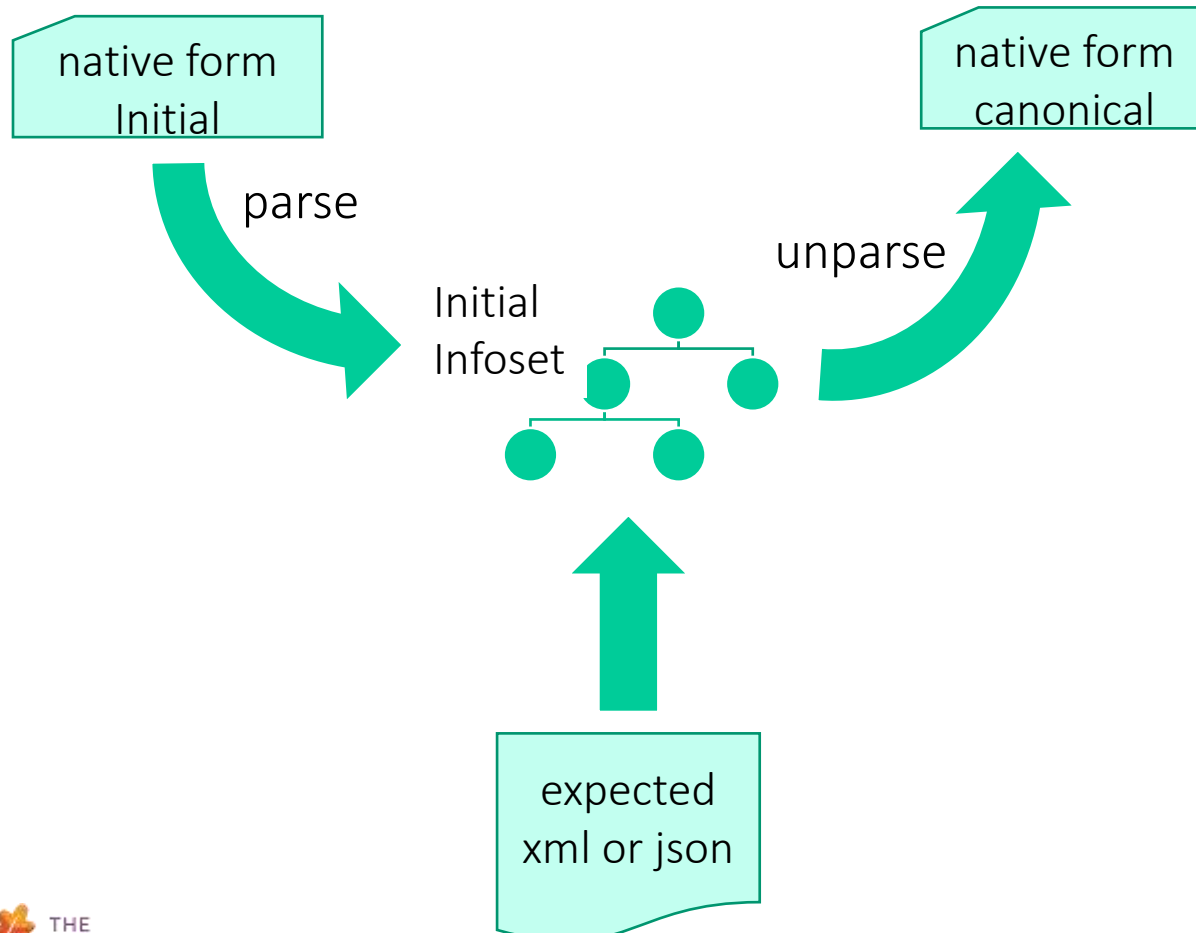

TDML Round Trip Parse/Unparse


- roundTrip="none"

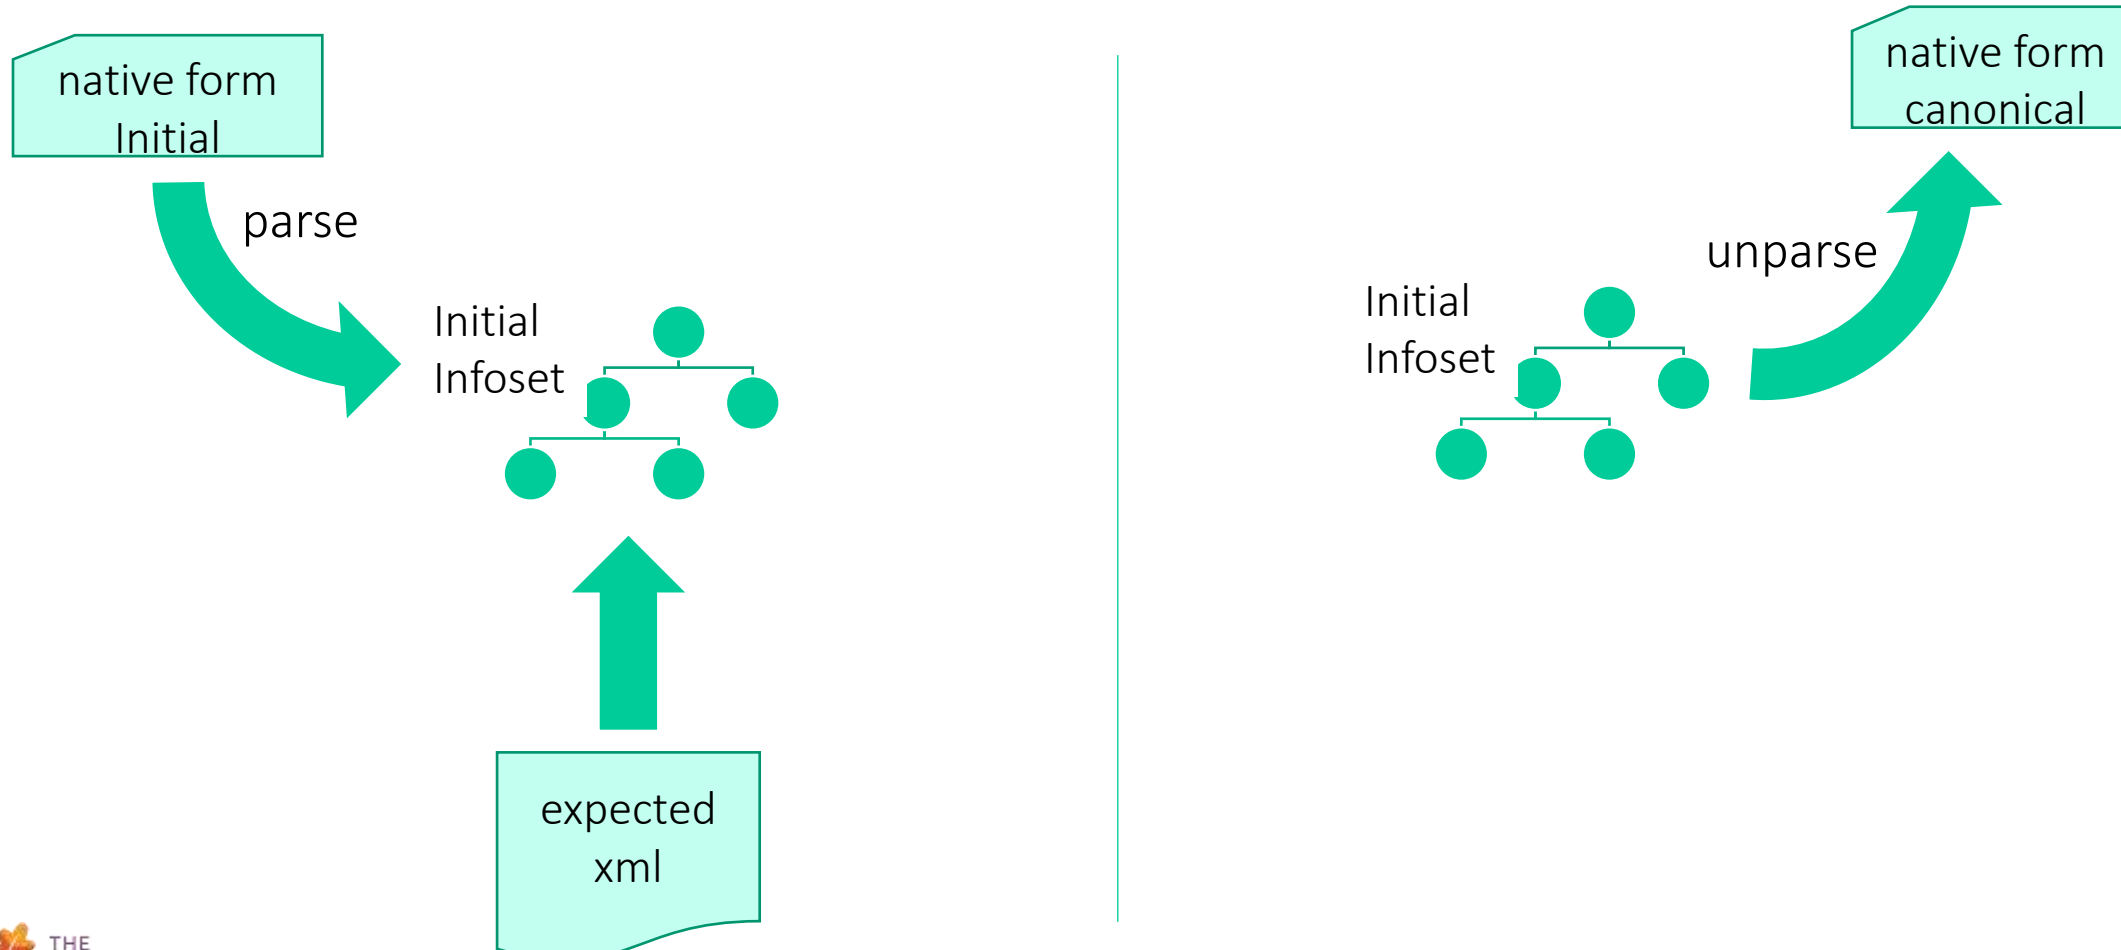

TDML Round Trip Parse/Unparse

- roundTrip="twoPass"

- native form initial must NOT equal native form Canonical

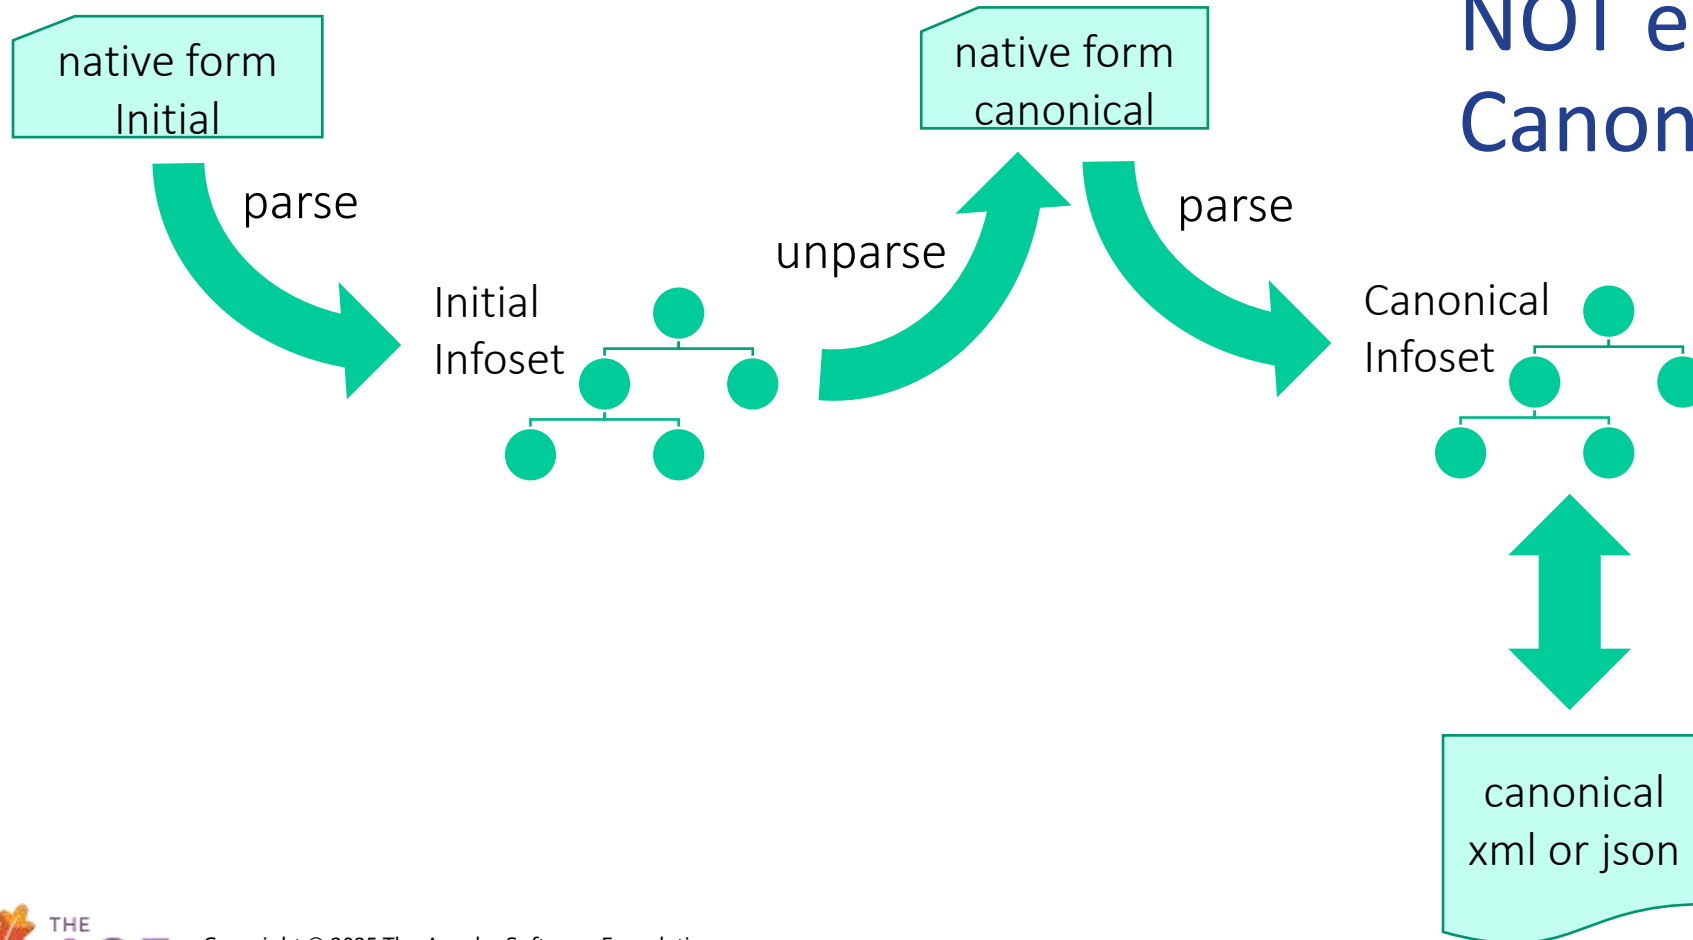

TDML Round Trip Parse/Unparse

- There is even "threePass"
 - But you will never need it!

Only very obscure cases need this.

