
Apache ShardingSphere document

Apache ShardingSphere

Jul 13, 2022

Contents

1	Introduction	2
1.1	ShardingSphere-JDBC	2
1.2	ShardingSphere-Proxy	2
1.3	ShardingSphere-Sidecar(TODO)	4
1.4	Hybrid Architecture	5
2	Solution	6
3	Roadmap	7
4	Quick Start	8
4.1	ShardingSphere-JDBC	8
4.1.1	Scenarios	8
4.1.2	Limitations	8
4.1.3	Requirements	8
4.1.4	Procedure	8
4.2	ShardingSphere-Proxy	9
4.2.1	Scenarios	9
4.2.2	Limitations	10
4.2.3	Requirements	10
4.2.4	Procedure	10
5	Concepts	12
5.1	Adaptor	12
5.1.1	ShardingSphere-JDBC	12
5.1.2	ShardingSphere-Proxy	13
5.1.3	Hybrid Adaptors	14
5.2	Mode	16
5.2.1	Background	16
5.2.2	Memory mode	16
5.2.3	Standalone mode	16
5.2.4	Cluster mode	16

5.3	DistSQL	16
5.3.1	Background	16
5.3.2	Challenges	16
5.3.3	Goal	17
5.3.4	Notice	17
5.4	Pluggable Architecture	17
5.4.1	Background	17
5.4.2	Challenges	17
5.4.3	Goal	18
5.4.4	Implementation	18
	L1 Kernel Layer	19
	L2 Feature Layer	19
	L3 Ecosystem Layer	19
6	Features	20
6.1	DB Compatibility	20
6.1.1	Background	20
6.1.2	Challenges	20
6.1.3	Goal	21
6.1.4	SQL Parser	21
	MySQL	21
	openGauss	22
	PostgreSQL	22
	SQLServer	23
	Oracle	23
	SQL92	23
6.1.5	DB Protocol	23
6.1.6	Feature Support	23
	MySQL	24
	PostgreSQL	24
	SQLServer	25
	Oracle	25
	SQL92	25
6.2	DB Gateway	25
6.2.1	Background	25
6.2.2	Challenges	25
6.2.3	Goal	25
6.2.4	Current State	26
6.3	Cluster Management	26
6.3.1	Background	26
6.3.2	Challenges	26
6.3.3	Goal	26
6.3.4	Core Concept	26
	Circuit Breaker	26
	Request Limit	27

6.4	Sharding	27
6.4.1	Background	27
	Vertical Sharding	28
	Horizontal Sharding	29
6.4.2	Challenges	30
6.4.3	Goal	30
6.4.4	Core Concept	30
	Overview	30
	Table	30
	Data Node	32
	Sharding	33
	Inline Expression	34
	Distributed Primary Key	37
	Hint Sharding Route	40
6.4.5	Use Norms	40
	Background	40
	SQL	41
	Pagination	45
6.5	Distributed Transaction	47
6.5.1	Definition	47
6.5.2	Related Concepts	48
	XA Protocol	48
6.5.3	Limitations	48
	LOCAL Transaction	48
	XA Transaction	49
	BASE Transaction	49
6.5.4	How it works	50
	LOCAL Transaction	50
	XA Transaction	50
	BASE Transaction	52
6.5.5	Related reference	53
6.6	ReadWrite-splitting	53
6.6.1	Definition	53
6.6.2	Related Concepts	53
	Primary database	53
	Secondary database	53
	Primary-Secondary synchronization	53
	Load balancer policy	53
6.6.3	Impact on the System	53
6.6.4	Limitations	54
6.6.5	How it works	54
6.6.6	相关参考	54
6.7	HA	54
6.7.1	Definition	54
6.7.2	Related Concepts	56

High Availability Type	56
Dynamic Read/Write Splitting	56
6.7.3 Limitations	56
Supported	56
Not supported	56
6.7.4 How it works	56
6.7.5 Related References	57
6.8 Scaling	57
6.8.1 Background	57
6.8.2 Challenges	57
6.8.3 Goal	58
6.8.4 Status	59
6.8.5 Core Concept	59
Scaling Job	59
Inventory Data	59
Incremental Data	59
6.8.6 User Norms	59
Supported	59
Unsupported	59
6.9 Encryption	59
6.9.1 Definition	59
6.9.2 Related Concepts	60
Logic column	60
Cipher column	60
Query assistant column	60
Plain column	60
6.9.3 Impact on the system	60
6.9.4 Limitations	60
6.9.5 How it works	61
Overall architecture	61
Encryption rules	62
Encryption process	63
6.9.6 Related References	63
6.10 Shadow	63
6.10.1 Definition	63
6.10.2 Related Concepts	65
Production Database	65
Shadow Database	65
Shadow Algorithm	65
6.10.3 Limitations	66
Hint based shadow algorithm	66
Column based shadow algorithm	66
6.10.4 How it works	66
DML sentence	67
DDL sentence	68

6.10.5	References	68
6.11	Observability	68
6.11.1	Definition	68
6.11.2	Related Concepts	68
Agent		68
APM		69
Tracing		69
Metrics		69
Logging		69
6.11.3	How it works	69
6.11.4	Related References	71
6.11.5	Core Concept	71
Agent		71
APM		71
Tracing		71
Metrics		71
6.11.6	Use Norms	71
Compile source code		71
Agent configuration		72
Used in ShardingSphere-Proxy		75
6.12	DistSQL	75
6.12.1	Definition	75
6.12.2	Related Concepts	75
RDL		76
RQL		76
RAL		76
6.12.3	Impact on the System	76
Before		76
After		77
6.12.4	Limitations	77
6.12.5	How it works	77
6.12.6	Related References	77
7	User Manual	79
7.1	ShardingSphere-JDBC	79
7.1.1	Java API	80
Overview		80
Usage		80
Mode Configuration		81
Data Source		84
Rules		85
7.1.2	YAML Configuration	104
Overview		104
Usage		104
YAML Syntax Explanation		106

Mode Configuration	106
Data Source	108
Rules	109
7.1.3 JDBC Driver	124
Background	124
Parameters	124
Procedure	124
Sample	126
7.1.4 Spring Boot Starter	126
Overview	126
Usage	126
Mode Configuration	127
Data Source	129
Rules	131
7.1.5 Spring Namespace	145
Overview	145
Usage	145
Mode Configuration	146
Data Source	149
Rules	150
7.1.6 Properties Configuration	171
Background	171
Parameters	172
Procedure	173
Sample	173
7.1.7 Builtin Algorithm	173
Introduction	173
Usage	173
Metadata Repository	173
Sharding Algorithm	175
Key Generate Algorithm	181
Load Balance Algorithm	183
Encryption Algorithm	185
Shadow Algorithm	186
SQL Translator	188
7.1.8 Special API	189
Sharding	189
Readwrite Splitting	192
Transaction	194
Observability	205
7.1.9 Unsupported Items	210
DataSource Interface	210
Connection Interface	210
Statement and PreparedStatement Interface	210
ResultSet Interface	211

JDBC 4.1	211
7.2 ShardingSphere-Proxy	211
7.2.1 Startup	211
Use Binary Tar	212
Use Docker	214
Use Helm	215
7.2.2 Yaml Configuration	219
Authority	220
Properties	221
Rules	223
7.2.3 DistSQL	223
Syntax	223
Usage	265
7.2.4 Logging	272
To distinguish databases in the same log	272
To distinguish databases and users in the same log	273
To split into different log files	273
7.2.5 Scaling	274
Introduction	274
Build	274
Manual	278
7.3 ShardingSphere-Sidecar	290
7.3.1 Introduction	290
7.3.2 Comparison	290
8 Dev Manual	292
8.1 Mode	292
8.1.1 SPI Interface	292
8.1.2 Sample	292
StandalonePersistRepository	292
ClusterPersistRepository	293
GovernanceWatcher	293
8.2 Configuration	293
8.2.1 SPI Interface	293
8.2.2 Sample	294
RuleBuilder	294
YamlRuleConfigurationSwapper	295
ShardingSphereYamlConstruct	296
8.3 Kernel	296
8.3.1 SQLRouter	296
8.3.2 SQLRewriteContextDecorator	296
8.3.3 SQLExecutionHook	296
8.3.4 ResultProcessEngine	297
8.3.5 StoragePrivilegeHandler	297
8.3.6 DynamicDataSourceStrategy	297

8.4	DataSource	298
8.4.1	SPI Interface	298
8.4.2	Sample	298
	DatabaseType Known Implementation Class	298
	DialectTableMetaDataLoader Known Implementation Class	298
	DataSourcePoolMetaData Known Implementation Class	299
	DataSourcePoolActiveDetector Known Implementation Class	299
8.5	SQL Parser	299
8.5.1	DatabaseTypedSQLParserFacade	299
8.5.2	SQLVisitorFacade	299
8.6	Proxy	300
8.6.1	SPI Interface	300
	DatabaseProtocolFrontendEngine	300
	AuthorityProvideAlgorithm	300
8.6.2	Example	301
	DatabaseProtocolFrontendEngine	301
	AuthorityProvideAlgorithm	301
8.7	Data Sharding	301
8.7.1	SPI Interface	301
8.7.2	Sample	302
	ShardingAlgorithm Known Implementation Class	302
	KeyGenerateAlgorithm Known Implementation Class	302
	ShardingAuditAlgorithm Known Implementation Class	302
	DatetimeService Known Implementation Class	303
	DatabaseSQLEntry Known Implementation Class	303
8.8	Readwrite-splitting	303
8.8.1	ReadwriteSplittingType	303
8.8.2	ReplicaLoadBalanceAlgorithm	303
8.9	HA	304
8.9.1	SPI Interface	304
8.9.2	Sample	304
	DatabaseDiscoveryProviderAlgorithm	304
8.10	Distributed Transaction	304
8.10.1	ShardingSphereTransactionManager	304
8.10.2	XATransactionManagerProvider	304
8.10.3	XADatasourceDefinition	305
8.10.4	DataSourcePropertyProvider	305
8.11	Scaling	306
8.11.1	ScalingEntry	306
8.11.2	JobCompletionDetectAlgorithm	306
8.11.3	DataConsistencyCalculateAlgorithm	306
8.12	SQL Checker	307
8.12.1	SQLChecker	307
8.13	Encryption	307
8.13.1	SPI Interface	307

8.13.2	Sample	307
EncryptAlgorithm Known Implementation Class		307
8.14	Shadow DB	307
8.14.1	SPI Interface	307
8.14.2	Sample	308
8.15	Observability	308
8.15.1	PluginDefinitionService	308
8.15.2	PluginBootService	308
9	Reference	309
9.1	Management	309
9.1.1	Data Structure in Registry Center	309
/rules		310
/props		311
/metadata/ <i>databaseName</i> /versions/{versionNumber}/dataSources		311
/metadata/ <i>databaseName</i> /versions/{versionNumber}/rules		312
/metadata/ <i>databaseName</i> /schemas/{schemaName}/tables		312
/nodes/compute_nodes		312
/nodes/storage_nodes		313
9.2	Sharding	313
9.2.1	SQL Parsing	314
9.2.2	SQL Route	314
9.2.3	SQL Rewrite	314
9.2.4	SQL Execution	314
9.2.5	Result Merger	314
9.2.6	Query Optimization	314
9.2.7	Parse Engine	314
Abstract Syntax Tree		315
SQL Parser		316
9.2.8	Route Engine	319
Sharding Route		319
Broadcast Route		321
9.2.9	Rewrite Engine	322
Correctness Rewrite		323
Identifier Rewrite		323
Column Derivation		325
Pagination Revision		326
Batch Split		328
Optimization Rewrite		329
9.2.10	Execute Engine	331
Connection Mode		331
Automatic Execution Engine		332
9.2.11	Merger Engine	336
Iteration Merger		336
Order-by Merger		336

Group-by Merger	339
Aggregation Merger	341
Pagination Merger	341
9.3 Transaction	342
9.3.1 Navigation	342
9.3.2 XA Transaction	342
Transaction Begin	342
Execute actual sharding SQL	343
Commit or Rollback	343
9.3.3 Seata BASE transaction	344
Init Seata Engine	345
Transaction Begin	345
Execute actual sharding SQL	345
Commit or Rollback	345
9.4 Scaling	345
9.4.1 Principle Description	345
9.4.2 Phase Description	346
Preparing Phase	346
Inventory Phase	347
Incremental Phase	347
Switching Phase	347
9.5 Encryption	348
9.5.1 Process Details	348
Overall Architecture	348
Encryption Rule	349
Encryption Process	350
9.5.2 Detailed Solution	352
New Business	352
Online Business Transformation	353
9.5.3 The advantages of Middleware encryption service	358
9.5.4 Solution	358
EncryptAlgorithm	358
9.6 Shadow	359
9.6.1 Overall Architecture	359
9.6.2 Shadow Rule	359
9.6.3 Routing Process	361
9.6.4 Shadow Judgment Process	361
DML Statement	361
DDL Statement	361
9.6.5 Shadow Algorithm	362
9.6.6 Use Example	362
Scenario	362
Shadow DB configuration	362
Shadow DB environment	363
Shadow algorithm example	364

9.7	Test	367
9.7.1	Integration Test	367
9.7.2	Module Test	367
9.7.3	Performance Test	367
9.7.4	Sysbench Test	367
9.7.5	Integration Test	367
	Process	368
	Notice	371
9.7.6	Performance Test	371
9.7.7	Module Test	371
	SQL Parser Test	371
	SQL Rewrite Test	373
9.7.8	Scaling Integration Test	374
	Objective	374
	Environment	375
	Guide	375
9.8	FAQ	377
9.8.1	[JDBC] Why there may be an error when configure both shardingsphere-jdbc-spring-boot-starter and a spring-boot-starter of certain datasource pool(such as druid)?	377
9.8.2	[JDBC] Why is xsd unable to be found when Spring Namespace is used?	377
9.8.3	[JDBC] Found a JtaTransactionManager in spring boot project when integrating with transaction of XA	377
9.8.4	[Proxy] In Windows environment, could not find or load main class org.apache.shardingsphere.proxy.Bootstrap, how to solve it?	378
9.8.5	[Proxy] How to add a new logic database dynamically when use ShardingSphere-Proxy?	378
9.8.6	[Proxy] How to use a suitable database tools connecting ShardingSphere-Proxy?	378
9.8.7	[Proxy] When using a client such as Navicat to connect to ShardingSphere-Proxy, if ShardingSphere-Proxy does not create a database or does not add a resource, the client connection will fail?	379
9.8.8	[Sharding] How to solve Cloud not resolve placeholder ... in string value ... error?	379
9.8.9	[Sharding] Why does float number appear in the return result of inline expression?	379
9.8.10	[Sharding] If sharding database is partial, should tables without sharding database & table configured in sharding rules?	379
9.8.11	[Sharding] When generic Long type SingleKeyTableShardingAlgorithm is used, why doesClassCastException: Integer can not cast to Long exception appear?	380
9.8.12	[Sharding:raw-latex:PROXY] When implementing the StandardShardingAlgorithm custom algorithm, the specific type of Comparable is specified as Long, and the field type in the database table is bigint, a ClassCastException: Integer can not cast to Long exception occurs.	380
9.8.13	[Sharding] Why are the default distributed auto-augment key strategy provided by ShardingSphere not continuous and most of them end with even numbers?	380

9.8.14	[Sharding] How to allow range query with using inline sharding strategy(BETWEEN AND, >, <, >=, <=)?	381
9.8.15	[Sharding] Why does my custom distributed primary key do not work after implementing KeyGenerateAlgorithm interface and configuring type property?	381
9.8.16	[Sharding] In addition to internal distributed primary key, does ShardingSphere support other native auto-increment keys?	381
9.8.17	[Encryption] How to solve that data encryption can't work with JPA?	382
9.8.18	[DistSQL] How to set custom JDBC connection properties or connection pool properties when adding a data source using DistSQL?	382
9.8.19	[DistSQL] How to solve Resource [xxx] is still used by [SingleTableRule]. exception when dropping a data source using DistSQL?	382
9.8.20	[DistSQL] How to solve Failed to get driver instance for jdbcURL=xxx. exception when adding a data source using DistSQL?	383
9.8.21	[Other] How to debug when SQL can not be executed rightly in ShardingSphere?	383
9.8.22	[Other] Why do some compiling errors appear? Why did not the IDEA index the generated codes?	383
9.8.23	[Other] In SQLSever and PostgreSQL, why does the aggregation column without alias throw exception?	383
9.8.24	[Other] Why does Oracle database throw “Order by value must implements Comparable” exception when using Timestamp Order By?	384
9.8.25	[Other] In Windows environment, when cloning ShardingSphere source code through Git, why prompt filename too long and how to solve it?	385
9.8.26	[Other] How to solve Type is required error?	386
9.8.27	[Other] How to speed up the metadata loading when service starts up?	386
9.8.28	[Other] The ANTLR plugin generates codes in the same level directory as src, which is easy to commit by mistake. How to avoid it?	386
9.8.29	[Other] Why is the database sharding result not correct when using Proxool?	386
9.8.30	[Other] The property settings in the configuration file do not take effect when integrating ShardingSphere with Spring Boot 2.x?	388
9.8.31	[ShardingSphere-JDBC] The tableName and columnName configured in yaml or properties leading incorrect result when loading Oracle metadata?	389
9.9	API Change Histories	390
9.9.1	ShardingSphere-JDBC	390
	YAML configuration	390
	Java API	405
	Spring namespace configuration change history	432
	Spring Boot Starter Configuration	453
9.9.2	ShardingSphere-Proxy	469
	5.0.0-beta	469
	5.0.0-alpha	470
	ShardingSphere-4.x	472
	ShardingSphere-3.x	474
9.10	DistSQL	475
9.10.1	Syntax	475
	RDL Syntax	476

RQL Syntax	492
RAL Syntax	503
Reserved word	503
10 Downloads	504
10.1 Latest Releases	504
10.1.1 Apache ShardingSphere - Version: 5.1.2 (Release Date: June 17th, 2022)	504
10.2 All Releases	504
10.3 Verify the Releases	504

Stargazers Over Time

Contributors Over Time

Apache ShardingSphere is positioned as a Database Plus, and aims at building a standard layer and ecosystem above heterogeneous databases. It focuses on how to reuse existing databases and their respective upper layer, rather than creating a new database. The goal is to minimize or eliminate the challenges caused by underlying databases fragmentation.

The concepts at the core of the project are Connect, Enhance and Pluggable.

- **Connect:** Flexible adaptation of database protocol, SQL dialect and database storage. It can quickly connect applications and heterogeneous databases quickly.
- **Enhance:** Capture database access entry to provide additional features transparently, such as: redirect (sharding, readwrite-splitting and shadow), transform (data encrypt and mask), authentication (security, audit and authority), governance (circuit breaker and access limitation and analyze, QoS and observability).
- **Pluggable:** Leveraging the micro kernel and 3 layers pluggable mode, features and database ecosystem can be embedded flexibly. Developers can customize their ShardingSphere just like building with LEGO blocks.

ShardingSphere became an [Apache Top-Level Project](#) on April 16, 2020.

Welcome to interact with community via the official [mail list](#) and the ShardingSphere Slack.

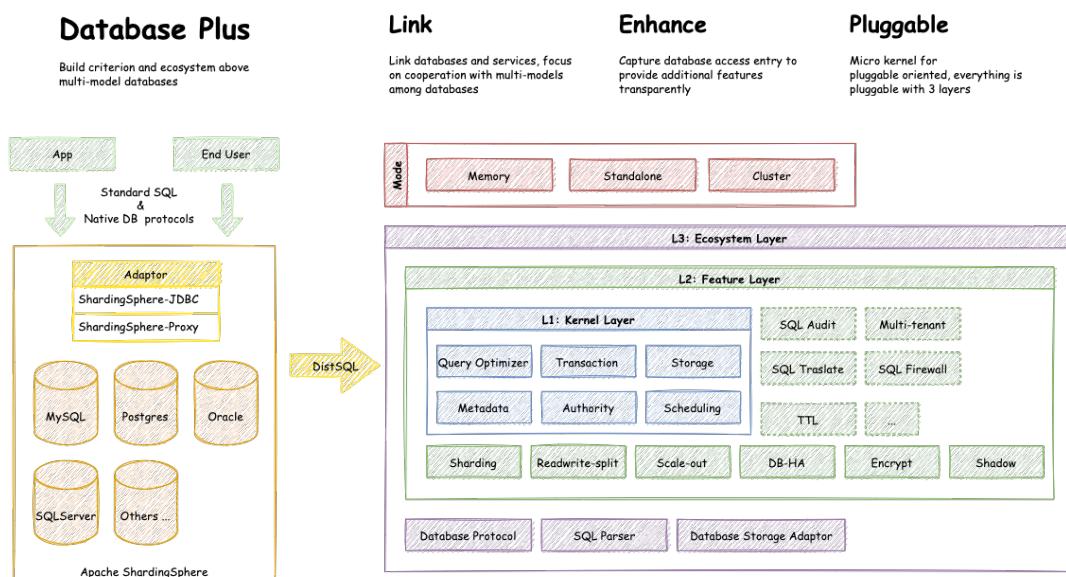


Figure1: Overview

Introduction

Apache ShardingSphere including 3 independent products: JDBC, Proxy & Sidecar (Planning). They all provide functions of data scale-out, distributed transaction and distributed governance, applicable in a variety of situations such as Java isomorphism, heterogeneous language and Cloud-Native.

As the cornerstone of enterprises, the relational database has a huge market share. Therefore, we prefer to focus on its incrementation instead of a total overturn.

1.1 ShardingSphere-JDBC

ShardingSphere-JDBC defines itself as a lightweight Java framework that provides extra services at the Java JDBC layer. With the client end connecting directly to the database, it provides services in the form of a jar and requires no extra deployment and dependence. It can be considered as an enhanced JDBC driver, which is fully compatible with JDBC and all kinds of ORM frameworks.

- Applicable in any ORM framework based on JDBC, such as JPA, Hibernate, Mybatis, Spring JDBC Template or direct use of JDBC;
- Supports any third-party database connection pool, such as DBCP, C3P0, BoneCP, HikariCP;
- Support any kind of JDBC standard database: MySQL, PostgreSQL, Oracle, SQLServer and any JDBC adapted databases.

1.2 ShardingSphere-Proxy

ShardingSphere-Proxy defines itself as a transparent database proxy, providing a database server that encapsulates database binary protocol to support heterogeneous languages. Currently, MySQL and PostgreSQL (compatible with PostgreSQL-based databases, such as openGauss) versions are provided. It can use any kind of terminal (such as MySQL Command Client, MySQL Workbench, etc.) that is compatible of MySQL or PostgreSQL protocol to operate data, which is friendlier to DBAs.

- Transparent towards applications, it can be used directly as MySQL and PostgreSQL servers;
- Applicable to any kind of terminal that is compatible with MySQL and PostgreSQL protocol.

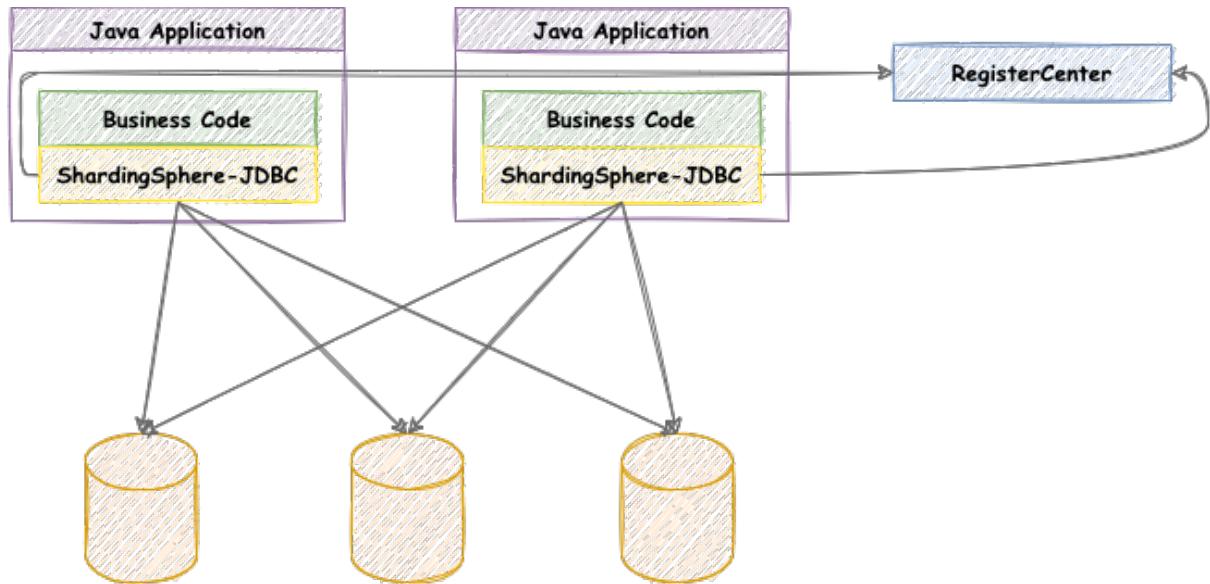


Figure1: ShardingSphere-JDBC Architecture

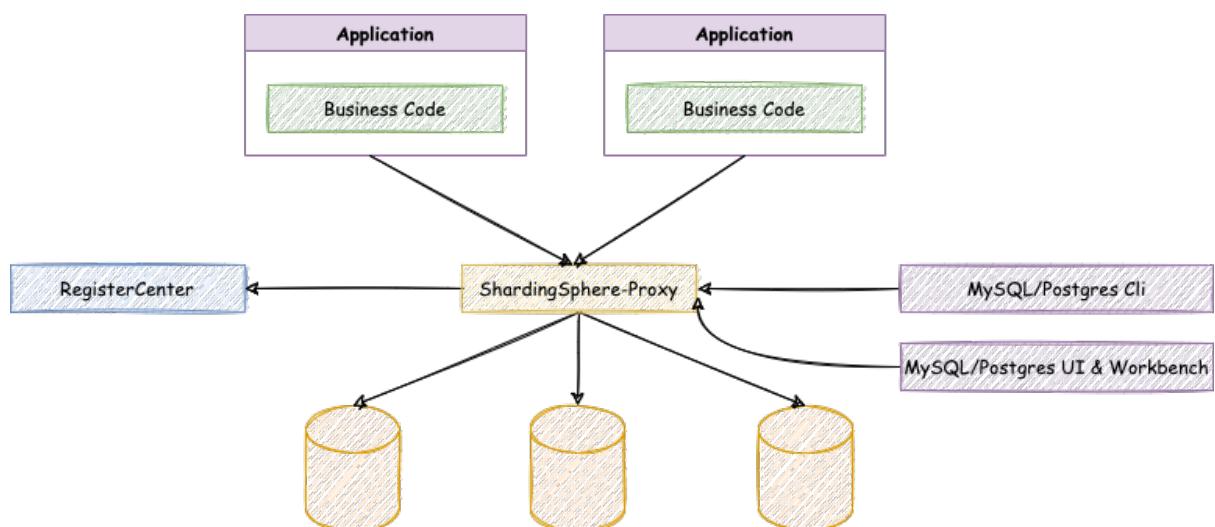


Figure2: ShardingSphere-Proxy Architecture

1.3 ShardingSphere-Sidecar(TODO)

ShardingSphere-Sidecar (TODO) defines itself as a cloud-native database agent of the Kubernetes environment, in charge of all database access in the form of a sidecar. It provides a mesh layer interacting with the database, we call this Database Mesh.

Database Mesh emphasizes how to connect distributed data-access applications with the databases. Focusing on interaction, it effectively organizes the interaction between messy applications and databases. The applications and databases that use Database Mesh to visit databases will form a large grid system, where they just need to be put into the right positions accordingly. They are all governed by the mesh layer.

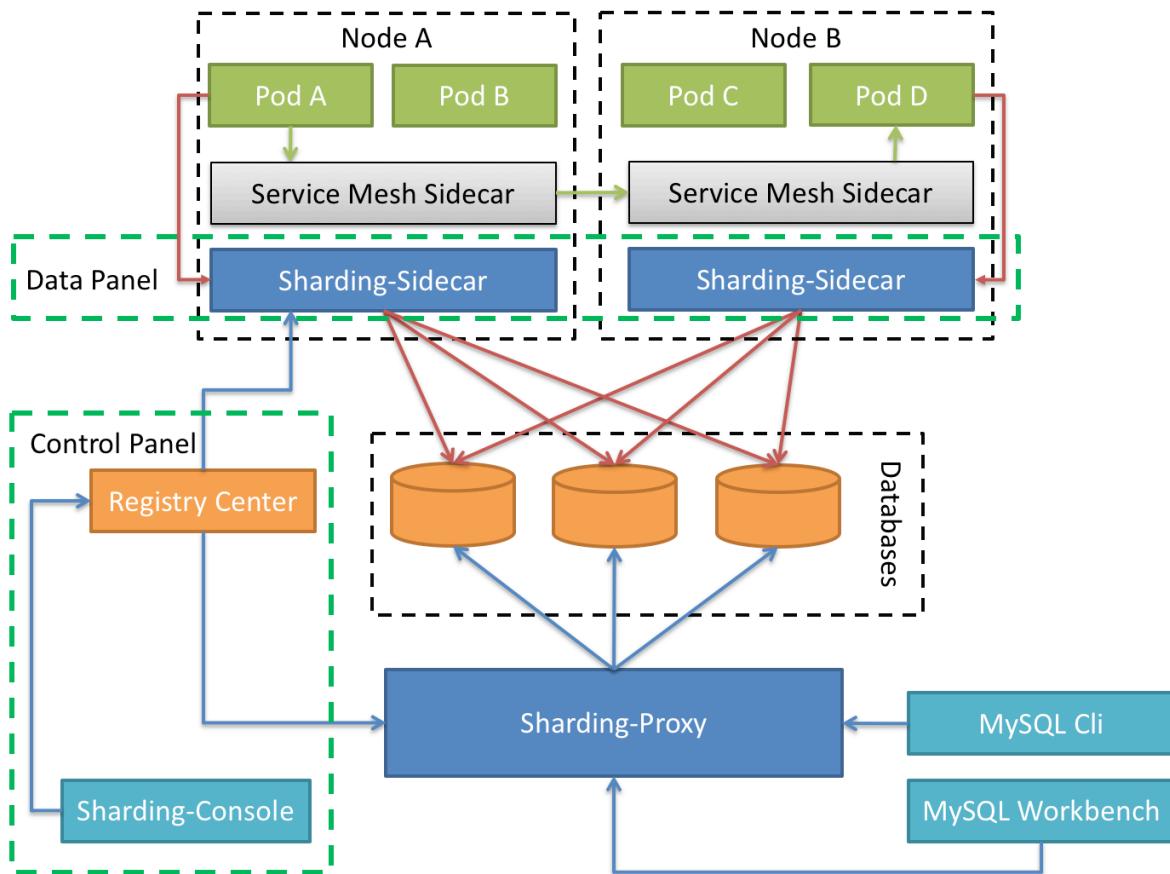


Figure3: ShardingSphere-Sidecar Architecture

	ShardingSphere-JDBC	ShardingSphere-Proxy	ShardingSphere-Sidecar
Database	Any	MySQL/PostgreSQL	MySQL/PostgreSQL
Connections Count Cost	High	Low	High
Supported Languages	Java Only	Any	Any
Performance	Low loss	Relatively High loss	Low loss
Decentralization	Yes	No	No
Static Entry	No	Yes	No

1.4 Hybrid Architecture

ShardingSphere-JDBC adopts a decentralized architecture, applicable to high-performance light-weight OLTP application developed with Java. ShardingSphere-Proxy provides static entry and all languages support, applicable for OLAP application and the sharding databases management and operation situation.

ShardingSphere is an ecosystem consisting of multiple endpoints together. Through a mixed use of ShardingSphere-JDBC and ShardingSphere-Proxy and a unified sharding strategy by the same registry center, ShardingSphere can build an application system that is applicable to all kinds of scenarios. Architects can adjust the system architecture to the most applicable one to their needs to conduct business more freely.

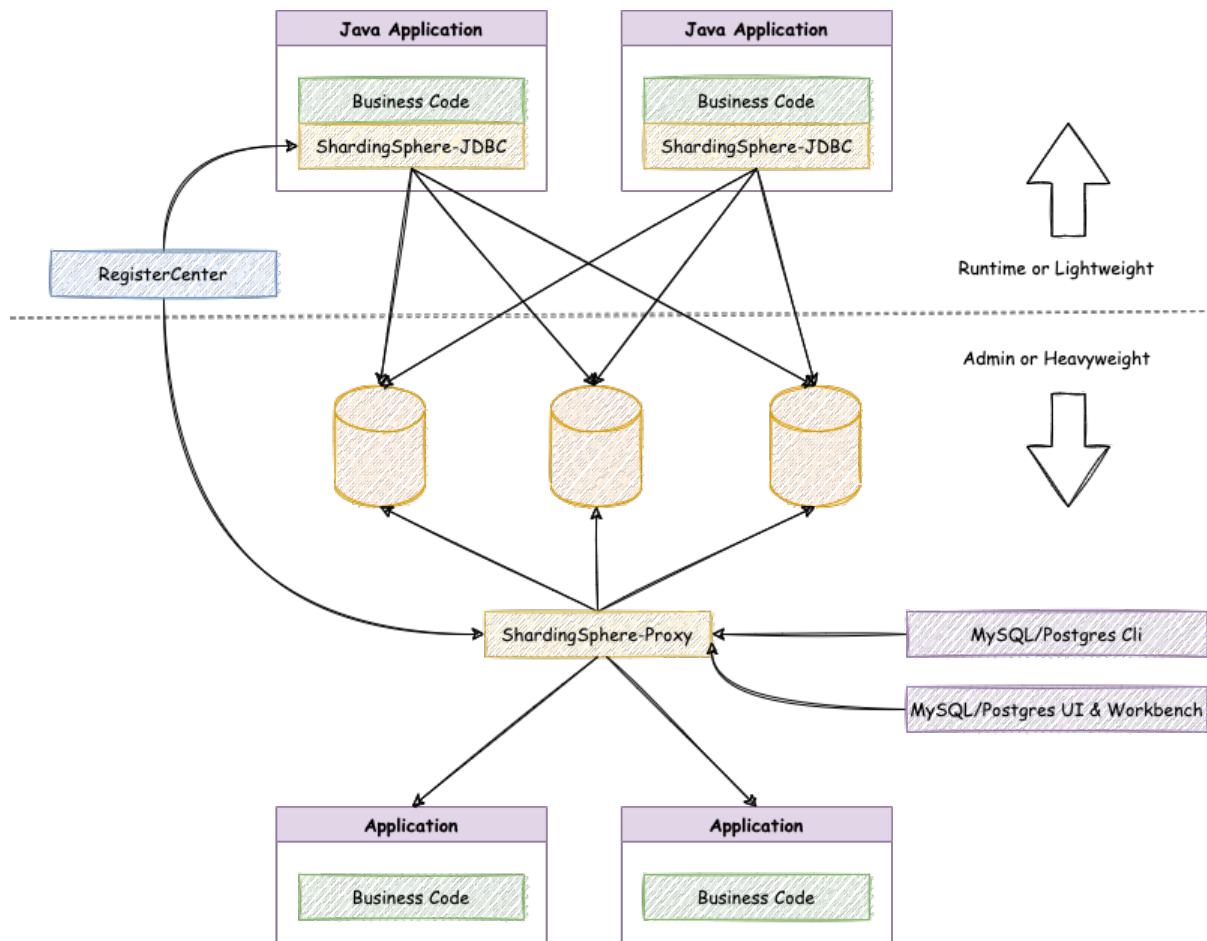


Figure4: ShardingSphere Hybrid Architecture

2

Solution

Solutions/ Features	• Distributed Database*	Data Security	Database Gateway	Stress Testing
	Data Sharding	Data Encrypt	Heterogeneous Databases Supported	Shadow Database
	Readwrite splitting	Row Authority (TODO)	SQL Dialect Translate (TODO)	Observability
	Distributed Transaction	SQL Audit (TODO)		
	Elastic Scale-out	SQL Firewall (TODO)		
	Highly Available			

Roadmap

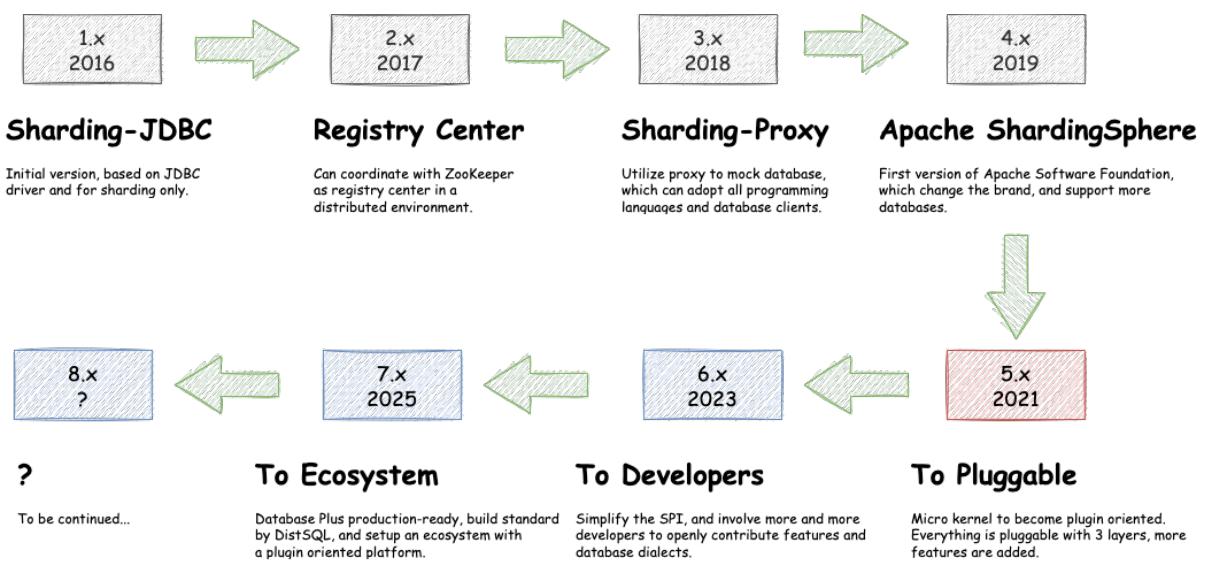


Figure1: Roadmap

In shortest time, this chapter provides users with a simplest quick start with Apache ShardingSphere.

Example Codes: <https://github.com/apache/shardingsphere/tree/master/examples>

4.1 ShardingSphere-JDBC

4.1.1 Scenarios

There are four ways you can configure Apache ShardingSphere: Java, YAML, Spring namespace and Spring boot starter. Developers can choose the preferred method according to their requirements.

4.1.2 Limitations

Currently only Java language is supported.

4.1.3 Requirements

The development environment requires Java JRE 8 or later.

4.1.4 Procedure

1. Rules configuration.

Please refer to [User Manual](#) for more details.

2. Import Maven dependency

```
<dependency>
  <groupId>org.apache.shardingsphere</groupId>
  <artifactId>shardingsphere-jdbc-core-spring-boot-starter</artifactId>
```

```
<version>${latest.release.version}</version>
</dependency>
```

Notice: Please change \${latest.release.version} to the actual version.

3. Edit application.yml.

```
spring:
  shardingsphere:
    datasource:
      names: ds_0, ds_1
      ds_0:
        type: com.zaxxer.hikari.HikariDataSource
        driverClassName: com.mysql.cj.jdbc.Driver
        jdbcUrl: jdbc:mysql://localhost:3306/demo_ds_0?serverTimezone=UTC&
useSSL=false&useUnicode=true&characterEncoding=UTF-8
        username: root
        password:
      ds_1:
        type: com.zaxxer.hikari.HikariDataSource
        driverClassName: com.mysql.cj.jdbc.Driver
        jdbcUrl: jdbc:mysql://localhost:3306/demo_ds_1?serverTimezone=UTC&
useSSL=false&useUnicode=true&characterEncoding=UTF-8
        username: root
        password:
    rules:
      sharding:
        tables:
          ...
...
```

4.2 ShardingSphere-Proxy

4.2.1 Scenarios

ShardingSphere-Proxy is positioned as a transparent database proxy. It theoretically supports any client operation data using MySQL, PostgreSQL and openGauss protocols, and is friendly to heterogeneous languages and operation and maintenance scenarios.

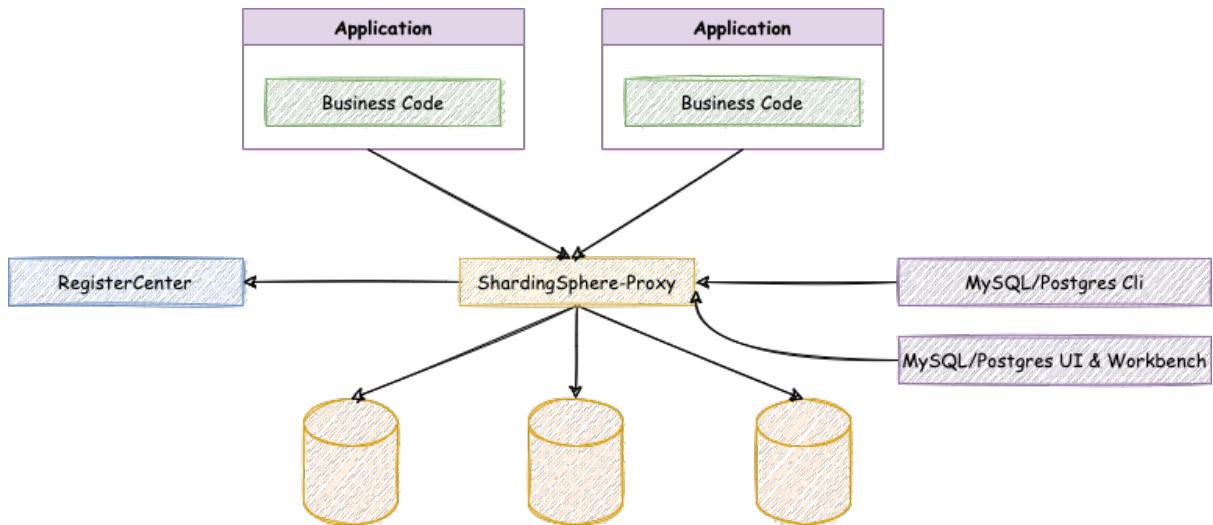


Figure1: shardingsphere-proxy

4.2.2 Limitations

Proxy provides limited support for system databases / tables (such as information_schema, pg_catalog). When connecting to Proxy through some graph database clients, the client or proxy may have an error prompt. You can use command-line clients (mysql, psql, gsql, etc.) to connect to the Proxy's authentication function.

4.2.3 Requirements

Starting ShardingSphere-Proxy with Docker requires no additional dependency. To start the Proxy using binary distribution, the environment must have Java JRE 8 or higher.

4.2.4 Procedure

1. Get ShardingSphere-Proxy.

ShardingSphere-Proxy is available at: - [Binary Distribution](#) - [Docker](#) - [Helm](#)

2. Rule configuration.

Edit %SHARDINGSPHERE_PROXY_HOME%/conf/server.yaml.

Edit %SHARDINGSPHERE_PROXY_HOME%/conf/config-xxx.yaml.

%SHARDINGSPHERE_PROXY_HOME% is the proxy extract path. for example: /opt/shardingsphere-proxy-bin/

Please refer to [Configuration Manual](#) for more details.

3. Import dependencies.

If the backend database is PostgreSQL or openGauss, no additional dependencies are required.

If the backend database is MySQL, please download `mysql-connector-java-5.1.47.jar` or `mysql-connector-java-8.0.11.jar` and put it into the `%SHARDINGSPHERE_HOME%/ext-lib` directory.

4. Start server.

- Use the default configuration to start

```
sh %SHARDINGSPHERE_HOME%/bin/start.sh
```

The default port is 3307, while the default profile directory is `%SHARDINGSPHERE_HOME%/conf/`.

- Customize port and profile directory

```
sh %SHARDINGSPHERE_HOME%/bin/start.sh ${proxy_port} ${proxy_conf_directory}
```

5. Use ShardingSphere-Proxy.

Use MySQL or PostgreSQL or openGauss client to connect ShardingSphere-Proxy.

Use the MySQL client to connect to the ShardingSphere-Proxy:

```
mysql -h${proxy_host} -P${proxy_port} -u${proxy_username} -p${proxy_password}
```

Use the PostgreSQL client to connect to the ShardingSphere-Proxy:

```
psql -h ${proxy_host} -p ${proxy_port} -U ${proxy_username}
```

Use the openGauss client to connect to the ShardingSphere-Proxy:

```
gsql -r -h ${proxy_host} -p ${proxy_port} -U ${proxy_username} -W ${proxy_password}
```

The functions of Apache ShardingSphere are pretty complex with hundreds of modules, but the concepts are very simple and clear. Most modules are horizontal extensions faced to these concepts.

The concepts include: adaptor faced to independent products, runtime mode faced to startup, DistSQL faced to users and pluggable architecture faced to developers.

This chapter describes concepts about Apache ShardingSphere.

5.1 Adaptor

Apache ShardingSphere including 2 independent products: ShardingSphere-JDBC & ShardingSphere-Proxy. They all provide functions of data scale-out, distributed transaction and distributed governance, applicable in a variety of situations such as Java isomorphism, heterogeneous language and Cloud-Native.

5.1.1 ShardingSphere-JDBC

As the first product and the predecessor of Apache ShardingSphere, ShardingSphere-JDBC defines itself as a lightweight Java framework that provides extra service at Java JDBC layer. With the client end connecting directly to the database, it provides service in the form of jar and requires no extra deployment and dependence. It can be considered as an enhanced JDBC driver, which is fully compatible with JDBC and all kinds of ORM frameworks.

- Applicable in any ORM framework based on JDBC, such as JPA, Hibernate, Mybatis, Spring JDBC Template or direct use of JDBC;
- Support any third-party database connection pool, such as DBCP, C3P0, BoneCP, HikariCP;
- Support any kind of JDBC standard database: MySQL, PostgreSQL, Oracle, SQLServer and any JDBC adapted databases.

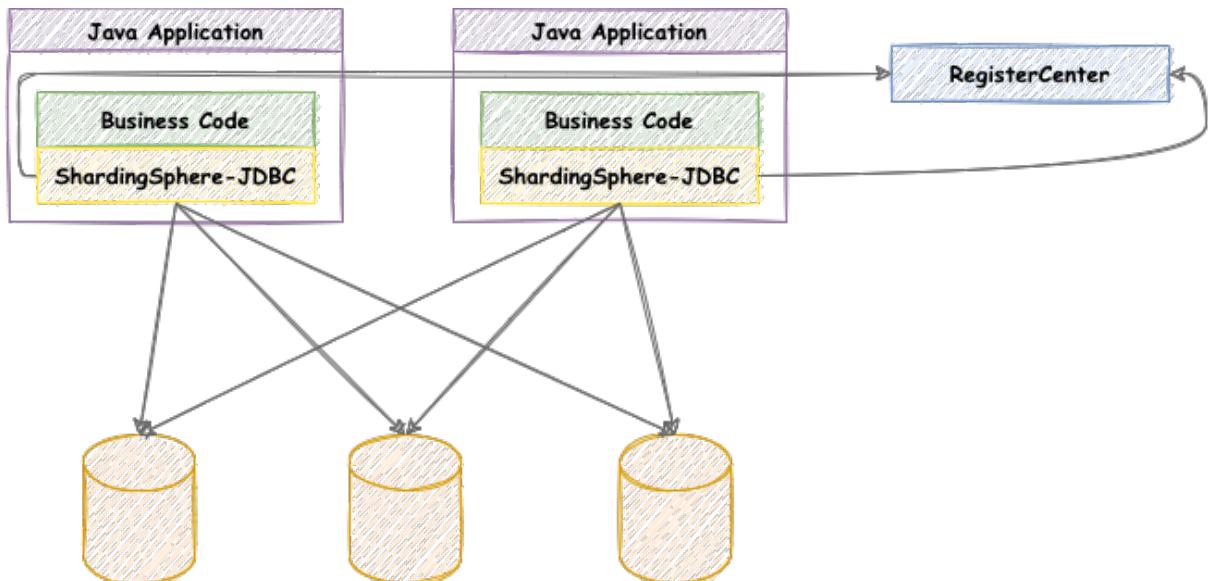


Figure1: ShardingSphere-JDBC Architecture

	<i>ShardingSphere-JDBC</i>	<i>ShardingSphere-Proxy</i>
Database	Any	MySQL/PostgreSQL
Connections Count Cost	More	Less
Supported Languages	Java Only	Any
Performance	Low loss	Relatively High loss
Decentralization	Yes	No
Static Entry	No	Yes

ShardingSphere-JDBC is suitable for java application.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-jdbc>

5.1.2 ShardingSphere-Proxy

ShardingSphere-Proxy is the second product of Apache ShardingSphere. It defines itself as a transparent database proxy, providing a database server that encapsulates database binary protocol to support heterogeneous languages. Currently, MySQL and PostgreSQL (compatible with PostgreSQL-based databases, such as openGauss) versions are provided. It can use any kind of terminal (such as MySQL Command Client, MySQL Workbench, etc.) that is compatible with MySQL or PostgreSQL protocol to operate data, which is friendlier to DBAs

- Totally transparent to applications, it can be used directly as MySQL/PostgreSQL;
- Applicable to any kind of client end that is compatible with MySQL/PostgreSQL protocol.

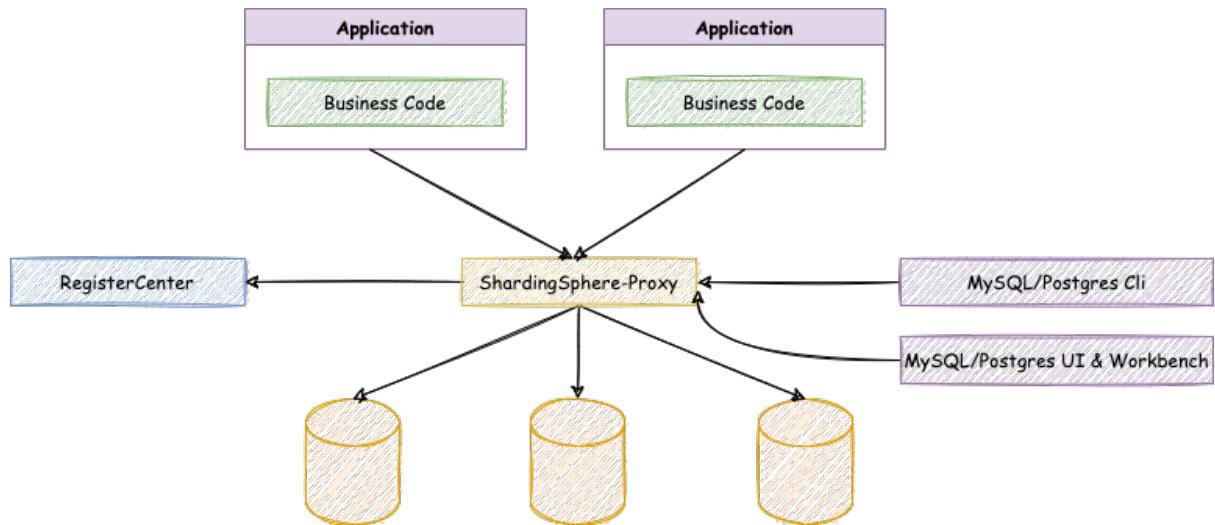


Figure2: ShardingSphere-Proxy Architecture

	<i>ShardingSphere-JDBC</i>	<i>ShardingSphere-Proxy</i>
Database	Any	MySQL/PostgreSQL
Connections Count Cost	High	Low
Supported Languages	Java Only	Any
Performance	Low loss	Relatively high loss
Decentralization	Yes	No
Static Entry	No	Yes

The advantages of ShardingSphere-Proxy lie in supporting heterogeneous languages and providing operational entries for DBA.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-proxy>

5.1.3 Hybrid Adaptors

ShardingSphere-JDBC adopts a decentralized architecture, applicable to high-performance light-weight OLTP application developed with Java. ShardingSphere-Proxy provides static entry and all languages support, applicable for OLAP application and the sharding databases management and operation situation.

ShardingSphere is an ecosystem consisting of multiple endpoints together. Through a mixed use of ShardingSphere-JDBC and ShardingSphere-Proxy and a unified sharding strategy by the same registry center, ShardingSphere can build an application system that is applicable to all kinds of scenarios. Architects can adjust the system architecture to the most applicable one to their needs to conduct business more freely.

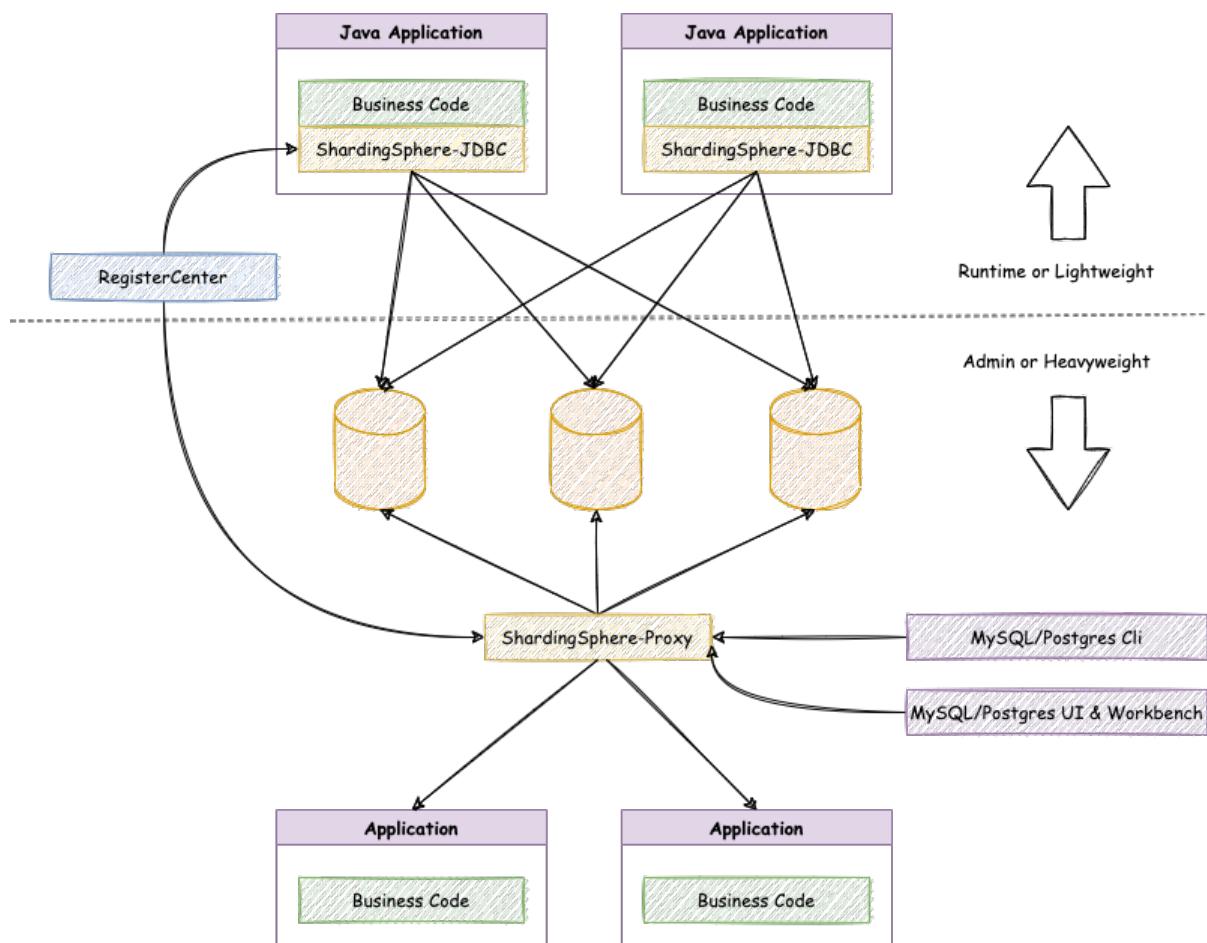


Figure3: Hybrid Architecture

5.2 Mode

5.2.1 Background

In order to meet the different needs of users for quick test startup, stand-alone running and cluster running, Apache shardingsphere provides various mode such as memory, stand-alone and cluster.

5.2.2 Memory mode

Suitable for fast integration testing, which is convenient for testing, such as for developers looking to perform fast integration function testing. This is the default mode of Apache ShardingSphere.

5.2.3 Standalone mode

Suitable in a standalone environment, through which data sources, rules, and metadata can be persisted. Will create a `.shardingsphere` file in the root directory to store configuration data by default.

5.2.4 Cluster mode

Suitable for use in distributed scenarios which provides metadata sharing and state coordination among multiple computing nodes. It is necessary to provide registry center for distributed coordination, such as ZooKeeper or Etcd.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-mode>

5.3 DistSQL

5.3.1 Background

DistSQL (Distributed SQL) is Apache ShardingSphere specific SQL, which provide added-on operation capability beside standard SQL.

5.3.2 Challenges

When using ShardingSphere-Proxy, developers can operate data just like using database, but they need to configure resources and rules through YAML file (or registry center). However, the format of YAML and habits changed by using registry center are not friendly to DBA.

DistSQL enables users to operate Apache ShardingSphere like a database, transforming it from a framework and middleware for developers to a database product for DBAs.

DistSQL is divided into RDL, RQL and RAL.

- RDL (Resource & Rule Definition Language) responsible for the definition of resources and rules;

- RQL (Resource & Rule Query Language) responsible for the query of resources and rules;
- RAL (Resource & Rule Administration Language) responsible for the added-on administrator feature of hint, transaction type switch, sharding execute planning and so on.

5.3.3 Goal

It is the design goal of DistSQL to break the boundary between middleware and database and let developers use Apache ShardingSphere just like database.

5.3.4 Notice

DistSQL can use for ShardingSphere-Proxy only, not for ShardingSphere-JDBC now.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-distsql>

5.4 Pluggable Architecture

5.4.1 Background

In Apache ShardingSphere, many functionality implementations are uploaded through [SPI \(Service Provider Interface\)](#), which is a kind of API for the third party to implement or expand, and can be applied in framework expansion or component replacement.

5.4.2 Challenges

Pluggable architecture is very difficult to design for the project architecture. It needs to make each module decouple to independent and imperceptible to each other totally, and enables appendable functions in a way of superposition through a pluggable kernel. Design an architecture to completely isolate each function, not only can stimulate the enthusiasm of the open source community, but also can guarantee the quality of the project.

Apache ShardingSphere begin to focus on pluggable architecture from version 5.x, features can be embedded into project flexibility. Currently, the features such as data sharding, readwrite-splitting, data encrypt, shadow database, and SQL dialects / database protocols such as MySQL, PostgreSQL, SQLServer, Oracle supported are all weaved by plugins. Developers can customize their own ShardingSphere just like building lego blocks. There are lots of SPI extensions for Apache ShardingSphere now and increase continuously.

5.4.3 Goal

It is the design goal of Apache shardingsphere pluggable architecture to enable developers to customize their own unique systems just like building blocks.

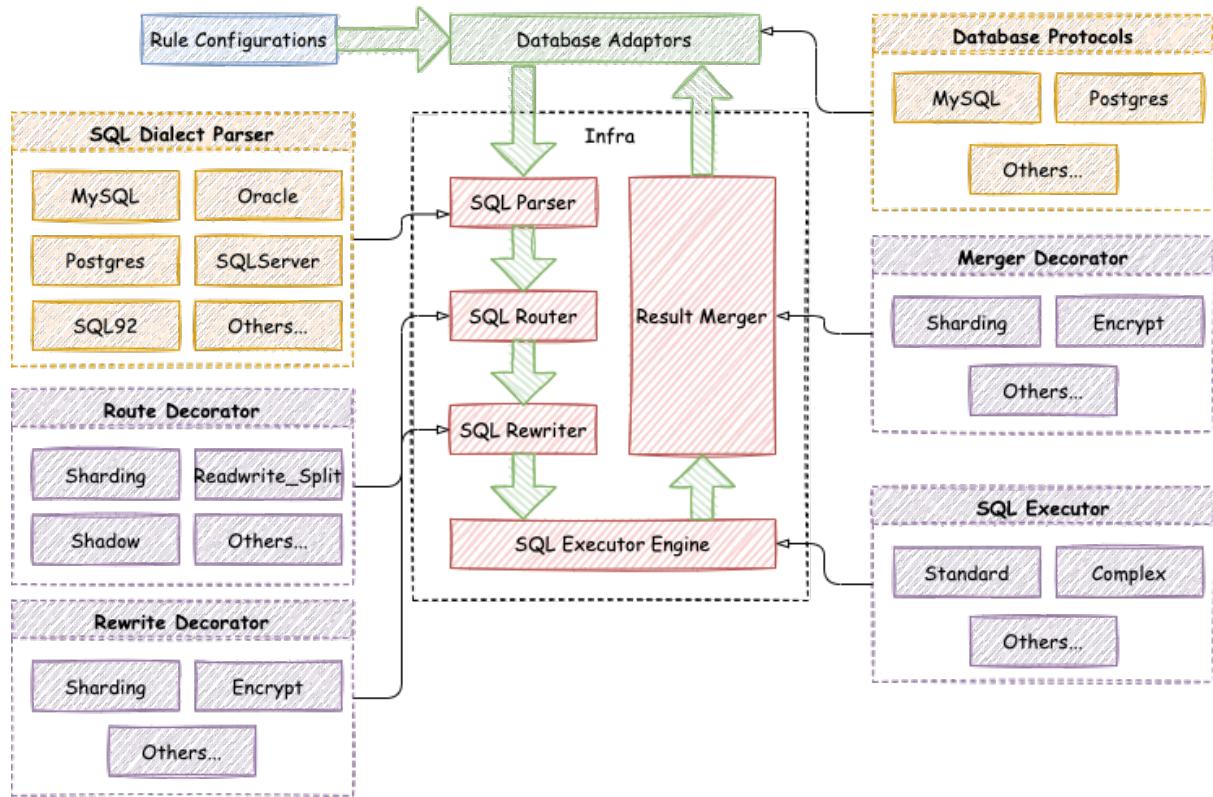


Figure4: Pluggable Platform

5.4.4 Implementation

The pluggable architecture of Apache ShardingSphere are composed by L1 Kernel Layer, L2 Feature Layer and L3 Ecosystem Layer.

L1 Kernel Layer

An abstraction of basic capabilities of database. All components are required and the specific implementation can be replaced by pluggable way. It includes query optimizer, distributed transaction engine, distributed execution engine, authority engine and scheduling engine.

L2 Feature Layer

Used to provide enhanced capability. All components are optional and can contain zero or multiple components. Components isolate each other and multiple components can be used together superimposed. It includes data sharding, readwrite-splitting, database highly availability, data encryption, shadow database and so on. The user-defined feature can be fully customized and extended for the top-level interface defined by Apache ShardingSphere without changing kernel codes.

L3 Ecosystem Layer

Used to integrate into the current database ecosystem. It includes database protocol, SQL parser and storage adapter.

Apache ShardingSphere provides a variety of features, from database kernel and database distributed solution to applications closed features.

There is no boundary for these features, warmly welcome more open source engineers to join the community and provide exciting ideas and features.

6.1 DB Compatibility

6.1.1 Background

With information technology innovating, more and more applications established in the new fields, prompt and push evolution of human society's cooperation mode. Data is increasing explosively, the data storage and computing method are facing innovation all the time.

Transaction, big data, association analysis, Internet of things and other scenarios subdivided quickly, a single database can not apply to all application scenarios anymore. At the same time, the internal of scenario is becoming more and more detailed, and it has become normal for similar scenarios to use different databases.

The trend of database fragmentation is coming.

6.1.2 Challenges

There is no unified database access protocol and SQL dialect, as well as the maintenance and monitoring methods differences by various databases, learning and maintenance cost of developers and DBAs are increasing rapidly. Improving the compatibility with the original database is the premise of providing incremental services on it.

The compatibility between SQL dialect and database protocol is the key point to improve database compatibility.

6.1.3 Goal

The goal of database compatibility for Apache ShardingSphere is make user feel nothing changed among various original databases.

6.1.4 SQL Parser

SQL is the standard operation language between users and databases. SQL Parse engine used to parse SQL into an abstract syntax tree to provide Apache ShardingSphere understand and implement the add-on features.

It supports SQL dialect for MySQL, PostgreSQL, SQLServer, Oracle, openGauss and SQL that conform to the SQL92 specification. However, due to the complexity of SQL syntax, there are still a little of SQL do not support yet.

This chapter has listed unsupported SQLs reference for users.

There are some unsupported SQLs maybe missing, welcome to finish them. We will try best to support the unavailable SQLs in future versions.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-sql-parser>

MySQL

The unsupported SQL list for MySQL are as follows:

SQL
CLONE LOCAL DATA DIRECTORY = 'clone_dir'
INSTALL COMPONENT 'file://component1' , 'file://component2'
UNINSTALL COMPONENT 'file://component1' , 'file://component2'
REPAIR TABLE t_order
OPTIMIZE TABLE t_order
CHECKSUM TABLE t_order
CHECK TABLE t_order
SET RESOURCE GROUP group_name
DROP RESOURCE GROUP group_name
CREATE RESOURCE GROUP group_name TYPE = SYSTEM
ALTER RESOURCE GROUP rg1 VCPU = 0-63

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-sql-parser/shardingsphere-sql-parser-dialect/shardingsphere-sql-parser-mysql>

openGauss

The unsupported SQL list for openGauss are as follows:

SQL
CREATE type avg_state AS (total bigint, count bigint);
CREATE AGGREGATE my_avg(int4) (stype = avg_state, sfunc = avg_transfn, finalfunc = avg_finalfn)
CREATE TABLE agg_data_2k AS SELECT g FROM generate_series(0, 1999) g;
CREATE SCHEMA alt_nsp1;
ALTER AGGREGATE alt_agg3(int) OWNER TO regress_alter_generic_user2;
CREATE CONVERSION alt_conv1 FOR 'LATIN1' TO 'UTF8' FROM iso8859_1_to_utf8;
CREATE FOREIGN DATA WRAPPER alt_fdw1
CREATE SERVER alt_fserv1 FOREIGN DATA WRAPPER alt_fdw1
CREATE LANGUAGE alt_lang1 HANDLER plpgsql_call_handler
CREATE STATISTICS alt_stat1 ON a, b FROM alt_regress_1
CREATE TEXT SEARCH DICTIONARY alt_ts_dict1 (template=simple)
CREATE RULE def_view_test_ins AS ON INSERT TO def_view_test DO INSTEAD INSERT INTO def_test SELECT new.*
ALTER TABLE alterlock SET (toast.autovacuum_enabled = off)
CREATE PUBLICATION pub1 FOR TABLE alter1.t1, ALL TABLES IN SCHEMA alter2

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-sql-parser/shardingsphere-sql-parser-dialect/shardingsphere-sql-parser-opengauss>

PostgreSQL

The unsupported SQL list for PostgreSQL are as follows:

SQL
CREATE type avg_state AS (total bigint, count bigint);
CREATE AGGREGATE my_avg(int4) (stype = avg_state, sfunc = avg_transfn, finalfunc = avg_finalfn)
CREATE TABLE agg_data_2k AS SELECT g FROM generate_series(0, 1999) g;
CREATE SCHEMA alt_nsp1;
ALTER AGGREGATE alt_agg3(int) OWNER TO regress_alter_generic_user2;
CREATE CONVERSION alt_conv1 FOR 'LATIN1' TO 'UTF8' FROM iso8859_1_to_utf8;
CREATE FOREIGN DATA WRAPPER alt_fdw1
CREATE SERVER alt_fserv1 FOREIGN DATA WRAPPER alt_fdw1
CREATE LANGUAGE alt_lang1 HANDLER plpgsql_call_handler
CREATE STATISTICS alt_stat1 ON a, b FROM alt_regress_1
CREATE TEXT SEARCH DICTIONARY alt_ts_dict1 (template=simple)
CREATE RULE def_view_test_ins AS ON INSERT TO def_view_test DO INSTEAD INSERT INTO def_test SELECT new.*
ALTER TABLE alterlock SET (toast.autovacuum_enabled = off)
CREATE PUBLICATION pub1 FOR TABLE alter1.t1, ALL TABLES IN SCHEMA alter2

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-sql-parser/shardingsphere-sql-parser-dialect/shardingsphere-sql-parser-postgresql>

SQLServer

The unsupported SQL list for SQLServer are as follows:

TODO

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-sql-parser/shardingsphere-sql-parser-dialect/shardingsphere-sql-parser-sqlserver>

Oracle

The unsupported SQL list for Oracle are as follows:

TODO

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-sql-parser/shardingsphere-sql-parser-dialect/shardingsphere-sql-parser-oracle>

SQL92

The unsupported SQL list for SQL92 are as follows:

TODO

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-sql-parser/shardingsphere-sql-parser-dialect/shardingsphere-sql-parser-sql92>

6.1.5 DB Protocol

Apache ShardingSphere implements MySQL and PostgreSQL Protocol.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-db-protocol>

6.1.6 Feature Support

Apache ShardingSphere provides the ability of distributed collaboration for the database, and abstracts part of the database features to the upper layer for unified management to reduce the difficulty of users.

Therefore, for the unified provided features, the native SQL will no longer be transferred to the database, and it will be prompted that the operation is not supported. User can use the feature provided by ShardingSphere to replace it.

This chapter has listed unsupported database features and related SQLs reference for users.

There are some unsupported SQLs maybe missing, welcome to finish them.

MySQL

The unsupported SQL list for MySQL are as follows:

User & Role

SQL
CREATE USER 'finley' @ 'localhost' IDENTIFIED BY 'password'
ALTER USER 'finley' @ 'localhost' IDENTIFIED BY 'new_password'
DROP USER 'finley' @ 'localhost' ;
CREATE ROLE 'app_read'
DROP ROLE 'app_read'
SHOW CREATE USER finley
SET PASSWORD = 'auth_string'
SET ROLE DEFAULT;

Authorization

SQL
GRANT ALL ON db1.* TO 'jeffrey' @ 'localhost'
GRANT SELECT ON world.* TO 'role3' ;
GRANT 'role1' , 'role2' TO 'user1' @ 'localhost'
REVOKE INSERT ON . FROM 'jeffrey' @ 'localhost'
REVOKE 'role1' , 'role2' FROM 'user1' @ 'localhost'
REVOKE ALL PRIVILEGES, GRANT OPTION FROM user_or_role
SHOW GRANTS FOR 'jeffrey' @ 'localhost'
SHOW GRANTS FOR CURRENT_USER
FLUSH PRIVILEGES

PostgreSQL

The unsupported SQL list for PostgreSQL are as follows:

TODO

SQLServer

The unsupported SQL list for SQLServer are as follows:

TODO

Oracle

The unsupported SQL list for Oracle are as follows:

TODO

SQL92

The unsupported SQL list for SQL92 are as follows:

TODO

6.2 DB Gateway

6.2.1 Background

With the trend of database fragmentation, using multiple types of databases together has become the norm. The scenario of using one SQL dialect to access all heterogeneous databases is increasing.

6.2.2 Challenges

The existence of diversified databases makes it difficult to standardize the SQL dialect accessing the database. Engineers need to use different dialects for different kinds of databases, and there is no unified query platform.

Automatically translate different types of database dialects into the dialects used by the database, so that engineers can use any database dialect to access all heterogeneous databases, which can reduce development and maintenance cost greatly.

6.2.3 Goal

The goal of database gateway for Apache ShardingSphere is translating SQL automatically among various databases.

6.2.4 Current State

SQL translation in Apache ShardingSphere is in the **experimental stage** currently.

It has supported auto translation with MySQL/PostgreSQL, engineers can use the SQL and protocol of MySQL to access PostgreSQL, vice versa.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-kernel/shardingsphere-sql-translator>

6.3 Cluster Management

6.3.1 Background

As the scale of data continues to expand, a distributed database has become a trend gradually. The unified management ability of cluster perspective, and control ability of individual components are necessary ability in modern database system.

6.3.2 Challenges

The challenge is ability which are unified management of centralized management, and operation in case of single node in failure.

Centralized management is to uniformly manage the state of database storage nodes and middleware computing nodes, and can detect the latest updates in the distributed environment in real time, further provide information with control and scheduling.

In the overload traffic scenario, circuit breaker and request limiting for a node to ensure whole database cluster can run continuously is a challenge to control ability of a single node.

6.3.3 Goal

The goal of Apache ShardingSphere management module is to realize the integrated management ability from database to computing node, and provide control ability for components in case of failure.

6.3.4 Core Concept

Circuit Breaker

Fuse connection between Apache ShardingSphere and the database. When an Apache ShardingSphere node exceeds the max load, stop the node's access to the database, so that the database can ensure sufficient resources to provide services for other Apache ShardingSphere nodes.

Request Limit

In the face of overload requests, open request limiting to protect some requests can still respond quickly.

6.4 Sharding

6.4.1 Background

The traditional solution that stores all the data in one concentrated node has hardly satisfied the requirement of massive data scenario in three aspects, performance, availability and operation cost.

In performance, the relational database mostly uses B+ tree index. When the data amount exceeds the threshold, deeper index will increase the disk IO access number, and thereby, weaken the performance of query. In the same time, high concurrency requests also make the centralized database to be the greatest limitation of the system.

In availability, capacity can be expanded at a relatively low cost and any extent with stateless service, which can make all the pressure, at last, fall on the database. But the single data node or simple primary-replica structure has been harder and harder to take these pressures. Therefore, database availability has become the key to the whole system.

From the aspect of operation costs, when the data in a database instance has reached above the threshold, DBA's operation pressure will also increase. The time cost of data backup and data recovery will be more uncontrollable with increasing amount of data. Generally, it is a relatively reasonable range for the data in single database case to be within 1TB.

Under the circumstance that traditional relational databases cannot satisfy the requirement of the Internet, there are more and more attempts to store the data in native distributed NoSQL. But its incompatibility with SQL and imperfection in ecosystem block it from defeating the relational database in the competition, so the relational database still holds an unshakable position.

Sharding refers to splitting the data in one database and storing them in multiple tables and databases according to some certain standard, so that the performance and availability can be improved. Both methods can effectively avoid the query limitation caused by data exceeding affordable threshold. What's more, database sharding can also effectively disperse TPS. Table sharding, though cannot ease the database pressure, can provide possibilities to transfer distributed transactions to local transactions, since cross-database upgrades are once involved, distributed transactions can turn pretty tricky sometimes. The use of multiple primary-replica sharding method can effectively avoid the data concentrating on one node and increase the architecture availability.

Splitting data through database sharding and table sharding is an effective method to deal with high TPS and mass amount data system, because it can keep the data amount lower than the threshold and evacuate the traffic. Sharding method can be divided into vertical sharding and horizontal sharding.

Vertical Sharding

According to business sharding method, it is called vertical sharding, or longitudinal sharding, the core concept of which is to specialize databases for different uses. Before sharding, a database consists of many tables corresponding to different businesses. But after sharding, tables are categorized into different databases according to business, and the pressure is also separated into different databases. The diagram below has presented the solution to assign user tables and order tables to different databases by vertical sharding according to business need.

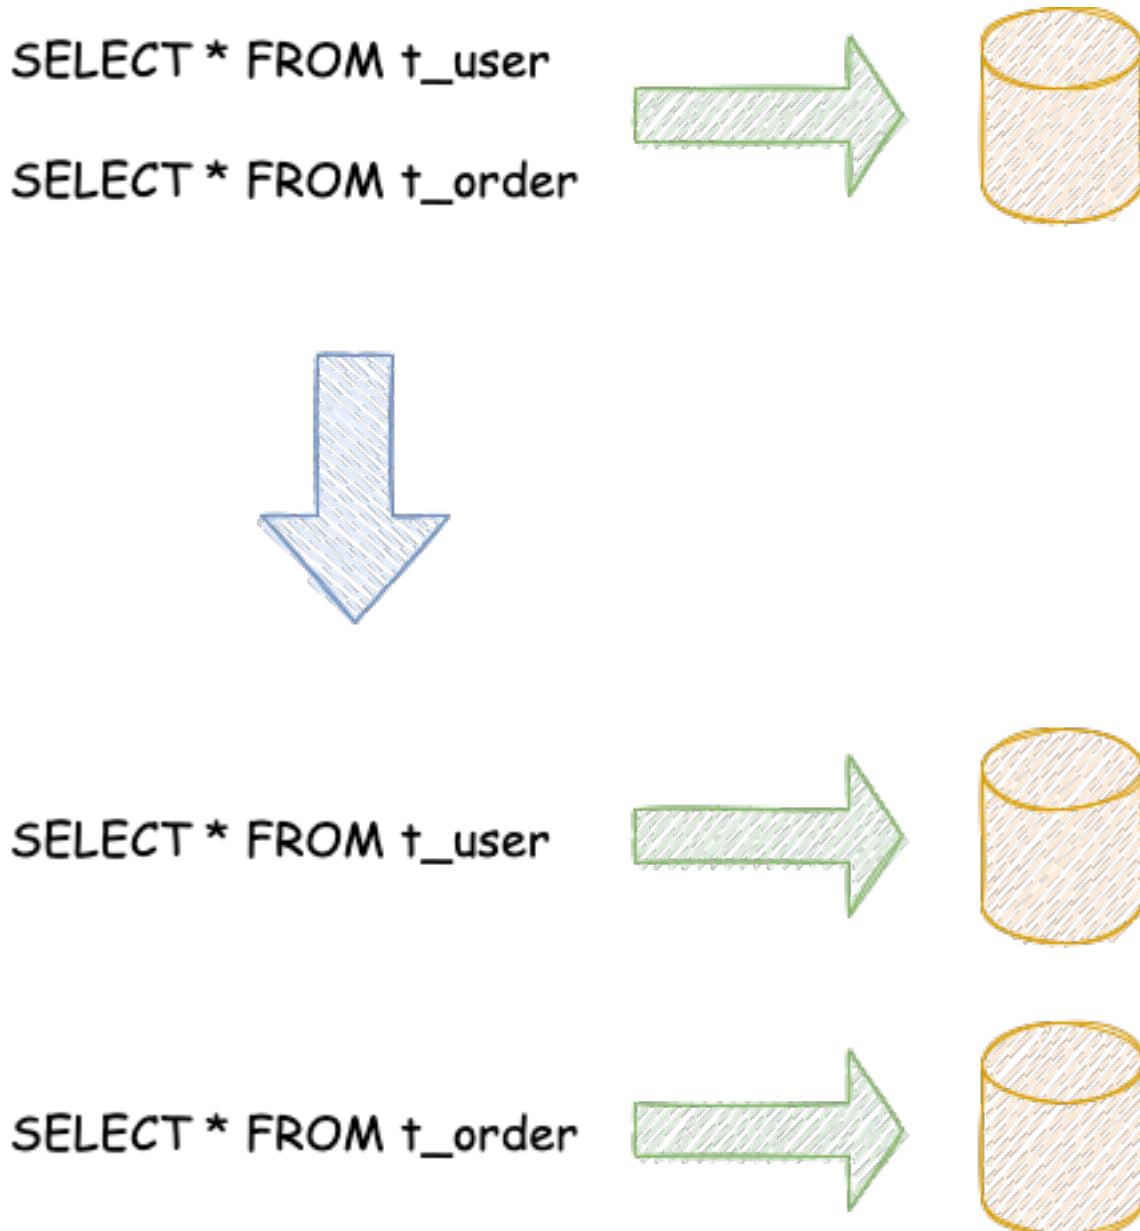


Figure1: Vertical Sharding

Vertical sharding requires to adjust the architecture and design from time to time. Generally speaking, it is not soon enough to deal with fast changing needs from Internet business and not able to really solve the single-node problem. It can ease problems brought by the high data amount and concurrency amount, but cannot solve them completely. After vertical sharding, if the data amount in the table still

exceeds the single node threshold, it should be further processed by horizontal sharding.

Horizontal Sharding

Horizontal sharding is also called transverse sharding. Compared with the categorization method according to business logic of vertical sharding, horizontal sharding categorizes data to multiple databases or tables according to some certain rules through certain fields, with each sharding containing only part of the data. For example, according to primary key sharding, even primary keys are put into the 0 database (or table) and odd primary keys are put into the 1 database (or table), which is illustrated as the following diagram.



Figure2: Horizontal Sharding

Theoretically, horizontal sharding has overcome the limitation of data processing volume in single machine and can be extended relatively freely, so it can be taken as a standard solution to database sharding and table sharding.

6.4.2 Challenges

Though sharding has solved problems such as performance, availability and single-node backup and recovery, its distributed architecture has also introduced some new problems as acquiring profits.

One problem is that application development engineers and database administrators' operations become exceptionally laborious, when facing such scattered databases and tables. They should know exactly which database table is the one to acquire data from.

Another challenge is that, the SQL that runs rightly in single-node databases may not be right in the sharding database. The change of table name after sharding, or misconducts caused by operations such as pagination, order by or aggregated group by are just the case in point.

Cross-database transaction is also a tricky thing that distributed databases need to deal. Fair use of sharding tables can also lead to the full use of local transactions when single-table data amount decreases. Troubles brought by distributed transactions can be avoided by the wise use of different tables in the same database. When cross-database transactions cannot be avoided, some businesses still need to keep transactions consistent. Internet giants have not massively adopted XA based distributed transactions since they are not able to ensure its performance in high-concurrency situations. They usually replace strongly consistent transactions with eventually consistent soft state.

6.4.3 Goal

The main design goal of the data sharding modular of Apache ShardingSphere is to try to reduce the influence of sharding, in order to let users use horizontal sharding database group like one database.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-features/shardingsphere-sharding>

6.4.4 Core Concept

Overview

This chapter is to introduce core concepts of data sharding.

Table

Table is the core concept of data sharding transparently. There are diversified tables provided for different data sharding requirements by Apache ShardingSphere.

Logic Table

The logical name of the horizontal sharding databases (tables) with the same schema, it is the logical table identification in SQL. For instance, the data of order is divided into 10 tables according to the last number of the primary key, and they are from `t_order_0` to `t_order_9`, whose logic name is `t_order`.

Actual Table

The physical table that really exists in the horizontal sharding database, i.e., `t_order_0` to `t_order_9` in the instance above.

Binding Table

It refers to a group of sharding tables with the same sharding rules. When using binding tables in multi-table correlating query, you must use the sharding key for correlation, otherwise Cartesian product correlation or cross-database correlation will appear, which will affect query efficiency. For example, `t_order` and `t_order_item` are both sharded by `order_id`, and use `order_id` to correlate, so they are binding tables with each other. Cartesian product correlation will not appear in the multi-tables correlating query, so the query efficiency will increase greatly. Take this one for example, if SQL is:

```
SELECT i.* FROM t_order o JOIN t_order_item i ON o.order_id=i.order_id WHERE o.order_id in (10, 11);
```

When binding table relations are not configured, suppose the sharding key `order_id` routes value 10 to sharding 0 and value 11 to sharding 1, there will be 4 SQLs in Cartesian product after routing:

```
SELECT i.* FROM t_order_0 o JOIN t_order_item_0 i ON o.order_id=i.order_id WHERE o.order_id in (10, 11);

SELECT i.* FROM t_order_0 o JOIN t_order_item_1 i ON o.order_id=i.order_id WHERE o.order_id in (10, 11);

SELECT i.* FROM t_order_1 o JOIN t_order_item_0 i ON o.order_id=i.order_id WHERE o.order_id in (10, 11);

SELECT i.* FROM t_order_1 o JOIN t_order_item_1 i ON o.order_id=i.order_id WHERE o.order_id in (10, 11);
```

With binding table configuration and use `order_id` to correlate, there should be 2 SQLs after routing:

```
SELECT i.* FROM t_order_0 o JOIN t_order_item_0 i ON o.order_id=i.order_id WHERE o.order_id in (10, 11);

SELECT i.* FROM t_order_1 o JOIN t_order_item_1 i ON o.order_id=i.order_id WHERE o.order_id in (10, 11);
```

In them, since table `t_order` specifies sharding conditions, it will be taken by ShardingSphere as the primary table of query. All the route computations will only use the sharding strategy of the primary table, so sharding computation of `t_order_item` table will use the conditions of `t_order`.

Broadcast Table

It refers to tables that exist in all sharding database sources. The schema and data must consist in each database. It can be applied to the small data volume that needs to correlate with big data tables to query, dictionary table for example.

Single Table

It refers to only one table that exists in all sharding database sources. It is suitable for little data in table without sharding. Users need to ensure that single table is unique. If single table is repeated under the same schema in the same database, ShardingSphere will only load the first single table for sql route.

Data Node

As the atomic unit of sharding, it consists of data source name and actual table name, e.g. `ds_0.t_order_0`.

Mapping relationship between logic tables and actual tables and can be divided into two kinds: uniform topology and user-defined topology.

Uniform topology

It means that tables are evenly distributed in each data source, for example:

```
db0
└── t_order0
└── t_order1
db1
└── t_order0
└── t_order1
```

The data node configurations will be as follows:

```
db0.t_order0, db0.t_order1, db1.t_order0, db1.t_order1
```

User-defined topology

It means that tables are distributed with certain rules, for example:

```
db0
  └── t_order0
  └── t_order1
db1
  └── t_order2
  └── t_order3
  └── t_order4
```

The data node configurations will be as follows:

```
db0.t_order0, db0.t_order1, db1.t_order2, db1.t_order3, db1.t_order4
```

Sharding

Sharding Key

Column used to determine database (table) sharding. For example, in last number modulo of order ID sharding, order ID is taken as the sharding key. The full route executed when there is no sharding column in SQL has a poor performance. Besides single sharding column, Apache ShardingSphere also supports multiple sharding columns.

Sharding Algorithm

Data sharding can be achieved by sharding algorithms through `=`, `>=`, `<=`, `>`, `<`, `BETWEEN` and `IN`. It can be implemented by developers themselves, or using built-in syntactic sugar of Apache ShardingSphere, with high flexibility.

Auto Sharding Algorithm

It provides syntactic sugar for sharding algorithm. It used to manage all data nodes automatically, user do not care about the topology of physical data nodes. It includes lots of implementation for Mod, Hash, Range and Time Interval etc.

User-Defined Sharding Algorithm

It provides interfaces for developers to implement the sharding algorithm related to business implementation, and allows users to manage the physical topology physical data nodes by themselves. It includes:

- Standard Sharding Algorithm

It is to process the sharding case in which single sharding keys =, IN, BETWEEN AND, >, <, >=, <= are used.

- Complex Keys Sharding Algorithm

It is to process the sharding case in which multiple sharding keys are used. It has a relatively complex logic that requires developers to deal by themselves.

- Hint Sharding Algorithm

It is to process the sharding case in which Hint is used.

Sharding Strategy

It includes the sharding key and the sharding algorithm, and the latter one is extracted out for its independence. Only sharding key + sharding algorithm can be used in sharding operation.

SQL Hint

In the case that the sharding column is not decide by SQL but other external conditions, SQL hint can be used to inject sharding value. For example, databases are shard according to the staff' s ID, but column does not exist in the database. SQL Hint can be used by two ways, Java API and SQL comment (TODO). Please refer to [Hint](#) for more details.

Inline Expression

Motivation

Configuration simplicity and unity are two main problems that inline expression intends to solve.

In complex sharding rules, with more data nodes, a large number of configuration repetitions make configurations difficult to maintain. Inline expressions can simplify data node configuration work.

Java codes are not helpful in the unified management of common configurations. Writing sharding algorithms with inline expressions, users can store rules together, making them easier to be browsed and stored.

Syntax Explanation

The use of inline expressions is really direct. Users only need to configure `${ expression }` or `$->{ expression }` to identify them. ShardingSphere currently supports the configurations of data nodes and sharding algorithms. Inline expressions use Groovy syntax, which can support all kinds of operations, including inline expressions. For example:

`${begin..end}` means range

`${[unit1, unit2, unit_x]}` means enumeration

If there are many continuous `${ expression }` or `$->{ expression }` expressions, according to each sub-expression result, the ultimate result of the whole expression will be in cartesian combination.

For example, the following inline expression:

```
 ${['online', 'offline']}_table${1..3}
```

Will be parsed as:

```
online_table1, online_table2, online_table3, offline_table1, offline_table2,  
offline_table3
```

Configuration

Data Node

For evenly distributed data nodes, if the data structure is as follow:

```
db0
  └── t_order0
  └── t_order1
db1
  └── t_order0
  └── t_order1
```

It can be simplified by inline expression as:

```
db${0..1}.t_order${0..1}
```

Or

```
db$->{0..1}.t_order$->{0..1}
```

For self-defined data nodes, if the data structure is:

```
db0
  └── t_order0
  └── t_order1
db1
```

```
└── t_order2
    ├── t_order3
    └── t_order4
```

It can be simplified by inline expression as:

```
db0.t_order${0..1},db1.t_order${2..4}
```

Or

```
db0.t_order$->{0..1},db1.t_order$->{2..4}
```

For data nodes with prefixes, inline expression can also be used to configure them flexibly, if the data structure is:

```
db0
└── t_order_00
    ├── t_order_01
    ├── t_order_02
    ├── t_order_03
    ├── t_order_04
    ├── t_order_05
    ├── t_order_06
    ├── t_order_07
    ├── t_order_08
    ├── t_order_09
    ├── t_order_10
    ├── t_order_11
    ├── t_order_12
    ├── t_order_13
    ├── t_order_14
    ├── t_order_15
    ├── t_order_16
    ├── t_order_17
    ├── t_order_18
    ├── t_order_19
    └── t_order_20

db1
└── t_order_00
    ├── t_order_01
    ├── t_order_02
    ├── t_order_03
    ├── t_order_04
    ├── t_order_05
    ├── t_order_06
    ├── t_order_07
    ├── t_order_08
    ├── t_order_09
    └── t_order_10
```

```

└── t_order_11
└── t_order_12
└── t_order_13
└── t_order_14
└── t_order_15
└── t_order_16
└── t_order_17
└── t_order_18
└── t_order_19
└── t_order_20

```

Users can configure separately, data nodes with prefixes first, those without prefixes later, and automatically combine them with the cartesian product feature of inline expressions. The example above can be simplified by inline expression as:

```
db${0..1}.t_order_0${0..9}, db${0..1}.t_order_${10..20}
```

Or

```
db$->{0..1}.t_order_0$->{0..9}, db$->{0..1}.t_order_$->{10..20}
```

Sharding Algorithm

For single sharding SQL that uses = and IN, inline expression can replace codes in configuration.

Inline expression is a piece of Groovy code in essence, which can return the corresponding real data source or table name according to the computation method of sharding keys.

For example, sharding keys with the last number 0 are routed to the data source with the suffix of 0, those with the last number 1 are routed to the data source with the suffix of 1, the rest goes on in the same way. The inline expression used to indicate sharding algorithm is:

```
ds${id % 10}
```

Or

```
ds$->{id % 10}
```

Distributed Primary Key

Motivation

In the development of traditional database software, the automatic sequence generation technology is a basic requirement. All kinds of databases have provided corresponding support for this requirement, such as MySQL auto-increment key, Oracle auto-increment sequence and so on. It is a tricky problem that there is only one sequence generated by different data nodes after sharding. Auto-increment keys in different physical tables in the same logic table can not perceive each other and thereby generate

repeated sequences. It is possible to avoid clashes by restricting the initiative value and increasing the step of auto-increment key. But introducing extra operation rules can make the solution lack integrity and scalability.

Currently, there are many third-party solutions that can solve this problem perfectly, (such as UUID and others) relying on some particular algorithms to generate unrepeatable keys or introducing sequence generation services. We have provided several built-in key generators, such as UUID, SNOWFLAKE. Besides, we have also extracted a key generator interface to make users implement self-defined key generator.

Built-In Key Generator

UUID

Use `UUID.randomUUID()` to generate the distributed key.

Nanoid

Generate a string of length 21 distributed key.

SNOWFLAKE

Users can configure the strategy of each table in sharding rule configuration module, with default snowflake algorithm generating 64bit long integral data.

As the distributed sequence generation algorithm published by Twitter, snowflake algorithm can ensure sequences of different processes do not repeat and those of the same process are ordered.

Principle

In the same process, it makes sure that IDs do not repeat through time, or through order if the time is identical. In the same time, with monotonously increasing time, if servers are generally synchronized, generated sequences are generally assumed to be ordered in a distributed environment. This can guarantee the effectiveness in index field insertion, like the sequence of MySQL InnoDB storage engine.

In the sequence generated with snowflake algorithm, binary form has 4 parts, 1 bit sign, 41bit timestamp, 10bit work ID and 12bit sequence number from high to low.

- sign bit (1bit)

Reserved sign bit, constantly to be zero.

- timestamp bit (41bit)

41bit timestamp can contain 2^{41} to the power of milliseconds. One year can use $365 * 24 * 60 * 60 * 1000$ milliseconds. We can see from the calculation:

```
Math.pow(2, 41) / (365 * 24 * 60 * 60 * 1000L);
```

The result is approximately equal to 69.73 years. Apache ShardingSphere snowflake algorithm starts from November 1st, 2016, and can be used until 2086, which we believe can satisfy the requirement of most systems.


- work ID bit (10bit)

The sign is the only one in Java process. If applied in distributed deployment, each work ID should be different. The default value is 0 and can be set through properties.

- sequence number bit (12bit)

The sequence number is used to generate different IDs in a millisecond. If the number generated in that millisecond exceeds 4,096 (2 to the power of 12), the generator will wait till the next millisecond to continue.

Please refer to the following picture for the detailed structure of snowflake algorithm sequence.

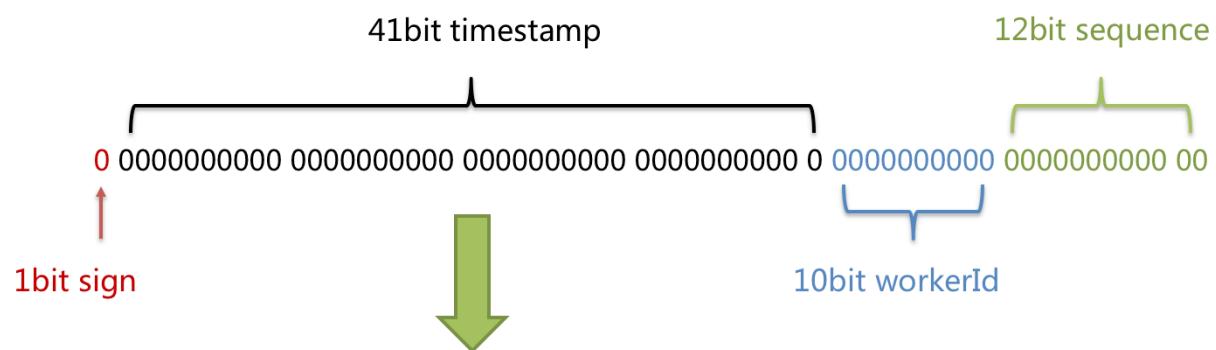

Time duration: $2^{41} / (365 * 24 * 60 * 60 * 1000L) = 69.73$ years
 Working applications count: $2^{10} = 1024$
 TPS of sequence generated: $2^{12} * 1000 = 4,096k$

Figure3: Snowflake

Clock-Back

The clock-back of server can generate repeated sequence, so the default distributed sequence generator has provided a maximum clock-back millisecond. If the clock-back time has exceeded it, the program will report error. If it is within the tolerance range, the generator will wait till after the last generation time and then continue to work. The default maximum clock-back millisecond is 0 and can be set through properties.

Hint Sharding Route

Motivation

Apache ShardingSphere can be compatible with SQL in way of parsing SQL statements and extracting columns and values to shard. If SQL does not have sharding conditions, it is impossible to shard without full data node route.

In some applications, sharding conditions are not in SQL but in external business logic. So it requires to designate sharding result externally, which is referred to as `Hint` in ShardingSphere.

Mechanism

Apache ShardingSphere uses `ThreadLocal` to manage sharding key values. Users can program to add sharding conditions to `HintManager`, but the condition is only effective within the current thread.

In addition to the programming method, Apache ShardingSphere is able to cite Hint through special notation in SQL, so that users can use that function in a more transparent way.

The SQL designated with sharding hint will ignore the former sharding logic but directly route to the designated node.

6.4.5 Use Norms

Background

Though Apache ShardingSphere intends to be compatible with all the SQLs and stand-alone databases, the distributed scenario has brought more complex situations to the database. Apache ShardingSphere wants to solve massive data OLTP problem first and complete relevant OLAP support problem little by little.

SQL

SQL Supporting Status

Compatible with all regular SQL when **routing to single data node**; **The SQL routing to multiple data nodes** is pretty complex, it divides the scenarios as totally supported, experimental supported and unsupported.

Totally Supported

Fully support DML, DDL, DCL, TCL and most regular DAL. Support complex query with pagination, DISTINCT, ORDER BY, GROUP BY, aggregation and table JOIN. Support PostgreSQL and openGauss database SCHEMA DDL and DML statements.

Regular Query

- SELECT Clause

```
SELECT select_expr [, select_expr ...] FROM table_reference [, table_reference ...]
[WHERE predicates]
[GROUP BY {col_name | position} [ASC | DESC], ...]
[ORDER BY {col_name | position} [ASC | DESC], ...]
[LIMIT {[offset,] row_count | row_count OFFSET offset}]
```

- select_expr

```
*
```

- | [DISTINCT] COLUMN_NAME [AS] [alias]
- | (MAX | MIN | SUM | AVG)(COLUMN_NAME | alias) [AS] [alias]
- | COUNT(*) | COLUMN_NAME | alias) [AS] [alias]

- table_reference

```
tbl_name [AS] alias] [index_hint_list]
| table_reference ([INNER] | {LEFT|RIGHT} [OUTER]) JOIN table_factor [JOIN ON
conditional_expr | USING (column_list)]
```

Subquery

Stable supported when sharding keys are using in both subquery and outer query, and values of sharding keys are the same.

For example:

```
SELECT * FROM (SELECT * FROM t_order WHERE order_id = 1) o WHERE o.order_id = 1;
```

Stable supported for subquery with [pagination](#).

For example:

```
SELECT * FROM (SELECT row_.*, rownum rownum_ FROM (SELECT * FROM t_order) row_
WHERE rownum <= ?) WHERE rownum > ?;
```

Sharding value in expression

Sharding value in calculated expressions will lead to full routing.

For example, if `create_time` is sharding value:

```
SELECT * FROM t_order WHERE to_date(create_time, 'yyyy-mm-dd') = '2019-01-01';
```

Experimental Supported

Experimental support specifically refers to use of Federation execution engine. The engine still in rapid development, basically available to users, but it still needs lots of optimization. It is an experimental product.

Subquery

Experimental supported when sharding keys are not using for both subquery and outer query, or values of sharding keys are not the same.

For example:

```
SELECT * FROM (SELECT * FROM t_order) o;
SELECT * FROM (SELECT * FROM t_order) o WHERE o.order_id = 1;
SELECT * FROM (SELECT * FROM t_order WHERE order_id = 1) o;
SELECT * FROM (SELECT * FROM t_order WHERE order_id = 1) o WHERE o.order_id = 2;
```

Join with cross databases

When tables in a join query are distributed on different database instances, sql statement will be supported by Federation execution engine. Assuming that `t_order` and `t_order_item` are sharding tables with multiple data nodes, and no binding table rules are configured, `t_user` and `t_user_role` are single tables that distributed on different database instances. Federation execution engine can support the following commonly used join query:

```
SELECT * FROM t_order o INNER JOIN t_order_item i ON o.order_id = i.order_id WHERE o.order_id = 1;

SELECT * FROM t_order o INNER JOIN t_user u ON o.user_id = u.user_id WHERE o.user_id = 1;

SELECT * FROM t_order o LEFT JOIN t_user_role r ON o.user_id = r.user_id WHERE o.user_id = 1;

SELECT * FROM t_order_item i LEFT JOIN t_user u ON i.user_id = u.user_id WHERE i.user_id = 1;

SELECT * FROM t_order_item i RIGHT JOIN t_user_role r ON i.user_id = r.user_id WHERE i.user_id = 1;

SELECT * FROM t_user u RIGHT JOIN t_user_role r ON u.user_id = r.user_id WHERE u.user_id = 1;
```

Unsupported

CASE WHEN can not support as following:

- CASE WHEN containing sub-query
- CASE WHEN containing logical-table (instead of table alias)

SQL Example

Stable supported SQL	Necessary conditions
SELECT * FROM tbl_name	
SELECT * FROM tbl_name WHERE (col1 = ? or col2 = ?) and col3 = ?	
SELECT * FROM tbl_name WHERE col1 = ? ORDER BY col2 DESC LIMIT ?	
SELECT COUNT(*), SUM(col1), MIN(col1), MAX(col1), AVG(col1) FROM tbl_name WHERE col1 = ?	
SELECT COUNT(col1) FROM tbl_name WHERE col2 = ? GROUP BY col1 ORDER BY col3 DESC LIMIT ?, ?	
SELECT DISTINCT * FROM tbl_name WHERE col1 = ?	
SELECT COUNT(DISTINCT col1), SUM(DISTINCT col1) FROM tbl_name	
(SELECT * FROM tbl_name)	
SELECT * FROM (SELECT * FROM tbl_name WHERE col1 = ?) o WHERE o.col1 = ?	Subquery and outer query in same sharded data node after route
INSERT INTO tbl_name (col1, col2, ...) VALUES (?, ?, ...)	
INSERT INTO tbl_name VALUES (?, ?, ...)	
INSERT INTO tbl_name (col1, col2, ...) VALUES(1 + 2, ?, ...)	
INSERT INTO tbl_name (col1, col2, ...) VALUES (?, ?, ...), (?, ?, ...)	
INSERT INTO tbl_name (col1, col2, ...) SELECT col1, col2, ... FROM tbl_name WHERE col3 = ?	Inserted and selected table must be the same or binding tables
REPLACE INTO tbl_name (col1, col2, ...) SELECT col1, col2, ... FROM tbl_name WHERE col3 = ?	Replaced and selected table must be the same or binding tables
UPDATE tbl_name SET col1 = ? WHERE col2 = ?	
DELETE FROM tbl_name WHERE col1 = ?	
CREATE TABLE tbl_name (col1 int, ...)	
ALTER TABLE tbl_name ADD col1 varchar(10)	
DROP TABLE tbl_name	
TRUNCATE TABLE tbl_name	
CREATE INDEX idx_name ON tbl_name	
DROP INDEX idx_name ON tbl_name	
DROP INDEX idx_name	

Experimental supported SQL	Necessary conditions
SELECT * FROM (SELECT * FROM tbl_name) o	
SELECT * FROM (SELECT * FROM tbl_name) o WHERE o.col1 = ?	
SELECT * FROM (SELECT * FROM tbl_name WHERE col1 = ?) o	
SELECT * FROM (SELECT * FROM tbl_name WHERE col1 = ?) o WHERE o.col1 = ?	Subquery and outer query in different sharded data node after route
SELECT (SELECT MAX(col1) FROM tbl_name) a, col2 from tbl_name	
SELECT SUM(DISTINCT col1), SUM(col1) FROM tbl_name	
SELECT col1, SUM(col2) FROM tbl_name GROUP BY col1 HAVING SUM(col2) > ?	
SELECT col1, col2 FROM tbl_name UNION SELECT col1, col2 FROM tbl_name	
SELECT col1, col2 FROM tbl_name UNION ALL SE- LECT col1, col2 FROM tbl_name	

Slow SQL	Reason
SELECT * FROM tbl_name WHERE to_date(create_time, 'yyyy-mm-dd') = ?	Full route because of sharding value in calculate expression

Unsupported SQL	Reason	Solution
INSERT INTO tbl_name (col1, col2, ...) SELECT * FROM tbl_name WHERE col3 = ?	SELECT clause does not support *-shorthand and built-in key generator	.
REPLACE INTO tbl_name (col1, col2, ...) SELECT * FROM tbl_name WHERE col3 = ?	SELECT clause does not support *-shorthand and built-in key generator	.
SELECT MAX(tbl_name.col1) FROM tbl_name	Use table name as column owner in function	Instead of table alias

Pagination

Totally support pagination queries of MySQL, PostgreSQL and Oracle; partly support SQLServer pagination query due to its complexity.

Pagination Performance

Performance Bottleneck

Pagination with query offset too high can lead to a low data accessibility, take MySQL as an example:

```
SELECT * FROM t_order ORDER BY id LIMIT 1000000, 10
```

This SQL will make MySQL acquire another 10 records after skipping 1,000,000 records when it is not able to use indexes. Its performance can thus be deduced. In sharding databases and sharding tables (suppose there are two databases), to ensure the data correctness, the SQL will be rewritten as this:

```
SELECT * FROM t_order ORDER BY id LIMIT 0, 1000010
```

It also means taking out all the records prior to the offset and only acquire the last 10 records after ordering. It will further aggravate the performance bottleneck effect when the database is already slow in execution. The reason for that is the former SQL only needs to transmit 10 records to the user end, but now it will transmit $1,000,010 * 2$ records after the rewrite.

Optimization of ShardingSphere

ShardingSphere has optimized in two ways.

Firstly, it adopts stream process + merger ordering to avoid excessive memory occupation. SQL rewrite unavoidably occupies extra bandwidth, but it will not lead to sharp increase of memory occupation. Most people may assume that ShardingSphere would upload all the $1,000,010 * 2$ records to the memory and occupy a large amount of it, which can lead to memory overflow. But each ShardingSphere comparison only acquires current result set record of each shard, since result set records have their own order. The record stored in the memory is only the current position pointed by the cursor in the result set of the shard routed to. For the item to be sorted which has its own order, merger ordering only has the time complexity of $O(mn(\log m))$, and the number of shard m is generally small enough to be considered as $O(n)$, with a very low performance consumption.

Secondly, ShardingSphere further optimizes the query that only falls into single shards. Requests of this kind can guarantee the correctness of records without rewriting SQLs. Under this kind of situation, ShardingSphere will not do that in order to save the bandwidth.

Pagination Solution Optimization

For LIMIT cannot search for data through indexes, if the ID continuity can be guaranteed, pagination by ID is a better solution:

```
SELECT * FROM t_order WHERE id > 100000 AND id <= 100010 ORDER BY id
```

Or use the ID of last record of the former query result to query the next page:

```
SELECT * FROM t_order WHERE id > 100000 LIMIT 10
```

Pagination Sub-query

Both Oracle and SQLServer pagination need to be processed by sub-query, ShardingSphere supports pagination related sub-query.

- Oracle

Support rownum pagination:

```
SELECT * FROM (SELECT row_.* , rownum rownum_ FROM (SELECT o.order_id as order_id
FROM t_order o JOIN t_order_item i ON o.order_id = i.order_id) row_ WHERE rownum <=
?) WHERE rownum > ?
```

Do not support rownum + BETWEEN pagination for now.

- SQLServer

Support TOP + ROW_NUMBER() OVER pagination:

```
SELECT * FROM (SELECT TOP (?) ROW_NUMBER() OVER (ORDER BY o.order_id DESC) AS
rownum, * FROM t_order o) AS temp WHERE temp.rownum > ? ORDER BY temp.order_id
```

Support OFFSET FETCH pagination after SQLServer 2012:

```
SELECT * FROM t_order o ORDER BY id OFFSET ? ROW FETCH NEXT ? ROWS ONLY
```

Do not support WITH xxx AS (SELECT ...) pagination. Because SQLServer automatically generated by Hibernate uses WITH statements, Hibernate SQLServer pagination or two TOP + sub-query pagination is not available now.

- MySQL, PostgreSQL

Both MySQL and PostgreSQL support LIMIT pagination, no need for sub-query:

```
SELECT * FROM t_order o ORDER BY id LIMIT ? OFFSET ?
```

6.5 Distributed Transaction

6.5.1 Definition

Four properties of transactions: ACID (Atomicity、Consistency、Isolation、Durability).

- Atomicity: transactions are executed as a whole, and either all or none is executed.
- Consistency: transactions should ensure that the state of data remains consistent after the transaction.

- Isolation: when multiple transactions execute concurrently, the execution of one transaction should not affect the execution of others.
- Durability: when a transaction committed modifies data, the operation will be saved persistently.

Distributed transactions guarantee the ACID properties in distributed scenarios, where a single transaction involves operations on multiple data nodes.

6.5.2 Related Concepts

XA Protocol

The original distributed transaction model of XA protocol is the “X/Open Distributed Transaction Processing (DTP)” model, XA protocol for short, which was proposed by the X/Open international consortium.

6.5.3 Limitations

Though Apache ShardingSphere intends to be compatible with all distributed scenario and best performance, under CAP theorem guidance, there is no silver bullet with distributed transaction solution.

Apache ShardingSphere wants to give the user choice of distributed transaction type and use the most suitable solution in different scenarios.

LOCAL Transaction

Supported

- Support none-cross-database transactions. For example, sharding table or sharding database with its route result in same database;
- Support cross-database transactions caused by logic exceptions. For example, update two databases in transaction with exception thrown, data can rollback in both databases.

Unsupported

- Do not support the cross-database transactions caused by network or hardware crash. For example, when update two databases in transaction, if one database crashes before commit, then only the data of the other database can commit.

XA Transaction

Supported

- Support Savepoint;
- PostgreSQL/OpenGauss, in the transaction block, the SQL execution is abnormal, then run Commit, transactions are automatically rollback;
- Support cross-database transactions after sharding;
- Operation atomicity and high data consistency in 2PC transactions;
- When service is down and restarted, commit and rollback transactions can be recovered automatically;
- Support use XA and non-XA connection pool together.

Unsupported

- Recover committing and rolling back in other machines after the service is down;
- MySQL, in the transaction block, the SQL execution is abnormal, and run Commit, and data remains consistent.

BASE Transaction

Supported

- Support cross-database transactions after sharding;
- Support RC isolation level;
- Rollback transaction according to undo log;
- Support recovery committing transaction automatically after the service is down.

Unsupported

- Do not support other isolation level except RC.

To Be Optimized

- SQL parsed twice by Apache ShardingSphere and SEATA.

6.5.4 How it works

ShardingSphere provides begin/commit/rollback traditional transaction interfaces externally, and provides distributed transaction capabilities through LOCAL, XA and BASE modes.

LOCAL Transaction

LOCAL mode is implemented based on ShardingSphere's proxy database interfaces, that is begin/commit/rollback. For a logical SQL, ShardingSphere starts transactions on each proxied database with the begin directive, executes the actual SQL, and performs commit/rollback. Since each data node manages its own transactions, there is no coordination and communication between them, and they do not know whether other data node transactions succeed or not. There is no loss in performance, but strong consistency and final consistency cannot be guaranteed.

XA Transaction

XA transaction adopts the concepts including AP(application program), YM(transaction manager) and RM(resource manager) to ensure the strong consistency of distributed transactions. Those concepts are abstracted from [DTP mode](#) which is defined by X/OPEN group. Among them, TM and RM use XA protocol to carry out both-way communication, which is realized through two-phase commit. Compared to traditional local transactions, XA transaction adds a preparation stage where the database can also inform the caller whether the transaction can be committed, in addition to passively accepting commit instructions. TM can collect the results of all branch transactions and make atomic commit at the end to ensure the strong consistency of transactions.

XA transaction is implemented based on the interface of ShardingSphere's proxy database xa start/end/prepare/commit/rollback/recover.

For a logical SQL, ShardingSphere starts transactions in each proxied database with the xa begin directive, integrates TM internally for coordinating branch transactions, and performs xa commit /rollback. Distributed transactions based on XA protocol are more suitable for short transactions with fixed execution time because the required resources need to be locked during execution. For long transactions, data exclusivity during the entire transaction will have an impact on performance in concurrent scenarios.

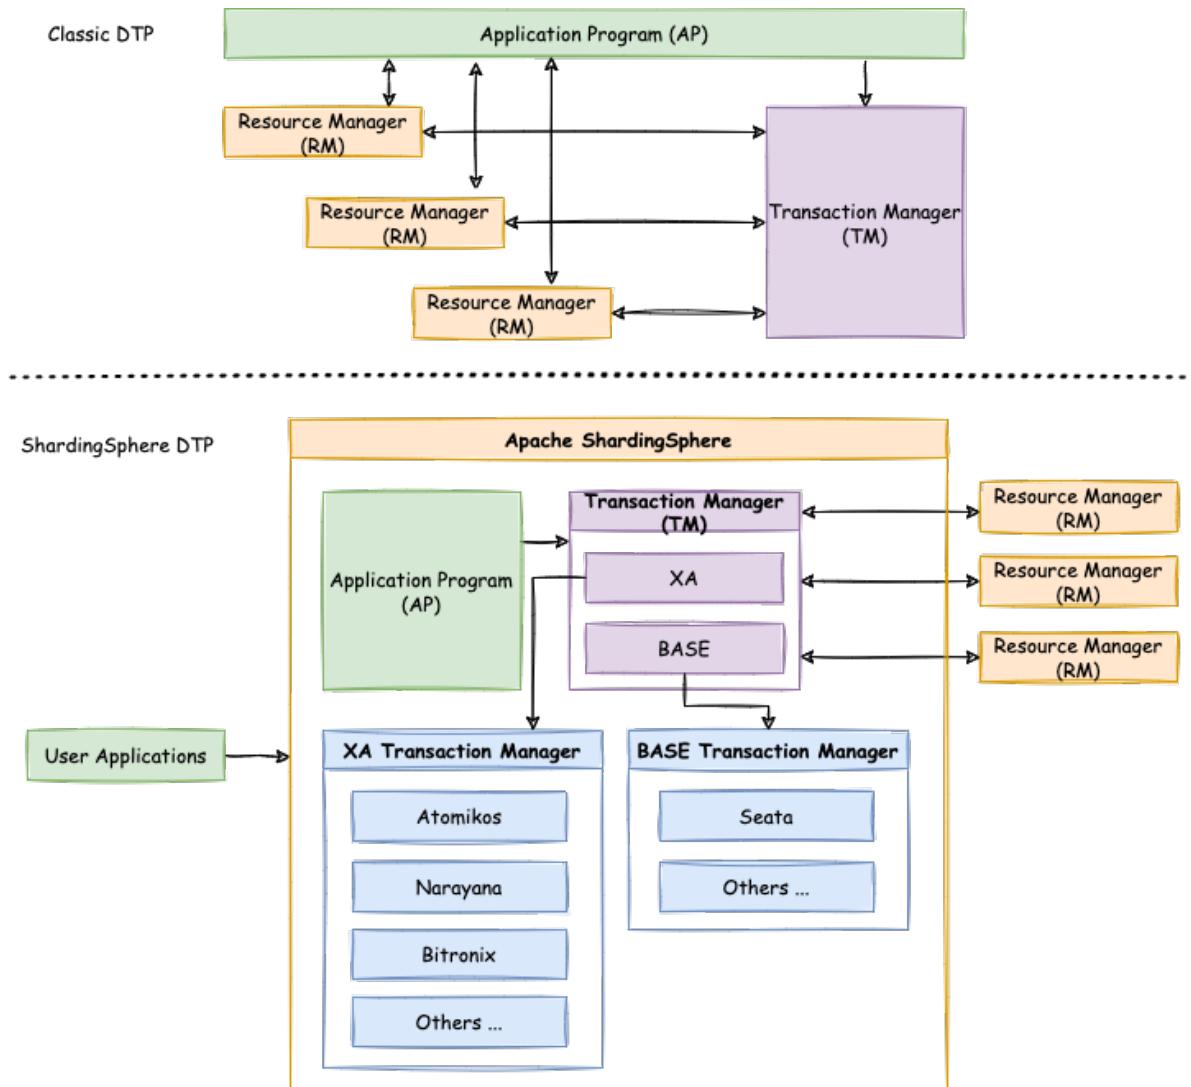


Figure4: Two-phase commit model

BASE Transaction

If a transaction that implements ACID is called a rigid transaction, then a transaction based on a BASE transaction element is called a flexible transaction. BASE stands for basic availability, soft state, and eventual consistency.

- Basically Available: ensure that distributed transaction parties are not necessarily online at the same time.
- Soft state: system status updates are allowed to have a certain delay, and the delay may not be recognized by customers.
- Eventually consistent: guarantee the eventual consistency of the system by means of messaging.

ACID transaction puts a high demand for isolation, where all resources must be locked during the execution of transactions. Flexible transaction is to move mutex operations from the resource level to the business level through business logic. Reduce the requirement for strong consistency in exchange for higher system throughput.

ACID-based strong consistency transactions and BASE-based final consistency transactions are not a jack of all trades and can fully leverage their advantages in the most appropriate scenarios. Apache ShardingSphere integrates the operational scheme taking SEATA as the flexible transaction. The following table can be used for comparison to help developers choose the suitable technology.

	LOCAL	XA	BASE
Business transformation	None	None	Seata server needed
Consistency	Not supported	Not supported	Final consistency
Isolation	Not supported	Supported	Business side guaranteed
Concurrent performance	no loss	severe loss	slight loss
Applied scenarios	Inconsistent processing by the business side	short transaction & low-level concurrency	long transaction & high concurrency

6.5.5 Related reference

- YAML distributed transaction configuration

6.6 Readwrite-splitting

6.6.1 Definition

Read/write splitting is to split the database into primary and secondary databases. The primary database is responsible for handling transactional operations including additions, deletions and changes. And the secondary database is responsible for the query operation of database architecture.

6.6.2 Related Concepts

Primary database

The primary database is used to add, update, and delete data operations. Currently, only single primary database is supported.

Secondary database

The secondary database is used to query data operations and multi-secondary databases are supported.

Primary-Secondary synchronization

It refers to the operation of asynchronously synchronizing data from a primary database to a secondary database. Due to the asynchronism of primary-secondary synchronization, data from the primary and secondary databases may be inconsistent for a short time.

Load balancer policy

Channel query requests to different secondary databases through load balancer policy.

6.6.3 Impact on the System

There may be complex primary-secondary relational database clusters in users' systems, so applications need to access multiple data sources, which increases the cost of system maintenance and the difficulty of business development. ShardingSphere enables users to use database clusters like a database through read/write splitting function, and the impact of read/write splitting will be transparent to users.

6.6.4 Limitations

- Data synchronization of primary and secondary databases is not supported.
- Data inconsistency resulting from data synchronization delays between primary and secondary databases is not supported.
- Multi-write of primary database is not supported.
- Transactional consistency between primary and secondary databases is not supported. In the primary-secondary model, both data reads and writes in transactions use the primary database.

6.6.5 How it works

ShardingSphere's read/write splitting mainly relies on the related functions of its kernel, including a parsing engine and a routing engine. The parsing engine converts the user's SQL into Statement information that can be identified by ShardingSphere, and the routing engine performs SQL routing according to the read/write type of SQL and transactional status. The routing from the secondary database supports a variety of load balancing algorithms, including polling algorithm, random access algorithm, weight access algorithm, etc. Users can also expand the required algorithm according to the SPI mechanism. As shown in the figure below, ShardingSphere identifies read and write operations and routes them to different database instances respectively.

6.6.6 相关参考

[Java API](#)

[YAML Configuration](#)

[Spring Boot Starter](#)

[Spring Namespace](#)

6.7 HA

6.7.1 Definition

High availability is the most basic requirement for modern systems. It is also an essential element of the database, which in turn is the cornerstone of any system. In a distributed database system, storage nodes and compute nodes are different in terms of their high availability schemes. Stateful storage nodes are required to have capabilities such as data consistency and synchronization, liveness probe, and primary-node election. Stateless compute nodes need to sense storage nodes' changes, setup load balancers independently, and enable service discovery and request distribution. Apache ShardingSphere's high availability module (HA) is mainly designed to ensure a 24/7 database service as much as possible.

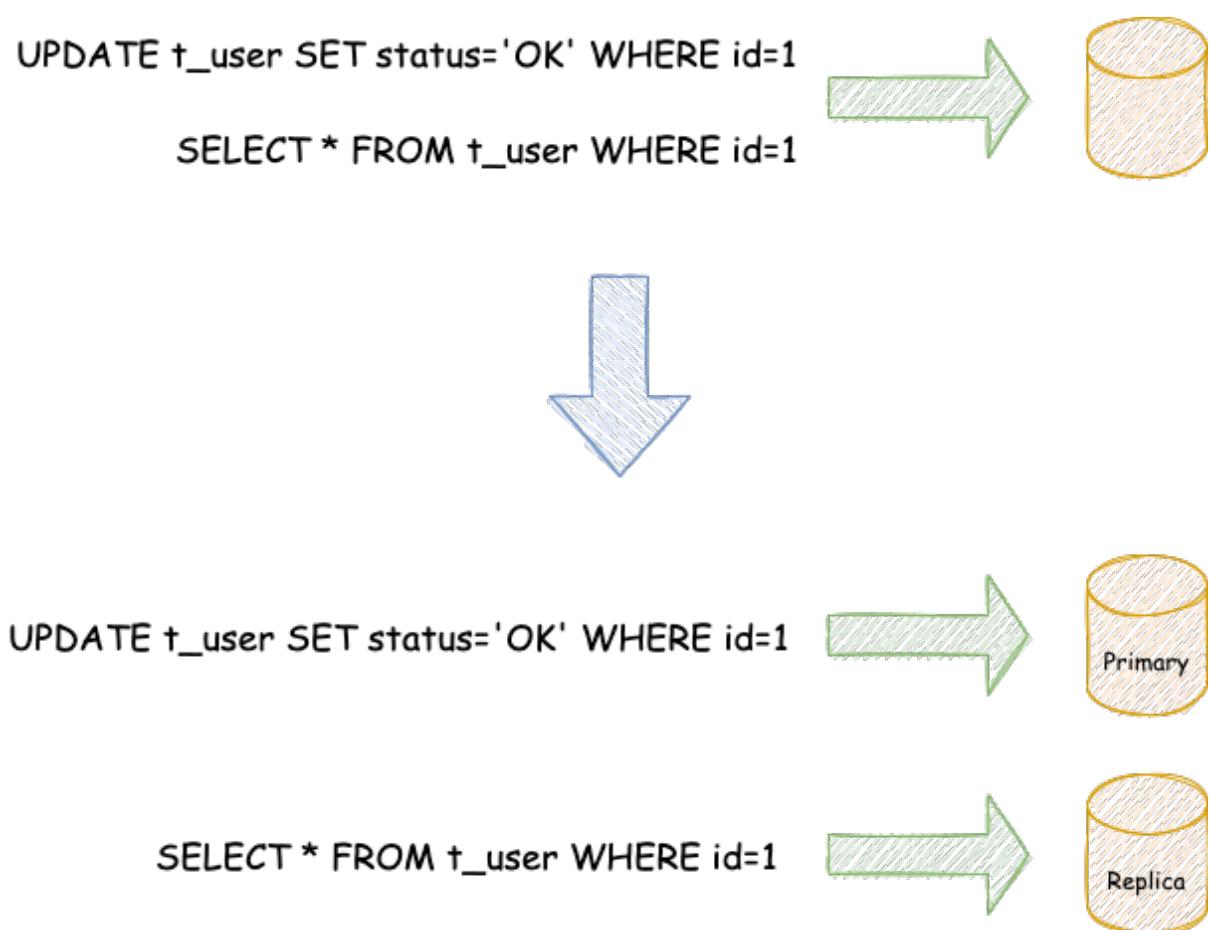


Figure5: 原理介绍

6.7.2 Related Concepts

High Availability Type

Apache ShardingSphere does not provide database high availability capability. It senses the change of databases' primary-secondary relationship through a third-party provided high availability solution. Specifically, ShardingSphere is capable of finding databases, automatically sensing the primary/secondary database relationship, and correcting compute nodes' connections to databases.

Dynamic Read/Write Splitting

When high availability and read/write splitting are adopted together, it is not necessary to configure specific primary and secondary databases for read/write splitting. Highly available data sources dynamically correct the primary/secondary relationship of read/write splitting and properly channel read/write traffic.

6.7.3 Limitations

Supported

- MySQL MGR single-primary mode
- MySQL Primary/secondary replication mode
- openGauss Primary/secondary replication mode

Not supported

- MySQL MGR Multi-primary mode

6.7.4 How it works

The high availability solution provided by Apache ShardingSphere allows you to carry out secondary custom development and achieve expansion, which is mainly divided into four steps: pre-check, primary database dynamic discovery, secondary database dynamic discovery and configuration synchronization.

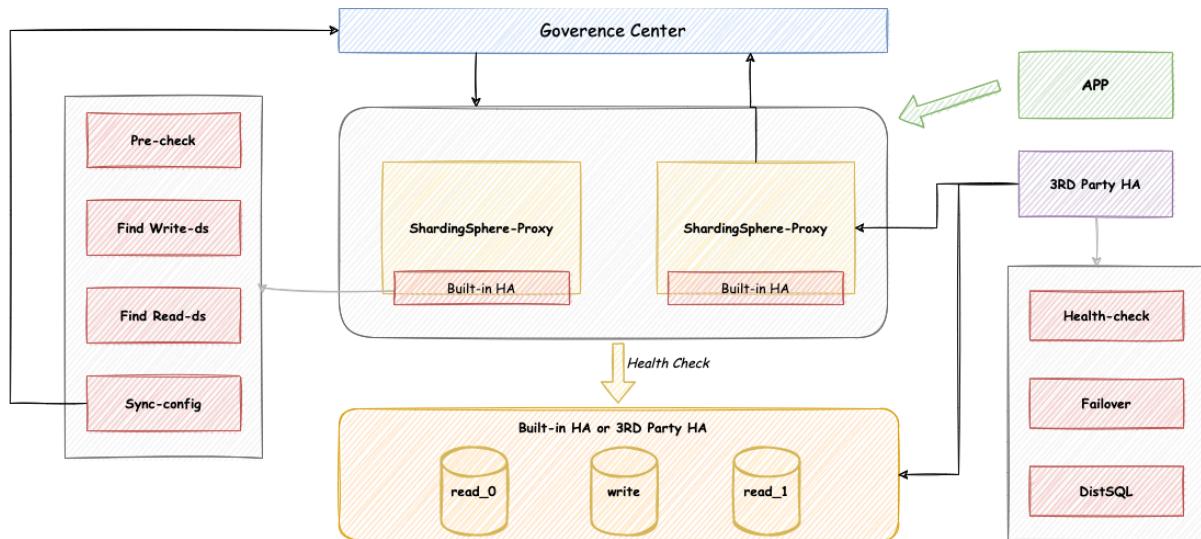


Figure6: Overview

6.7.5 Related References

[Java API](#)

[YAML Configuration](#)

[Spring Boot Starter](#)

[Spring Namespace](#)

[Source Code](#)

6.8 Scaling

6.8.1 Background

There is a problem which how to migrate data from stand-alone database to sharding data nodes safely and simply; For applications which have used Apache ShardingSphere, scale out elastically is a mandatory requirement.

6.8.2 Challenges

Apache ShardingSphere provides great flexibility in sharding algorithms, but it gives a great challenge to scaling out. So it's the first challenge that how to find a way can support kinds of sharding algorithms and scale data nodes efficiently.

What's more, During the scaling process, it should not affect the running applications. So It is another big challenge for scaling to reduce the time window of data unavailability during the scaling as much as possible, or even completely unaware.

Finally, scaling should not affect the existing data. How to ensure the availability and correctness of data is the third challenge of scaling.

ShardingSphere-Scaling is a common solution for migrating or scaling data.

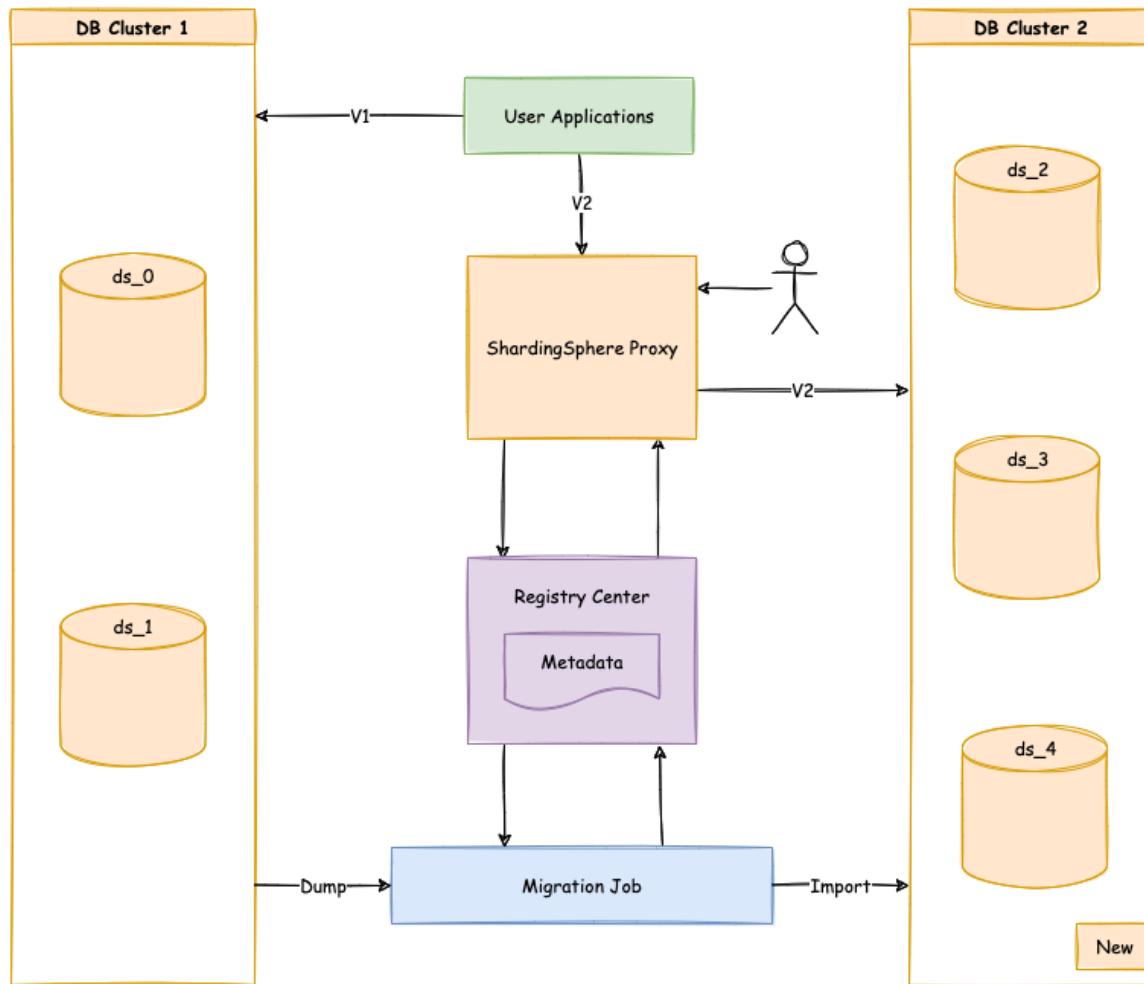


Figure7: Overview

6.8.3 Goal

The main design goal of ShardingSphere-Scaling is providing common solution which can support kinds of sharding algorithm and reduce the impact as much as possible during scaling.

6.8.4 Status

ShardingSphere-Scaling since version **4.1.0**. Current status is in **alpha** development.

Source Codes: <https://github.com/apache/shardingsphere/tree/master/shardingsphere-kernel/shardingsphere-data-pipeline>

6.8.5 Core Concept

Scaling Job

It refers one complete process of scaling data from old rule to new rule.

Inventory Data

It refers all existing data stored in data nodes before the scaling job started.

Incremental Data

It refers the new data generated by application during scaling job.

6.8.6 User Norms

Supported

- Migrate data outside into databases which managed by Apache ShardingSphere;
- Scale out data between data nodes of Apache ShardingSphere.

Unsupported

- Scale table without primary key, primary key can not be composite;
- Scale table with composite primary key;
- Do not support scale on in used databases, need to prepare a new database cluster for target.

6.9 Encryption

6.9.1 Definition

Data encryption refers to the modification of some sensitive information through encryption rules in order to offer reliable protection to sensitive private data. Data related to customer security or some

sensitive commercial data, such as ID number, mobile phone number, card number, customer number, and other personal information, shall be encrypted according to the regulations of respective regulations.

6.9.2 Related Concepts

Logic column

It is used to calculate the encryption and decryption columns and it is the logical identifier of the column in SQL. Logical columns contain ciphertext columns (mandatory), query-helper columns (optional), and plaintext columns (optional).

Cipher column

Encrypted data columns.

Query assistant column

It is a helper column used for queries. For some non-idempotent encryption algorithms with higher security levels, irreversible idempotent columns are provided for queries.

Plain column

The column is used to store plaintext and provide services during the migration of encrypted data. It can be deleted after the data cleansing is complete.

6.9.3 Impact on the system

In real business scenarios, service development teams need to implement and maintain a set of encryption and decryption systems based on the requirements of the security department. When the encryption scenario changes, the self-maintained encryption system often faces the risk of reconstruction or modification. Additionally, for services that have been launched, it is relatively complicated to achieve seamless encrypted transformation in a transparent and secure manner without modifying business logic and SQL.

6.9.4 Limitations

- You need to process the original data on stocks in the database by yourself.
- The case-insensitive queries are not supported for encrypted fields.
- Comparison operations are not supported for encrypted fields, such as GREATER THAN, LESS THAN, ORDER BY, BETWEEN, LIKE.

- Calculation operations are not supported for encrypted fields, such as AVG, SUM, and computation expressions.

6.9.5 How it works

Apache ShardingSphere parses the SQL entered by users and rewrites the SQL according to the encryption rules provided by users, to encrypt the source data and store the source data (optional) and ciphertext data in the underlying database. When a user queries data, it only retrieves ciphertext data from the database, decrypts it, and finally returns the decrypted source data to the user. Apache ShardingSphere achieves a transparent and automatic data encryption process. Users can use encrypted data as normal data without paying attention to the implementation details of data encryption.

Overall architecture

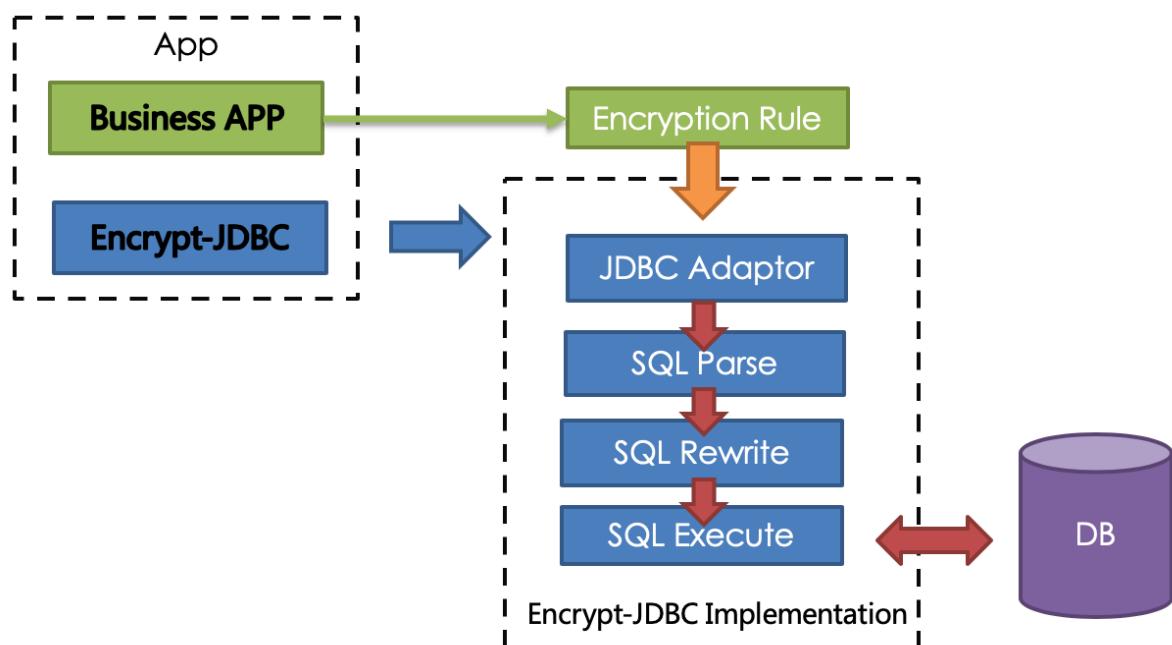


Figure8: 1

The encrypted module intercepts the SQL initiated by the user and parses and understands the SQL behavior through the SQL grammar parser. Then it finds out the fields to be encrypted and the encryption and decryption algorithm according to the encryption rules introduced by the user and interacts with the underlying database. Apache ShardingSphere will encrypt the plaintext requested by users and store it in the underlying database. When the user queries, the ciphertext is extracted from the database, decrypted, and returned to the terminal user. By shielding the data encryption process, users do not need to operate the SQL parsing process, data encryption, and data decryption.

Encryption rules

Before explaining the whole process, we need to understand the encryption rules and configuration. Encryption configuration is mainly divided into four parts: data source configuration, encryptor configuration, encryption table configuration and query attribute configuration, as shown in the figure below:

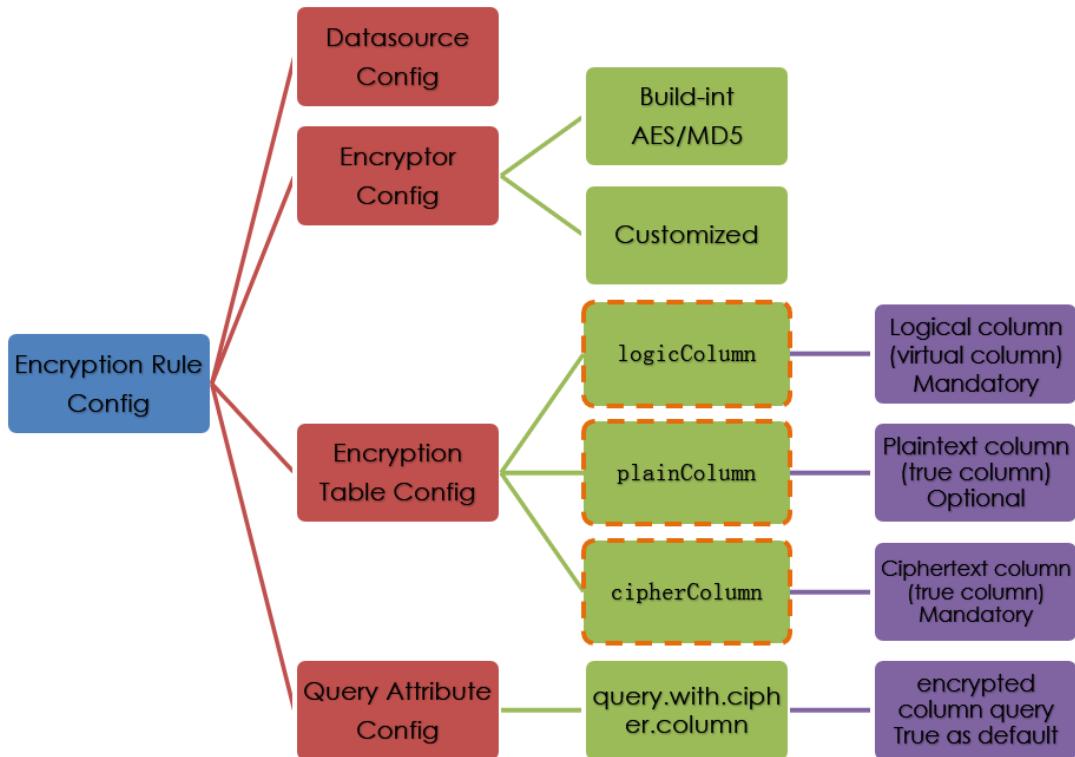


Figure9: 2

Data source configuration: literally the configuration of the data source.

Encryptor configuration: refers to the encryption algorithm used for encryption and decryption. Currently, ShardingSphere has three built-in encryption and decryption algorithms: AES, MD5 and RC4. Users can also implement a set of encryption and decryption algorithms by implementing the interfaces provided by ShardingSphere.

Encryption table configuration: it is used to tell ShardingSphere which column in the data table is used to store ciphertext data (cipherColumn), which column is used to store plaintext data (plainColumn), and which column the user would like to use for SQL writing (logicColumn).

What does it mean by “which column the user would like to use for SQL writing (logicColumn)” ?

We have to know first why the encrypted module exists. The goal of the encrypted module is to shield the underlying data encryption process, which means we don’t want users to know how data is encrypted and decrypted, and how to store plaintext data into plainColumn and ciphertext data into cipherColumn. In other words, we don’t want users to know there is a plainColumn and cipherColumn or how they are used. Therefore, we need to provide the

user with a conceptual column that can be separated from the real column in the underlying database. It may or may not be a real column in the database table so that users can change the column names of plainColumn and cipherColumn of the underlying database at will. Or we can delete plainColumn and never store plaintext, only ciphertext. The only thing we have to ensure is that the user's SQL is written towards the logical column, and the correct mapping relation between logicColumn, plainColumn and cipherColumn can be seen in the encryption rules.

Query attribute configuration: if both plaintext and ciphertext data are stored in the underlying database table, this attribute can be used to determine whether to query the plaintext data in the database table and return it directly, or query the ciphertext data and return it after decryption through Apache ShardingSphere. This attribute can be configured at the table level and the entire rule level. The table-level has the highest priority.

Encryption process

For example, if there is a table named `t_user` in the database, and there actually are two fields in the table: `pwd_plain` for storing plaintext data and `pwd_cipher` for storing ciphertext data, and `logicColumn` is defined as `pwd`, then users should write SQL for `logicColumn`, that is `INSERT INTO t_user SET pwd = '123'`. Apache ShardingSphere receives the SQL and finds that the `pwd` is the `logicColumn` based on the encryption configuration provided by the user. Therefore, it encrypts the logical column and its corresponding plaintext data. **Apache ShardingSphere transforms the column names and data encryption mapping between the logical columns facing users and the plaintext and ciphertext columns facing the underlying database.** As shown in the figure below:

The user's SQL is separated from the underlying data table structure according to the encryption rules provided by the user so that the user's SQL writing does not depend on the real database table structure. The connection, mapping, and transformation between the user and the underlying database are handled by Apache ShardingSphere. The picture below shows the processing flow and conversion logic when the encryption module is used to add, delete, change and check, as shown in the figure below.

6.9.6 Related References

- Configuration: Data Encryption
- Developer Guide: Data Encryption

6.10 Shadow

6.10.1 Definition

Solution for stress testing data governance at the database level, under the online full link stress testing scenario of Apache ShardingSphere.

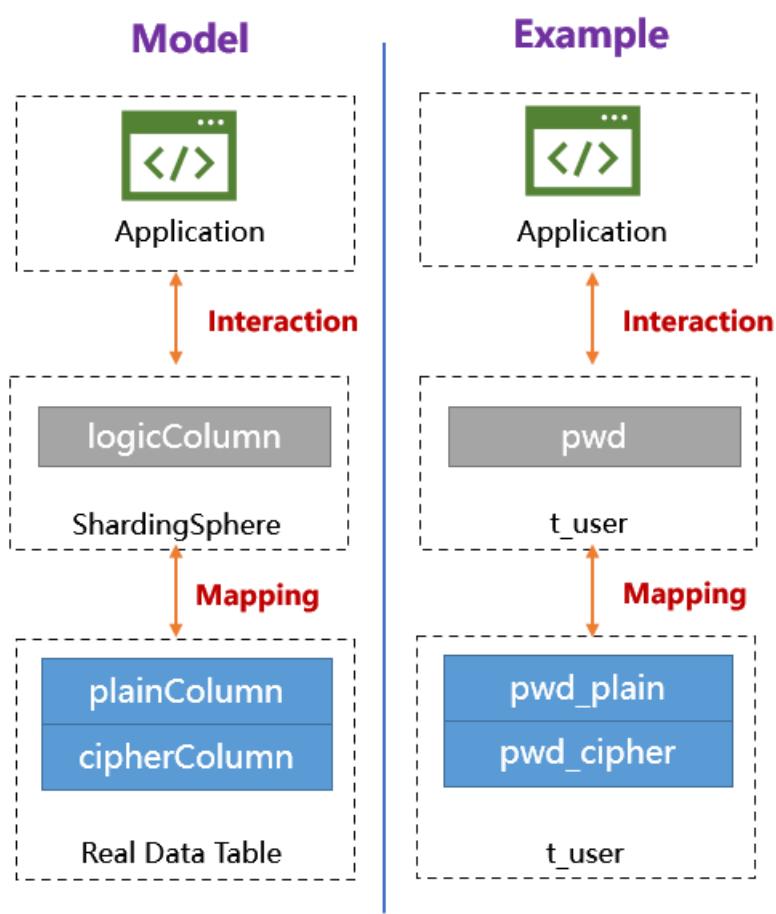


Figure10: 3



Figure11: 4

6.10.2 Related Concepts

Production Database

Database for production data

Shadow Database

The Database for stress test data isolation. Configurations should be the same as the Production Database.

Shadow Algorithm

Shadow Algorithm, which is closely related to business operations, currently has 2 types.

- Column based shadow algorithm Routing to shadow database by recognizing data from SQL. Suitable for stress test scenario that has an emphasis on data list.
- Hint based shadow algorithm Routing to shadow database by recognizing comments from SQL. Suitable for stress test driven by the identification of upstream system passage.

6.10.3 Limitations

Hint based shadow algorithm

No

Column based shadow algorithm

Does not support DDL. Does not support scope, group, subqueries such as BETWEEN, GROUP BY … HAVING, etc. SQL support list

- INSERT


SQL	<i>support or not</i>
INSERT INTO table (column, …) VALUES (value, …)	support
INSERT INTO table (column, …) VALUES (value, …), (value, …), …	support
INSERT INTO table (column, …) SELECT column1 from table1 where column1 = value1	do not support

- SELECT/UPDATE/DELETE

condition categories	SQL	<i>support or not</i>
=	SELECT/UPDATE/DELETE … WHERE column = value	support
LIKE/NOT LIKE	SELECT/UPDATE/DELETE … WHERE column LIKE/NOT LIKE value	support
BETWEEN	SELECT/UPDATE/DELETE … WHERE column BETWEEN value1 AND value2	do not support
GROUP BY … HAVING…	SELECT/UPDATE/DELETE … WHERE … GROUP BY column HAVING column > value	do not support
Sub Query	SELECT/UPDATE/DELETE … WHERE column = (SELECT column FROM table WHERE column = value)	do not support

6.10.4 How it works

Apache ShardingSphere determines the incoming SQL via shadow by parsing the SQL and routing it to the production or shadow database based on the shadow rules set by the user in the configuration file.

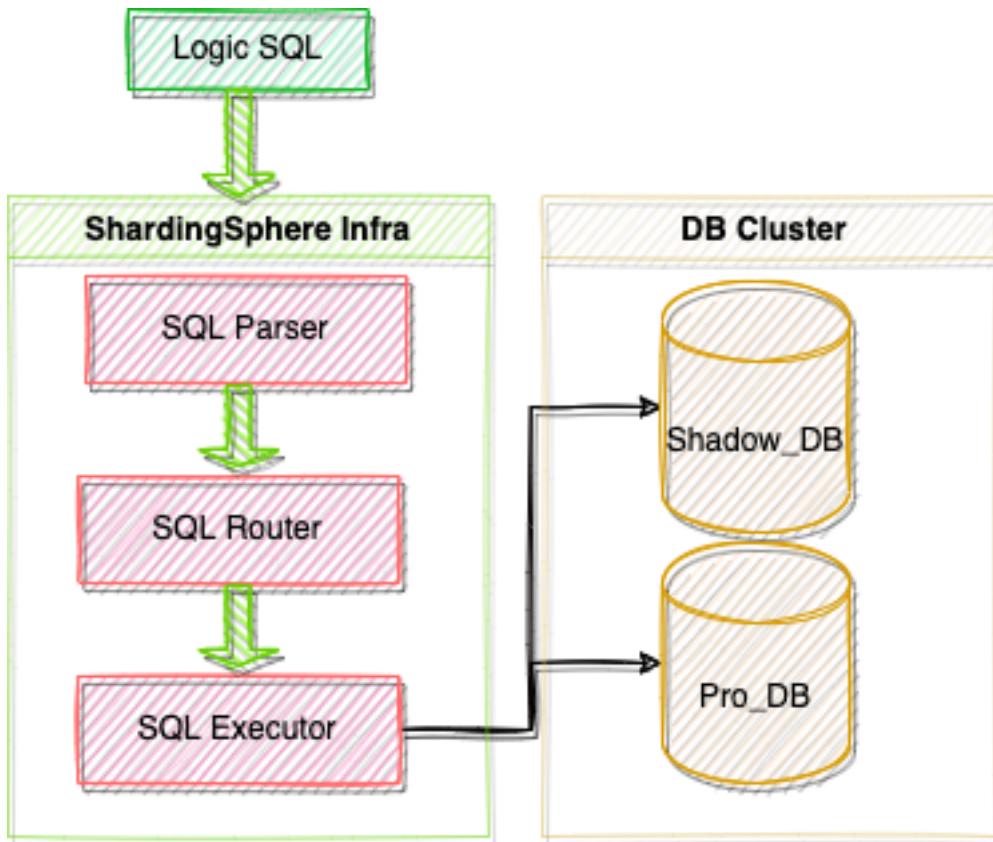

In the example of an INSERT statement, when writing data, Apache ShardingSphere parses the SQL and then constructs a routing chain based on the rules in the configuration file. In the current version, the shadow feature is at the last execution unit in the routing chain, i.e. if other rules exist that require routing, such as sharding, Apache ShardingSphere will first route to a particular database according to the sharding rules, and then run the shadow routing determination process to determine that the execution SQL meets the configuration set by shadow rules. Then data is routed to the corresponding shadow database, while the production data remains unchanged.

DML sentence

Two algorithms are supported. Shadow determination first determines whether the execution SQL-related table intersects with the configured shadow table. If the result is positive, the shadow algorithm within the part of intersection associated with the shadow table will be determined sequentially. If any of the determination is successful, the SQL statement is routed to the shadow library. If there is no intersection or the shadow algorithm determination is unsuccessful, the SQL statement is routed to the production database.

DDL sentence

Only supports shadow algorithm with comments attached. In stress testing scenarios, DDL statements are generally not required for testing, and are used mainly when initializing or modifying shadow tables in the shadow database. The shadow determination will first determine whether the execution SQL contains comments or not. If the result is a yes, the HINT shadow algorithm configured in the shadow rules determines them in order. The SQL statement is routed to the shadow database if any of the determinations are successful. If the execution SQL does not contain comments or the HINT shadow algorithm determination is unsuccessful, the SQL statements are routed to the production database.

6.10.5 References

[JAVA API: shadow database configuration](#)

[YAML Configuration: shadow database](#)

[Spring Boot Starter: shadow database configuration](#)

[Spring namespace: shadow database configuration](#)

6.11 Observability

6.11.1 Definition

Observing a cluster's operation status in order to quickly grasp the system's current status and efficiently be able to carry out maintenance work, represents a new challenge for distributed systems.

The point-to-point operation and maintenance method of logging into a specific server cannot be applied to scenarios facing a large number of distributed servers.

Telemetry of system-observable data is the recommended way of operating and maintaining distributed systems.

6.11.2 Related Concepts

Agent

Based on bytecode enhancement and plugin design to provide tracing, metrics and logging features.

Only after the plugin of the Agent is enabled, the monitoring indicator data can be output to the third-party APM for display.

APM

APM is an acronym for Application Performance Monitoring.

Focusing on the performance diagnosis of distributed systems, its main functions include call chain display, application topology analysis, etc.

Tracing

Tracing data between distributed services or internal processes will be collected by agent. It will then be sent to third-party APM systems.

Metrics

System statistical indicators are collected through probes and written to the time series database for display by third-party applications.

Logging

The log can be easily expanded through the agent to provide more information for analyzing the system running status.

6.11.3 How it works

ShardingSphere-Agent module provides an observable framework for ShardingSphere, which is implemented based on Java Agent.

Metrics, tracing and logging functions are integrated into the agent through plugins, as shown in the following figure:

- The Metrics plugin is used to collect and display statistical indicators for the entire cluster. Apache ShardingSphere supports Prometheus by default.
- The tracing plugin is used to obtain the link trace information of SQL parsing and SQL execution. Apache ShardingSphere provides support for Jaeger, OpenTelemetry, OpenTracing(SkyWalking) and Zipkin by default. It also supports users developing customized tracing components through plugin.
- The default logging plugin shows how to record additional logs in ShardingSphere. In practical applications, users need to explore according to their own needs.

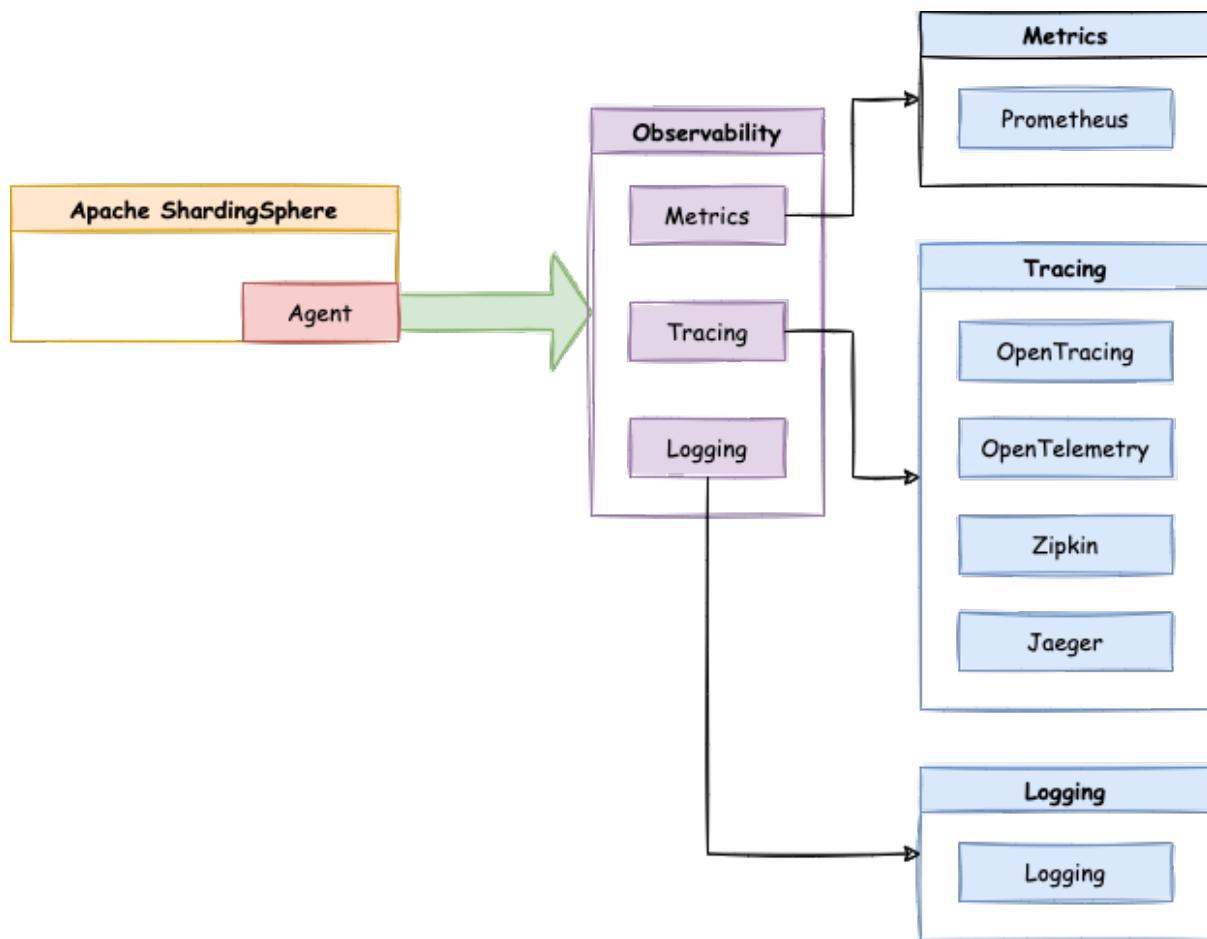


Figure12: Overview

6.11.4 Related References

Special API: Observability

6.11.5 Core Concept

Agent

Based on bytecode enhance and plug-in design to provide tracing, metrics and logging features. Enable the plugin in agent to collect data and send data to the integrated 3rd APM system.

APM

APM is the abbreviation for application performance monitoring. It works for performance diagnosis of distributed systems, including chain demonstration, service topology analysis and so on.

Tracing

Tracing data between distributed services or internal processes will be collected by agent. It then will be sent to APM system.

Metrics

System statistical indicator which collected from agent. Write to time series databases periodically. 3rd party UI can display the metrics data simply.

6.11.6 Use Norms

Compile source code

Download Apache ShardingSphere from GitHub, Then compile.

```
git clone --depth 1 https://github.com/apache/shardingsphere.git
cd shardingsphere
mvn clean install -Dmaven.javadoc.skip=true -Dcheckstyle.skip=true -Drat.skip=true
-Djacoco.skip=true -DskipITs -DskipTests -Prelease
```

Output directory: shardingsphere-agent/shardingsphere-agent-distribution/target/apache-shardingsphere-\${latest.release.version}-shardingsphere-agent-bin.tar.gz

Agent configuration

- Directory structure

Create agent directory, and unzip agent distribution package to the directory. ```shell mkdir agent
tar -zvxf apache-shardingsphere-latest.release.version - shardingsphere - agent - bin.tar.gz -
Cagentcdagenttree.¶conf¶ agent.yaml¶ logback.xml¶ plugins¶ shardingsphere-
agent - logging - base-[latest.release.version].jar ¶ shardingsphere - agent -
metrics-prometheus-latest.release.version.jar¶ shardingsphere - agent - tracing -
jaeger-[latest.release.version].jar¶ shardingsphere - agent - tracing -
opentelemetry-latest.release.version.jar¶ shardingsphere - agent - tracing -
opentracing-[latest.release.version].jar¶ shardingsphere - agent - tracing -
zipkin-[latest.release.version].jar¶ shardingsphere-agent.jar

* Configuration file

agent.yaml is a configuration file. The plug-ins include Jaeger, opentracing, Zipkin, opentelemetry, logging and Prometheus.

Remove the corresponding plug-in in ignoredpluginnames to start the plug-in.

```
```yaml
applicationName: shardingsphere-agent
ignoredPluginNames:
 - Jaeger
 - OpenTracing
 - Zipkin
 - OpenTelemetry
 - Logging
 - Prometheus

plugins:
 Prometheus:
 host: "localhost"
 port: 9090
 props:
 JVM_INFORMATION_COLLECTOR_ENABLED : "true"
 Jaeger:
 host: "localhost"
 port: 5775
 props:
 SERVICE_NAME: "shardingsphere-agent"
 JAEGGER_SAMPLER_TYPE: "const"
 JAEGGER_SAMPLER_PARAM: "1"
 Zipkin:
 host: "localhost"
 port: 9411
 props:
 SERVICE_NAME: "shardingsphere-agent"
```

```
URL_VERSION: "/api/v2/spans"
SAMPLER_TYPE: "const"
SAMPLER_PARAM: "1"
OpenTracing:
 props:
 OPENTRACING_TRACER_CLASS_NAME: "org.apache.skywalking.apm.toolkit.
opentracing.SkywalkingTracer"
 OpenTelemetry:
 props:
 otel.resource.attributes: "service.name=shardingsphere-agent"
 otel.traces.exporter: "zipkin"
 Logging:
 props:
 LEVEL: "INFO"
```

- Parameter description:

Name	Description	Value range	Default value
JVM_IN- FORMA- TION_CO- LLEC- TOR_ENABLED	Start JVM collector	true, false	true
SER- VICE_NAME	Tracking service name	Custom	shardingsphere-agent
JAEG- ER_SAMPLER_TYPE	Jaeger sample rate type	const, probabilistic, ratelimiting, remote	const
JAEGE- R_SAMPLER_PARAM	Jaeger sample rate parameter	const:0, 1, probabilistic:0.0 - 1.0, ratelimiting: > 0, Customize the number of acquisitions per second, remote: need to customize the remote service address, JAEGER_SAMPLER_MAX_HOST_PORT	1 (const type)
SAM- PLER_TYPE	Zipkin sample rate type	const, counting, ratelimiting, boundary	const
SAM- PLER_PARAM	Zipkin sampling rate parameter	const:0, 1, counting:0.01 - 1.0, ratelimiting: > 0, boundary:0.0001 - 1.0	1 (const type)
otel.reso- urce.attributes	open-telemetry properties	String key value pair (, split)	service.name=shardingsphere-agent
otel- traces.exporter	Tracing exporter	zipkin, jaeger	zipkin
otel- .traces.sampler	Open-telemetry sample rate type	always_on, always_off, traceidratio	always_on
otel- aces.sampler.arg	Open-telemetry sample rate parameter	traceidratio: 0.0 - 1.0	1.0

## Used in ShardingSphere-Proxy

- Startup script

Configure the absolute path of shardingsphere-agent.jar to the start.sh startup script of shardingsphere proxy.

```
nohup java ${JAVA_OPTS} ${JAVA_MEM_OPTS} \
-javaagent:/xxxxx/agent/shardingsphere-agent.jar \
-classpath ${CLASS_PATH} ${MAIN_CLASS} >> ${STDOUT_FILE} 2>&1 &
```

- Launch plugin

```
bin/start.sh
```

After normal startup, you can view the startup log of the plugin in the shardingsphere proxy log, and you can view the data at the configured address.

## 6.12 DistSQL

### 6.12.1 Definition

DistSQL (Distributed SQL) is Apache ShardingSphere's specific SQL, providing additional operation capabilities compared to standard SQL.

Flexible rule configuration and resource management & control capabilities are one of the characteristics of Apache ShardingSphere.

When using 4.x and earlier versions, developers can operate data just like using a database, but they need to configure resources and rules through YAML file (or registry center). However, the YAML file format and the changes brought by using the registry center made it unfriendly to DBAs.

Starting from version 5.x, DistSQL enables users to operate Apache ShardingSphere just like a database, transforming it from a framework and middleware for developers to a database product for DBAs.

### 6.12.2 Related Concepts

DistSQL is divided into RDL, RQL, and RAL.

**RDL**

Resource & Rule Definition Language, is responsible for the definition of resources and rules.

**RQL**

Resource & Rule Query Language, is responsible for the query of resources and rules.

**RAL**

Resource & Rule Administration Language, is responsible for the added-on administrator features of hint, transaction type switch, sharding execute planning, etc.

### 6.12.3 Impact on the System

#### Before

Before having DistSQL, users used SQL to operate data while using YAML configuration files to manage ShardingSphere, as shown below:

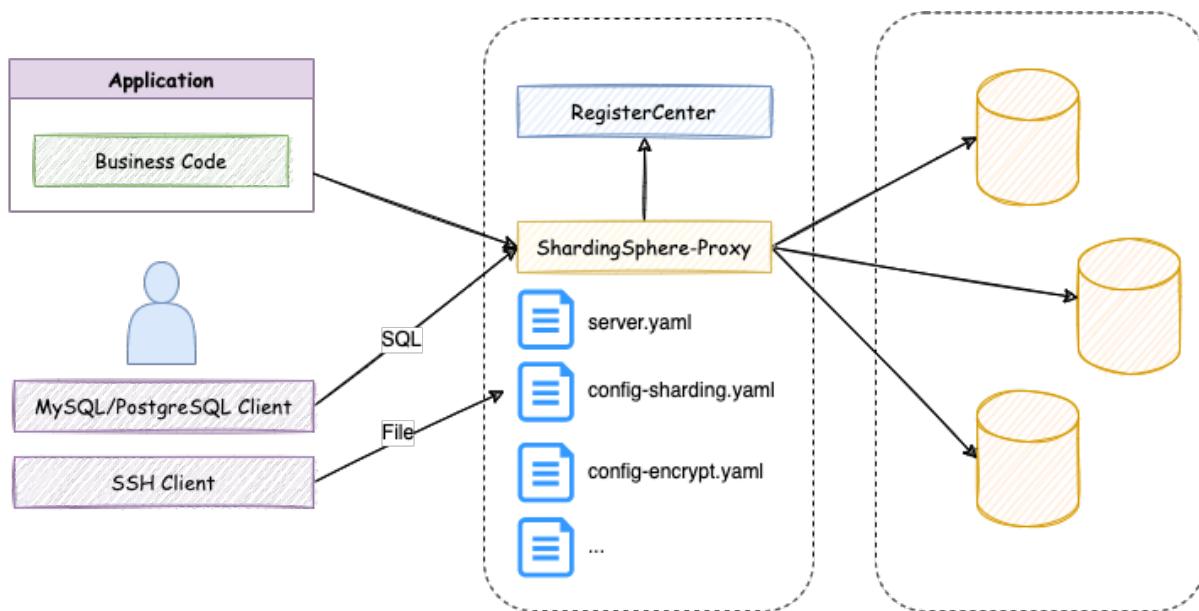


Figure13: Before

At that time, users faced the following problems:

- Different types of clients are required to operate data and manage ShardingSphere configuration.
- Multiple logical databases require multiple YAML files.
- Editing a YAML file requires writing permissions.
- Need to restart ShardingSphere after editing YAML.

## After

With the advent of DistSQL, the operation of ShardingSphere has also changed:

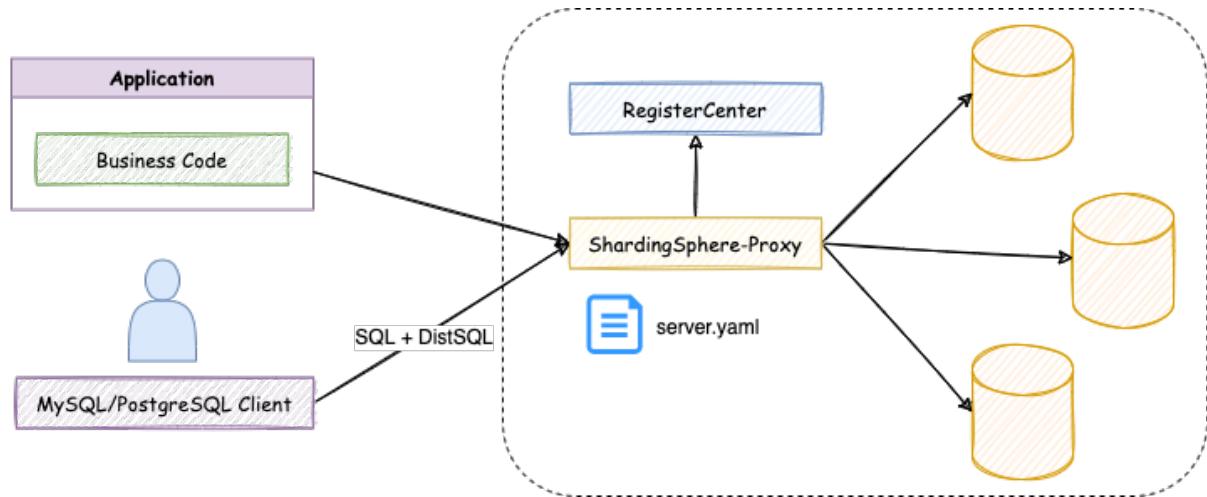


Figure14: After

Now, the user experience has been greatly improved:

- Uses the same client to operate data and ShardingSphere configuration.
- No need for additional YAML files, and the logical databases are managed through DistSQL.
- Editing permissions for files are no longer required, and configuration is managed through DistSQL.
- Configuration changes take effect in real-time without restarting ShardingSphere.

### 6.12.4 Limitations

DistSQL can be used only with ShardingSphere-Proxy, not with ShardingSphere-JDBC for now.

### 6.12.5 How it works

Like standard SQL, DistSQL is recognized by the parsing engine of ShardingSphere. It converts the input statement into an abstract syntax tree and then generates the Statement corresponding to each grammar, which is processed by the appropriate Handler.

### 6.12.6 Related References

User Manual: DistSQL

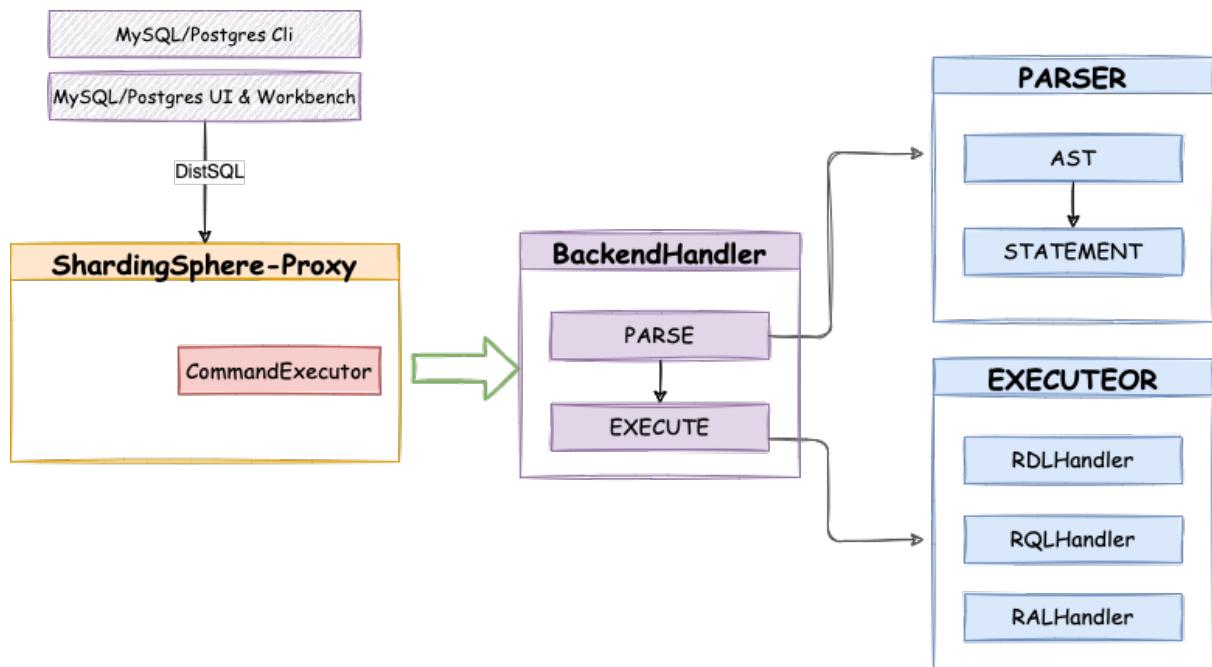


Figure15: Overview

This chapter describes how to use projects of Apache ShardingSphere.

## 7.1 ShardingSphere-JDBC

Configuration is the only module in ShardingSphere-JDBC that interacts with application developers, through which developers can quickly and clearly understand the functions provided by ShardingSphere-JDBC.

This chapter is a configuration manual for ShardingSphere-JDBC, which can also be referred to as a dictionary if necessary.

ShardingSphere-JDBC has provided 4 kinds of configuration methods for different situations. By configuration, application developers can flexibly use data sharding, readwrite-splitting, data encryption, shadow database or the combination of them.

Mixed rule configurations are very similar to single rule configuration, except for the differences from single rule to multiple rules.

It should be noted that the superposition between rules are data source and table name related. If the previous rule is data source oriented aggregation, the next rule needs to use the aggregated logical data source name configured by the previous rule when configuring the data source; Similarly, if the previous rule is table oriented aggregation, the next rule needs to use the aggregated logical table name configured by the previous rule when configuring the table.

Please refer to [Example](#) for more details.

### 7.1.1 Java API

#### Overview

Java API is the basic configuration methods in ShardingSphere-JDBC, and other configurations will eventually be transformed into Java API configuration methods.

The Java API is the most complex and flexible configuration method, which is suitable for the scenarios requiring dynamic configuration through programming.

#### Usage

##### Import Maven Dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>
```

##### Create Data Source

ShardingSphere-JDBC Java API consists of database name, mode configuration, data source map, rule configurations and properties.

The ShardingSphereDataSource created by ShardingSphereDataSourceFactory implements the standard JDBC DataSource interface.

```
String databaseName = "foo_schema"; // Indicate logic database name
ModeConfiguration modeConfig = ... // Build mode configuration
Map<String, DataSource> dataSourceMap = ... // Build actual data sources
Collection<RuleConfiguration> ruleConfigs = ... // Build concentrate rule
configurations
Properties props = ... // Build properties
DataSource dataSource = ShardingSphereDataSourceFactory.
createDataSource(databaseName, modeConfig, dataSourceMap, ruleConfigs, props);
```

Please refer to [Mode Configuration](#) for more mode details.

Please refer to [Data Source Configuration](#) for more data source details.

Please refer to [Rules Configuration](#) for more rule details.

## Use Data Source

Developer can choose to use native JDBC or ORM frameworks such as JPA, Hibernate or MyBatis through the DataSource.

Take native JDBC usage as an example:

```
// Create ShardingSphereDataSource
DataSource dataSource = ShardingSphereDataSourceFactory.
createDataSource(databaseName, modeConfig, dataSourceMap, ruleConfigs, props);

String sql = "SELECT i.* FROM t_order o JOIN t_order_item i ON o.order_id=i.order_
id WHERE o.user_id=? AND o.order_id=?";
try {
 Connection conn = dataSource.getConnection();
 PreparedStatement ps = conn.prepareStatement(sql)) {
 ps.setInt(1, 10);
 ps.setInt(2, 1000);
 try (ResultSet rs = preparedStatement.executeQuery()) {
 while(rs.next()) {
 // ...
 }
 }
}
```

## Mode Configuration

### Background

Build the running mode through Java API.

### Parameters

Class name: org.apache.shardingsphere.infra.config.mode.ModeConfiguration

Attributes:

Name *	DataType	Description	Default Value *
type	String	Type of mode configurationValues could be: Memory, Standalone, Cluster	Memory
repository	PersistentRepositoryConfiguration	Persistent repository configurationMemory type does not need persist, could be nullStandalone type uses StandalonePersistRepositoryConfigurationCluster type uses ClusterPersistRepositoryConfiguration	
overwrite	boolean	Whether overwrite persistent configuration with local configuration	false

### Standalone Persist Configuration

Class name: org.apache.shardingsphere.mode.repository.standalone.StandalonePersistRepositoryConfiguration

Attributes:

Name	DataType	Description
type	String	Type of persist repository
props	Properties	Properties of persist repository

### Cluster Persist Configuration

Class name: org.apache.shardingsphere.mode.repository.cluster.ClusterPersistRepositoryConfiguration

Attributes:

Name	* Data Type*	Description
type	String	Type of persist repository
namespace	String	Namespace of registry center
server-lists	String	Server lists of registry center
props	Properties	Properties of persist repository

## Notes

1. Cluster mode deployment is recommended for production environment.
2. The ‘ZooKeeper’ registry center is recommended for cluster mode deployment.

## Procedure

### 1. Introduce Maven Dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-boot-starter</artifactId>
 <version>${latest.release.version}</version>
</dependency>
```

Notice: Please change \${latest.release.version} to the actual version.

## Sample

### Standalone Mode

```
ModeConfiguration modeConfig = createModeConfiguration();
Map<String, DataSource> dataSourceMap = ... // Building real data sources
Collection<RuleConfiguration> ruleConfigs = ... // Build specific rules
Properties props = ... // Build property configuration
DataSource dataSource = ShardingSphereDataSourceFactory.
createDataSource(databaseName, modeConfig, dataSourceMap, ruleConfigs, props);

private ModeConfiguration createModeConfiguration() {
 return new ModeConfiguration("Standalone", new
 StandalonePersistRepositoryConfiguration("File", new Properties()), true);
}
```

### Cluster Mode (Recommended)

```
ModeConfiguration modeConfig = createModeConfiguration();
Map<String, DataSource> dataSourceMap = ... // Building real data sources
Collection<RuleConfiguration> ruleConfigs = ... // Build specific rules
Properties props = ... // Build property configuration
DataSource dataSource = ShardingSphereDataSourceFactory.
createDataSource(databaseName, modeConfig, dataSourceMap, ruleConfigs, props);

private ModeConfiguration createModeConfiguration() {
```

```

 return new ModeConfiguration("Cluster", new
ClusterPersistRepositoryConfiguration("ZooKeeper", "governance-sharding-db",
"localhost:2181", new Properties()), true);
}

```

## Related References

- Installation and Usage of ZooKeeper Registry Center
- Please refer to [Builtin Persist Repository List](#) for more details about type of repository.

## Data Source

### Background

ShardingSphere-JDBC supports all database JDBC drivers and connection pools.

This section describes how to configure data sources through the JAVA API.

### Procedure

#### 1. Import Maven dependency.

```

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${latest.release.version}</version>
</dependency>

```

Notice: Please change \${latest.release.version} to the actual version.

### Sample

```

ModeConfiguration modeConfig = // Build running mode
Map<String, DataSource> dataSourceMap = createDataSources();
Collection<RuleConfiguration> ruleConfigs = ... // Build specific rules
Properties props = ... // Build attribute configuration
DataSource dataSource = ShardingSphereDataSourceFactory.
createDataSource(databaseName, modeConfig, dataSourceMap, ruleConfigs, props);

private Map<String, DataSource> createDataSources() {
 Map<String, DataSource> dataSourceMap = new HashMap<>();
 // Configure the 1st data source
 HikariDataSource dataSource1 = new HikariDataSource();
 dataSource1.setDriverClassName("com.mysql.jdbc.Driver");
}

```

```
dataSource1.setJdbcUrl("jdbc:mysql://localhost:3306/ds_1");
dataSource1.setUsername("root");
dataSource1.setPassword("");
dataSourceMap.put("ds_1", dataSource1);

// Configure the 2nd data source
HikariDataSource dataSource2 = new HikariDataSource();
dataSource2.setDriverClassName("com.mysql.jdbc.Driver");
dataSource2.setJdbcUrl("jdbc:mysql://localhost:3306/ds_2");
dataSource2.setUsername("root");
dataSource2.setPassword("");
dataSourceMap.put("ds_2", dataSource2);
}
```

## Rules

Rules are pluggable part of Apache ShardingSphere. This chapter is a java rule configuration manual for ShardingSphere-JDBC.

## Sharding

### Background

The Java API rule configuration for data sharding, which allows users to create ShardingSphereDataSource objects directly by writing Java code, is flexible enough to integrate various types of business systems without relying on additional jar packages.

### Parameters

#### Root Configuration

Class name: org.apache.shardingsphere.sharding.api.config.ShardingRuleConfiguration

Attributes:

Name	DataType	Description	Default Value
tables (+)	Collection<ShardingTableRuleConfiguration>	Sharding table rules	.
autoTables (+)	Collection<ShardingAutoTableRuleConfiguration>	Sharding auto table rules	.
bindingTableGroups (*)	Collection<String>	Binding table rules	Empty
broadcastTables (*)	Collection<String>	Broadcast table rules	Empty
defaultDatabaseShardingStrategy (?)	ShardingStrategyConfiguration	Default database sharding strategy	Not sharding
defaultTableShardingStrategy (?)	ShardingStrategyConfiguration	Default table sharding strategy	Not sharding
defaultKeyGeneratorStrategy (?)	KeyGeneratorConfiguration	Default key generator	Snowflake
defaultShardingColumn (?)	String	Default sharding column name	None
shardingAlgorithms (+)	Map<String, ShardingSphereAlgorithmConfiguration>	Sharding algorithm name and configurations	None
keyGenerators (?)	Map<String, ShardingSphereAlgorithmConfiguration>	Key generate algorithm name and configurations	None

## Sharding Table Configuration

Class name: org.apache.shardingsphere.sharding.api.config.ShardingTableRuleConfiguration

Attributes:

Name*	<i>DataType</i>	<i>Description</i>	<i>Default Value</i>
logic Table	String	Name of sharding logic table	.
actualDataNodes (?)	String	Describe data source names and actual tables, delimiter as point. Multiple data nodes split by comma, support inline expression	Broadcast table or databases sharding only
databaseShardingStrategy (?)	ShardingStrategyConfiguration	Databases sharding strategy	Use default databases sharding strategy
tableShardingStrategy (?)	ShardingStrategyConfiguration	Tables sharding strategy	Use default tables sharding strategy
keyGeneratorStrategy (?)	KeyGeneratorConfiguration	Key generator configuration	Use default key generator

### Sharding Auto Table Configuration

Class name: org.apache.shardingsphere.sharding.api.config.ShardingAutoTableRuleConfiguration

Attributes:

<i>Name</i>	<i>DataType</i>	<i>Description</i>	<i>Default Value</i>
logicTable	String	Name of sharding logic table	.
actualDataSources (?)	String	Data source names. Multiple data nodes split by comma	Use all configured data sources
shardingStrategy (?)	ShardingStrategyConfiguration	Sharding strategy	Use default sharding strategy
keyGeneratorStrategy (?)	KeyGeneratorConfiguration	Key generator configuration	Use default key generator

## Sharding Strategy Configuration

### Standard Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.StandardShardingStrategyConfiguration

Attributes:

Name	DataType	Description
shardingColumn	String	Sharding column name
shardingAlgorithmName	String	Sharding algorithm name

### Complex Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.ComplexShardingStrategyConfiguration

Attributes:

Name	DataType	Description
shardingColumns	String	Sharding column name, separated by commas
shardingAlgorithmName	String	Sharding algorithm name

### Hint Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.HintShardingStrategyConfiguration

Attributes:

Name	DataType	Description
shardingAlgorithmName	String	Sharding algorithm name

### None Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.NoneShardingStrategyConfiguration

Attributes: None

Please refer to [Built-in Sharding Algorithm List](#) for more details about type of algorithm.

## Distributed Key Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.keygen.KeyGenerateStrategyConfiguration

Attributes:

Name	DataType	Description
column	String	Column name of key generate
keyGeneratorName	String	key generate algorithm name

Please refer to [Built-in Key Generate Algorithm List](#) for more details about type of algorithm.

## Procedure

1. Create an authentic data source mapping relationship, with key as the logical name of the data source and value as the DataSource object.
2. Create the sharding rule object ShardingRuleConfiguration, and initialize the sharding table objects—ShardingTableRuleConfiguration, the set of bound tables, the set of broadcast tables, and parameters like library sharding strategy and the database sharding strategy, on which the data sharding depends.
3. Using the ShardingSphereDataSource method of calling the ShardingSphereDataSourceFactory subject to create the ShardingSphereDataSource.

## Sample

```
public final class ShardingDatabasesAndTablesConfigurationPrecise implements
ExampleConfiguration {

 @Override
 public DataSource getDataSource() throws SQLException {
 return ShardingSphereDataSourceFactory.
createDataSource(createDataSourceMap(), Collections.
singleton(createShardingRuleConfiguration()), new Properties());
 }

 private ShardingRuleConfiguration createShardingRuleConfiguration() {
 ShardingRuleConfiguration result = new ShardingRuleConfiguration();
 result.getTables().add(getOrderTableRuleConfiguration());
 result.getTables().add(getOrderItemTableRuleConfiguration());
 result.getBindingTableGroups().add("t_order, t_order_item");
 result.getBroadcastTables().add("t_address");
 result.setDefaultDatabaseShardingStrategy(new
StandardShardingStrategyConfiguration("user_id", "inline"));
 result.setDefaultTableShardingStrategy(new
StandardShardingStrategyConfiguration("order_id", "standard_test_tbl"));
 }
}
```

```

Properties props = new Properties();
props.setProperty("algorithm-expression", "demo_ds_${user_id % 2}");
result.getShardingAlgorithms().put("inline", new
ShardingSphereAlgorithmConfiguration("INLINE", props));
result.getShardingAlgorithms().put("standard_test_tbl", new
ShardingSphereAlgorithmConfiguration("STANDARD_TEST_TBL", new Properties()));
result.getKeyGenerators().put("snowflake", new
ShardingSphereAlgorithmConfiguration("SNOWFLAKE", new Properties()));
return result;
}

private ShardingTableRuleConfiguration get0rderTableRuleConfiguration() {
 ShardingTableRuleConfiguration result = new ShardingTableRuleConfiguration(
"t_order", "demo_ds_${0..1}.t_order_${[0, 1]}");
 result.setKeyGenerateStrategy(new KeyGenerateStrategyConfiguration("order_
id", "snowflake"));
 return result;
}

private ShardingTableRuleConfiguration get0rderItemTableRuleConfiguration() {
 ShardingTableRuleConfiguration result = new ShardingTableRuleConfiguration(
"t_order_item", "demo_ds_${0..1}.t_order_item_${[0, 1]}");
 result.setKeyGenerateStrategy(new KeyGenerateStrategyConfiguration("order_
item_id", "snowflake"));
 return result;
}

private Map<String, DataSource> createDataSourceMap() {
 Map<String, DataSource> result = new HashMap<>();
 result.put("demo_ds_0", DataSourceUtil.createDataSource("demo_ds_0"));
 result.put("demo_ds_1", DataSourceUtil.createDataSource("demo_ds_1"));
 return result;
}
}

```

## Related References

- Core Feature: Data Sharding
- Developer Guide: Data Sharding

## Readwrite-splitting

### Background

The read/write splitting configured in Java API form can be easily applied to various scenarios without relying on additional jar packages. Users only need to construct the read/write splitting data source through java code to be able to use the read/write splitting function.

### Parameters Explained

#### Entry

Class name: org.apache.shardingsphere.readwritesplitting.api.ReadwriteSplittingRuleConfiguration

Configurable Properties:

Name*	<i>DataType</i>	<i>Description</i>
dataSources (+)	Collection<ReadwriteSplittingDataSourceRuleConfiguration>	Data sources of write and reads
loadBalancers (*)	Map<String, ShardingSphereAlgorithmConfiguration>	Load balance algorithm name and configurations of replica data sources

### Primary-secondary Data Source Configuration

Class name: org.apache.shardingsphere.readwritesplitting.api.rule.ReadwriteSplittingDataSourceRuleConfiguration

Configurable Properties:

Name	<i>DataType</i>	<i>Description</i>	<i>Default Value</i>
name	String	Readwrite-splitting data source name	.
staticStrategy	String	Static Readwrite-splitting configuration	.
dynamicStrategy	Properties	Dynamic Readwrite-splitting configuration	.
loadBalancerName (?)	String	Load balance algorithm name of replica sources	Round robin load balance algorithm

Class name: org.apache.shardingsphere.readwritesplitting.api.strategy.StaticReadwriteSplittingStrategyConfiguration

Configurable Properties:

Name	DataType	Description	Default Value
writeDataSourceName	String	Write data source name	.
readDataSource-Names	List<String>	Read data sources list	.

Class name: org.apache.shardingsphere.readwritesplitting.api.strategy.DynamicReadWriteSplittingStrategyConfigurati

Configurable Properties:

Name	DataType	Description	Default Value
autoAwareDataSourceName	String	Database discovery logic data source name	.
writeDataSourceQueryEnabled (?)	String	All read data source are offline, write data source whether the data source is responsible for read traffic	true

Please refer to [Built-in Load Balance Algorithm List](#) for details on algorithm types. Please refer to [Use Norms](#) for more details about query consistent routing.

## Operating Procedures

1. Add read-write splitting data source
2. Set load balancing algorithms
3. Use read-write splitting data source

## Configuration Examples

```
public DataSource getDataSource() throws SQLException {
 ReadwriteSplittingDataSourceRuleConfiguration dataSourceConfig = new
 ReadwriteSplittingDataSourceRuleConfiguration(
 "demo_read_query_ds", new
 StaticReadWriteSplittingStrategyConfiguration("demo_write_ds",
 Arrays.asList("demo_read_ds_0", "demo_read_ds_1")), null, "demo_
 weight_lb");
 Properties algorithmProps = new Properties();
 algorithmProps.setProperty("demo_read_ds_0", "2");
 algorithmProps.setProperty("demo_read_ds_1", "1");
```

```

 Map<String, ShardingSphereAlgorithmConfiguration> algorithmConfigMap = new
 HashMap<>(1);
 algorithmConfigMap.put("demo_weight_lb", new
 ShardingSphereAlgorithmConfiguration("WEIGHT", algorithmProps));
 ReadwriteSplittingRuleConfiguration ruleConfig = new
 ReadwriteSplittingRuleConfiguration(Collections.singleton(dataSourceConfig),
 algorithmConfigMap);
 Properties props = new Properties();
 props.setProperty("sql-show", Boolean.TRUE.toString());
 return ShardingSphereDataSourceFactory.
 createDataSource(createDataSourceMap(), Collections.singleton(ruleConfig), props);
 }

 private Map<String, DataSource> createDataSourceMap() {
 Map<String, DataSource> result = new HashMap<>(3, 1);
 result.put("demo_write_ds", DataSourceUtil.createDataSource("demo_write_ds"));
 result.put("demo_read_ds_0", DataSourceUtil.createDataSource("demo_read_ds_0"));
 result.put("demo_read_ds_1", DataSourceUtil.createDataSource("demo_read_ds_1"));
 return result;
 }
}

```

## References

- Read-write splitting-Core features
- YAML Configuration: read-write splitting
- Spring Boot Starter: read-write splitting
- Spring namespace: read-write splitting

## Distributed Transaction

### Root Configuration

org.apache.shardingsphere.transaction.config.TransactionRuleConfiguration

Attributes:

<i>name</i>	<i>DataType</i>	<i>Description</i>
defaultType	String	Default transaction type
providerType (?)	String	Transaction provider type
props (?)	Properties	Transaction properties

## HA

### Background

Build high availability rule configuration through Java API.

### Parameters

#### Root Configuration

Class name: org.apache.shardingsphere.dbdiscovery.api.config.DatabaseDiscoveryRuleConfiguration

Attributes:

Name	Data Type	Description
dataSources (+)	Collection<DatabaseDiscoveryDataSourceRuleConfiguration>	Data source configuration
discoverEveryHeartbeats (+)	Map<String, DatabaseDiscoveryHeartBeatConfiguration>	Detect heartbeat configuration
discoveryTypes (+)	Map<String, ShardingSphereAlgorithmConfiguration>	Database discovery type configuration

#### Data Source Configuration

Class name: org.apache.shardingsphere.dbdiscovery.api.config.rule.DatabaseDiscoveryDataSourceRuleConfiguration

Attributes:

Name	Data Type	Description	Default Value
groupName (+)	String	Database discovery group name	.
dataSourceNames (+)	Collection<String>	Data source names, multiple data source names separated with comma. Such as: ds_0, ds_1	.
discoverEveryHeartbeatName (+)	String	Detect heartbeat name	.
discoveryTypeName (+)	String	Database discovery type name	.

## Detect Heartbeat Configuration

Class name: org.apache.shardingsphere.dbdiscovery.api.config.rule.DatabaseDiscoveryHeartBeatConfiguration

Attributes:

Name	Data Type*	Description	Default Value
propops (+)	Properties	Detect heartbeat attribute configuration, keep-alive-cron configuration, cron expression. Such as: '0/5 * * * * ?'	.

## Database Discovery Type Configuration

Class name: org.apache.shardingsphere.infra.config.algorithm.ShardingSphereAlgorithmConfiguration

Attributes:

Name	Data Type	Description	Default Value
type (+)	String	Database discovery type, such as: MySQL.MGR	.
props (?)	Properties	Required parameters for high-availability types, such as MGR's group-name	.

## Procedure

1. Import Maven dependency.

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${latest.release.version}</version>
</dependency>
```

Notice: Please change \${latest.release.version} to the actual version.

## Sample

```

// Build data source ds_0, ds_1, ds_2
Map<String, DataSource> dataSourceMap = new HashMap<>(3, 1);
dataSourceMap.put("ds_0", createDataSource1("primary_demo_ds"));
dataSourceMap.put("ds_1", createDataSource2("primary_demo_ds"));
dataSourceMap.put("ds_2", createDataSource3("primary_demo_ds"));

DataSource dataSource = ShardingSphereDataSourceFactory.createDataSource("database_
discovery_db", dataSourceMap, Arrays.asList(createDatabaseDiscoveryConfiguration(),
createReadWriteSplittingConfiguration()), null);

private static DatabaseDiscoveryRuleConfiguration
createDatabaseDiscoveryConfiguration() {
 DatabaseDiscoveryDataSourceRuleConfiguration dataSourceRuleConfiguration = new
DatabaseDiscoveryDataSourceRuleConfiguration("readwrite_ds", Arrays.asList("ds_0",
ds_1, ds_2), "mgr-heartbeat", "mgr");
 return new DatabaseDiscoveryRuleConfiguration(Collections.
singleton(dataSourceRuleConfiguration), createDiscoveryHeartbeats(),
createDiscoveryTypes());
}

private static ReadwriteSplittingRuleConfiguration
createReadWriteSplittingConfiguration() {
 ReadwriteSplittingDataSourceRuleConfiguration dataSourceConfiguration1 = new
ReadwriteSplittingDataSourceRuleConfiguration("replica_ds", new
DynamicReadWriteSplittingStrategyConfiguration("readwrite_ds", true), "");
 return new ReadwriteSplittingRuleConfiguration(Arrays.
asList(dataSourceConfiguration1), Collections.emptyMap());
}

private static Map<String, ShardingSphereAlgorithmConfiguration>
createDiscoveryTypes() {
 Map<String, ShardingSphereAlgorithmConfiguration> discoveryTypes = new HashMap
<>(1, 1);
 Properties props = new Properties();
 props.put("group-name", "558edd3c-02ec-11ea-9bb3-080027e39bd2");
 discoveryTypes.put("mgr", new ShardingSphereAlgorithmConfiguration("MGR",
props));
 return discoveryTypes;
}

private static Map<String, DatabaseDiscoveryHeartBeatConfiguration>
createDiscoveryHeartbeats() {
 Map<String, DatabaseDiscoveryHeartBeatConfiguration>
discoveryHeartBeatConfiguration = new HashMap<>(1, 1);
 Properties props = new Properties();
 props.put("keep-alive-cron", "0/5 * * * * ?");
}

```

```

 discoveryHeartBeatConfiguration.put("mgr-heartbeat", new
DatabaseDiscoveryHeartBeatConfiguration(props));
 return discoveryHeartBeatConfiguration;
}

```

## Related References

- Feature Description of HA
- YAML Configuration: HA
- Spring Boot Starter: HA
- Spring Namespace: HA

## Encryption

### Root Configuration

Class name: org.apache.shardingsphere.encrypt.api.config.EncryptRuleConfiguration

Attributes:

Name	DataType	Description	Default Value
tables (+)	Collection<EncryptTableRuleConfiguration>	Encrypt table rule configurations	
encryptors (+)	Map<String, ShardingSphereAlgorithmConfiguration>	Encrypt algorithm name and configurations	
queryWithCipherColumn (?)	boolean	Whether query with cipher column for data encrypt. User you can use plaintext to query if have	true

### Encrypt Table Rule Configuration

Class name: org.apache.shardingsphere.encrypt.api.config.rule.EncryptTableRuleConfiguration

Attributes:

Name*	DataType	Description
name	String	Table name
columns (+)	Collection <EncryptColumnRuleConfiguration>	Encrypt column rule configurations
queryWithCipherColumn (?)	boolean	The current table whether query with cipher column for data encrypt.

### Encrypt Column Rule Configuration

Class name: org.apache.shardingsphere.encrypt.api.config.rule.EncryptColumnRuleConfiguration

Attributes:

Name	DataType*	Description
logicColumn	String	Logic column name
cipherColumn	String	Cipher column name
assistedQueryColumn (?)	String	Assisted query column name
plainColumn (?)	String	Plain column name
encryptorName	String	Encrypt algorithm name
assistedQueryEncryptorName	String	Assisted query encrypt algorithm name
queryWithCipherColumn (?)	boolean	The current column whether query with cipher column for data encrypt.

### Encrypt Algorithm Configuration

Class name: org.apache.shardingsphere.infra.config.algorithm.ShardingSphereAlgorithmConfiguration

Attributes:

Name	DataType	Description
name	String	Encrypt algorithm name
type	String	Encrypt algorithm type
properties	Properties	Encrypt algorithm properties

Please refer to [Built-in Encrypt Algorithm List](#) for more details about type of algorithm.

## Shadow DB

### Root Configuration

Class name: org.apache.shardingsphere.shadow.api.config.ShadowRuleConfiguration

Attributes:

Name	DataType	Description	Default Value
dataSources	Map<String, ShadowDataSourceConfiguration>	Shadow data source mapping name and configuration	
tables	Map<String, ShadowTableConfiguration>	Shadow table name and configuration	
defaultShadowAlgorithmName	String	Default shadow algorithm name	
shadowAlgorithms	Map<String, ShardingSphereAlgorithmConfiguration>	Shadow algorithm name and configuration	

### Shadow Data Source Configuration

Class name: org.apache.shardingsphere.shadow.api.config.datasource.ShadowDataSourceConfiguration

Attributes:

Name	DataType	Description
sourceDataSourceName	String	Production data source name
shadowDataSourceName	String	Shadow data source name

### Shadow Table Configuration

Class name: org.apache.shardingsphere.shadow.api.config.table.ShadowTableConfiguration

Attributes:

Name	DataType	Description
dataSourceNames	Collection<String>	Shadow table location shadow data source mapping names
shadowAlgorithmNames	Collection<String>	Shadow table location shadow algorithm names

## Shadow Algorithm Configuration

Please refer to [Built-in Shadow Algorithm List](#).

## SQL Parser

### Root Configuration

Class: org.apache.shardingsphere.parser.config.SQLParserRuleConfiguration

Attributes:

<i>name</i>	<i>DataType</i>	<i>Description</i>
sqlCommentParseEnabled (?)	boolean	Whether to parse SQL comments
parseTreeCache (?)	CacheOption	Parse syntax tree local cache configuration
sqlStatementCache (?)	CacheOption	sql statement local cache configuration

### Cache option Configuration

Class: org.apache.shardingsphere.sql.parser.api.CacheOption

Attributes:

<i>name</i>	<i>• Data Type*</i>	<i>Description</i>	<i>Default Value</i>
initialCapacity	int	Initial capacity of local cache	parser syntax tree local cache default value 128, SQL statement cache default value 2000
maximumSize (?)	long	Maximum capacity of local cache	The default value of local cache for parsing syntax tree is 1024, and the default value of sql statement cache is 65535

## SQL Translator

### Root Configuration

Class: org.apache.shardingsphere.sqltranslator.api.config.SQLTranslatorRuleConfiguration

Attributes:

<i>name</i>	<i>data type</i>	<i>Description</i>
<i>type</i>	String	SQL translator type
<i>useOriginalSQLWhenTranslatingFailed</i> (?)	boolean	Whether use original SQL when translating failed

## Mixed Rules

### Configuration Item Explanation

```
/* Data source configuration */
HikariDataSource writeDataSource0 = new HikariDataSource();
writeDataSource0.setDriverClassName("com.mysql.jdbc.Driver");
writeDataSource0.setJdbcUrl("jdbc:mysql://localhost:3306/db0?serverTimezone=UTC&
useSSL=false&useUnicode=true&characterEncoding=UTF-8");
writeDataSource0.setUsername("root");
writeDataSource0.setPassword("");

HikariDataSource writeDataSource1 = new HikariDataSource();
// ...Omit specific configuration.

HikariDataSource read00fwriteDataSource0 = new HikariDataSource();
// ...Omit specific configuration.

HikariDataSource read10fwriteDataSource0 = new HikariDataSource();
// ...Omit specific configuration.

HikariDataSource read00fwriteDataSource1 = new HikariDataSource();
// ...Omit specific configuration.

HikariDataSource read10fwriteDataSource1 = new HikariDataSource();
// ...Omit specific configuration.

Map<String, DataSource> datasourceMaps = new HashMap<>(6);

datasourceMaps.put("write_ds0", writeDataSource0);
datasourceMaps.put("write_ds0_read0", read00fwriteDataSource0);
datasourceMaps.put("write_ds0_read1", read10fwriteDataSource0);
```

```

datasourceMaps.put("write_ds1", writeDataSource1);
datasourceMaps.put("write_ds1_read0", read0fwriteDataSource1);
datasourceMaps.put("write_ds1_read1", read1fwriteDataSource1);

/* Sharding rule configuration */
// The enumeration value of `ds_${0..1}` is the name of the logical data source
// configured with read-query
ShardingTableRuleConfiguration t0OrderRuleConfiguration = new
ShardingTableRuleConfiguration("t_order", "ds_${0..1}.t_order_${[0, 1]}");
t0OrderRuleConfiguration.setKeyGenerateStrategy(new
KeyGenerateStrategyConfiguration("order_id", "snowflake"));
t0OrderRuleConfiguration.setTableShardingStrategy(new
StandardShardingStrategyConfiguration("order_id", "tOrderInlineShardingAlgorithm
"));
Properties t0OrderShardingInlineProps = new Properties();
t0OrderShardingInlineProps.setProperty("algorithm-expression", "t_order_${order_id %
2}");
t0OrderRuleConfiguration.getShardingAlgorithms().putIfAbsent(
"tOrderInlineShardingAlgorithm", new ShardingSphereAlgorithmConfiguration("INLINE",
t0OrderShardingInlineProps));

ShardingTableRuleConfiguration t0OrderItemRuleConfiguration = new
ShardingTableRuleConfiguration("t_order_item", "ds_${0..1}.t_order_item_${[0, 1]}
");
t0OrderItemRuleConfiguration.setKeyGenerateStrategy(new
KeyGenerateStrategyConfiguration("order_item_id", "snowflake"));
t0OrderRuleConfiguration.setTableShardingStrategy(new
StandardShardingStrategyConfiguration("order_item_id",
"tOrderItemInlineShardingAlgorithm"));
Properties t0OrderItemShardingInlineProps = new Properties();
t0OrderItemShardingInlineProps.setProperty("algorithm-expression", "t_order_item_$
{order_item_id % 2}");
t0OrderRuleConfiguration.getShardingAlgorithms().putIfAbsent(
"tOrderItemInlineShardingAlgorithm", new ShardingSphereAlgorithmConfiguration(
"INLINE", t0OrderItemShardingInlineProps));

ShardingRuleConfiguration shardingRuleConfiguration = new
ShardingRuleConfiguration();
shardingRuleConfiguration.getTables().add(t0OrderRuleConfiguration);
shardingRuleConfiguration.getTables().add(t0OrderItemRuleConfiguration);
shardingRuleConfiguration.getBindingTableGroups().add("t_order, t_order_item");
shardingRuleConfiguration.getBroadcastTables().add("t_bank");
// Default database strategy configuration
shardingRuleConfiguration.setDefaultDatabaseShardingStrategy(new
StandardShardingStrategyConfiguration("user_id", "default_db_strategy_inline"));
Properties defaultDatabaseStrategyInlineProps = new Properties();
defaultDatabaseStrategyInlineProps.setProperty("algorithm-expression", "ds_${user_
id % 2}");

```

```
shardingRuleConfiguration.getShardingAlgorithms().put("default_db_strategy_inline",
new ShardingSphereAlgorithmConfiguration("INLINE",
defaultDatabaseStrategyInlineProps));

// Key generate algorithm configuration
Properties snowflakeProperties = new Properties();
shardingRuleConfiguration.getKeyGenerators().put("snowflake", new
ShardingSphereAlgorithmConfiguration("SNOWFLAKE", snowflakeProperties));

/* Data encrypt rule configuration */
Properties encryptProperties = new Properties();
encryptProperties.setProperty("aes-key-value", "123456");
EncryptColumnRuleConfiguration columnConfigAes = new
EncryptColumnRuleConfiguration("username", "username", "", "username_plain", "name_
encryptor");
EncryptColumnRuleConfiguration columnConfigTest = new
EncryptColumnRuleConfiguration("pwd", "pwd", "assisted_query_pwd", "", "pwd_
encryptor");
EncryptTableRuleConfiguration encryptTableRuleConfig = new
EncryptTableRuleConfiguration("t_user", Arrays.asList(columnConfigAes,
columnConfigTest));
// Data encrypt algorithm configuration
Map<String, ShardingSphereAlgorithmConfiguration> encryptAlgorithmConfigs = new
LinkedHashMap<>(2, 1);
encryptAlgorithmConfigs.put("name_encryptor", new
ShardingSphereAlgorithmConfiguration("AES", encryptProperties));
encryptAlgorithmConfigs.put("pwd_encryptor", new
ShardingSphereAlgorithmConfiguration("assistedTest", encryptProperties));
EncryptRuleConfiguration encryptRuleConfiguration = new
EncryptRuleConfiguration(Collections.singleton(encryptTableRuleConfig),
encryptAlgorithmConfigs);

/* Readwrite-splitting rule configuration */
Properties readwriteProps1 = new Properties();
readwriteProps1.setProperty("write-data-source-name", "write_ds0");
readwriteProps1.setProperty("read-data-source-names", "write_ds0_read0, write_ds0_
read1");
ReadwriteSplittingDataSourceRuleConfiguration dataSourceConfiguration1 = new
ReadwriteSplittingDataSourceRuleConfiguration("ds_0", "Static", readwriteProps1,
"roundRobin");
Properties readwriteProps2 = new Properties();
readwriteProps2.setProperty("write-data-source-name", "write_ds0");
readwriteProps2.setProperty("read-data-source-names", "write_ds1_read0, write_ds1_
read1");
ReadwriteSplittingDataSourceRuleConfiguration dataSourceConfiguration2 = new
ReadwriteSplittingDataSourceRuleConfiguration("ds_1", "Static", readwriteProps2,
"roundRobin");
```

```

// Load balance algorithm configuration
Map<String, ShardingSphereAlgorithmConfiguration> loadBalanceMaps = new HashMap<>()
(1);
loadBalanceMaps.put("roundRobin", new ShardingSphereAlgorithmConfiguration("ROUND_
ROBIN", new Properties()));

ReadWriteSplittingRuleConfiguration readWriteSplittingRuleConfiguration = new
ReadWriteSplittingRuleConfiguration(Arrays.asList(dataSourceConfiguration1,
dataSourceConfiguration2), loadBalanceMaps);

/* Other Properties configuration */
Properties otherProperties = new Properties();
otherProperties.setProperty("sql-show", "true");

/* The variable `shardingDataSource` is the logic data source referenced by other
frameworks(such as ORM, JPA, etc.) */
DataSource shardingDataSource = ShardingSphereDataSourceFactory.
createDataSource(datasourceMaps, Arrays.asList(shardingRuleConfiguration,
readWriteSplittingRuleConfiguration, encryptRuleConfiguration), otherProperties);

```

## 7.1.2 YAML Configuration

### Overview

YAML configuration provides interaction with ShardingSphere JDBC through configuration files. When used with the governance module together, the configuration of persistence in the configuration center is YAML format.

YAML configuration is the most common configuration mode, which can omit the complexity of programming and simplify user configuration.

### Usage

#### Import Maven Dependency

```

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

```

## YAML Format

ShardingSphere-JDBC YAML file consists of database name, mode configuration, data source map, rule configurations and properties.

Note: The example connection pool is HikariCP, which can be replaced with other connection pools according to business scenarios.

```
JDBC logic database name. Through this parameter to connect ShardingSphere-JDBC and ShardingSphere-Proxy.
Default value: logic_db
databaseName (?):

mode:

dataSources:

rules:
- !FOO_XXX
 ...
- !BAR_XXX
 ...

props:
 key_1: value_1
 key_2: value_2
```

Please refer to [Mode Configuration](#) for more mode details.

Please refer to [Data Source Configuration](#) for more data source details.

Please refer to [Rules Configuration](#) for more rule details.

## Create Data Source

The ShardingSphereDataSource created by YamlShardingSphereDataSourceFactory implements the standard JDBC DataSource interface.

```
File yamlFile = // Indicate YAML file
DataSource dataSource = YamlShardingSphereDataSourceFactory.
createDataSource(yamlFile);
```

## Use Data Source

Same with Java API.

## YAML Syntax Explanation

- ! ! means instantiation of that class
- ! means self-defined alias
- means one or multiple can be included
- [ ] means array, can substitutable with - each other

## Mode Configuration

### Background

The default configuration uses memory mode.

### Parameters

```
mode (?): # Default value is Memory
 type: # Type of mode configuration. Values could be: Memory, Standalone, Cluster
 repository (?): # Persist repository configuration. Memory type does not need
 persist
 overwrite: # Whether overwrite persistent configuration with local configuration
```

### Memory Mode

```
mode:
 type: Memory
```

### Standalone Mode

```
mode:
 type: Standalone
 repository:
 type: # Type of persist repository
 props: # Properties of persist repository
 foo_key: foo_value
 bar_key: bar_value
 overwrite: # Whether overwrite persistent configuration with local configuration
```

## Cluster Mode (recommended)

```
mode:
 type: Cluster
 repository:
 type: # Type of persist repository
 props: # Properties of persist repository
 namespace: # Namespace of registry center
 server-lists: # Server lists of registry center
 foo_key: foo_value
 bar_key: bar_value
 overwrite: # Whether overwrite persistent configuration with local configuration
```

### Notes

1. Cluster mode deployment is recommended for production environment.
2. The ‘ZooKeeper’ registry center is recommended for cluster mode deployment. ## Sample

## Standalone Mode

```
mode:
 type: Standalone
 repository:
 type: File
 overwrite: false
```

## Cluster Mode (recommended)

```
mode:
 type: Cluster
 repository:
 type: ZooKeeper
 props:
 namespace: governance
 server-lists: localhost:2181
 retryIntervalMilliseconds: 500
 timeToLiveSeconds: 60
 overwrite: false
```

## Related References

- Installation and Usage of ZooKeeper Registry Center
- Please refer to [Builtin Persist Repository List](#) for more details about the type of repository.

## Data Source

### Background

ShardingSphere-JDBC Supports all JDBC drivers and database connection pools.

In this example, the database driver is MySQL, and the connection pool is HikariCP, which can be replaced with other database drivers and connection pools. When using ShardingSphere JDBC, the property name of the JDBC pool depends on the definition of the respective JDBC pool and is not defined by ShardingSphere. For related processing, please refer to the class `org.apache.shardingsphere.infra.datasource.pool.creator.DataSourcePoolCreator`. For example, with Alibaba Druid 1.2.9, using `url` instead of `jdbcUrl` in the example below is the expected behavior.

### Parameters

```
dataSources: # Data sources configuration, multiple <data-source-name> available
 <data-source-name>: # Data source name
 dataSourceClassName: # Data source class name
 driverClassName: # The database driver class name is subject to the
 configuration of the database connection pool itself
 jdbcUrl: # The database URL connection is subject to the configuration of the
 database connection pool itself
 username: # Database user name, subject to the configuration of the database
 connection pool itself
 password: # The database password is subject to the configuration of the
 database connection pool itself
 # ... Other properties of data source pool
```

### Sample

```
dataSources:
 ds_1:
 dataSourceClassName: com.zaxxer.hikari.HikariDataSource
 driverClassName: com.mysql.jdbc.Driver
 jdbcUrl: jdbc:mysql://localhost:3306/ds_1
 username: root
 password:
 ds_2:
 dataSourceClassName: com.zaxxer.hikari.HikariDataSource
```

```

driverClassName: com.mysql.jdbc.Driver
jdbcUrl: jdbc:mysql://localhost:3306/ds_2
username: root
password:

Configure other data sources

```

## Rules

Rules are pluggable part of Apache ShardingSphere. This chapter is a YAML rule configuration manual for ShardingSphere-JDBC.

## Sharding

### Background

Data sharding YAML configuration is highly readable. The dependencies between sharding rules can be quickly understood through the YAML format. ShardingSphere automatically creates the ShardingSphereDataSource object according to YAML configuration, which can reduce unnecessary coding for users.

### Parameters

```

rules:
- !SHARDING
 tables: # Sharding table configuration
 <logic-table-name> (+): # Logic table name
 actualDataNodes (?): # Describe data source names and actual tables (refer to
 Inline syntax rules)
 databaseStrategy (?): # Databases sharding strategy, use default databases
 sharding strategy if absent. sharding strategy below can choose only one.
 standard: # For single sharding column scenario
 shardingColumn: # Sharding column name
 shardingAlgorithmName: # Sharding algorithm name
 complex: # For multiple sharding columns scenario
 shardingColumns: # Sharding column names, multiple columns separated with
 comma
 shardingAlgorithmName: # Sharding algorithm name
 hint: # Sharding by hint
 shardingAlgorithmName: # Sharding algorithm name
 none: # Do not sharding
 tableStrategy: # Tables sharding strategy, same as database sharding strategy
 keyGenerateStrategy: # Key generator strategy
 column: # Column name of key generator
 keyGeneratorName: # Key generator name

```

```

autoTables: # Auto Sharding table configuration
 t_order_auto: # Logic table name
 actualDataSources (?): # Data source names
 shardingStrategy: # Sharding strategy
 standard: # For single sharding column scenario
 shardingColumn: # Sharding column name
 shardingAlgorithmName: # Auto sharding algorithm name
bindingTables (+): # Binding tables
 - <logic_table_name_1, logic_table_name_2, ...>
 - <logic_table_name_1, logic_table_name_2, ...>
broadcastTables (+): # Broadcast tables
 - <table-name>
 - <table-name>
defaultDatabaseStrategy: # Default strategy for database sharding
defaultTableStrategy: # Default strategy for table sharding
defaultKeyGenerateStrategy: # Default Key generator strategy
defaultShardingColumn: # Default sharding column name

Sharding algorithm configuration
shardingAlgorithms:
 <sharding-algorithm-name> (+): # Sharding algorithm name
 type: # Sharding algorithm type
 props: # Sharding algorithm properties
 # ...

Key generate algorithm configuration
keyGenerators:
 <key-generate-algorithm-name> (+): # Key generate algorithm name
 type: # Key generate algorithm type
 props: # Key generate algorithm properties
 # ...

```

## Procedure

1. Configure data sharding rules in YAML files, including data source, sharding rules, and global attributes and other configuration items.
2. Call `createDataSource` method of the object `YamlShardingSphereDataSourceFactory`. Create `ShardingSphereDataSource` according to the configuration information in YAML files.

## Sample

The YAML configuration sample of data sharding is as follows:

```
dataSources:
 ds_0:
 dataSourceClassName: com.zaxxer.hikari.HikariDataSource
 driverClassName: com.mysql.jdbc.Driver
 jdbcUrl: jdbc:mysql://localhost:3306/demo_ds_0?serverTimezone=UTC&useSSL=false&
useUnicode=true&characterEncoding=UTF-8
 username: root
 password:
 ds_1:
 dataSourceClassName: com.zaxxer.hikari.HikariDataSource
 driverClassName: com.mysql.jdbc.Driver
 jdbcUrl: jdbc:mysql://localhost:3306/demo_ds_1?serverTimezone=UTC&useSSL=false&
useUnicode=true&characterEncoding=UTF-8
 username: root
 password:

rules:
- !SHARDING
 tables:
 t_order:
 actualDataNodes: ds_${0..1}.t_order_${0..1}
 tableStrategy:
 standard:
 shardingColumn: order_id
 shardingAlgorithmName: t-order-inline
 keyGenerateStrategy:
 column: order_id
 keyGeneratorName: snowflake
 t_order_item:
 actualDataNodes: ds_${0..1}.t_order_item_${0..1}
 tableStrategy:
 standard:
 shardingColumn: order_id
 shardingAlgorithmName: t_order-item-inline
 keyGenerateStrategy:
 column: order_item_id
 keyGeneratorName: snowflake
 t_account:
 actualDataNodes: ds_${0..1}.t_account_${0..1}
 tableStrategy:
 standard:
 shardingAlgorithmName: t-account-inline
 keyGenerateStrategy:
 column: account_id
 keyGeneratorName: snowflake
```

```
defaultShardingColumn: account_id
bindingTables:
 - t_order,t_order_item
broadcastTables:
 - t_address
defaultDatabaseStrategy:
 standard:
 shardingColumn: user_id
 shardingAlgorithmName: database-inline
defaultTableStrategy:
 none:

shardingAlgorithms:
 database-inline:
 type: INLINE
 props:
 algorithm-expression: ds_${user_id % 2}
 t-order-inline:
 type: INLINE
 props:
 algorithm-expression: t_order_${order_id % 2}
 t_order-item-inline:
 type: INLINE
 props:
 algorithm-expression: t_order_item_${order_id % 2}
 t-account-inline:
 type: INLINE
 props:
 algorithm-expression: t_account_${account_id % 2}
keyGenerators:
 snowflake:
 type: SNOWFLAKE

props:
 sql-show: false
```

Read the YAML configuration to create a data source according to the `createDataSource` method of `YamlShardingSphereDataSourceFactory`.

```
YamlShardingSphereDataSourceFactory.createDataSource(getFile("/META-INF/sharding-
databases-tables.yaml"));
```

## Related References

- Core Feature: Data Sharding
- Developer Guide: Data Sharding

## Readwrite-splitting

### Configuration Item Explanation

#### Static Readwrite-splitting

```
rules:
- !READWRITE_SPLITTING
 dataSources:
 <data-source-name> (+): # Logic data source name of readwrite-splitting
 static-strategy: # Readwrite-splitting type
 write-data-source-name: # Write data source name
 read-data-source-names: # Read data source names, multiple data source
 names separated with comma
 loadBalancerName: # Load balance algorithm name

 # Load balance algorithm configuration
 loadBalancers:
 <load-balancer-name> (+): # Load balance algorithm name
 type: # Load balance algorithm type
 props: # Load balance algorithm properties
 # ...
```

#### Dynamic Readwrite-splitting

```
rules:
- !READWRITE_SPLITTING
 dataSources:
 <data-source-name> (+): # Logic data source name of readwrite-splitting
 dynamic-strategy: # Readwrite-splitting type
 auto-aware-data-source-name: # Database discovery logic data source name
 write-data-source-query-enabled: # All read data source are offline, write
 data source whether the data source is responsible for read traffic
 loadBalancerName: # Load balance algorithm name

 # Load balance algorithm configuration
 loadBalancers:
 <load-balancer-name> (+): # Load balance algorithm name
 type: # Load balance algorithm type
```

```
props: # Load balance algorithm properties
...
```

Please refer to [Built-in Load Balance Algorithm List](#) for more details about type of algorithm. Please refer to [Use Norms](#) for more details about query consistent routing.

## Distributed Transaction

### Background

ShardingSphere provides three modes for distributed transactions LOCAL, XA, BASE.

### Parameters

- defaultType: transaction mode, optional value LOCAL/XA/BASE.
- providerType: specific implementation of the mode.

### Procedure

#### Use LOCAL Mode

The content of the server.yaml configuration file is as follows:

```
rules:
- !TRANSACTION
 defaultType: LOCAL
```

#### Use XA Mode

The content of the server.yaml configuration file is as follows:

```
rules:
- !TRANSACTION
 defaultType: XA
 providerType: Narayana/Atomikos
```

To manually add Narayana-related dependencies:

```
jta-5.12.4.Final.jar
arjuna-5.12.4.Final.jar
common-5.12.4.Final.jar
jboss-connector-api_1.7_spec-1.0.0.Final.jar
jboss-logging-3.2.1.Final.jar
jboss-transaction-api_1.2_spec-1.0.0.Alpha3.jar
```

```
jboss-transaction-spi-7.6.0.Final.jar
narayana-jts-integration-5.12.4.Final.jar
shardingsphere-transaction-xa-narayana-x.x.x-SNAPSHOT.jar
```

## Use BASE Mode

The content of the server.yaml configuration file is as follows:

```
rules:
- ! TRANSACTION
 defaultType: BASE
 providerType: Seata
```

Build a Seata Server, add relevant configuration files and Seata dependencies, see [ShardingSphere Integrates Seata Flexible Transactions](#)

## HA

### Background

Through YAML format, ShardingSphere will automatically create the ShardingSphereDataSource object according to the YAML configuration, reducing unnecessary coding work for users.

### Parameters

```
rules:
- !READWRITE_SPLITTING
 dataSources:
 replica_ds:
 dynamicStrategy:
 autoAwareDataSourceName: # High availability rule logical data source name

- !DB_DISCOVERY
 dataSources:
 <data-source-name> (+): # Logic data source name
 dataSourceNames: # Data source names
 - <data-source>
 - <data-source>
 discoveryHeartbeatName: # Detect heartbeat name
 discoveryTypeName: # Database discovery type name

 # Heartbeat Configuration
 discoveryHeartbeats:
 <discovery-heartbeat-name> (+): # heartbeat name
 props:
```

```
keep-alive-cron: # This is cron expression, such as: '0/5 * * * * ?'

Database Discovery Configuration
discoveryTypes:
<discovery-type-name> (+): # Database discovery type name
 type: # Database discovery type, such as: MySQL.MGR
 props (?):
 group-name: 92504d5b-6dec-11e8-91ea-246e9612aaf1 # Required parameters for
 database discovery types, such as MGR's group-name
```

## Sample

```
databaseName: database_discovery_db

dataSources:
 ds_0:
 url: jdbc:mysql://127.0.0.1:33306/primary_demo_ds?serverTimezone=UTC&
useSSL=false
 username: root
 password:
 connectionTimeoutMilliseconds: 3000
 idleTimeoutMilliseconds: 60000
 maxLifetimeMilliseconds: 1800000
 maxPoolSize: 50
 minPoolSize: 1
 ds_1:
 url: jdbc:mysql://127.0.0.1:33307/primary_demo_ds?serverTimezone=UTC&
useSSL=false
 username: root
 password:
 connectionTimeoutMilliseconds: 3000
 idleTimeoutMilliseconds: 60000
 maxLifetimeMilliseconds: 1800000
 maxPoolSize: 50
 minPoolSize: 1
 ds_2:
 url: jdbc:mysql://127.0.0.1:33308/primary_demo_ds?serverTimezone=UTC&
useSSL=false
 username: root
 password:
 connectionTimeoutMilliseconds: 3000
 idleTimeoutMilliseconds: 60000
 maxLifetimeMilliseconds: 1800000
 maxPoolSize: 50
 minPoolSize: 1

rules:
```

```
- !READWRITE_SPLITTING
 dataSources:
 replica_ds:
 dynamicStrategy:
 autoAwareDataSourceName: readwrite_ds
- !DB_DISCOVERY
 dataSources:
 readwrite_ds:
 dataSourceNames:
 - ds_0
 - ds_1
 - ds_2
 discoveryHeartbeatName: mgr-heartbeat
 discoveryTypeName: mgr
 discoveryHeartbeats:
 mgr-heartbeat:
 props:
 keep-alive-cron: '0/5 * * * * ?'
 discoveryTypes:
 mgr:
 type: MySQL.MGR
 props:
 group-name: 558edd3c-02ec-11ea-9bb3-080027e39bd2
```

## Related References

- Feature Description of HA
- JAVA API: HA
- Spring Boot Starter: HA
- Spring Namespace: HA

## Encryption

### Background

The YAML configuration approach to data encryption is highly readable, with the YAML format enabling a quick understanding of dependencies between encryption rules. Based on the YAML configuration, ShardingSphere automatically completes the creation of ShardingSphereDataSource objects, reducing unnecessary coding efforts for users.

## Parameters

```

rules:
- !ENCRYPT
 tables:
 <table-name> (+): # Encrypt table name
 columns:
 <column-name> (+): # Encrypt logic column name
 cipherColumn: # Cipher column name
 assistedQueryColumn (?): # Assisted query column name
 plainColumn (?): # Plain column name
 encryptorName: # Encrypt algorithm name
 queryWithCipherColumn(?): # The current table whether query with cipher
 column for data encrypt.

 # Encrypt algorithm configuration
 encryptors:
 <encrypt-algorithm-name> (+): # Encrypt algorithm name
 type: # Encrypt algorithm type
 props: # Encrypt algorithm properties
 # ...

 queryWithCipherColumn: # Whether query with cipher column for data encrypt. User
 you can use plaintext to query if have

```

Please refer to [Built-in Encrypt Algorithm List](#) for more details about type of algorithm.

## Procedure

1. Configure data encryption rules in the YAML file, including data sources, encryption rules, global attributes, and other configuration items.
2. Using the `createDataSource` of calling the `YamlShardingSphereDataSourceFactory` object to create `ShardingSphereDataSource` based on the configuration information in the YAML file.

## Sample

The data encryption YAML configurations are as follows:

```

dataSources:
 unique_ds:
 dataSourceClassName: com.zaxxer.hikari.HikariDataSource
 driverClassName: com.mysql.jdbc.Driver
 jdbcUrl: jdbc:mysql://localhost:3306/demo_ds?serverTimezone=UTC&useSSL=false&
 useUnicode=true&characterEncoding=UTF-8
 username: root
 password:

```

```
rules:
- !ENCRYPT
 tables:
 t_user:
 columns:
 username:
 plainColumn: username_plain
 cipherColumn: username
 encryptorName: name-encryptor
 pwd:
 cipherColumn: pwd
 assistedQueryColumn: assisted_query_pwd
 encryptorName: pwd_encryptor
 encryptors:
 name-encryptor:
 type: AES
 props:
 aes-key-value: 123456abc
 pwd_encryptor:
 type: assistedTest
```

Read the YAML configuration to create a data source according to the `createDataSource` method of `YamlShardingSphereDataSourceFactory`.

```
YamlShardingSphereDataSourceFactory.createDataSource(getFile());
```

## Related References

- [Core Feature: Data Encryption](#)
- [Developer Guide: Data Encryption](#)

## Shadow DB

### Background

Please refer to the following configuration in order to use the ShardingSphere shadow DB feature in ShardingSphere-Proxy.

### Parameters

#### Configuration entry

```
rules:
- !SHADOW
```

#### Configurable attributes

Name	Description	Default
dataSources	shadow DB logical data source mapping the configuration list	none
tables	shadow table configuration list	none
defaultShadowAlgorithmName	name of default shadow algorithm	none, option
shadowAlgorithms	shadow algorithm configuration list	none

#### Shadow data source configuration

Name	Description	Default
dataSourceName	shadow DB logical data source name	无
sourceDataSourceName	production data source name	无
shadowDataSourceName	shadow data source name	无

#### Shadow table configuration

Name	Description	Default
dataSourceNames	shadow table associates shadow DB logical data source name list	无
shadowAlgorithmNames	shadow table associates shadow algorithm name list	无

## Shadow algorithm configuration

Name	Description	Default
type	shadow algorithm type	none
props	shadow algorithm configuration	none

Please refer to [Built-in shadow algorithm list](#) for more details.

## Procedure

1. Create production and shadow data sources.
2. Configure shadow rules.
  - Configure the shadow data source.
  - Configure the shadow table.
  - Configure the shadow algorithm.

## Sample

```

rules:
- !SHADOW
dataSources:
 shadowDataSource:
 sourceDataSourceName: # production data source name
 shadowDataSourceName: # shadow data source name
tables:
 <table-name>:
 dataSourceNames: # shadow table associates shadow data source name list
 - <shadow-data-source>
 shadowAlgorithmNames: # shadow table associates shadow algorithm name list
 - <shadow-algorithm-name>
defaultShadowAlgorithmName: # default shadow algorithm name (option)
shadowAlgorithms:
 <shadow-algorithm-name> (+): # shadow algorithm name
 type: # shadow algorithm type
 props: # shadow algorithm attribute configuration

```

## Related References

- Core Features of Shadow DB
- JAVA API: Shadow DB Configuration
- Spring Boot Starter: Shadow DB Configuration
- Spring Namespace: Shadow DB Configuration

## SQL-parser

### Configuration Item Explanation

```
rules:
- !SQL_PARSER
 sqlCommentParseEnabled: # Whether to parse SQL comments
 sqlStatementCache: # SQL statement local cache
 initialCapacity: # Initial capacity of local cache
 maximumSize: # Maximum capacity of local cache
 parseTreeCache: # Parse tree local cache
 initialCapacity: # Initial capacity of local cache
 maximumSize: # Maximum capacity of local cache
```

## SQL Translator

### Configuration Item Explanation

```
rules:
- !SQL_TRANSLATOR
 type: # SQL translator type
 useOriginalSQLWhenTranslatingFailed: # Whether use original SQL when translating failed
```

## Mixed Rules

The overlay between rule items in a mixed configuration is associated by the data source name and the table name.

If the previous rule is aggregation-oriented, the next rule needs to use the aggregated logical data source name configured by the previous rule when configuring the data source. Similarly, if the previous rule is table aggregation-oriented, the next rule needs to use the aggregated logical table name configured by the previous rule when configuring the table.

## Configuration Item Explanation

```

dataSources: # Configure the real data source name.
 write_ds:
 # ...Omit specific configuration.
 read_ds_0:
 # ...Omit specific configuration.
 read_ds_1:
 # ...Omit specific configuration.

rules:
 - !SHARDING # Configure data sharding rules.
 tables:
 t_user:
 actualDataNodes: ds.t_user_${0..1} # Data source name 'ds' uses the logical
 data source name of the readwrite-splitting configuration.
 tableStrategy:
 standard:
 shardingColumn: user_id
 shardingAlgorithmName: t_user_inline
 shardingAlgorithms:
 t_user_inline:
 type: INLINE
 props:
 algorithm-expression: t_user_${user_id % 2}

 - !ENCRYPT # Configure data encryption rules.
 tables:
 t_user: # Table `t_user` is the name of the logical table that uses the data
 sharding configuration.
 columns:
 pwd:
 plainColumn: plain_pwd
 cipherColumn: cipher_pwd
 encryptorName: encryptor_aes
 encryptors:
 encryptor_aes:
 type: aes
 props:
 aes-key-value: 123456abc

 - !READWRITE_SPLITTING # Configure readwrite-splitting rules.
 dataSources:
 ds: # The logical data source name 'ds' for readwrite-splitting is used in
 data sharding.
 type: Static
 props:
 write-data-source-name: write_ds # Use the real data source name 'write_
 ds'.

```

```

 read-data-source-names: read_ds_0, read_ds_1 # Use the real data source
name 'read_ds_0', 'read_ds_1'.
 loadBalancerName: roundRobin
 loadBalancers:
 roundRobin:
 type: ROUND_ROBIN

props:
 sql-show: true

```

### 7.1.3 JDBC Driver

#### Background

ShardingSphere-JDBC provides a JDBC Driver, which can be used only through configuration changes without rewriting the code.

#### Parameters

##### Driver Class Name

org.apache.shardingsphere.driver.ShardingSphereDriver

##### URL Configuration

- Use `jdbc:shardingsphere:` as prefix
- Configuration file: `xxx.yaml`, keep consist format with [YAML Configuration](#)
- Configuration file loading rule:
  - No prefix means that the configuration file is loaded from the absolute path
  - `classpath:` prefix indicates that the configuration file is loaded from the classpath

#### Procedure

##### 1. Import Maven Dependency

```

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

```

##### 2. Use drive

- Use native drivers:

```
Class.forName("org.apache.shardingsphere.driver.ShardingSphereDriver");
String jdbcUrl = "jdbc:shardingsphere:classpath:config.yaml";

String sql = "SELECT i.* FROM t_order o JOIN t_order_item i ON o.order_id=i.order_id WHERE o.user_id=? AND o.order_id=?";
try {
 Connection conn = DriverManager.getConnection(jdbcUrl);
 PreparedStatement ps = conn.prepareStatement(sql)) {
 ps.setInt(1, 10);
 ps.setInt(2, 1000);
 try (ResultSet rs = preparedStatement.executeQuery()) {
 while(rs.next()) {
 // ...
 }
 }
}
```

- Use database connection pool:

```
String driverClassName = "org.apache.shardingsphere.driver.ShardingSphereDriver";
String jdbcUrl = "jdbc:shardingsphere:classpath:config.yaml";

// Take HikariCP as an example
HikariDataSource dataSource = new HikariDataSource();
dataSource.setDriverClassName(driverClassName);
dataSource.setJdbcUrl(jdbcUrl);

String sql = "SELECT i.* FROM t_order o JOIN t_order_item i ON o.order_id=i.order_id WHERE o.user_id=? AND o.order_id=?";
try {
 Connection conn = dataSource.getConnection();
 PreparedStatement ps = conn.prepareStatement(sql)) {
 ps.setInt(1, 10);
 ps.setInt(2, 1000);
 try (ResultSet rs = preparedStatement.executeQuery()) {
 while(rs.next()) {
 // ...
 }
 }
}
```

## Sample

Load JDBC URL of config.yaml profile in classpath:

```
jdbc:shardingsphere:classpath:config.yaml
```

Load JDBC URL of config.yaml profile in absolute path

```
jdbc:shardingsphere:/path/to/config.yaml
```

## 7.1.4 Spring Boot Starter

### Overview

ShardingSphere-JDBC provides official Spring Boot Starter to make convenient for developers to integrate ShardingSphere-JDBC and Spring Boot.

### Usage

#### Import Maven Dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-boot-starter</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>
```

#### Configure Spring Boot Properties

ShardingSphere-JDBC spring boot properties consists of database name, mode configuration, data source map, rule configurations and properties.

```
JDBC logic database name. Through this parameter to connect ShardingSphere-JDBC
and ShardingSphere-Proxy.
spring.shardingsphere.database.name= # logic database name, default value: logic_db
spring.shardingsphere.mode.xxx= # mode configuration
spring.shardingsphere.dataSource.xxx= # data source map
spring.shardingsphere.rules.xxx= # rule configurations
spring.shardingsphere.props= # properties
```

Please refer to [Mode Configuration](#) for more mode details.

Please refer to [Data Source Configuration](#) for more data source details.

Please refer to [Rules Configuration](#) for more rule details.

## Use Data Source

Developer can inject to use native JDBC or ORM frameworks such as JPA, Hibernate or MyBatis through the DataSource.

Take native JDBC usage as an example:

```
@Resource
private DataSource dataSource;
```

## Mode Configuration

### Background

The default configuration uses memory mode. ## Parameters

```
mode (?): # Default value is Memory
type: # Type of mode configuration. Values could be: Memory, Standalone, Cluster
repository (?): # Persist repository configuration. Memory type does not need
persist
overwrite: # Whether overwrite persistent configuration with local configuration
```

### Memory Mode

```
mode:
 type: Memory
```

### Standalone Mode

```
mode:
 type: Standalone
 repository:
 type: # Type of persist repository
 props: # Properties of persist repository
 foo_key: foo_value
 bar_key: bar_value
 overwrite: # Whether overwrite persistent configuration with local configuration
```

## Cluster Mode (recommended)

```
mode:
 type: Cluster
 repository:
 type: # Type of persist repository
 props: # Properties of persist repository
 namespace: # Namespace of registry center
 server-lists: # Server lists of registry center
 foo_key: foo_value
 bar_key: bar_value
 overwrite: # Whether overwrite persistent configuration with local configuration
```

### Notes

1. Cluster mode deployment is recommended for production environment.
2. The ‘ZooKeeper’ registry center is recommended for cluster mode deployment. ## Sample

## Standalone Mode

```
mode:
 type: Standalone
 repository:
 type: File
 overwrite: false
```

## Cluster Mode (recommended)

```
mode:
 type: Cluster
 repository:
 type: ZooKeeper
 props:
 namespace: governance
 server-lists: localhost:2181
 retryIntervalMilliseconds: 500
 timeToLiveSeconds: 60
 overwrite: false
```

## Related References

- Installation and Usage of ZooKeeper Registry Center
- Please refer to [Builtin Persist Repository List](#) for more details about the type of repository.

## Data Source

### Background information

#### Use local datasource

The database driver showed in the example is MySQL and the connection pool is HikariCP, either of which can be replaced by other database drivers and connection pools. When using ShardingSphere JDBC, the property names of the JDBC pools depend on its own definition instead of being fixed by ShardingSphere. See relevant procedures at `org.apache.shardingsphere.infra.datasource.pool.creator.DataSourcePoolCreator`. For example, using `url` instead of `jdbc-url` for Alibaba Druid 1.2.9 is the expected behavior.

#### Use datasource JNDI

If you wish to use JNDI for database configuration, you can replace a series of datasource configurations with `spring.shardingsphere.datasource.${datasourceName}.jndiName` when you are using ShardingSphere-JDBC on application servers(e.g. Tomcat).

### Parameters Explanation

#### Using local datasource

```
spring.shardingsphere.datasource.names= # Actual datasource names. Multiple
datasources are separated with comma

<actual-data-source-name> to show actual datasource name
spring.shardingsphere.datasource.<actual-data-source-name>.type= # Full class name
of the database connection pool
spring.shardingsphere.datasource.<actual-data-source-name>.driver-class-name= #
Database-driven class name, based on the database connection pool's own
configuration
spring.shardingsphere.datasource.<actual-data-source-name>.jdbc-url= # Database URL
connection, in line with the connection pool's own configuration
spring.shardingsphere.datasource.<actual-data-source-name>.username= # database
user names, in line with the connection pool's own configuration
spring.shardingsphere.datasource.<actual-data-source-name>.password= # database
password , in line with the connection pool's own configuration
spring.shardingsphere.datasource.<actual-data-source-name>.<xxx>= # ... Other
properties of the database connection pool
```

## Using JNDI datasource

```
spring.shardingsphere.datasource.names= # Authentic datasource names. Multiple
datasources are separated with comma
<actual-data-source-name> to show actual datasource name
spring.shardingsphere.datasource.<actual-data-source-name>.jndi-name= # datasource
JNDI
```

## Configuration Examples

### Using local datasource

```
configure actual datasource
spring.shardingsphere.datasource.names=ds1,ds2

configure the first datasource
spring.shardingsphere.datasource.ds1.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds1.driver-class-name=com.mysql.jdbc.Driver
spring.shardingsphere.datasource.ds1.jdbc-url=jdbc:mysql://localhost:3306/ds1
spring.shardingsphere.datasource.ds1.username=root
spring.shardingsphere.datasource.ds1.password=

configure the second datasource
spring.shardingsphere.datasource.ds2.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds2.driver-class-name=com.mysql.jdbc.Driver
spring.shardingsphere.datasource.ds2.jdbc-url=jdbc:mysql://localhost:3306/ds2
spring.shardingsphere.datasource.ds2.username=root
spring.shardingsphere.datasource.ds2.password=
```

### Using JNDI datasource

```
configure actual datasource
spring.shardingsphere.datasource.names=ds1,ds2
configure the first datasource
spring.shardingsphere.datasource.ds1.jndi-name=java:comp/env/jdbc/ds1
configure the second datasource
spring.shardingsphere.datasource.ds2.jndi-name=java:comp/env/jdbc/ds2
```

## Rules

Rules are pluggable part of Apache ShardingSphere. This chapter is a Spring Boot Starter rule configuration manual for ShardingSphere-JDBC.

## Sharding

### Background

SpringBoot Starter's data sharding configuration applies to business scenarios that use SpringBoot, which can maximize SpringBoot's capabilities, such as configuration initialization and Bean management. It can complete the creation of the ShardingSphereDataSource object and reduce unnecessary coding.

### Parameters

```
spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

Standard sharding table configuration
spring.shardingsphere.rules.sharding.tables.<table-name>.actual-data-nodes= #
Describe data source names and actual tables, delimiter as point, multiple data
nodes separated with comma, support inline expression. Absent means sharding
databases only.

Databases sharding strategy, use default databases sharding strategy if absent.
sharding strategy below can choose only one.

For single sharding column scenario
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.
standard.sharding-column= # Sharding column name
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.
standard.sharding-algorithm-name= # Sharding algorithm name

For multiple sharding columns scenario
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.complex.
sharding-columns= # Sharding column names, multiple columns separated with comma
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.complex.
sharding-algorithm-name= # Sharding algorithm name

Sharding by hint
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy_hint.
sharding-algorithm-name= # Sharding algorithm name

Tables sharding strategy, same as database sharding strategy
spring.shardingsphere.rules.sharding.tables.<table-name>.table-strategy.xxxx= #
Omitted
```

```

Auto sharding table configuraiton
spring.shardingsphere.rules.sharding.auto-tables.<auto-table-name>.actual-data-
sources= # data source names

spring.shardingsphere.rules.sharding.auto-tables.<auto-table-name>.sharding-
strategy.standard.sharding-column= # Sharding column name
spring.shardingsphere.rules.sharding.auto-tables.<auto-table-name>.sharding-
strategy.standard.sharding-algorithm-name= # Auto sharding algorithm name

Key generator strategy configuration
spring.shardingsphere.rules.sharding.tables.<table-name>.key-generate-strategy.
column= # Column name of key generator
spring.shardingsphere.rules.sharding.tables.<table-name>.key-generate-strategy.key-
generator-name= # Key generator name

spring.shardingsphere.rules.sharding.binding-tables[0]= # Binding table name
spring.shardingsphere.rules.sharding.binding-tables[1]= # Binding table name
spring.shardingsphere.rules.sharding.binding-tables[x]= # Binding table name

spring.shardingsphere.rules.sharding.broadcast-tables[0]= # Broadcast tables
spring.shardingsphere.rules.sharding.broadcast-tables[1]= # Broadcast tables
spring.shardingsphere.rules.sharding.broadcast-tables[x]= # Broadcast tables

spring.shardingsphere.rules.sharding.default-database-strategy.xxx= # Default
strategy for database sharding
spring.shardingsphere.rules.sharding.default-table-strategy.xxx= # Default strategy
for table sharding
spring.shardingsphere.rules.sharding.default-key-generate-strategy.xxx= # Default
Key generator strategy
spring.shardingsphere.rules.sharding.default-sharding-column= # Default sharding
column name

Sharding algorithm configuration
spring.shardingsphere.rules.sharding.sharding-algorithms.<sharding-algorithm-name>.
type= # Sharding algorithm type
spring.shardingsphere.rules.sharding.sharding-algorithms.<sharding-algorithm-name>.
props.xxx= # Sharding algorithm properties

Key generate algorithm configuration
spring.shardingsphere.rules.sharding.key-generators.<key-generate-algorithm-name>.
type= # Key generate algorithm type
spring.shardingsphere.rules.sharding.key-generators.<key-generate-algorithm-name>.
props.xxx= # Key generate algorithm properties

```

Please refer to [Built-in Sharding Algorithm List](#) and [Built-in Key Generate Algorithm List](#) for more details about type of algorithm.

Attention: Inline expression identifier can use \${...} or \$->{...}, but \${...} is conflict

with spring placeholder of properties, so use `$->{...}` on spring environment is better.

## Procedure

1. Configure data sharding rules in the SpringBoot file, including data sources, sharding rules, and global attributes.
2. Start the SpringBoot program. The configuration is automatically loaded and the ShardingSphere-DataSource is initialized.

## Sample

```
spring.shardingsphere.mode.type=Standalone
spring.shardingsphere.mode.repository.type=File
spring.shardingsphere.mode.overwrite=true

spring.shardingsphere.datasource.names=ds-0,ds-1

spring.shardingsphere.datasource.ds-0.jdbc-url=jdbc:mysql://localhost:3306/demo_ds_0?serverTimezone=UTC&useSSL=false&useUnicode=true&characterEncoding=UTF-8
spring.shardingsphere.datasource.ds-0.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds-0.driver-class-name=com.mysql.jdbc.Driver
spring.shardingsphere.datasource.ds-0.username=root
spring.shardingsphere.datasource.ds-0.password=

spring.shardingsphere.datasource.ds-1.jdbc-url=jdbc:mysql://localhost:3306/demo_ds_1?serverTimezone=UTC&useSSL=false&useUnicode=true&characterEncoding=UTF-8
spring.shardingsphere.datasource.ds-1.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds-1.driver-class-name=com.mysql.jdbc.Driver
spring.shardingsphere.datasource.ds-1.username=root
spring.shardingsphere.datasource.ds-1.password=

spring.shardingsphere.rules.sharding.default-database-strategy.standard.sharding-column=user_id
spring.shardingsphere.rules.sharding.default-database-strategy.standard.sharding-algorithm-name=database-inline
spring.shardingsphere.rules.sharding.binding-tables[0]=t_order,t_order_item
spring.shardingsphere.rules.sharding.broadcast-tables=t_address

spring.shardingsphere.rules.sharding.tables.t_order.actual-data-nodes=ds-$->{0..1}.t_order_${0..1}
spring.shardingsphere.rules.sharding.tables.t_order.table-strategy.standard.sharding-column=order_id
spring.shardingsphere.rules.sharding.tables.t_order.table-strategy.standard.sharding-algorithm-name=t-order-inline

spring.shardingsphere.rules.sharding.tables.t_order.key-generate-strategy.column=order_id
```

```

spring.shardingsphere.rules.sharding.tables.t_order.key-generate-strategy.key-
generator-name=snowflake

spring.shardingsphere.rules.sharding.tables.t_order_item.actual-data-nodes=ds-$>
{0..1}.t_order_item_$->{0..1}
spring.shardingsphere.rules.sharding.tables.t_order_item.table-strategy.standard.
sharding-column=order_id
spring.shardingsphere.rules.sharding.tables.t_order_item.table-strategy.standard.
sharding-algorithm-name=t-order-item-inline

spring.shardingsphere.rules.sharding.tables.t_order_item.key-generate-strategy.
column=order_item_id
spring.shardingsphere.rules.sharding.tables.t_order_item.key-generate-strategy.key-
generator-name=snowflake

spring.shardingsphere.rules.sharding.sharding-algorithms.database-inline.
type=INLINE
spring.shardingsphere.rules.sharding.sharding-algorithms.database-inline.props.
algorithm-expression=ds-$->{user_id % 2}
spring.shardingsphere.rules.sharding.sharding-algorithms.t-order-inline.type=INLINE
spring.shardingsphere.rules.sharding.sharding-algorithms.t-order-inline.props.
algorithm-expression=t_order_$->{order_id % 2}
spring.shardingsphere.rules.sharding.sharding-algorithms.t-order-item-inline.
type=INLINE
spring.shardingsphere.rules.sharding.sharding-algorithms.t-order-item-inline.props.
algorithm-expression=t_order_item_$->{order_id % 2}

spring.shardingsphere.rules.sharding.key-generators.snowflake.type=SNOWFLAKE

```

## Related References

- Core Feature: Data Sharding
- Developer Guide: Data Sharding

## Readwrite splitting

### Configuration Item Explanation

#### Static Readwrite-splitting

```

spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

```

```

spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.static-strategy.write-data-source-name= # Write data source name

```

```

spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.static-strategy.read-data-source-names= # Read data source names,
multiple data source names separated with comma
spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.load-balancer-name= # Load balance algorithm name

Load balance algorithm configuration
spring.shardingsphere.rules.readwrite-splitting.load-balancers.<load-balance-
algorithm-name>.type= # Load balance algorithm type
spring.shardingsphere.rules.readwrite-splitting.load-balancers.<load-balance-
algorithm-name>.props.xxx= # Load balance algorithm properties

```

## Dynamic Readwrite-splitting

```

spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.dynamic-strategy.auto-aware-data-source-name= # Database
discovery logic data source name
spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.dynamic-strategy.write-data-source-query-enabled= # All read data
source are offline, write data source whether the data source is responsible for
read traffic
spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.load-balancer-name= # Load balance algorithm name

Load balance algorithm configuration
spring.shardingsphere.rules.readwrite-splitting.load-balancers.<load-balance-
algorithm-name>.type= # Load balance algorithm type
spring.shardingsphere.rules.readwrite-splitting.load-balancers.<load-balance-
algorithm-name>.props.xxx= # Load balance algorithm properties

```

Please refer to [Built-in Load Balance Algorithm List](#) for more details about type of algorithm. Please refer to [Use Norms](#) for more details about query consistent routing.

## HA

### Background

The Spring Boot Starter configuration method is applicable to business scenarios using Spring-Boot. It can make full use of the SpringBoot configuration initialization and bean management capabilities, to automatically complete the creation of ShardingSphereDataSource objects.

## Parameters

```

spring.shardingsphere.datasource.names= # Omit data source configuration, please
refer to the user manual

spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.dynamic-strategy.auto-aware-data-source-name= # Logical data
source name discovered by the database

spring.shardingsphere.rules.database-discovery.data-sources.<database-discovery-
data-source-name>.data-source-names= # Data source name. Multiple data sources are
separated by commas, for example: ds_0, ds_1
spring.shardingsphere.rules.database-discovery.data-sources.<database-discovery-
data-source-name>.discovery-heartbeat-name= # Detect heartbeat name
spring.shardingsphere.rules.database-discovery.data-sources.<database-discovery-
data-source-name>.discovery-type-name= # Database discovery type name
spring.shardingsphere.rules.database-discovery.discovery-heartbeats.<discovery-
heartbeat-name>.props.keep-alive-cron= # Cron expression, such as: '0/5 * * * * ?'
spring.shardingsphere.rules.database-discovery.discovery-types.<discovery-type-
name>.type= # Database discovery type, such as: MySQL.MGR
spring.shardingsphere.rules.database-discovery.discovery-types.<discovery-type-
name>.props.group-name= # Necessary parameters of database discovery type, such as
group-name of MGR

```

## Procedure

1. Import MAVEN dependency.

```

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-boot-starter</artifactId>
 <version>${latest.release.version}</version>
</dependency>

```

Note: please change `\${latest.release.version}` to the actual version number.

## Sample

```

spring.shardingsphere.datasource.names=ds-0,ds-1,ds-2
spring.shardingsphere.datasource.ds-0.jdbc-url = jdbc:mysql://127.0.0.1:13306/
primary_demo_ds?serverTimezone=UTC&useSSL=false
spring.shardingsphere.datasource.ds-0.username=root
spring.shardingsphere.datasource.ds-0.password=
spring.shardingsphere.datasource.ds-0.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds-0.driver-class-name=com.mysql.cj.jdbc.Driver

```

```

spring.shardingsphere.datasource.ds-1.jdbc-url = jdbc:mysql://127.0.0.1:13307/
primary_demo_ds?serverTimezone=UTC&useSSL=false
spring.shardingsphere.datasource.ds-1.username=root
spring.shardingsphere.datasource.ds-1.password=
spring.shardingsphere.datasource.ds-1.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds-1.driver-class-name=com.mysql.cj.jdbc.Driver

spring.shardingsphere.datasource.ds-2.jdbc-url = jdbc:mysql://127.0.0.1:13308/
primary_demo_ds?serverTimezone=UTC&useSSL=false
spring.shardingsphere.datasource.ds-2.username=root
spring.shardingsphere.datasource.ds-2.password=
spring.shardingsphere.datasource.ds-2.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds-2.driver-class-name=com.mysql.cj.jdbc.Driver

spring.shardingsphere.rules.readwrite-splitting.data-sources.replica_ds.dynamic-
strategy.auto-aware-data-source-name=readwrite_ds

spring.shardingsphere.rules.database-discovery.data-sources.readwrite_ds.data-
source-names=ds-0, ds-1, ds-2
spring.shardingsphere.rules.database-discovery.data-sources.readwrite_ds.discovery-
heartbeat-name=mgr-heartbeat
spring.shardingsphere.rules.database-discovery.data-sources.readwrite_ds.discovery-
type-name=mgr
spring.shardingsphere.rules.database-discovery.discovery-heartbeats.mgr-heartbeat.
props.keep-alive-cron=0/5 * * * * ?
spring.shardingsphere.rules.database-discovery.discovery-types.mgr.type=MGR
spring.shardingsphere.rules.database-discovery.discovery-types.mgr.props.
groupName=b13df29e-90b6-11e8-8d1b-525400fc3996

```

## Related References

- Feature Description of HA
- JAVA API: HA
- YAML Configuration: HA
- Spring Namespace: HA

## Encryption

### Background

The configuration method for Spring Boot Starter Data Encryption is suitable for business scenarios using SpringBoot and can make the most of SpringBoot's configuration initialization and Bean management capabilities to complete the creation of ShardingSphereDataSource objects, reducing unnecessary coding work.

## Parameters

```

spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

spring.shardingsphere.rules.encrypt.tables.<table-name>.query-with-cipher-column= #
Whether the table uses cipher columns for query
spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
cipher-column= # Cipher column name
spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
assisted-query-column= # Assisted query column name
spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
plain-column= # Plain column name
spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
encryptor-name= # Encrypt algorithm name

Encrypt algorithm configuration
spring.shardingsphere.rules.encryptors.<encrypt-algorithm-name>.type= #
Encrypt algorithm type
spring.shardingsphere.rules.encryptors.<encrypt-algorithm-name>.props.xxx= #
Encrypt algorithm properties

spring.shardingsphere.rules.encrypt.queryWithCipherColumn= # Whether query with
cipher column for data encrypt. User you can use plaintext to query if have

```

Please refer to [Built-in Encrypt Algorithm List](#) for more details about type of algorithm.

## Procedure

1. Configure the data encryption rules in the SpringBoot file, including the data source, encryption rules, global properties and other items.
2. Start the SpringBoot program, which will automatically load the configuration and initialize the ShardingSphereDataSource.

## Sample

```

spring.shardingsphere.datasource.names=ds

spring.shardingsphere.datasource.ds.type=com.zaxxer.hikari.HikariDataSource
spring.shardingsphere.datasource.ds.driver-class-name=com.mysql.jdbc.Driver
spring.shardingsphere.datasource.ds.jdbc-url=jdbc:mysql://localhost:3306/demo_ds?
serverTimezone=UTC&useSSL=false&useUnicode=true&characterEncoding=UTF-8
spring.shardingsphere.datasource.ds.username=root
spring.shardingsphere.datasource.ds.password=

spring.shardingsphere.rules.encrypt.encryptors.name-encryptor.type=AES

```

```
spring.shardingsphere.rules.encrypt.encryptors.name-encryptor.props.aes-key-
value=123456abc
spring.shardingsphere.rules.encrypt.encryptors.pwd-encryptor.type=AES
spring.shardingsphere.rules.encrypt.encryptors.pwd-encryptor.props.aes-key-
value=123456abc

spring.shardingsphere.rules.encrypt.tables.t_user.columns.username.cipher-
column=username
spring.shardingsphere.rules.encrypt.tables.t_user.columns.username.encryptor-
name=name-encryptor
spring.shardingsphere.rules.encrypt.tables.t_user.columns.pwd.cipher-column=pwd
spring.shardingsphere.rules.encrypt.tables.t_user.columns.pwd.encryptor-name=pwd-
encryptor

spring.shardingsphere.props.query-with-cipher-column=true
spring.shardingsphere.props.sql-show=true
```

## Related References

- Core Feature: Data Encryption
- Developer Guide: Data Encryption

## Shadow DB

### Background

If you want to use the ShardingSphere Shadow DB feature in the Spring Boot environment, please refer to the following configuration.

## Parameters

### Root Configuration

```
spring.shardingsphere.rules.shadow
```

### Configurable attributes

Name	Description	Default Value
data-sources	Shadow DB logical data source mapping configuration list	none
tables	Shadow table configuration list	none
shadowAlgorithms	Shadow algorithm configuration list	none
default -shadow-algorithm-name	Default shadow algorithm name	none, options

### Shadow Data Source Configuration

Name	Description	Default Value
source-data-source-name	Production data source name	none
shadow-data-source-name	Shadow data source name	none

### Shadow Table Configuration

Name	Description	Default Value
data-source-names	影子表关联影子库逻辑数据源名称列表	无
shadow-algorithm-names	影子表关联影子算法名称列表	无

### Shadow Algorithm Configuration

Name	Description	Default Value
type	Shadow algorithm type	none
props	Shadow algorithm configuration	none

For details, see [list of built-in shadow algorithms](#)

## Procedure

1. Create production and shadow data sources.
2. Configure shadow rules:
  - Configure shadow data sources
  - Configure shadow tables
  - Configure shadow algorithm

## Sample

```
spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

spring.shardingsphere.rules.shadow.data-sources.shadow-data-source.source-data-
source-name= # Production data source name
spring.shardingsphere.rules.shadow.data-sources.shadow-data-source.shadow-data-
source-name= # Shadow data source name

spring.shardingsphere.rules.shadow.tables.<table-name>.data-source-names= # Shadow
table location shadow data source names (multiple values are separated by ",")
spring.shardingsphere.rules.shadow.tables.<table-name>.shadow-algorithm-names= #
Shadow table location shadow algorithm names (multiple values are separated by ",")

spring.shardingsphere.rules.shadow.defaultShadowAlgorithmName= # Default shadow
algorithm name, optional item.

spring.shardingsphere.rules.shadow.shadow-algorithms.<shadow-algorithm-name>.type= #
Shadow algorithm type
spring.shardingsphere.rules.shadow.shadow-algorithms.<shadow-algorithm-name>.props.
xxx= # Shadow algorithm property configuration
```

## Related References

- Feature Description of Shadow DB
- JAVA API: Shadow DB
- YAML Configuration: Shadow DB
- Spring Namespace: Shadow DB
- Dev Guide: Shadow DB

## SQL Parser

### Configuration Item Explanation

```
spring.shardingsphere.rules.sql-parser.sql-comment-parse-enabled= # Whether to
parse SQL comments

spring.shardingsphere.rules.sql-parser.sql-statement-cache.initial-capacity= #
Initial capacity of SQL statement local cache
spring.shardingsphere.rules.sql-parser.sql-statement-cache.maximum-size= # Maximum
capacity of SQL statement local cache

spring.shardingsphere.rules.sql-parser.parse-tree-cache.initial-capacity= # Initial
capacity of parse tree local cache
spring.shardingsphere.rules.sql-parser.parse-tree-cache.maximum-size= # Maximum
local cache capacity of parse tree
```

## Mixed Rules

### Configuration Item Explanation

```
data source configuration
spring.shardingsphere.datasource.names= write-ds0,write-ds1,write-ds0-read0,write-
ds1-read0

spring.shardingsphere.datasource.write-ds0.jdbc-url= # Database URL connection
spring.shardingsphere.datasource.write-ds0.type= # Database connection pool type
name
spring.shardingsphere.datasource.write-ds0.driver-class-name= # Database driver
class name
spring.shardingsphere.datasource.write-ds0.username= # Database username
spring.shardingsphere.datasource.write-ds0.password= # Database password
spring.shardingsphere.datasource.write-ds0.xxx= # Other properties of database
connection pool

spring.shardingsphere.datasource.write-ds1.url= # Database URL connection
...Omit specific configuration.

spring.shardingsphere.datasource.write-ds0-read0.url= # Database URL connection
...Omit specific configuration.

spring.shardingsphere.datasource.write-ds1-read0.url= # Database URL connection
...Omit specific configuration.

Sharding rules configuration
Databases sharding strategy
```

```
spring.shardingsphere.rules.sharding.default-database-strategy.standard.sharding-
column=user_id
spring.shardingsphere.rules.sharding.default-database-strategy.standard.sharding-
algorithm-name=default-database-strategy-inline
Binding table rules configuration ,and multiple groups of binding-tables
configured with arrays
spring.shardingsphere.rules.sharding.binding-tables[0]=t_user,t_user_detail
spring.shardingsphere.rules.sharding.binding-tables[1]= # Binding table names,
multiple table name are separated by commas
spring.shardingsphere.rules.sharding.binding-tables[x]= # Binding table names,
multiple table name are separated by commas
Broadcast table rules configuration
spring.shardingsphere.rules.sharding.broadcast-tables= # Broadcast table names,
multiple table name are separated by commas

Table sharding strategy
The enumeration value of `ds_{$->{0..1}}` is the name of the logical data source
configured with readwrite-splitting
spring.shardingsphere.rules.sharding.tables.t_user.actual-data-nodes=ds_{$->{0..1}}.
t_user_{$->{0..1}}
spring.shardingsphere.rules.sharding.tables.t_user.table-strategy.standard.
sharding-column=user_id
spring.shardingsphere.rules.sharding.tables.t_user.table-strategy.standard.
sharding-algorithm-name=user-table-strategy-inline

Data encrypt configuration
Table `t_user` is the name of the logical table that uses for data sharding
configuration.
spring.shardingsphere.rules.encrypt.tables.t_user.columns.username.cipher-
column=username
spring.shardingsphere.rules.encrypt.tables.t_user.columns.username.encryptor-
name=name-encryptor
spring.shardingsphere.rules.encrypt.tables.t_user.columns.pwd.cipher-column=pwd
spring.shardingsphere.rules.encrypt.tables.t_user.columns.pwd.encryptor-name=pwd-
encryptor

Data encrypt algorithm configuration
spring.shardingsphere.rules.encrypt.encryptors.name-encryptor.type=AES
spring.shardingsphere.rules.encrypt.encryptors.name-encryptor.props.aes-key-
value=123456abc
spring.shardingsphere.rules.encrypt.encryptors.pwd-encryptor.type=AES
spring.shardingsphere.rules.encrypt.encryptors.pwd-encryptor.props.aes-key-
value=123456abc

Key generate strategy configuration
spring.shardingsphere.rules.sharding.tables.t_user.key-generate-strategy.
column=user_id
spring.shardingsphere.rules.sharding.tables.t_user.key-generate-strategy.key-
generator-name=snowflake
```

```
Sharding algorithm configuration
spring.shardingsphere.rules.sharding.sharding-algorithms.default-database-strategy-
inline.type=INLINE
The enumeration value of `ds_$->{user_id % 2}` is the name of the logical data
source configured with readwrite-splitting
spring.shardingsphere.rules.sharding.sharding-algorithms.default-database-strategy-
inline.algorithm-expression=ds$->{user_id % 2}
spring.shardingsphere.rules.sharding.sharding-algorithms.user-table-strategy-
inline.type=INLINE
spring.shardingsphere.rules.sharding.sharding-algorithms.user-table-strategy-
inline.algorithm-expression=t_user_$->{user_id % 2}

Key generate algorithm configuration
spring.shardingsphere.rules.sharding.key-generators.snowflake.type=SNOWFLAKE

read query configuration
ds_0,ds_1 is the logical data source name of the readwrite-splitting
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_0.type=Static
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_0.props.write-data-
source-name=write-ds0
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_0.props.read-data-
source-names=write-ds0-read0
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_0.load-balancer-
name=read-random
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_1.type=Static
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_1.props.write-data-
source-name=write-ds1
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_1.props.read-data-
source-names=write-ds1-read0
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_1.load-balancer-
name=read-random

Load balance algorithm configuration
spring.shardingsphere.rules.readwrite-splitting.load-balancers.read-random.
type=RANDOM
```

## 7.1.5 Spring Namespace

### Overview

ShardingSphere-JDBC provides official Spring Namespace to make convenient for developers to integrate ShardingSphere-JDBC and Spring.

### Usage

#### Import Maven Dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-namespace</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>
```

#### Configure Spring Bean

#### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/datasource/datasource-5.1.2.xsd>

<shardingsphere:data-source />

Name	Type*	Description
id	Attribute	Spring Bean Id
data-base-name (?)	Attribute	JDBC data source alias
data-sources-names	Attribute	Data source name, multiple data source names are separated by commas
rule-refs	Attribute	Rule name, multiple rule names are separated by commas
mode (?)	Tag	Mode configuration
props (?)	Tag	Properties configuration, Please refer to <a href="#">Properties Configuration</a> for more details

## Example

```

<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/
shardingsphere/datasource"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
http://www.springframework.org/schema/beans/spring-
beans.xsd
http://shardingsphere.apache.org/schema/shardingsphere/
datasource
http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd
">
 <shardingsphere:data-source id="ds" database-name="foo_schema" data-source-
names="..." rule-refs="...">
 <shardingsphere:mode type="..." />
 <props>
 <prop key="xxx.xxx">${xxx.xxx}</prop>
 </props>
 </shardingsphere:data-source>
</beans>

```

## Use Data Source

Same with Spring Boot Starter.

## Mode Configuration

### Background

The default configuration uses memory mode

### Parameters Explained

#### Standalone Mode

Namespace:<http://shardingsphere.apache.org/schema/shardingsphere/mode-repository/standalone/repository-5.1.1.xsd>

Name	Type	Description
id	Property	Persistent repository Bean name
type	Property	Persistent repository Type
props (?)	Tag	Properties required for persistent repository

### Cluster Mode(Recommended)

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/mode-repository/cluster/repository-5.1.1.xsd>

Name	Type	Description
id	Property	Persistent repository Bean name
type	Property	Persistent repository Type
namespace	Property	Registry Center namespace
server-lists	Property	Registry Center Link
props (?)	Tag	Properties required for persistent repository

#### Tips:

1. For production environments, it is recommended to use cluster mode deployment.
2. For cluster mode deployment, it is recommended to use ZooKeeper registry.

### Operating Procedures

1. Introduce MAVEN dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-namespace</artifactId>
 <version>${latest.release.version}</version>
</dependency>
```

Note: Please change \${latest.release.version} to the actual version number.

### Configuration Example

#### Standalone Mode

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/
shardingsphere/datasource"
 xmlns:standalone="http://shardingsphere.apache.org/schema/shardingsphere/
mode-repository/standalone"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-
beans.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource"
```

```
http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd
http://shardingsphere.apache.org/schema/shardingsphere/
mode-repository/standalone
http://shardingsphere.apache.org/schema/shardingsphere/
mode-repository/standalone/repository.xsd">
<standalone:repository id="standaloneRepository" type="File">
 <props>
 <prop key="path">.shardingsphere</prop>
 </props>
</standalone:repository>
<shardingsphere:data-source id="ds" database-name="foo_db" data-source-names=". .
." rule-refs="..." >
 <shardingsphere:mode type="Standalone" repository-ref="standaloneRepository
" overwrite="false" />
</shardingsphere:data-source>
</beans>
```

## Cluster Mode

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/
shardingsphere/datasource"
 xmlns:cluster="http://shardingsphere.apache.org/schema/shardingsphere/mode-
repository/cluster"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-
beans.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
mode-repository/cluster
 http://shardingsphere.apache.org/schema/shardingsphere/
mode-repository/cluster/repository.xsd">
 <cluster:repository id="clusterRepository" type="Zookeeper" namespace=
"regCenter" server-lists="localhost:3182">
 <props>
 <prop key="max-retries">3</prop>
 <prop key="operation-timeout-milliseconds">1000</prop>
 </props>
 </cluster:repository>
```

```

<shardingsphere:data-source id="ds" database-name="foo_db" data-source-names=". .
. . . rule-refs="...>
 <shardingsphere:mode type="Cluster" repository-ref="clusterRepository"
overwrite="false" />
</shardingsphere:data-source>
</beans>

```

## Relevant References

- Installation and use of ZooKeeper Registry Center
- For details about persistent repository, please refer toList of Built-in repository types

## Data Source

### Background

Any data source object configured as Spring bean can be used with the Spring namespace of ShardingSphere-JDBC Data Planning.

The database driver in the example is MySQL and the connection pool is HikariCP, both of which can be replaced by other database drivers and connection pools. When using ShardingSphere JDBC, the property names of the JDBC pools depend on the definition of JDBC pools themselves respectively, rather than being rigidly defined by ShardingSphere. For relevant processing, you can see reference class `org.apache.shardingsphere.infra.datasource.pool.creator.DataSourcePoolCreator`. As for Alibaba Druid 1.2.9, using `url` instead of `jdbcUrl` as in the following example is the expected behavior.

### Configuration Examples

```

<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/
shardingsphere/datasource"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-
beans.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd
 ">
 <bean id="ds1" class="com.zaxxer.hikari.HikariDataSource" destroy-method="close
">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />

```

```
<property name="jdbcUrl" value="jdbc:mysql://localhost:3306/ds1" />
<property name="username" value="root" />
<property name="password" value="" />
</bean>

<bean id="ds2" class="com.zaxxer.hikari.HikariDataSource" destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="jdbcUrl" value="jdbc:mysql://localhost:3306/ds2" />
 <property name="username" value="root" />
 <property name="password" value="" />
</bean>

<shardingsphere:data-source id="ds" database-name="foo_schema" data-source-names="ds1,ds2" rule-refs="..." />
</beans>
```

## Rules

Rules are pluggable part of Apache ShardingSphere. This chapter is a Spring namespace rule configuration manual for ShardingSphere-JDBC.

## Sharding

### Background

The configuration method of data sharding Spring Namespace is applicable to traditional Spring projects. The sharding rules and attributes are configured through the namespace xml configuration file. Spring completes the creation and management of ShardingSphereDataSource objects to avoid additional coding work.

## Parameters

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/sharding/sharding-5.1.2.xsd>  
<sharding:rule />

Name	Type	Description
id	Attribute	Spring Bean Id
table-rules (?)	Tag	Sharding table rule configuration
auto-table-rules (?)	Tag	Automatic sharding table rule configuration
binding-table-rules (?)	Tag	Binding table rule configuration
broadcast-table-rules (?)	Tag	Broadcast table rule configuration
default-database-strategy-ref (?)	Attribute	Default database strategy name
default-table-strategy-ref (?)	Attribute	Default table strategy name
default-key-generate-strategy-ref (?)	Attribute	Default key generate strategy name
default-sharding-column (?)	Attribute	Default sharding column name

<sharding:table-rule />

Name	Type	Description
logic-table	Attribute	Logic table name
actual-data-nodes	Attribute	Describe data source names and actual tables, delimiter as point, multiple data nodes separated with comma, support inline expression. Absent means sharding databases only.
actual-data-sources	Attribute	Data source names for auto sharding table
database-strategy-ref	Attribute	Database strategy name for standard sharding table
table-strategy-ref	Attribute	Table strategy name for standard sharding table
sharding-strategy-ref	Attribute	sharding strategy name for auto sharding table
key-generate-strategy-ref	Attribute	Key generate strategy name

<sharding:binding-table-rules />

Name	Type	Description
binding-table-rule (+)	Tag	Binding table rule configuration

<sharding:binding-table-rule />

Name	Type	Description
logictables	Attribute	Binding table name, multiple tables separated with comma

<sharding:broadcast-table-rules />

Name	Type	Description
broadcast-table-rule (+)	Tag	Broadcast table rule configuration

<sharding:broadcast-table-rule />

Name	Type	Description
table	Attribute	Broadcast table name

<sharding:standard-strategy />

Name	Type	Description
id	Attribute	Standard sharding strategy name
sharding-column	Attribute	Sharding column name
algorithm-ref	Attribute	Sharding algorithm name

<sharding:complex-strategy />

Name	Type	Description
id	Attribute	Complex sharding strategy name
sharding-columns	Attribute	Sharding column names, multiple columns separated with comma
algorithm-ref	Attribute	Sharding algorithm name

<sharding:hint-strategy />

Name	Type	Description
id	Attribute	Hint sharding strategy name
algorithm-ref	Attribute	Sharding algorithm name

<sharding:none-strategy />

Name	Type	Description
id	Attribute	Sharding strategy name

<sharding:key-generate-strategy />

Name	Type	Description
id	Attribute	Key generate strategy name
column	Attribute	Key generate column name
algorithm-ref	Attribute	Key generate algorithm name

<sharding:sharding-algorithm />

Name	Type	Description
id	Attribute	Sharding algorithm name
type	Attribute	Sharding algorithm type
props (?)	Tag	Sharding algorithm properties

<sharding:key-generate-algorithm />

Name	Type	Description
id	Attribute	Key generate algorithm name
type	Attribute	Key generate algorithm type
props (?)	Tag	Key generate algorithm properties

Please refer to [Built-in Sharding Algorithm List](#) and [Built-in Key Generate Algorithm List](#) for more details about type of algorithm.

Attention: Inline expression identifier can use \${...} or \${->...}, but \${...} is conflict with spring placeholder of properties, so use \${->...} on spring environment is better.

## Procedure

1. Configure data sharding rules in the Spring Namespace configuration file, including data source, sharding rules, global attributes and other configuration items.
2. Start the Spring program, the configuration will be loaded automatically, and the ShardingSphere-DataSource will be initialized.

## Sample

```

<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/
shardingsphere/datasource"
 xmlns:context="http://www.springframework.org/schema/context"
 xmlns:tx="http://www.springframework.org/schema/tx"
 xmlns:encrypt="http://shardingsphere.apache.org/schema/shardingsphere/
encrypt"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-
beans.xsd
 http://www.springframework.org/schema/tx
 http://www.springframework.org/schema/tx/spring-tx.xsd
 http://www.springframework.org/schema/context
 http://www.springframework.org/schema/context/spring-
context.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
encrypt
 http://shardingsphere.apache.org/schema/shardingsphere/
encrypt/encrypt.xsd
 ">
<context:component-scan base-package="org.apache.shardingsphere.example.core.
mybatis" />

<bean id="ds" class="com.zaxxer.hikari.HikariDataSource" destroy-method="close
">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="jdbcUrl" value="jdbc:mysql://localhost:3306/demo_ds?
serverTimezone=UTC&useSSL=false&useUnicode=true&characterEncoding=UTF-8
"/>
 <property name="username" value="root"/>
 <property name="password" value=""/>
</bean>

<encrypt:encrypt-algorithm id="name_encryptor" type="AES">
 <props>
 <prop key="aes-key-value">123456</prop>
 </props>
</encrypt:encrypt-algorithm>
<encrypt:encrypt-algorithm id="pwd_encryptor" type="assistedTest" />

<encrypt:rule id="encryptRule">

```

```

<encrypt:table name="t_user">
 <encrypt:column logic-column="username" cipher-column="username" plain-
 column="username_plain" encrypt-algorithm-ref="name_encryptor" />
 <encrypt:column logic-column="pwd" cipher-column="pwd" assisted-query-
 column="assisted_query_pwd" encrypt-algorithm-ref="pwd_encryptor" />
</encrypt:table>
</encrypt:rule>

<shardingsphere:data-source id="encryptDataSource" data-source-names="ds" rule-
refs="encryptRule" />

<bean id="transactionManager" class="org.springframework.jdbc.datasource.
DataSourceTransactionManager">
 <property name="dataSource" ref="encryptDataSource" />
</bean>
<tx:annotation-driven />

<bean id="sqlSessionFactory" class="org.mybatis.spring.SqlSessionFactoryBean">
 <property name="dataSource" ref="encryptDataSource"/>
 <property name="mapperLocations" value="classpath*:META-INF/mappers/*.xml"/
>
</bean>

<bean class="org.mybatis.spring.mapper.MapperScannerConfigurer">
 <property name="basePackage" value="org.apache.shardingsphere.example.core.
mybatis.repository"/>
 <property name="sqlSessionFactoryBeanName" value="sqlSessionFactory"/>
</bean>
</beans>

```

## Related References

- Core Feature: Data Sharding
- Developer Guide: Data Sharding

## Readwrite-splitting

### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/readwrite-splitting/readwrite-splitting-5.1.2.xsd>

<readwrite-splitting:rule />

Name	Type*	Description
id	Attribute	Spring Bean Id
data-source-rule (+)	Tag	Readwrite-splitting data source rule configuration

<readwrite-splitting:data-source-rule />

Name	Type	Description
id	Attribute	Readwrite-splitting data source rule name
static-strategy	Tag	Static Readwrite-splitting type
dynamic-strategy	Tag	Dynamic Readwrite-splitting type
load-balance-algorithm-ref	Attribute	Load balance algorithm name

<readwrite-splitting:static-strategy />

Name	Type*	Description
id	Attribute	Static readwrite-splitting name
write-data-source-name	Attribute	Write data source name
read-data-source-names	Attribute	Read data source names, multiple data source names separated with comma
load-balance-algorithm-ref	Attribute	Load balance algorithm name

<readwrite-splitting:dynamic-strategy />

Name	Type*	Description
id	Attribute	Dynamic readwrite-splitting name
auto-aware-data-source-name	Attribute	Database discovery logic data source name
write-data-source-query-enabled	Attribute	All read data source are offline, write data source whether the data source is responsible for read traffic
load-balance-algorithm-ref	Attribute	Load balance algorithm name

<readwrite-splitting:load-balance-algorithm />

Name	Type	Description
id	Attribute	Load balance algorithm name
type	Attribute	Load balance algorithm type
props (?)	Tag	Load balance algorithm properties

Please refer to [Built-in Load Balance Algorithm List](#) for more details about type of algorithm. Please refer to [Use Norms](#) for more details about query consistent routing.

## HA

### Background

The Spring namespace configuration method, applicable to traditional Spring projects, configures highly availability rules by means of namespace XML configuration files, and Spring completes the creation and management of ShardingSphereDataSource objects.

### Parameters Explained

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/database-discovery/database-discovery-5.1.1.xsd>

<database-discovery:rule />

Name	Type	Description
id	Property	Spring Bean Id
data-source-rule (+)	Tag	Configuration of data source rules
discovery-heartbeat (+)	Tag	Configuration of heartbeat rules detection

<database-discovery:data-source-rule />

Name	Type *	Description
id	Property	Data source rules name
data-source-names	Property	Data source name, multiple datasources are divided by comma, such as: ds_0, ds_1
discovery-heartbeat-name	Property	Detect heartbeat name
discovery-type-name	Property	type name of database discovery

<database-discovery:discovery-heartbeat />

Name	Type *	Description
id	Property	heartbeat listen name
props		property configuration of heartbeat of keep-alive-cron property configuration, such as: '0/5 * * * * ?'

<database-discovery:discovery-type />

Name	Type	Description
id	Property	Type name of database discovery
type	Property	Database discovery type, such as: MySQL.MGR
props (?)	Tag	Configuration of database discovery type, such as group-name property configuration of MGR

## Operating Procedures

### 1. Introduce Maven dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-namespace</artifactId>
 <version>${latest.release.version}</version>
</dependency>
```

### Configuration Example

```
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:cluster="http://shardingsphere.apache.org/schema/shardingsphere/repository/cluster"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/shardingsphere/datasource"
 xmlns:database-discovery="http://shardingsphere.apache.org/schema/shardingsphere/database-discovery"
 xmlns:readwrite-splitting="http://shardingsphere.apache.org/schema/shardingsphere/readwrite-splitting"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
```

```

http://www.springframework.org/schema/beans/spring-
beans.xsd
http://shardingsphere.apache.org/schema/shardingsphere/
database-discovery
http://shardingsphere.apache.org/schema/shardingsphere/
database-discovery/database-discovery.xsd
http://shardingsphere.apache.org/schema/shardingsphere/
readwrite-splitting
http://shardingsphere.apache.org/schema/shardingsphere/
readwrite-splitting/readwrite-splitting.xsd
http://shardingsphere.apache.org/schema/shardingsphere/
mode-repository/cluster
http://shardingsphere.apache.org/schema/shardingsphere/
mode-repository/cluster/repository.xsd
http://shardingsphere.apache.org/schema/shardingsphere/
datasource
http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd
">
<bean id="ds_0" class="com.zaxxer.hikari.HikariDataSource" destroy-method=
"close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="jdbcUrl" value="jdbc:mysql://127.0.0.1:33306/primary_demo_
ds?serverTimezone=UTC&useSSL=false&useUnicode=true&
characterEncoding=UTF-8" />
 <property name="username" value="root" />
 <property name="password" value="" />
</bean>
<bean id="ds_1" class="com.zaxxer.hikari.HikariDataSource" destroy-method=
"close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="jdbcUrl" value="jdbc:mysql://127.0.0.1:33307/primary_demo_
ds?serverTimezone=UTC&useSSL=false&useUnicode=true&
characterEncoding=UTF-8" />
 <property name="username" value="root" />
 <property name="password" value="" />
</bean>
<bean id="ds_2" class="com.zaxxer.hikari.HikariDataSource" destroy-method=
"close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="jdbcUrl" value="jdbc:mysql://127.0.0.1:33308/primary_demo_
ds?useSSL=false"/>
 <property name="username" value="root"/>
 <property name="password" value="" />
</bean>
<cluster:repository id="clusterRepository" type="ZooKeeper" namespace=
"governance" server-lists="localhost:2181">
 <props>

```

```
<prop key="max-retries">3</prop>
<prop key="operation-timeout-milliseconds">3000</prop>
</props>
</cluster:repository>
<readwrite-splitting:rule id="readWriteSplittingRule">
 <readwrite-splitting:data-source-rule id="replica_ds">
 <readwrite-splitting:dynamic-strategy id="dynamicStrategy" auto-aware-
data-source-name="readwrite_ds" />
 </readwrite-splitting:data-source-rule>
</readwrite-splitting:rule>
<database-discovery:rule id="mgrDatabaseDiscoveryRule">
 <database-discovery:data-source-rule id="readwrite_ds" data-source-names=
"ds_0,ds_1,ds_2" discovery-heartbeat-name="mgr-heartbeat" discovery-type-name="mgr" />
 <database-discovery:discovery-heartbeat id="mgr-heartbeat">
 <props>
 <prop key="keep-alive-cron" >0/5 * * * * ?</prop>
 </props>
 </database-discovery:discovery-heartbeat>
</database-discovery:rule>
<database-discovery:discovery-type id="mgr" type="MySQL.MGR">
 <props>
 <prop key="group-name">558edd3c-02ec-11ea-9bb3-080027e39bd2</prop>
 </props>
</database-discovery:discovery-type>
<shardingsphere:data-source id="databaseDiscoveryDataSource" schema-name=
"database-discovery-db" data-source-names="ds_0, ds_1, ds_2" rule-refs=
"readWriteSplittingRule, mgrDatabaseDiscoveryRule">
 <shardingsphere:mode repository-ref="clusterRepository" type="Cluster" />
</shardingsphere:data-source>
</beans>
```

## Related References

- Feature Description of HA
- JAVA API: HA
- YAML Configuration: HA
- Spring Boot Starter: HA

## Encryption

### Background

Spring Namespace's data encryption configuration applies to the traditional Spring projects. Sharding rules and attributes are configured through the XML configuration file of the namespace. Spring creates and manages the ShardingSphereDataSource object, reducing unnecessary coding.

### Parameters

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/encrypt/encrypt-5.1.2.xsd>

<encrypt:rule />

Name	Type *	Description	Default Value
id	Attribute	Spring Bean Id	
queryWithCipherColumn (?)	Attribute	Whether query with cipher column for data encrypt. User you can use plaintext to query if have	true
table (+)	Tag	Encrypt table configuration	

<encrypt:table />

Name	Type *	Description
name	Attribute	Encrypt table name
column (+)	Tag	Encrypt column configuration
query-with-cipher-column(?)	Attribute	Whether the table query with cipher column for data encrypt. User you can use plaintext to query if have

<encrypt:column />

Name	Type	Description
logic-column	Attribute	Column logic name
cipher-column	Attribute	Cipher column name
assisted-query-column (?)	Attribute	Assisted query column name
plain-column (?)	Attribute	Plain column name
encrypt-algorithm-ref	Attribute	Encrypt algorithm name

<encrypt:encrypt-algorithm />

Name	Type	Description
id	Attribute	Encrypt algorithm name
type	Attribute	Encrypt algorithm type
props (?)	Tag	Encrypt algorithm properties

Please refer to [Built-in Encrypt Algorithm List](#) for more details about type of algorithm.

## Procedure

1. Configure data encryption rules in the Spring namespace configuration file, including data sources, encryption rules, and global attributes.
2. Start the Spring program, and it will automatically load the configuration and initialize the ShardingSphereDataSource.

## Sample

```

<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/
shardingsphere/datasource"
 xmlns:context="http://www.springframework.org/schema/context"
 xmlns:tx="http://www.springframework.org/schema/tx"
 xmlns:encrypt="http://shardingsphere.apache.org/schema/shardingsphere/
encrypt"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-
beans.xsd
 http://www.springframework.org/schema/tx
 http://www.springframework.org/schema/tx/spring-tx.xsd
 http://www.springframework.org/schema/context
 http://www.springframework.org/schema/context/spring-
context.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource
 http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd
 http://shardingsphere.apache.org/schema/shardingsphere/
encrypt
 http://shardingsphere.apache.org/schema/shardingsphere/
encrypt/encrypt.xsd
 ">
<context:component-scan base-package="org.apache.shardingsphere.example.core.
mybatis" />

```

```

<bean id="ds" class="com.zaxxer.hikari.HikariDataSource" destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="jdbcUrl" value="jdbc:mysql://localhost:3306/demo_ds?serverTimezone=UTC&useSSL=false&useUnicode=true&characterEncoding=UTF-8"/>
 <property name="username" value="root"/>
 <property name="password" value=""/>
</bean>

<encrypt:encrypt-algorithm id="name_encryptor" type="AES">
 <props>
 <prop key="aes-key-value">123456</prop>
 </props>
</encrypt:encrypt-algorithm>
<encrypt:encrypt-algorithm id="pwd_encryptor" type="assistedTest" />

<encrypt:rule id="encryptRule">
 <encrypt:table name="t_user">
 <encrypt:column logic-column="username" cipher-column="username" plain-column="username_plain" encrypt-algorithm-ref="name_encryptor" />
 <encrypt:column logic-column="pwd" cipher-column="pwd" assisted-query-column="assisted_query_pwd" encrypt-algorithm-ref="pwd_encryptor" />
 </encrypt:table>
</encrypt:rule>

<shardingsphere:data-source id="encryptDataSource" data-source-names="ds" rule-refs="encryptRule" />

<bean id="transactionManager" class="org.springframework.jdbc.datasource.DataSourceTransactionManager">
 <property name="dataSource" ref="encryptDataSource" />
</bean>
<tx:annotation-driven />

<bean id="sqlSessionFactory" class="org.mybatis.spring.SqlSessionFactoryBean">
 <property name="dataSource" ref="encryptDataSource"/>
 <property name="mapperLocations" value="classpath*:META-INF/mappers/*.xml"/>
</bean>

<bean class="org.mybatis.spring.mapper.MapperScannerConfigurer">
 <property name="basePackage" value="org.apache.shardingsphere.example.core.mybatis.repository"/>
 <property name="sqlSessionFactoryBeanName" value="sqlSessionFactory"/>
</bean>
</beans>

```

## Related References

- Core Feature: Data Encryption
- Developer Guide: Data Encryption

## Shadow DB

### Background

Under the distributed application architecture based on microservices, the business needs multiple services to be completed through a series of service and middleware calls, so the stress test of a single service can no longer represent the real scenario. In the test environment, rebuilding a complete set of pressure test environments similar to the production environment would mean an excessively high cost, and often an inability to simulate the complexity and flow of the online environment. Therefore, enterprises usually select the full link voltage test method, i.e. a pressure test in the production environment, so that the test results can accurately reflect the system's real capacity and performance level.

### Parameters

#### Configuration Entry

```
<shadow:rule />
```

#### Configurable Properties:

Name	Type	Description
id	Attribute	Spring Bean Id
data-source(?)	Tag	Shadow data source configuration
shadow-table(?)	Tag	Shadow table configuration
shadow-algorithm(?)	Tag	Shadow table configuration
default-shadow-algorithm-name(?)	Tag	Default shadow algorithm configuration

#### Shadow data source configuration:

```
<shadow:data-source />
```

Name	Type	Description
id	Attribute	Spring Bean Id
source-data-source-name	Attribute	Production data source name
shadow-data-source-name	Attribute	Shadow data source name

### Shadow table configuration:

```
<shadow:shadow-table />
```

Name	Type	Description
name	At-tribute	Shadow table name
data-sources	At-tribute	Shadow table associated shadow data source name list (multiple values are separated by “,” )
algorithm (?)	Tag	Shadow table association shadow algorithm configuration

```
<shadow:algorithm />
```

Name	Type	Description
shadow-algorithm-ref	Attribute	Shadow table association shadow algorithm name

### Shadow algorithm configuration:

```
<shadow:shadow-algorithm />
```

Name	Type	Description
id	Attribute	Shadow algorithm name
type	Attribute	Shadow algorithm type
props (?)	Tag	Shadow algorithm attribute configuration

Refer to [Builin Shadow Algorithm](#) for details

## Procedure

1. Create production and shadow data sources.
2. Configure shadow rules.
  - Configure shadow data sources.
  - Configure shadow table.
  - Configure shadow algorithm.

## Sample

```

<beans xmlns="http://www.springframework.org/schema/beans" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:shadow="http://shardingsphere.apache.org/schema/shardingsphere/shadow" xsi:schemaLocation="http://www.springframework.org/schema/beans
http://www.springframework.org/schema/beans/spring-beans.xsd
http://shardingsphere.apache.org/schema/shardingsphere/shadow
http://shardingsphere.apache.org/schema/shardingsphere/shadow/shadow.xsd
">
 <shadow:shadow-algorithm id="user-id-insert-match-algorithm" type="VALUE_MATCH">
 <props>
 <prop key="operation">insert</prop>
 <prop key="column">user_id</prop>
 <prop key="value">1</prop>
 </props>
 </shadow:shadow-algorithm>

 <shadow:rule id="shadowRule">
 <shadow:datasource id="shadow-data-source" source-data-source-name="ds" shadow-data-source-name="ds_shadow"/>
 <shadow:shadow-table name="t_user" data-sources="shadow-data-source">
 <shadow:algorithm shadow-algorithm-ref="user-id-insert-match-algorithm"/>
 </shadow:shadow-table>
 </shadow:rule>
 </beans>

```

## Related References

- Feature Description of Shadow DB
- JAVA API: Shadow DB
- YAML Configuration: Shadow DB
- Spring Namespace: Shadow DB
- Dev Guide: Shadow DB

## SQL Parser

### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/sql-parser/sql-parser-5.1.2.xsd>

<sql-parser:rule />

Name	Type	Description
id	Attribute	Spring Bean Id
sql-comment-parse-enable	Attribute	Whether to parse SQL comments
parse-tree-cache-ref	Attribute	Parse tree local cache name
sql-statement-cache-ref	Attribute	SQL statement local cache name

<sql-parser:cache-option />

Name	Type	Description
id	Attribute	Local cache configuration item name
initial-capacity	Attribute	Initial capacity of local cache
maximum-size	Attribute	Maximum capacity of local cache

## Mixed Rules

### Configuration Item Explanation

```
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:shardingsphere="http://shardingsphere.apache.org/schema/
shardingsphere/datasource"
 xmlns:readwrite-splitting="http://shardingsphere.apache.org/schema/
shardingsphere/readwrite-splitting"
 xmlns:encrypt="http://shardingsphere.apache.org/schema/shardingsphere/
encrypt"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
```

```
http://www.springframework.org/schema/beans/spring-
beans.xsd

http://shardingsphere.apache.org/schema/shardingsphere/
datasource

http://shardingsphere.apache.org/schema/shardingsphere/
datasource/datasource.xsd

http://shardingsphere.apache.org/schema/shardingsphere/
readwrite-splitting

http://shardingsphere.apache.org/schema/shardingsphere/
readwrite-splitting/readwrite-splitting.xsd

http://shardingsphere.apache.org/schema/shardingsphere/
encrypt

http://shardingsphere.apache.org/schema/shardingsphere/
encrypt/encrypt.xsd

">

<bean id="write_ds0" class=" com.zaxxer.hikari.HikariDataSource" init-method=
"init" destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="jdbcUrl" value="jdbc:mysql://localhost:3306/write_ds?
useSSL=false&useUnicode=true&characterEncoding=UTF-8" />
 <property name="username" value="root" />
 <property name="password" value="" />
</bean>

<bean id="read_ds0_0" class=" com.zaxxer.hikari.HikariDataSource" init-method=
"init" destroy-method="close">
 <!-- ...Omit specific configuration. -->
</bean>

<bean id="read_ds0_1" class=" com.zaxxer.hikari.HikariDataSource" init-method=
"init" destroy-method="close">
 <!-- ...Omit specific configuration. -->
</bean>

<bean id="write_ds1" class=" com.zaxxer.hikari.HikariDataSource" init-method=
"init" destroy-method="close">
 <!-- ...Omit specific configuration. -->
</bean>

<bean id="read_ds1_0" class=" com.zaxxer.hikari.HikariDataSource" init-method=
"init" destroy-method="close">
 <!-- ...Omit specific configuration. -->
</bean>

<bean id="read_ds1_1" class=" com.zaxxer.hikari.HikariDataSource" init-method=
"init" destroy-method="close">
 <!-- ...Omit specific configuration. -->
</bean>
```

```

<!-- load balance algorithm configuration for readwrite-splitting -->
<readwrite-splitting:load-balance-algorithm id="randomStrategy" type="RANDOM" /
>

<!-- readwrite-splitting rule configuration -->
<readwrite-splitting:rule id="readWriteSplittingRule">
 <readwrite-splitting:data-source-rule id="ds_0" type="Static" load-balance-
algorithm-ref="randomStrategy">
 <props>
 <prop key="write-data-source-name">write_ds0</prop>
 <prop key="read-data-source-names">read_ds0_0, read_ds0_1</prop>
 </props>
 </readwrite-splitting:data-source-rule>
 <readwrite-splitting:data-source-rule id="ds_1" type="Static" load-balance-
algorithm-ref="randomStrategy">
 <props>
 <prop key="write-data-source-name">write_ds1</prop>
 <prop key="read-data-source-names">read_ds1_0, read_ds1_1</prop>
 </props>
 </readwrite-splitting:data-source-rule>
</readwrite-splitting:rule>

<!-- sharding strategy configuration -->
<sharding:standard-strategy id="databaseStrategy" sharding-column="user_id"
algorithm-ref="inlineDatabaseStrategyAlgorithm" />
 <sharding:standard-strategy id="orderTableStrategy" sharding-column="order_id"
algorithm-ref="inlineOrderTableStrategyAlgorithm" />
 <sharding:standard-strategy id="orderItemTableStrategy" sharding-column="order_
item_id" algorithm-ref="inlineOrderItemTableStrategyAlgorithm" />

 <sharding:sharding-algorithm id="inlineDatabaseStrategyAlgorithm" type="INLINE"
">
 <props>
 <!-- the expression enumeration is the logical data source name of the
readwrite-splitting configuration -->
 <prop key="algorithm-expression">ds_${user_id % 2}</prop>
 </props>
 </sharding:sharding-algorithm>
 <sharding:sharding-algorithm id="inlineOrderTableStrategyAlgorithm" type=
"INLINE">
 <props>
 <prop key="algorithm-expression">t_order_${order_id % 2}</prop>
 </props>
 </sharding:sharding-algorithm>
 <sharding:sharding-algorithm id="inlineOrderItemTableStrategyAlgorithm" type=
"INLINE">
 <props>

```

```

<prop key="algorithm-expression">t_order_item_${order_item_id % 2}</
prop>
</props>
</sharding:sharding-algorithm>

<!-- sharding rule configuration -->
<sharding:rule id="shardingRule">
 <sharding:table-rules>
 <!-- the expression 'ds_${0..1}' enumeration is the logical data source
name of the readwrite-splitting configuration -->
 <sharding:table-rule logic-table="t_order" actual-data-nodes="ds_${0..
1}.t_order_${0..1}" database-strategy-ref="databaseStrategy" table-strategy-ref=
"orderTableStrategy" key-generate-strategy-ref="orderKeyGenerator"/>
 <sharding:table-rule logic-table="t_order_item" actual-data-nodes="ds_$
{0..1}.t_order_item_${0..1}" database-strategy-ref="databaseStrategy" table-
strategy-ref="orderItemTableStrategy" key-generate-strategy-ref="itemKeyGenerator"/
>
 </sharding:table-rules>
 <sharding:binding-table-rules>
 <sharding:binding-table-rule logic-tables="t_order, t_order_item"/>
 </sharding:binding-table-rules>
 <sharding:broadcast-table-rules>
 <sharding:broadcast-table-rule table="t_address"/>
 </sharding:broadcast-table-rules>
</sharding:rule>

<!-- data encrypt configuration -->
<encrypt:encrypt-algorithm id="name_encryptor" type="AES">
 <props>
 <prop key="aes-key-value">123456</prop>
 </props>
</encrypt:encrypt-algorithm>
<encrypt:encrypt-algorithm id="pwd_encryptor" type="assistedTest" />

<encrypt:rule id="encryptRule">
 <encrypt:table name="t_user">
 <encrypt:column logic-column="username" cipher-column="username" plain-
column="username_plain" encrypt-algorithm-ref="name_encryptor" />
 <encrypt:column logic-column="pwd" cipher-column="pwd" assisted-query-
column="assisted_query_pwd" encrypt-algorithm-ref="pwd_encryptor" />
 </encrypt:table>
</encrypt:rule>

<!-- datasource configuration -->
<!-- the element data-source-names's value is all of the datasource name -->
<shardingsphere:data-source id="readQueryDataSource" data-source-names="write_
ds0, read_ds0_0, read_ds0_1, write_ds1, read_ds1_0, read_ds1_1"
rule-refs="readWriteSplittingRule, shardingRule, encryptRule" >

```

```
<props>
 <prop key="sql-show">true</prop>
</props>
</shardingsphere:data-source>
</beans>
```

## 7.1.6 Properties Configuration

### Background

Apache ShardingSphere provides the way of property configuration to configure system level configuration.

## Parameters

Name	. Data Type *	Description	. Default Value *
sql-show (?)	boolean	Whether show SQL or not in log. Print SQL details can help developers debug easier. The log details include: logic SQL, actual SQL and SQL parse result. Enable this property will log into log topic ShardingSphere-SQL, log level is INFO	false
sql-simple (?)	boolean	Whether show SQL details in simple style	false
kernel-executor-size (?)	int	The max thread size of worker group to execute SQL. One ShardingSphereDataSource will use a independent thread pool, it does not share thread pool even different data source in same JVM	infinite
max-connection-size-per-query (?)	int	Max opened connection size for each query	1
check-table-metadata-enabled (?)	boolean	Whether validate table meta data consistency when application startup or updated	false
sql-federation-enabled (?)	boolean	Whether enable SQL federation	false

## Procedure

- Properties configuration is directly configured in the profile used by ShardingSphere-JDBC. The format is as follows:

```
props:
 sql-show: true
```

## Sample

The example of ShardingSphere warehouse contains property configurations of various scenarios. Please refer to: <https://github.com/apache/shardingsphere/tree/master/examples/shardingsphere-jdbc-example>

### 7.1.7 Builtin Algorithm

#### Introduction

Apache ShardingSphere allows developers to implement algorithms via SPI; At the same time, Apache ShardingSphere also provides a couple of builtin algorithms for simplify developers.

#### Usage

The builtin algorithms are configured by type and props. Type is defined by the algorithm in SPI, and props is used to deliver the customized parameters of the algorithm.

No matter which configuration type is used, the configured algorithm is named and passed to the corresponding rule configuration. This chapter distinguishes and lists all the builtin algorithms of Apache ShardingSphere according to its functions for developers' reference.

#### Metadata Repository

##### H2 Repository

Type: H2

Mode: Standalone

Attributes:

Name	Type *	Description	Default Value
jdbcUrl	String	Database access URL	jdb c:h2:mem:config;DB_CLOSE_DELAY=-1; DATABASE_TO_UPPER=false;MODE=MY
user	String	Database access user-name	sa
password	String	Database access pass-word	

### ZooKeeper Repository

Type: ZooKeeper

Mode: Cluster

Attributes:

Name	Type	Description	Default Value
retryIntervalMilliseconds	int	Milliseconds of retry interval	500
maxRetries	int	Max retries of client connection	3
timeToLiveSeconds	int	Seconds of ephemeral data live	60
operationTimeoutMilliseconds	int	Milliseconds of operation timeout	500
digest	String	Password of login	

### EtcD Repository

Type: EtcD

Mode: Cluster

Attributes:

Name	Type	Description	Default Value
timeToLiveSeconds	long	Seconds of ephemeral data live	30
connectionTimeout	long	Seconds of connection timeout	30

## Sharding Algorithm

### Background

ShardingSphere built-in algorithms provide a variety of sharding algorithms, which can be divided into automatic sharding algorithms, standard sharding algorithms, composite sharding algorithms, and hint sharding algorithms, and can meet the needs of most business scenarios of users.

Additionally, considering the complexity of business scenarios, the built-in algorithm also provides a way to customize the sharding algorithm. Users can complete complex sharding logic by writing java code.

### Parameters

#### Auto Sharding Algorithm

#### Modulo Sharding Algorithm

Type: MOD

Attributes:

Name	DataType	Description
sharding-count	int	Sharding count

#### Hash Modulo Sharding Algorithm

Type: HASH\_MOD

Attributes:

Name	DataType	Description
sharding-count	int	Sharding count

#### Volume Based Range Sharding Algorithm

Type: VOLUME\_RANGE

Attributes:

Name	DataType	Description
range-lower	long	Range lower bound, throw exception if lower than bound
range-upper	long	Range upper bound, throw exception if upper than bound
sharding-volume	long	Sharding volume

### Boundary Based Range Sharding Algorithm

Type: BOUNDARY\_RANGE

Attributes:

Name	Data Type	Description
sharding-ranges	String	Range of sharding border, multiple boundaries separated by commas

### Auto Interval Sharding Algorithm

Type: AUTO\_INTERVAL

Attributes:

Name	Data Type*	Description
datetime.lower	String	Shard datetime begin boundary, pattern: yyyy-MM-dd HH:mm:ss
datetime.upper	String	Shard datetime end boundary, pattern: yyyy-MM-dd HH:mm:ss
sharding-seconds	long	Max seconds for the data in one shard, allows sharding key timestamp format seconds with time precision, but time precision after seconds is automatically erased

## Standard Sharding Algorithm

Apache ShardingSphere built-in standard sharding algorithm are:

### Inline Sharding Algorithm

With Groovy expressions, `InlineShardingStrategy` provides single-key support for the sharding operation of `=` and `IN` in SQL. Simple sharding algorithms can be used through a simple configuration to avoid laborious Java code developments. For example, `t_user_$->{u_id % 8}` means table `t_user` is divided into 8 tables according to `u_id`, with table names from `t_user_0` to `t_user_7`. Please refer to [Inline Expression](#) for more details.

Type: INLINE

Attributes:

Name	• Data Type *	Description	Default Value
algorithm-expression	String	Inline expression sharding algorithm	.
allow-range-query-with-inline-sharding(?)	boolean	Whether range query is allowed. Note: range query will ignore sharding strategy and conduct full routing	false

### Interval Sharding Algorithm

Type: INTERVAL

Attributes:

Name	.	Description	.
	DataType*		DefaultValue*
date time -pattern	String	Timestamp pattern of sharding value, must can be transformed to Java LocalDateTime. For example: yyyy-MM-dd HH:mm:ss, yyyy-MM-dd or HH:mm:ss etc. But Gy-MM etc. related to java.time.chrono. JapaneseDate are not supported	.
date time-lower	String	Datetime sharding lower boundary, pattern is defined <code>datetime-pattern</code>	.
date time-upper (?)	String	Datetime sharding upper boundary, pattern is defined <code>datetime-pattern</code>	Now
shardin g-suffix -pattern	String	Suffix pattern of sharding data sources or tables, must can be transformed to Java LocalDateTime, must be consistent with <code>date-time-interval-unit</code> . For example: yyyyMM	.
date time-interval-amount (?)	int	Interval of sharding value	1
date time-inter val-unit (?)	String	Unit of sharding value interval, must can be transformed to Java ChronoUnit's Enum value. For example: MONTHS	Days

## Complex Sharding Algorithm

### Complex Inline Sharding Algorithm

Please refer to [Inline Expression](#) for more details.

Type: COMPLEX\_INLINE

Name	• Data Type*	Description	Default Value
sharding-columns (?)	String	sharing column names	.
algorithm-expression	String	Inline expression sharding algorithm	.
allow-range-query-with-inline-sharding (?)	boolean	Whether range query is allowed. Note: range query will ignore sharding strategy and conduct full routing	false

### Hint Sharding Algorithm

#### Hint Inline Sharding Algorithm

Please refer to [Inline Expression](#) for more details.

Type: COMPLEX\_INLINE

Name	DataType	Description	Default Value
algorithm-expression	String	Inline expression sharding algorithm	\${value}

### Class Based Sharding Algorithm

Realize custom extension by configuring the sharding strategy type and algorithm class name.

Type: CLASS\_BASED

Attributes:

Name	Data Type	Description
strategy	String	Sharding strategy type, support STANDARD, COMPLEX or HINT (case insensitive)
algorithmClassName	String	Fully qualified name of sharding algorithm

### Procedure

1. When using data sharding, configure the corresponding data sharding algorithm under the shardingAlgorithms attribute.

### Sample

```

rules:
- !SHARDING
 tables:
 t_order:
 actualDataNodes: ds_${0..1}.t_order_${0..1}
 tableStrategy:
 standard:
 shardingColumn: order_id
 shardingAlgorithmName: t-order-inline
 keyGenerateStrategy:
 column: order_id
 keyGeneratorName: snowflake
 t_order_item:
 actualDataNodes: ds_${0..1}.t_order_item_${0..1}
 tableStrategy:
 standard:
 shardingColumn: order_id
 shardingAlgorithmName: t_order-item-inline
 keyGenerateStrategy:
 column: order_item_id
 keyGeneratorName: snowflake
 t_account:
 actualDataNodes: ds_${0..1}.t_account_${0..1}
 tableStrategy:
 standard:
 shardingAlgorithmName: t-account-inline
 keyGenerateStrategy:
 column: account_id
 keyGeneratorName: snowflake
 defaultShardingColumn: account_id
 bindingTables:

```

```
- t_order,t_order_item
broadcastTables:
- t_address
defaultDatabaseStrategy:
standard:
 shardingColumn: user_id
 shardingAlgorithmName: database-inline
defaultTableStrategy:
none:

shardingAlgorithms:
database-inline:
type: INLINE
props:
 algorithm-expression: ds_${user_id % 2}
t-order-inline:
type: INLINE
props:
 algorithm-expression: t_order_${order_id % 2}
t_order-item-inline:
type: INLINE
props:
 algorithm-expression: t_order_item_${order_id % 2}
t-account-inline:
type: INLINE
props:
 algorithm-expression: t_account_${account_id % 2}
keyGenerators:
snowflake:
type: SNOWFLAKE
```

## Related References

- [Core Feature: Data Sharding](#)
- [Developer Guide: Data Sharding](#)

## Key Generate Algorithm

### Snowflake

Type: SNOWFLAKE

Attributes:

Name	• Data Type *	Description	Default Value
max-tolerate-time-difference-milliseconds (?)	long	The max tolerate time for different server's time difference in milliseconds	10 milliseconds
max-vibration-offset (?)	int	The max upper limit value of vibrate number, range [0, 4096). Notice: To use the generated value of this algorithm as sharding value, it is recommended to configure this property. The algorithm generates key mod $2^n$ ( $2^n$ is usually the sharding amount of tables or databases) in different milliseconds and the result is always 0 or 1. To prevent the above sharding problem, it is recommended to configure this property, its value is $(2^n)-1$	1

## UUID

Type: UUID

Attributes: None

## CosId

Type: COSID

Attributes:

Name *	Data Type *	Description	Default Value
id-name	String	ID generator name	`_share_`
as-string	bool	Whether to generate a string type ID: Convert long type ID to Base-62 String type (Long.MAX_VALUE maximum string length is 11 digits), and ensure the ordering of string IDs	`false`

## CosId-Snowflake

Type: COSID\_SNOWFLAKE

Attributes:

Name *	Data Type *	Description	Default Value
epoch	String	EPOCH of Snowflake ID Algorithm	`147792960000`
as-string	bool	Whether to generate a string type ID: Convert long type ID to Base-62 String type (Long.MAX_VALUE maximum string length is 11 digits), and ensure the ordering of string IDs	`false`

## Load Balance Algorithm

### Background

ShardingSphere built-in provides a variety of load balancer algorithms, including polling algorithm, random access algorithm and weight access algorithm, which can meet users' needs in most business scenarios.

Moreover, considering the complexity of the business scenario, the built-in algorithm also provides an extension mode. Users can implement the load balancer algorithm they need based on SPI interface.

## Parameters

### Round Robin Algorithm

Type: ROUND\_ROBIN

Attributes: None

### Random Algorithm

Type: RANDOM

Attributes: None

### Weight Algorithm

Type: WEIGHT

Attributes:

All read data in use must be configured with weights

Name	Data Type	Description
• (+)	double	The attribute name uses the read database name, and the parameter fills in the weight value corresponding to the read database. The minimum value of the weight parameter range > 0, the total <= Double.MAX_VALUE.

## Procedure

1. Configure a load balancer algorithm for the loadBalancers attribute to use read/write splitting.

## Sample

```
rules:
- !READWRITE_SPLITTING
dataSources:
 readwrite_ds:
 staticStrategy:
 writeDataSourceName: write_ds
 readDataSourceNames:
```

```
- read_ds_0
- read_ds_1
loadBalancerName: random
loadBalancers:
random:
type: RANDOM
```

## Related References

- Core Feature: Read/Write Splitting
- Developer Guide: Read/Write Splitting

## Encryption Algorithm

### MD5 Encrypt Algorithm

Type: MD5

Attributes: None

### AES Encrypt Algorithm

Type: AES

Attributes:

Name	DataType	Description
aes-key-value	String	AES KEY

### RC4 Encrypt Algorithm

Type: RC4

Attributes:

Name	DataType	Description
rc4-key-value	String	RC4 KEY

## SM3 Encrypt Algorithm

Type: SM3

Attributes:

Name	DataType	Description
sm3-salt	String	SM3 SALT (should be blank or 8 bytes long)

## SM4 Encrypt Algorithm

Type: SM4

Attributes:

Name	DataType	Description
sm4-key	String	SM4 KEY (should be 16 bytes)
sm4-mode	String	SM4 MODE (should be CBC or ECB)
sm4-iv	String	SM4 IV (should be specified on CBC, 16 bytes long)
sm4-padding	String	SM4 PADDING (should be PKCS5Padding or PKCS7Padding, NoPadding excepted)

## Shadow Algorithm

### Background

The shadow DB feature carries out shadow measurement to SQL statements executed. Shadow measurement supports two types of algorithms, and users can choose one or a combination of them based on actual business needs.

### Parameters

#### Column-based shadow algorithm

#### Column value matching shadow algorithm

Type: VALUE\_MATCH

Attribute Name	Data Type	Description
column	String	shadow column
operation	String	SQL operation type (INSERT, UPDATE, DELETE, SELECT)
value	String	value matched by shadow column

## Column-based Regex matching algorithm

Type: REGEX\_MATCH

Attribute Name	Data Type	Description
column	String	match a column
operation	String	SQL operation type (INSERT, UPDATE, DELETE, SELECT)
regex	String	shadow column matching Regex

## Hint-based shadow algorithm

### Simple Hint matching shadow algorithm

Type: SIMPLE\_HINT

Attribute Name	Data Type	Description
foo	String	bar

## Configuration sample

- Java API

```
public final class ShadowConfiguration {
 // ...

 private ShardingSphereAlgorithmConfiguration
createShadowAlgorithmConfiguration() {
 Properties userIdInsertProps = new Properties();
 userIdInsertProps.setProperty("operation", "insert");
 userIdInsertProps.setProperty("column", "user_id");
 userIdInsertProps.setProperty("value", "1");
 return new ShardingSphereAlgorithmConfiguration("VALUE_MATCH",
userIdInsertProps));
}

// ...
}
```

- YAML:

```
shadowAlgorithms:
 user-id-insert-algorithm:
 type: VALUE_MATCH
 props:
 column: user_id
```

```
operation: insert
value: 1
```

- Spring Boot Starter:

```
spring.shardingsphere.rules.shadow.shadow-algorithms.user-id-insert-algorithm.
type=VALUE_MATCH
spring.shardingsphere.rules.shadow.shadow-algorithms.user-id-insert-algorithm.
props.operation=insert
spring.shardingsphere.rules.shadow.shadow-algorithms.user-id-insert-algorithm.
props.column=user_id
spring.shardingsphere.rules.shadow.shadow-algorithms.user-id-insert-algorithm.
props.value=1
```

- Spring Namespace:

```
<shadow:shadow-algorithm id="user-id-insert-algorithm" type="VALUE_MATCH">
 <props>
 <prop key="operation">insert</prop>
 <prop key="column">user_id</prop>
 <prop key="value">1</prop>
 </props>
</shadow:shadow-algorithm>
```

## SQL Translator

### Native SQL translator

Type: NATIVE

Attributes:

None

**Default SQL translator, does not implement yet.**

### JooQ SQL translator

Type: JOOQ

Attributes:

None

**Because of it need JooQ dependency, ShardingSphere does not include the module, please use below XML to import it by Maven.**

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
```

```
<artifactId>shardingsphere-sql-translator-jooq-provider</artifactId>
<version>${project.version}</version>
</dependency>
```

### 7.1.8 Special API

This chapter will introduce the special API of ShardingSphere-JDBC.

#### Sharding

This chapter will introduce the Sharding API of ShardingSphere-JDBC.

#### Hint

#### Background

Apache ShardingSphere uses ThreadLocal to manage sharding key values for mandatory routing. A sharding value can be added by programming to the HintManager that takes effect only within the current thread. Apache ShardingSphere can also do mandatory routing by adding comments to SQL.

Main application scenarios for Hint: - The sharding fields do not exist in the SQL and database table structure but in the external business logic. - Certain data operations are forced to be performed in given databases.

#### Procedure

1. Call HintManager.getInstance() to obtain an instance of HintManager.
2. Use HintManager.addDatabaseShardingValue, HintManager.addTableShardingValue to set the sharding key value.
3. Execute SQL statements to complete routing and execution.
4. Call HintManager.close to clean up the contents of ThreadLocal.

#### Sample

##### Sharding with Hint

##### Hint Configuration

Hint algorithms require users to implement the interface of `org.apache.shardingsphere.api.sharding_hint.HintShardingAlgorithm`. Apache ShardingSphere will acquire sharding values from HintManager to route.

Take the following configurations for reference:

```
rules:
- !SHARDING
 tables:
 t_order:
 actualDataNodes: demo_ds_${0..1}.t_order_${0..1}
 databaseStrategy:
 hint:
 algorithmClassName: xxx.xxx.xxx.HintXXXAlgorithm
 tableStrategy:
 hint:
 algorithmClassName: xxx.xxx.xxx.HintXXXAlgorithm
 defaultTableStrategy:
 none:
 defaultKeyGenerateStrategy:
 type: SNOWFLAKE
 column: order_id

 props:
 sql-show: true
```

## Get HintManager

```
HintManager hintManager = HintManager.getInstance();
```

## Add Sharding Value

- Use `hintManager.addDatabaseShardingValue` to add sharding key value of data source.
- Use `hintManager.addTableShardingValue` to add sharding key value of table.

Users can use `hintManager.setDatabaseShardingValue` to add sharding in hint route to some certain sharding database without sharding tables.

## Clean Hint Values

Sharding values are saved in `ThreadLocal`, so it is necessary to use `hintManager.close()` to clean `ThreadLocal`.

**``HintManager`` has implemented ``AutoCloseable``. We recommend to close it automatically with ``try with resource``.**

**Codes:**

```
// Sharding database and table with HintManager
String sql = "SELECT * FROM t_order";
try (HintManager hintManager = HintManager.getInstance();
 Connection conn = dataSource.getConnection();
 PreparedStatement preparedStatement = conn.prepareStatement(sql)) {
 hintManager.addDatabaseShardingValue("t_order", 1);
 hintManager.addTableShardingValue("t_order", 2);
 try (ResultSet rs = preparedStatement.executeQuery()) {
 while (rs.next()) {
 // ...
 }
 }
}

// Sharding database and one database route with HintManager
String sql = "SELECT * FROM t_order";
try (HintManager hintManager = HintManager.getInstance();
 Connection conn = dataSource.getConnection();
 PreparedStatement preparedStatement = conn.prepareStatement(sql)) {
 hintManager.setDatabaseShardingValue(3);
 try (ResultSet rs = preparedStatement.executeQuery()) {
 while (rs.next()) {
 // ...
 }
 }
}
```

**Related References**

- [Core Feature: Data Sharding](#)
- [Developer Guide: Data Sharding](#)

## Readwrite Splitting

This chapter will introduce the Readwrite Splitting API of ShardingSphere-JDBC.

### Hint

#### Background

Apache ShardingSphere uses ThreadLocal to manage primary database routing marks for mandatory routing. A primary database routing mark can be added to HintManager through programming, and this value is valid only in the current thread. Apache ShardingSphere can also route the primary database by adding comments to SQL.

Hint is mainly used to perform mandatory data operations in the primary database under the read/write splitting scenarios.

#### Procedure

1. Call `HintManager.getInstance()` to obtain HintManager instance.
2. Call `HintManager.setWriteRouteOnly()` method to set the primary database routing marks.
3. Execute SQL statements to complete routing and execution.
4. Call `HintManager.close()` to clear the content of ThreadLocal.

#### Sample

##### Primary Route with Hint

###### Use manual programming

###### Get HintManager

Be the same as sharding based on hint.

###### Configure Primary Database Route

- Use `hintManager.setWriteRouteOnly` to configure primary database route.

## Clean Hint Value

Be the same as data sharding based on hint.

### Codes:

```
String sql = "SELECT * FROM t_order";
try (HintManager hintManager = HintManager.getInstance();
 Connection conn = dataSource.getConnection();
 PreparedStatement preparedStatement = conn.prepareStatement(sql)) {
 hintManager.setWriteRouteOnly();
 try (ResultSet rs = preparedStatement.executeQuery()) {
 while (rs.next()) {
 // ...
 }
 }
}
```

## Use special SQL comments

### Terms of Use

To use SQL Hint function, users need to set `sqlCommentParseEnabled` to true. The comment format only supports `/* */` for now. The content needs to start with `ShardingSphere hint:`, and the attribute name needs to be `writeRouteOnly`.

### Codes:

```
/* ShardingSphere hint: writeRouteOnly=true */
SELECT * FROM t_order;
```

## Related References

- Core Feature: Readwrite Splitting
- Developer Guide: Readwrite Splitting

## Transaction

Using distributed transaction through Apache ShardingSphere is no different from local transaction. In addition to transparent use of distributed transaction, Apache ShardingSphere can switch distributed transaction types every time the database accesses.

Supported transaction types include local, XA and BASE. It can be set before creating a database connection, and default value can be set when Apache ShardingSphere startup.

### Use Java API

### Background

With ShardingSphere-JDBC, XA and BASE mode transactions can be used through the API.

### Prerequisites

Introducing Maven dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA's Narayana mode -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-narayana</artifactId>
 <version>${project.version}</version>
</dependency>

<!-- This module is required when using BASE transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-base-seata-at</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>
```

## Procedure

1. Set the transaction type
2. Perform the business logic

## Sample

```
TransactionTypeHolder.set(TransactionType.XA); // support TransactionType.LOCAL,
TransactionType.XA, TransactionType.BASE
try (Connection conn = dataSource.getConnection()) { // use
ShardingSphereDataSource
 conn.setAutoCommit(false);
 PreparedStatement ps = conn.prepareStatement("INSERT INTO t_order (user_id,
status) VALUES (?, ?)");
 ps.setObject(1, 1000);
 ps.setObject(2, "init");
 ps.executeUpdate();
 conn.commit();
}
```

## Use Spring Boot Starter

### Background

ShardingSphere-JDBC can be used through spring boot starter. ## Prerequisites

Introducing Maven dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-boot-starter</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA's Narayana mode -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-narayana</artifactId>
 <version>${project.version}</version>

```

```

</dependency>

<!-- This module is required when using BASE transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-base-seata-at</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

```

## Procedure

1. Configure the transaction Type
2. Use distributed transactions

## Sample

### Configure the transaction Type

```

@Configuration
@EnableTransactionManagement
public class TransactionConfiguration {

 @Bean
 public PlatformTransactionManager txManager(final DataSource dataSource) {
 return new DataSourceTransactionManager(dataSource);
 }

 @Bean
 public JdbcTemplate jdbcTemplate(final DataSource dataSource) {
 return new JdbcTemplate(dataSource);
 }
}

```

### Use distributed transactions

```

@Transactional
@ShardingSphereTransactionType(TransactionType.XA) // 支持 TransactionType.LOCAL,
 TransactionType.XA, TransactionType.BASE
public void insert() {
 jdbcTemplate.execute("INSERT INTO t_order (user_id, status) VALUES (?, ?)",
(PreparedStatementCallback<Object>) ps -> {
 ps.setObject(1, i);
 ps.setObject(2, "init");
 ps.executeUpdate();
})
}

```

```
});
}
```

## Use Spring Namespace

### Background

ShardingSphere-JDBC can be used through spring namespace.

### Prerequisites

Introducing Maven dependency

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core-spring-namespace</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA's Narayana mode -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-narayana</artifactId>
 <version>${project.version}</version>
</dependency>

<!-- This module is required when using BASE transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-base-seata-at</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>
```

## Procedure

1. Configure the transaction manager
2. Use distributed transactions

## Sample

### Configure the transaction manager

```
<!-- Configuration of ShardingDataSource -->
<!-- ... -->

<bean id="transactionManager" class="org.springframework.jdbc.datasource.
DataSourceTransactionManager">
 <property name="dataSource" ref="shardingDataSource" />
</bean>
<bean id="jdbcTemplate" class="org.springframework.jdbc.core.JdbcTemplate">
 <property name="dataSource" ref="shardingDataSource" />
</bean>
<tx:annotation-driven />

<!-- Enable automatic scanning of @ShardingSphereTransactionType annotation and use
Spring's native AOP for class and method enhancements -->
<sharding:tx-type-annotation-driven />
```

### Use distributed transactions

```
@Transactional
@ShardingSphereTransactionType(TransactionType.XA) // support TransactionType.
LOCAL, TransactionType.XA, TransactionType.BASE
public void insert() {
 jdbcTemplate.execute("INSERT INTO t_order (user_id, status) VALUES (?, ?)",
(PreparedStatementCallback<Object>) ps -> {
 ps.setObject(1, i);
 ps.setObject(2, "init");
 ps.executeUpdate();
 });
}
```

## Atomikos Transaction

### Background

Apache ShardingSphere provides XA transactions, and the default XA transaction manager is Atomikos.

### Procedure

1. Configure the transaction type
2. Configure Atomikos

### Sample

#### Configure the transaction type

Yaml:

```
- !TRANSACTION
 defaultType: XA
 providerType: Atomikos
```

SpringBoot:

```
spring:
 shardingsphere:
 props:
 xa-transaction-manager-type: Atomikos
```

Spring Namespace:

```
<shardingsphere:data-source id="xxx" data-source-names="xxx" rule-refs="xxx">
 <props>
 <prop key="xa-transaction-manager-type">Atomikos</prop>
 </props>
</shardingsphere:data-source>
```

#### Configure Atomikos

Atomikos configuration items can be customized by adding `jta.properties` to the project's classpath.

See Atomikos' s official documentation for more details.

## Data Recovery

`xa_tx.log` is generated in the `logs` directory of the project. This is the log required for recovering XA crash. Do not delete it.

## Bitronix Transaction

### background

Apache ShardingSphere provides XA transactions that integrate with the Bitronix implementation.

### Prerequisites

Introducing Maven dependency

```
<properties>
 <btm.version>2.1.3</btm.version>
</properties>

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-bitronix</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<dependency>
 <groupId>org.codehaus.btm</groupId>
 <artifactId>btm</artifactId>
 <version>${btm.version}</version>
</dependency>
```

## Procedure

1. Configure the XA transaction type
2. Configure Bitronix

## Sample

### Configure the XA transaction type

Yaml:

```
- !TRANSACTION
 defaultType: XA
 providerType: Bitronix
```

SpringBoot:

```
spring:
 shardingsphere:
 props:
 xa-transaction-manager-type: Bitronix
```

Spring Namespace:

```
<shardingsphere:data-source id="xxx" data-source-names="xxx" rule-refs="xxx">
 <props>
 <prop key="xa-transaction-manager-type">Bitronix</prop>
 </props>
</shardingsphere:data-source>
```

### Configure Bitronix (Deletable)

See Bitronix's Official Documentation for more details.

## Narayana Transaction

### Background

Apache ShardingSphere provides XA transactions that integrate with the Narayana implementation.

## Prerequisites

### Introducing Maven dependency

```
<properties>
 <narayana.version>5.12.4.Final</narayana.version>
 <jboss-transaction-spi.version>7.6.0.Final</jboss-transaction-spi.version>
 <jboss-logging.version>3.2.1.Final</jboss-logging.version>
</properties>

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-jdbc-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<!-- This module is required when using XA transactions -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-core</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>

<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-transaction-xa-narayana</artifactId>
 <version>${shardingsphere.version}</version>
</dependency>
<dependency>
 <groupId>org.jboss.narayana.jta</groupId>
 <artifactId>jta</artifactId>
 <version>${narayana.version}</version>
</dependency>
<dependency>
 <groupId>org.jboss.narayana.jts</groupId>
 <artifactId>narayana-jts-integration</artifactId>
 <version>${narayana.version}</version>
</dependency>
<dependency>
 <groupId>org.jboss</groupId>
 <artifactId>jboss-transaction-spi</artifactId>
 <version>${jboss-transaction-spi.version}</version>
</dependency>
<dependency>
 <groupId>org.jboss.logging</groupId>
 <artifactId>jboss-logging</artifactId>
 <version>${jboss-logging.version}</version>
</dependency>
```

## Procedure

1. Configure Narayana
2. Set the XA transaction type

## Sample

### Configure Narayana

Narayana configuration items can be customized by adding `jbossts-properties.xml` to the project's classpath.

See [Narayana's Official Documentation](#) for more details.

### Set the XA transaction type

Yaml:

```
- !TRANSACTION
 defaultType: XA
 providerType: Narayana
```

SpringBoot:

```
spring:
 shardingsphere:
 props:
 xa-transaction-manager-type: Narayana
```

Spring Namespace:

```
<shardingsphere:data-source id="xxx" data-source-names="xxx" rule-refs="xxx">
 <props>
 <prop key="xa-transaction-manager-type">Narayana</prop>
 </props>
</shardingsphere:data-source>
```

## Seata Transaction

### Background

Apache ShardingSphere provides BASE transactions that integrate the Seata implementation.

## Procedure

1. Start Seata Server
2. Create the log table
3. Add the Seata configuration

## Sample

### Start Seata Server

Refer to [seata-work-shop](#) to download and start the Seata server.

### Create undo\_log table

Create the undo\_log table in each shard database instance (take MySQL as an example).

```
CREATE TABLE IF NOT EXISTS `undo_log`
(
 `id` BIGINT(20) NOT NULL AUTO_INCREMENT COMMENT 'increment id',
 `branch_id` BIGINT(20) NOT NULL COMMENT 'branch transaction id',
 `xid` VARCHAR(100) NOT NULL COMMENT 'global transaction id',
 `context` VARCHAR(128) NOT NULL COMMENT 'undo_log context,such as
serialization',
 `rollback_info` LONGBLOB NOT NULL COMMENT 'rollback info',
 `log_status` INT(11) NOT NULL COMMENT '0:normal status,1:defense status',
 `log_created` DATETIME NOT NULL COMMENT 'create datetime',
 `log_modified` DATETIME NOT NULL COMMENT 'modify datetime',
 PRIMARY KEY (`id`),
 UNIQUE KEY `ux_undo_log` (`xid`, `branch_id`)
) ENGINE = InnoDB
AUTO_INCREMENT = 1
DEFAULT CHARSET = utf8 COMMENT ='AT transaction mode undo table';
```

### Modify configuration

Add the seata.conf file to the classpath.

```
client {
 application.id = example ## Apply the only primary key
 transaction.service.group = my_test_tx_group ## The transaction group it
belongs to.
}
```

Modify the file.conf and registry.conf files of Seata as required.

## Observability

Introduce how to use agent and integrate 3rd party with observability.

### Use Agent

#### Build

##### Local Build

```
> cd shardingsphere/shardingsphere-agent
> mvn clean install
```

##### Download (Not Released Yet)

```
> wget http://xxxxx/shardingsphere-agent.tar.gz
> tar -zxvcf shardingsphere-agent.tar.gz
```

#### Configuration

Found agent.yaml file:

```
applicationName: shardingsphere-agent
ignoredPluginNames: # A collection of ignored plugins
 - Opentracing
 - Jaeger
 - Zipkin
 - Prometheus
 - OpenTelemetry
 - Logging

plugins:
 Prometheus:
 host: "localhost"
 port: 9090
 props:
 JVM_INFORMATION_COLLECTOR_ENABLED : "true"
 Jaeger:
 host: "localhost"
 port: 5775
 props:
 SERVICE_NAME: "shardingsphere-agent"
 JAAGER_SAMPLER_TYPE: "const"
 JAAGER_SAMPLER_PARAM: "1"
```

```

JAEGER_REPORTER_LOG_SPANS: "true"
JAEGER_REPORTER_FLUSH_INTERVAL: "1"

Zipkin:
 host: "localhost"
 port: 9411
 props:
 SERVICE_NAME: "shardingsphere-agent"
 URL_VERSION: "/api/v2/spans"

Opentracing:
 props:
 OPENTRACING_TRACER_CLASS_NAME: "org.apache.skywalking.apm.toolkit.
opentracing.SkywalkingTracer"

OpenTelemetry:
 props:
 otel.resource.attributes: "service.name=shardingsphere-agent" # Multiple
configurations can be split by ','
 otel.traces.exporter: "zipkin"

Logging:
 props:
 LEVEL: "INFO"

```

## Startup

Add arguments in startup script.

```
-javaagent:\absolute path\shardingsphere-agent.jar
```

## APM Integration

### Usage

#### Use OpenTracing

- Method 1: inject Tracer provided by APM system through reading system parameters

Add startup arguments

```
-Dorg.apache.shardingsphere.tracing.opentracing.tracer.class=org.apache.skywalking.
apm.toolkit.opentracing.SkywalkingTracer
```

Call initialization method.

```
ShardingTracer.init();
```

- Method 2: inject Tracer provided by APM through parameter.

```
ShardingTracer.init(new SkywalkingTracer());
```

*Notice: when using SkyWalking OpenTracing agent, the OpenTracing plug-in of Apache ShardingSphere Agent cannot be used at the same time to prevent the two plug-ins from conflicting with each other.*

### Use SkyWalking's Automatic Agent

Please refer to [SkyWalking Manual](#).

### Use OpenTelemetry

Just fill in the configuration in `agent.yaml`. For example, export Traces data to Zipkin.

```
OpenTelemetry:
 props:
 otel.resource.attributes: "service.name=shardingsphere-agent"
 otel.traces.exporter: "zipkin"
 otel.exporter.zipkin.endpoint: "http://127.0.0.1:9411/api/v2/spans"
```

### Result Demonstration

No matter in which way, it is convenient to demonstrate APM information in the connected system. Take SkyWalking for example:

### Application Architecture

Use ShardingSphere-Proxy to visit two databases, 192.168.0.1:3306 and 192.168.0.2:3306, and there are two tables in each one of them.

### Topology

It can be seen from the picture that the user has accessed ShardingSphere-Proxy 18 times, with each database twice each time. It is because two tables in each database are accessed each time, so there are totally four tables accessed each time.

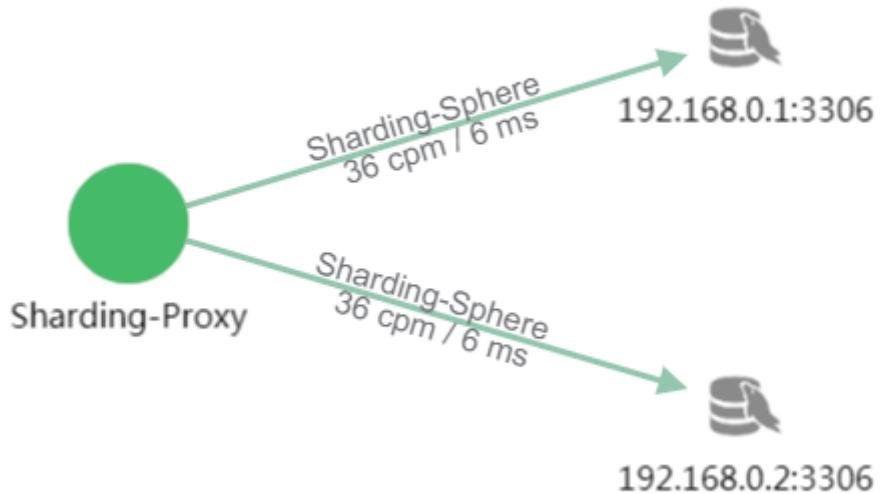


Figure1: The topology diagram

## Tracking Data

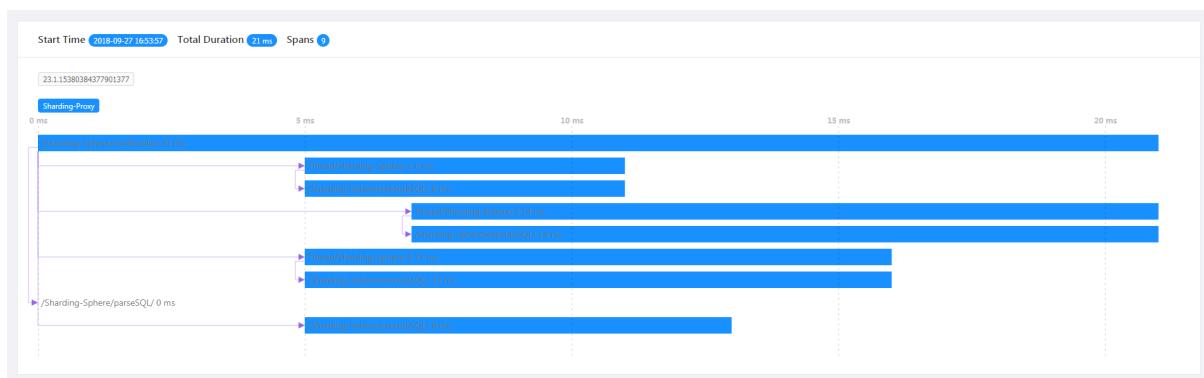


Figure2: The tracking diagram

SQL parsing and implementation can be seen from the tracing diagram.

/Sharding-Sphere/parseSQL/ indicates the SQL parsing performance this time.

/Sharding-Sphere/executeSQL/ indicates the SQL parsing performance in actual execution.

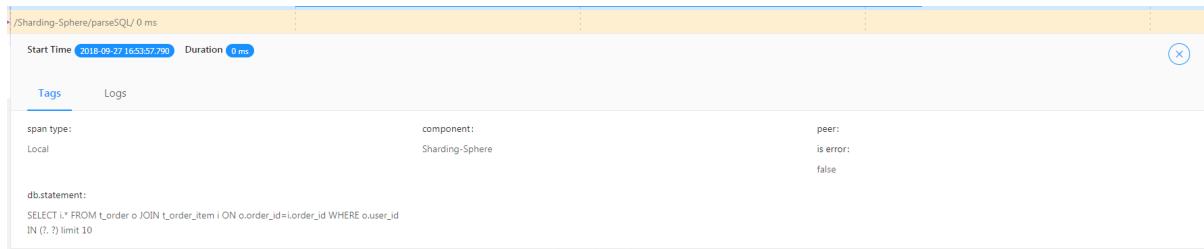


Figure3: The parsing node



Figure4: The actual access node

## Exception



Figure5: Exception tracking diagram

Exception nodes can be seen from the tracing diagram.

/Sharding-Sphere/executeSQL/ indicates the exception results of SQL.

/Sharding-Sphere/executeSQL/ indicates the exception log of SQL execution.

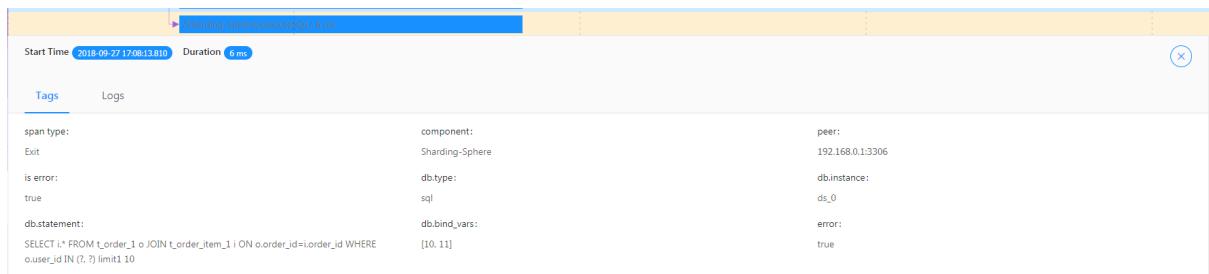


Figure6: Exception node



Figure7: Exception log

### 7.1.9 Unsupported Items

#### DataSource Interface

- Do not support timeout related operations

#### Connection Interface

- Do not support operations of stored procedure, function and cursor
- Do not support native SQL
- Do not support savepoint related operations
- Do not support Schema/Catalog operation
- Do not support self-defined type mapping

#### Statement and PreparedStatement Interface

- Do not support statements that return multiple result sets (stored procedures, multiple pieces of non-SELECT data)
- Do not support the operation of international characters

## ResultSet Interface

- Do not support getting result set pointer position
- Do not support changing result pointer position through none-next method
- Do not support revising the content of result set
- Do not support acquiring international characters
- Do not support getting Array

## JDBC 4.1

- Do not support new functions of JDBC 4.1 interface

For all the unsupported methods, please read `org.apache.shardingsphere.driver.jdbc.unsupported` package.

## 7.2 ShardingSphere-Proxy

Configuration is the only module in ShardingSphere-Proxy that interacts with application developers, through which developer can quickly and clearly understand the functions provided by ShardingSphere-Proxy.

This chapter is a configuration manual for ShardingSphere-Proxy, which can also be referred to as a dictionary if necessary.

ShardingSphere-Proxy provided YAML configuration, and used DistSQL to communicate. By configuration, application developers can flexibly use data sharding, readwrite-splitting, data encryption, shadow database or the combination of them.

Rule configuration keeps consist with YAML configuration of ShardingSphere-JDBC. DistSQL and YAML can be replaced each other.

Please refer to [Example](#) for more details.

### 7.2.1 Startup

This chapter will introduce the deployment and startup of ShardingSphere-Proxy.

## Use Binary Tar

### Background

This section describes how to start ShardingSphere-Proxy by binary release packages

### Premise

Start the Proxy with a binary package requires an environment with Java JRE 8 or later.

### Steps

1. Obtain the binary release package of ShardingSphere-Proxy

Obtain the binary release package of ShardingSphere-Proxy on the [download page](#).

2. Configure `conf/server.yaml`

ShardingSphere-Proxy's operational mode is configured on `server.yaml`, and its configuration mode is the same with that of ShardingSphere-JDBC. Refer to [mode of configuration](#).

Please refer to the following links for other configuration items: \* [Permission configuration](#) \* [Property configuration](#)

3. Configure `conf/config-*.yaml`

Modify files named with the prefix `config-` in the `conf` directory, such as `conf/config-sharding.yaml` file and configure sharding rules and read/write splitting rules. See [Configuration Manual](#) for configuration methods. The `*` part of the `config-*.yaml` file can be named whatever you want.

ShardingSphere-Proxy supports multiple logical data sources. Each YAML configuration file named with the prefix `config-` is a logical data source.

4. Introduce database driver (Optional)

If the backend is connected to a PostgreSQL or openGauss database, no additional dependencies need to be introduced.

If the backend is connected to a MySQL database, please download `mysql-connector-java-5.1.47.jar` or `mysql-connector-java-8.0.11.jar`, and put it into the `ext-lib` directory.

5. Introduce dependencies required by the cluster mode (Optional)

ShardingSphere-Proxy integrates the ZooKeeper Curator client by default. ZooKeeper is used in cluster mode without introducing other dependencies.

If the cluster mode uses Etcd, the client drivers of Etcd `jetcd-core 0.5.0` need to be copied into the `ext-lib` directory.

6. Introduce dependencies required by distributed transactions (Optional)

It is the same with ShardingSphere-JDBC. Please refer to [Distributed Transaction](#) for more details.

7. Introduce custom algorithm (Optional)

If you need to use a user-defined algorithm class, you can configure custom algorithm in the following ways:

1. Implement the algorithm implementation class defined by `ShardingAlgorithm`.
2. Create a `META-INF/services` directory under the project `resources` directory.
3. Create file `org.apache.shardingsphere.sharding.spi.ShardingAlgorithm` under the directory `META-INF/services`.
4. Writes the fully qualified class name of the implementation class to a file `org.apache.shardingsphere.sharding.spi.ShardingAlgorithm`
5. Package the above Java files into jar packages.
6. Copy the above jar package to the `ext-lib` directory.
7. Configure the Java file reference of the above custom algorithm implementation class in a YAML file, see [Configuration rule](<https://shardingsphere.apache.org/document/current/en/user-manual/shardingsphere-proxy/yaml-config/>) for more details.

## 8. Start ShardingSphere-Proxy

In Linux or macOS, run `bin/start.sh`. In Windows, run `bin/start.bat` to start ShardingSphere-Proxy. The default listening port is 3307 and the default configuration directory is the `conf` directory in Proxy. The startup script can specify the listening port and the configuration file directory by running the following command:

```
bin/start.sh [port] [/path/to/conf]
```

## 9. Connect ShardingSphere-Proxy with client

Run the MySQL/PostgreSQL/openGauss client command to directly operate ShardingSphere-Proxy.

Connect ShardingSphere-Proxy with MySQL client:

```
mysql -h${proxy_host} -P${proxy_port} -u${proxy_username} -p${proxy_password}
```

Connect ShardingSphere-Proxy with PostgreSQL:

```
psql -h ${proxy_host} -p ${proxy_port} -U ${proxy_username}
```

Connect ShardingSphere-Proxy with openGauss client:

```
gsql -r -h ${proxy_host} -p ${proxy_port} -U ${proxy_username} -W ${proxy_password}
```

## Sample

Please refer to samples on ShardingSphere repository for complete configuration: <https://github.com/apache/shardingsphere/tree/master/examples/shardingsphere-proxy-example>

## Use Docker

### Background

This chapter is an introduction about how to start ShardingSphere-Proxy via Docker

### Notice

Using Docker to start ShardingSphere-Proxy does not require additional package support.

### Steps

#### 1. Acquire Docker Image

- Method 1 (Recommended): Pull from DockerHub

```
docker pull apache/shardingsphere-proxy
```

- Method 2: Acquire latest master branch image master: <https://github.com/apache/shardingsphere/pkgs/container/shardingsphere-proxy>
- Method 3: Build your own image

```
git clone https://github.com/apache/shardingsphere
mvn clean install
cd shardingsphere-distribution/shardingsphere-proxy-distribution
mvn clean package -Prelease,docker
```

If the following problems emerge, please make sure Docker daemon Process is running.

```
I/O exception (java.io.IOException) caught when processing request to {}->unix://
localhost:80: Connection refused?
```

#### 2. Configure conf/server.yaml and conf/config-\*.yaml

Configuration file template can be attained from the Docker container and can be copied to any directory on the host:

```
docker run -d --name tmp --entrypoint=bash apache/shardingsphere-proxy
docker cp tmp:/opt/shardingsphere-proxy/conf /host/path/to/conf
docker rm tmp
```

Since the network conditions inside the container may differ from those of the host, if errors such as “cannot connect to the database” occurs, please make sure that the IP of the database specified in the conf/config-\*.yaml configuration file can be accessed from inside the Docker container.

For details, please refer to [ShardingSphere-Proxy quick start manual - binary distribution packages](#).

#### 3. (Optional) Introduce third-party dependencies or customized algorithms

If you have any of the following requirements:  
\* ShardingSphere-Proxy Backend use MySQL Database;  
\* Implement customized algorithms; \* Use Etcd as Registry Center in cluster mode.

Please create `ext-lib` directory anywhere inside the host and refer to the steps in [ShardingSphere-Proxy quick start manual - binary distribution packages](#).

#### 4. Start ShardingSphere-Proxy container

Mount the `conf` and `ext-lib` directories from the host to the container. Start the container:

```
docker run -d \
-v /host/path/to/conf:/opt/shardingsphere-proxy/conf \
-v /host/path/to/ext-lib:/opt/shardingsphere-proxy/ext-lib \
-e PORT=3308 -p13308:3308 apache/shardingsphere-proxy:latest
```

`ext-lib` is not necessary during the process. Users can mount it at will. ShardingSphere-Proxy default portal 3307 can be designated according to environment variable `-e PORT` Customized JVM related parameters can be set according to environment variable `JVM_OPTS`

#### 5. Use Client to connect to ShardingSphere-Proxy

Please refer to [ShardingSphere-Proxy quick start manual - binary distribution packages](#).

### Configuration Example

For full configuration, please refer to the examples given in ShardingSphere library: <https://github.com/apache/shardingsphere/tree/master/examples/shardingsphere-proxy-example>

### Use Helm

Use [Helm](#) to provide guidance for the installation of ShardingSphere-Proxy instance in Kubernetes cluster.

### Quick Start

Attention: The following installation method will start ShardingSphere-Proxy with the default `server.yaml` configuration

```
helm repo add shardingsphere https://shardingsphere.apache.org/charts
helm install shardingsphere-proxy shardingsphere/apache-shardingsphere-proxy
```

## Step By Step

### Requirements

1. Kubernetes 1.18+
2. kubectl
3. Helm 3.2.0+

Use StorageClass to allow dynamic provisioning of Persistent Volumes (PV) for data persistent (optional).

### Install

#### Online installation

1. Add ShardingSphere-Proxy to the local helm repo:

```
helm repo add shardingsphere https://shardingsphere.apache.org/charts
```

2. Install ShardingSphere-Proxy charts: Attention: The following installation method will start ShardingSphere-Proxy with the default server.yaml configuration

```
helm install shardingsphere-proxy shardingsphere/apache-shardingsphere-proxy
```

To modify the configuration:

```
helm pull shardingsphere/apache-shardingsphere-proxy
tar -zxvf apache-shardingsphere-proxy-1.1.0-chart.tgz
Modify the serverConfig section in apache-shardingsphere-proxy/values.yaml
helm install shardingsphere-proxy apache-shardingsphere-proxy
```

#### Source installation

```
cd apache-shardingsphere-proxy/charts/governance
helm dependency build
cd ../..
helm dependency build
cd ..
helm install shardingsphere-proxy apache-shardingsphere-proxy
```

Charts will be installed with default configuration if above commands executed. Please refer configuration items description below to get more details. Execute `helm list` to acquire all installed releases.

## Uninstall

```
helm uninstall shardingsphere-proxy
```

Delete all release records by default, add `--keep-history` to keep them.

## Parameters

### Governance-Node parameters

Name	Description	Value
<code>governance.enabled</code>	Switch to enable or disable the governance helm chart	<code>``true``</code>

### Governance-Node ZooKeeper parameters

Name	Description	Value
<code>governance.zookeeper.enabled</code>	Switch to enable or disable the ZooKeeper helm chart	<code>true</code>
<code>governance.zookeeper.replicaCount</code>	Number of ZooKeeper nodes	<code>1</code>
<code>governance.zookeeper.persistence.enabled</code>	Enable persistence on ZooKeeper using PVC(s)	<code>`false`</code>
<code>governance.zookeeper.persistence.storageClass</code>	Persistent Volume storage class	<code>""</code>
<code>governance.zookeeper.persistence.accessModes</code>	Persistent Volume access modes	<code>["ReadWriteOnce"]</code>
<code>governance.zookeeper.persistence.size</code>	Persistent Volume size	<code>8Gi</code>
<code>governance.zookeeper.resources.limits</code>	The resources limits for the ZooKeeper containers	<code>{}</code>
<code>governance.zookeeper.resources.requests.memory</code>	The requested memory for the ZooKeeper containers	<code>`256Mi`</code>
<code>governance.zookeeper.resources.requests.cpu</code>	The requested cpu for the ZooKeeper containers	<code>250m</code>

**Compute-Node ShardingSphere-Proxy parameters**

Name	Description	Value
compute.image.repository	Image name of ShardingSphere-Proxy.	apache/sharding-sphere-proxy
compute.image.pullPolicy	The policy for pulling ShardingSphere-Proxy image	``IfNotPresent``
compute.image.tag	ShardingSphere-Proxy image tag	5.1.2
compute.imagePullSecrets	Specify docker-registry secret names as an array	[]
compute.resources.limits	The resources limits for the ShardingSphere-Proxy containers	{}
compute.resources.requests.memory	The requested memory for the ShardingSphere-Proxy containers	2Gi
compute.resources.requests.cpu	The requested cpu for the ShardingSphere-Proxy containers	200m
compute.replicas	Number of cluster replicas	3
compute.service.type	ShardingSphere-Proxy network mode	ClusterIP
compute.service.port	ShardingSphere-Proxy expose port	3307
compute.mysqlConnector.version	MySQL connector version	5.1.49
compute.startPort	ShardingSphere-Proxy start port	3307

**Compute-Node ShardingSphere-Proxy ServerConfiguration authority parameters**

Name	Description	Value
compute.serverConfig.authority.privilege.type	authority provider for storage node, the default value is ALL_PERMITTED	ALL_PRIVILEGES_PERMISSIONED
compute.serverConfig.authority.users[0].password	Password for compute node.	root
compute.serverConfig.authority.users[0].user	Username,authorized host for compute node. Format: @hostname is % or empty string means do not care about authorized host	root@%

### Compute-Node ShardingSphere-Proxy ServerConfiguration mode Configuration parameters

Name	Description	Value
compute.serverConfig.mode.type	Type of mode configuration. Now only support Cluster mode	Cluster
compute.serverConfig.mode.repository.props.namespace	Namespace of registry center	governance_ds
compute.serverConfig.mode.repository.server-lists	Server lists of registry center	<code>{} printf "%s-zookeeper.%s:2 181" .Release.Name .Release.Namespace }}</code>
compute.serverConfig.mode.repository.maxRetries	Max retries of client connection	3
compute.serverConfig.mode.repository.operationTimeoutMilliseconds	Milliseconds of operation timeout	5000
compute.serverConfig.mode.repository.retryIntervalMilliseconds	Milliseconds of retry interval	500
compute.serverConfig.mode.repository.timeToLiveSeconds	Seconds of ephemeral data live	60
<code>compute.serverConfig.mode.repository.type</code>	Type of persist repository. Now only support ZooKeeper	ZooKeeper
compute.serverConfig.mode.overwrite	Whether overwrite persistent configuration with local configuration	true

#### 7.2.2 Yaml Configuration

The YAML configuration of ShardingSphere-JDBC is the subset of ShardingSphere-Proxy. In `server.yaml` file, ShardingSphere-Proxy can configure authority feature and more properties for Proxy only.

This chapter will introduce the extra YAML configuration of ShardingSphere-Proxy.

## Authority

It is used to set up initial user to login compute node, and authority data of storage node.

### Configuration Item Explanation

```
rules:
- !AUTHORITY
 users:
 - # Username, authorized host and password for compute node. Format:
<username>@<hostname>:<password>, hostname is % or empty string means do not care
 about authorized host
 provider:
 type: # authority provider for storage node, the default value is ALL_
PERMITTED
```

### Example

#### ALL\_PERMITTED

```
rules:
- !AUTHORITY
 users:
 - root@localhost:root
 - my_user@:pwd
 provider:
 type: ALL_PERMITTED
```

#### DATABASE\_PERMITTED

```
rules:
- !AUTHORITY
 users:
 - root@:root
 - my_user@:pwd
 provider:
 type: DATABASE_PERMITTED
 props:
 user-database-mappings: root@=sharding_db, root@=test_db, my_user@127.0.0.
1=sharding_db
```

The above configuration means: - The user `root` can access `sharding_db` when connecting from any host - The user `root` can access `test_db` when connecting from any host - The user `my_user` can access `sharding_db` only when connected from `127.0.0.1`

Refer to [Authority Provider](#) for more implementations.

## Properties

### Background

Apache ShardingSphere can configure system-level configuration through property configuration. This section describes the configuration items in `server.yaml`.

## Parameters

Name	• Data Type *	Description	• Default *	• Dynamic Update *
sql-show (?)	boolean	Whether to print SQL in logs. Printing SQL can help developers quickly locate system problems. Logs contain the following contents: logical SQL, authentic SQL and SQL parsing result. If configuration is enabled, logs will use Topic Sharding-Sphere-SQL, and log level is INFO.	false	True
sql-simple (?)	boolean	Whether to print simple SQL in logs.	false	True
kernel-exe cutor-size (?)	int	Set the size of the thread pool for task processing. Each ShardingSphere-DataSource uses an independent thread pool, and different data sources on the same JVM do not share thread pools.	infinite	False
max-connections-size -per-query (?)	int	The maximum number of connections that a query request	1	True
<b>7.2. ShardingSphere-Proxy</b>		can use in each database instance.		<b>222</b>
check-tables	boolean	Whether to check table	false	True

Property configuration can be modified according to [DistSQL#RAL](#). Properties that support dynamic change can take effect immediately. Properties that do not support dynamic change take effect after a restart.

## Sample

For a complete sample, please refer to `server.yaml` in ShardingSphere's repository: <https://github.com/apache/shardingsphere/blob/aac0d3026e00575114701be603ec189a02a45747/shardingsphere-proxy/shardingsphere-proxy-bootstrap/src/main/resources/conf/server.yaml#L71-L93>

## Rules

### Background

This section describes how to configure the rules for ShardingSphere-Proxy.

### Parameters Explained

Rules configuration of ShardingSphere-Proxy is the same as that of ShardingSphere-JDBC. For details, please refer to [ShardingSphere-JDBC Rules Configuration](#).

### Notice

Unlike ShardingSphere-JDBC, the following rules need to be configured in `server.yaml` of ShardingSphere-Proxy:

- [SQL Parsing](#)
- [Distributed Operations](#)
- [SQL Translator](#)

## 7.2.3 DistSQL

This chapter will introduce the detailed syntax of DistSQL.

### Syntax

This chapter describes the syntax of DistSQL in detail, and introduces use of DistSQL with practical examples.

## RDL Syntax

RDL (Resource & Rule Definition Language) responsible for definition of resources/rules.

### Resource Definition

#### Syntax

```

ADD RESOURCE dataSource [, dataSource] ...

ALTER RESOURCE dataSource [, dataSource] ...

DROP RESOURCE dataSourceName [, dataSourceName] ... [ignore single tables]

dataSource:
 simpleSource | urlSource

simpleSource:
 dataSourceName(HOST=hostname,PORT=port,DB=dbName,USER=user [,PASSWORD=password]
 [,PROPERTIES(poolProperty [,poolProperty] ...)])

urlSource:
 dataSourceName(URL=url,USER=user [,PASSWORD=password] [,PROPERTIES(poolProperty
 [,poolProperty]) ...])

poolProperty:
 "key"= ("value" | value)

```

- Before adding resources, please confirm that a distributed database has been created, and execute the `use` command to successfully select a database
- Confirm that the added resource can be connected normally, otherwise it will not be added successfully
- Duplicate `dataSourceName` is not allowed to be added
- In the definition of a `dataSource`, the syntax of `simpleSource` and `urlSource` cannot be mixed
- `poolProperty` is used to customize connection pool properties, `key` must be the same as the connection pool property name, `value` supports int and String types
- `ALTER RESOURCE` is not allowed to change the real data source associated with this resource
- `ALTER RESOURCE` will switch the connection pool. This operation may affect the ongoing business, please use it with caution
- `DROP RESOURCE` will only delete logical resources, not real data sources
- Resources referenced by rules cannot be deleted

- If the resource is only referenced by `single table rule`, and the user confirms that the restriction can be ignored, the optional parameter `ignore single tables` can be added to perform forced deletion

### Example

```
ADD RESOURCE resource_0 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=db0,
 USER=root,
 PASSWORD=root
),resource_1 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=db1,
 USER=root
),resource_2 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=db2,
 USER=root,
 PROPERTIES("maximumPoolSize"=10)
),resource_3 (
 URL="jdbc:mysql://127.0.0.1:3306/db3?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=10,"idleTimeout"="30000")
);

ALTER RESOURCE resource_0 (
 HOST=127.0.0.1,
 PORT=3309,
 DB=db0,
 USER=root,
 PASSWORD=root
),resource_1 (
 URL="jdbc:mysql://127.0.0.1:3309/db1?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=10,"idleTimeout"="30000")
);

DROP RESOURCE resource_0, resource_1;
DROP RESOURCE resource_2, resource_3 ignore single tables;
```

## Rule Definition

This chapter describes the syntax of rule definition.

### Sharding

#### Syntax

##### Sharding Table Rule

```
CREATE SHARDING TABLE RULE shardingTableRuleDefinition [,
shardingTableRuleDefinition] ...

ALTER SHARDING TABLE RULE shardingTableRuleDefinition [,
shardingTableRuleDefinition] ...

DROP SHARDING TABLE RULE tableName [, tableName] ...

CREATE DEFAULT SHARDING shardingScope STRATEGY (shardingStrategy)

ALTER DEFAULT SHARDING shardingScope STRATEGY (shardingStrategy)

DROP DEFAULT SHARDING shardingScope STRATEGY;

CREATE SHARDING ALGORITHM shardingAlgorithmDefinition [,
shardingAlgorithmDefinition] ...

ALTER SHARDING ALGORITHM shardingAlgorithmDefinition [,
shardingAlgorithmDefinition] ...

DROP SHARDING ALGORITHM algorithmName [, algorithmName] ...

CREATE SHARDING KEY GENERATOR keyGeneratorDefinition [, keyGeneratorDefinition] ...

ALTER SHARDING KEY GENERATOR keyGeneratorDefinition [, keyGeneratorDefinition] ...

DROP SHARDING KEY GENERATOR keyGeneratorName [, keyGeneratorName] ...

shardingTableRuleDefinition:
 shardingAutoTableRule | shardingTableRule

shardingAutoTableRule:
 tableName(resources, shardingColumn, algorithmDefinition [,
keyGenerateDeclaration)

shardingTableRule:
 tableName(dataNodes [, databaseStrategy] [, tableStrategy] [,
keyGenerateDeclaration)
```

```
resources:
 RESOURCES(resource [, resource] ...)

dataNodes:
 DATANODES(dataNode [, dataNode] ...)

resource:
 resourceName | inlineExpression

dataNode:
 resourceName | inlineExpression

shardingColumn:
 SHARDING_COLUMN=columnName

algorithmDefinition:
 TYPE(NAME=shardingAlgorithmType [, PROPERTIES([algorithmProperties])])

keyGenerateDeclaration:
 keyGenerateDefinition | keyGenerateConstruction

keyGenerateDefinition:
 KEY_GENERATE_STRATEGY(COLUMN=columnName, strategyDefinition)

shardingScope:
 DATABASE | TABLE

databaseStrategy:
 DATABASE_STRATEGY(shardingStrategy)

tableStrategy:
 TABLE_STRATEGY(shardingStrategy)

keyGenerateConstruction
 KEY_GENERATE_STRATEGY(COLUMN=columnName, KEY_
GENERATOR=keyGenerateAlgorithmName)

shardingStrategy:
 TYPE=strategyType, shardingColumn, shardingAlgorithm

shardingAlgorithm:
 existingAlgorithm | autoCreativeAlgorithm

existingAlgorithm:
 SHARDING_ALGORITHM=shardingAlgorithmName

autoCreativeAlgorithm:
```

```

SHARDING_ALGORITHM(algorithmDefinition)

strategyDefinition:
 TYPE(NAME=keyGenerateStrategyType [, PROPERTIES([algorithmProperties]))]

shardingAlgorithmDefinition:
 shardingAlgorithmName(algorithmDefinition)

algorithmProperties:
 algorithmProperty [, algorithmProperty] ...

algorithmProperty:
 key=value

keyGeneratorDefinition:
 keyGeneratorName (algorithmDefinition)

```

- RESOURCES needs to use data source resources managed by RDL
- shardingAlgorithmType specifies the type of automatic sharding algorithm, please refer to [Auto Sharding Algorithm](#)
- keyGenerateStrategyType specifies the distributed primary key generation strategy, please refer to [Key Generate Algorithm](#)
- Duplicate tableName will not be created
- shardingAlgorithm can be reused by different Sharding Table Rule, so when executing `DROP SHARDING TABLE RULE`, the corresponding shardingAlgorithm will not be removed
- To remove shardingAlgorithm, please execute `DROP SHARDING ALGORITHM`
- strategyType specifies the sharding strategy, please refer to [Sharding Strategy](#)
- Sharding Table Rule supports both Auto Table and Table at the same time. The two types are different in syntax. For the corresponding configuration file, please refer to [Sharding](#)
- When using the `autoCreativeAlgorithm` way to specify shardingStrategy, a new sharding algorithm will be created automatically. The algorithm naming rule is `tableName_strategyType_shardingAlgorithmType`, such as `t_order_database_inline`

## Sharding Binding Table Rule

```

CREATE SHARDING BINDING TABLE RULES bindTableRulesDefinition [, bindTableRulesDefinition] ...

ALTER SHARDING BINDING TABLE RULES bindTableRulesDefinition [, bindTableRulesDefinition] ...

DROP SHARDING BINDING TABLE RULES bindTableRulesDefinition [, bindTableRulesDefinition] ...

```

```
bindTableRulesDefinition:
 (tableName [, tableName] ...)
```

- ALTER will overwrite the binding table configuration in the database with the new configuration

### Sharding Broadcast Table Rule

```
CREATE SHARDING BROADCAST TABLE RULES (tableName [, tableName] ...)

ALTER SHARDING BROADCAST TABLE RULES (tableName [, tableName] ...)

DROP SHARDING BROADCAST TABLE RULES
```

- ALTER will overwrite the broadcast table configuration in the database with the new configuration

### Sharding Scaling Rule

```
CREATE SHARDING SCALING RULE scalingName [scalingRuleDefinition]

DROP SHARDING SCALING RULE scalingName

ENABLE SHARDING SCALING RULE scalingName

DISABLE SHARDING SCALING RULE scalingName

scalingRuleDefinition:
 [inputDefinition] [, outputDefinition] [, streamChannel] [, completionDetector]
 [, dataConsistencyChecker]

inputDefinition:
 INPUT ([workerThread] [, batchSize] [, rateLimiter])

outputDefinition:
 OUTPUT ([workerThread] [, batchSize] [, rateLimiter])

completionDetector:
 COMPLETION_DETECTOR (algorithmDefinition)

dataConsistencyChecker:
 DATA_CONSISTENCY_CHECKER (algorithmDefinition)

rateLimiter:
 RATE_LIMITER (algorithmDefinition)

streamChannel:
```

```

STREAM_CHANNEL (algorithmDefinition)

workerThread:
 WORKER_THREAD=intValue

batchSize:
 BATCH_SIZE=intValue

intValue:
 INT

```

- ENABLE is used to set which sharding scaling rule is enabled;
- DISABLE will disable the sharding scaling rule currently in use;
- Enabled by default when creating the first sharding scaling rule in a logical database.

## Example

### Sharding Table Rule

#### Key Generator

```

CREATE SHARDING KEY GENERATOR snowflake_key_generator (
 TYPE(NAME=SNOWFLAKE)
);

ALTER SHARDING KEY GENERATOR snowflake_key_generator (
 TYPE(NAME=SNOWFLAKE)
);

DROP SHARDING KEY GENERATOR snowflake_key_generator;

```

#### Auto Table

```

CREATE SHARDING TABLE RULE t_order (
 RESOURCES(resource_0,resource_1),
 SHARDING_COLUMN=order_id,TYPE(NAME=hash_mod,PROPERTIES("sharding-count"=4)),
 KEY_GENERATE_STRATEGY(COLUMN=another_id,TYPE(NAME=snowflake))
);

ALTER SHARDING TABLE RULE t_order (
 RESOURCES(resource_0,resource_1,resource_2,resource_3),
 SHARDING_COLUMN=order_id,TYPE(NAME=hash_mod,PROPERTIES("sharding-count"=16)),
 KEY_GENERATE_STRATEGY(COLUMN=another_id,TYPE(NAME=snowflake))
);

DROP SHARDING TABLE RULE t_order;

```

```
DROP SHARDING ALGORITHM t_order_hash_mod;
```

*Table*

```
CREATE SHARDING ALGORITHM table_inline (
 TYPE(NAME=inline,PROPERTIES("algorithm-expression"="t_order_item_${order_id % 2}"))
);

CREATE SHARDING TABLE RULE t_order_item (
 DATANODES("resource_${0..1}.t_order_item_${0..1}"),
 DATABASE_STRATEGY(TYPE=standard,SHARDING_COLUMN=user_id,SHARDING_
 ALGORITHM(TYPE(NAME=inline,PROPERTIES("algorithm-expression"="resource_${user_id % 2}")))),
 TABLE_STRATEGY(TYPE=standard,SHARDING_COLUMN=order_id,SHARDING_ALGORITHM=table_
 inline),
 KEY_GENERATE_STRATEGY(COLUMN=another_id,KEY_GENERATOR=snowflake_key_generator)
);

ALTER SHARDING ALGORITHM database_inline (
 TYPE(NAME=inline,PROPERTIES("algorithm-expression"="resource_${user_id % 4}"))
),table_inline (
 TYPE(NAME=inline,PROPERTIES("algorithm-expression"="t_order_item_${order_id % 4}"))
);

ALTER SHARDING TABLE RULE t_order_item (
 DATANODES("resource_${0..3}.t_order_item${0..3}"),
 DATABASE_STRATEGY(TYPE=standard,SHARDING_COLUMN=user_id,SHARDING_
 ALGORITHM=database_inline),
 TABLE_STRATEGY(TYPE=standard,SHARDING_COLUMN=order_id,SHARDING_ALGORITHM=table_
 inline),
 KEY_GENERATE_STRATEGY(COLUMN=another_id,KEY_GENERATOR=snowflake_key_generator)
);

DROP SHARDING TABLE RULE t_order_item;

DROP SHARDING ALGORITHM database_inline;

CREATE DEFAULT SHARDING DATABASE STRATEGY (
 TYPE = standard,SHARDING_COLUMN=order_id,SHARDING_ALGORITHM=database_inline
);

ALTER DEFAULT SHARDING DATABASE STRATEGY (
 TYPE = standard,SHARDING_COLUMN=another_id,SHARDING_ALGORITHM=database_inline
);

DROP DEFAULT SHARDING DATABASE STRATEGY;
```

## Sharding Binding Table Rule

```
CREATE SHARDING BINDING TABLE RULES (t_order,t_order_item),(t_1,t_2);

ALTER SHARDING BINDING TABLE RULES (t_order,t_order_item);

DROP SHARDING BINDING TABLE RULES;

DROP SHARDING BINDING TABLE RULES (t_order,t_order_item);
```

## Sharding Broadcast Table Rule

```
CREATE SHARDING BROADCAST TABLE RULES (t_b,t_a);

ALTER SHARDING BROADCAST TABLE RULES (t_b,t_a,t_3);

DROP SHARDING BROADCAST TABLE RULES;
```

## Sharding Scaling Rule

```
CREATE SHARDING SCALING RULE sharding_scaling(
INPUT(
 WORKER_THREAD=40,
 BATCH_SIZE=1000
),
OUTPUT(
 WORKER_THREAD=40,
 BATCH_SIZE=1000
),
STREAM_CHANNEL(TYPE(NAME=MEMORY, PROPERTIES("block-queue-size"=10000))),
COMPLETION_DETECTOR(TYPE(NAME=IDLE, PROPERTIES("incremental-task-idle-seconds-threshold"=1800))),
DATA_CONSISTENCY_CHECKER(TYPE(NAME=DATA_MATCH, PROPERTIES("chunk-size"=1000)))
);

ENABLE SHARDING SCALING RULE sharding_scaling;

DISABLE SHARDING SCALING RULE sharding_scaling;

DROP SHARDING SCALING RULE sharding_scaling;
```

## Single Table

### Definition

```
CREATE DEFAULT SINGLE TABLE RULE singleTableRuleDefinition

ALTER DEFAULT SINGLE TABLE RULE singleTableRuleDefinition

DROP DEFAULT SINGLE TABLE RULE

singleTableRuleDefinition:
 RESOURCE = resourceName
```

- RESOURCE needs to use data source resource managed by RDL

### Example

#### Single Table Rule

```
CREATE DEFAULT SINGLE TABLE RULE RESOURCE = ds_0

ALTER DEFAULT SINGLE TABLE RULE RESOURCE = ds_1

DROP DEFAULT SINGLE TABLE RULE
```

## Readwrite-Splitting

### Syntax

```
CREATE READWRITE_SPLITTING RULE readwriteSplittingRuleDefinition [, readwriteSplittingRuleDefinition] ...

ALTER READWRITE_SPLITTING RULE readwriteSplittingRuleDefinition [, readwriteSplittingRuleDefinition] ...

DROP READWRITE_SPLITTING RULE ruleName [, ruleName] ...

readwriteSplittingRuleDefinition:
 ruleName ([staticReadwriteSplittingRuleDefinition | dynamicReadwriteSplittingRuleDefinition]
 [, loadBanlancerDefinition])

staticReadwriteSplittingRuleDefinition:
 WRITE_RESOURCE=writeResourceName, READ_RESOURCES(resourceName [, resourceName]
...)
```

```

dynamicReadWriteSplittingRuleDefinition:
 AUTO_AWARE_RESOURCE=resourceName [, WRITE_DATA_SOURCE_QUERY_
ENABLED=writeDataSourceQueryEnabled]

loadBanlancerDefinition:
 TYPE(NAME=loadBanlancerType [, PROPERTIES([algorithmProperties])])

algorithmProperties:
 algorithmProperty [, algorithmProperty] ...

algorithmProperty:
 key=value

writeDataSourceQueryEnabled:
 TRUE | FALSE

```

- Support the creation of static readwrite-splitting rules and dynamic readwrite-splitting rules
- Dynamic readwrite-splitting rules rely on database discovery rules
- `loadBanlancerType` specifies the load balancing algorithm type, please refer to [Load Balance Algorithm](#)
- Duplicate `ruleName` will not be created

### Example

```

// Static
CREATE READWRITE_SPLITTING RULE ms_group_0 (
 WRITE_RESOURCE=write_ds,
 READ_RESOURCES(read_ds_0,read_ds_1),
 TYPE(NAME=random)
);

// Dynamic
CREATE READWRITE_SPLITTING RULE ms_group_1 (
 AUTO_AWARE_RESOURCE=group_0,
 WRITE_DATA_SOURCE_QUERY_ENABLED=false,
 TYPE(NAME=random,PROPERTIES(read_weight='2:1'))
);

ALTER READWRITE_SPLITTING RULE ms_group_1 (
 WRITE_RESOURCE=write_ds,
 READ_RESOURCES(read_ds_0,read_ds_1,read_ds_2),
 TYPE(NAME=random,PROPERTIES(read_weight='2:0'))
);

```

```
DROP READWRITE_SPLITTING RULE ms_group_1;
```

## DB Discovery

### Syntax

```
CREATE DB_DISCOVERY RULE ruleDefinition [, ruleDefinition] ...

ALTER DB_DISCOVERY RULE ruleDefinition [, ruleDefinition] ...

DROP DB_DISCOVERY RULE ruleName [, ruleName] ...

CREATE DB_DISCOVERY TYPE databaseDiscoveryTypeDefinition [, databaseDiscoveryTypeDefinition] ...

ALTER DB_DISCOVERY TYPE databaseDiscoveryTypeDefinition [, databaseDiscoveryTypeDefinition] ...

DROP DB_DISCOVERY TYPE discoveryTypeName [, discoveryTypeName] ...

CREATE DB_DISCOVERY HEARTBEAT databaseDiscoveryHeartbaetDefinition [, databaseDiscoveryHeartbaetDefinition] ...

ALTER DB_DISCOVERY HEARTBEAT databaseDiscoveryHeartbaetDefinition [, databaseDiscoveryHeartbaetDefinition] ...

DROP DB_DISCOVERY HEARTBEAT discoveryHeartbeatName [, discoveryHeartbeatName] ...

ruleDefinition:
 (databaseDiscoveryRuleDefinition | databaseDiscoveryRuleConstruction)

databaseDiscoveryRuleDefinition
 ruleName (resources, typeDefinition, heartbeatDefinition)

databaseDiscoveryRuleConstruction
 ruleName (resources, TYPE = discoveryTypeName, HEARTBEAT = discoveryHeartbeatName)

databaseDiscoveryTypeDefinition
 discoveryTypeName (typeDefinition)

databaseDiscoveryHeartbaetDefinition
 discoveryHeartbeatName (PROPERTIES (properties))

resources:
 RESOURCES(resourceName [, resourceName] ...)
```

```

typeDefinition:
 TYPE(NAME=typeName [, PROPERTIES([properties])])

heartbeatDefinition
 HEARTBEAT (PROPERTIES (properties))

properties:
 property [, property] ...

property:
 key=value

```

- `discoveryType` specifies the database discovery service type, ShardingSphere has built-in support for MySQL.MGR
- Duplicate `ruleName` will not be created
- The `discoveryType` and `discoveryHeartbeat` being used cannot be deleted
- Names with - need to use " " when changing
- When removing the `discoveryRule`, the `discoveryType` and `discoveryHeartbeat` used by the `discoveryRule` will not be removed

## Example

### When creating a `discoveryRule`, create both `discoveryType` and `discoveryHeartbeat`

```

CREATE DB_DISCOVERY RULE db_discovery_group_0 (
RESOURCES(ds_0, ds_1, ds_2),
TYPE(NAME='MySQL.MGR',PROPERTIES('group-name'='92504d5b-6dec')),
HEARTBEAT(PROPERTIES('keep-alive-cron'='0/5 * * * * ?'))
);

ALTER DB_DISCOVERY RULE db_discovery_group_0 (
RESOURCES(ds_0, ds_1, ds_2),
TYPE(NAME='MySQL.MGR',PROPERTIES('group-name'='246e9612-aaf1')),
HEARTBEAT(PROPERTIES('keep-alive-cron'='0/5 * * * * ?'))
);

DROP DB_DISCOVERY RULE db_discovery_group_0;

DROP DB_DISCOVERY TYPE db_discovery_group_0_mgr;

DROP DB_DISCOVERY HEARTBEAT db_discovery_group_0_heartbeat;

```

Use the existing `discoveryType` and `discoveryHeartbeat` to create a `discoveryRule`

```

CREATE DB_DISCOVERY TYPE db_discovery_group_1_mgr(
 TYPE(NAME='MySQL.MGR',PROPERTIES('group-name'='92504d5b-6dec'))
);

CREATE DB_DISCOVERY HEARTBEAT db_discovery_group_1_heartbeat(
 PROPERTIES('keep-alive-cron'='0/5 * * * * ?')
);

CREATE DB_DISCOVERY RULE db_discovery_group_1 (
 RESOURCES(ds_0, ds_1, ds_2),
 TYPE=db_discovery_group_1_mgr,
 HEARTBEAT=db_discovery_group_1_heartbeat
);

ALTER DB_DISCOVERY TYPE db_discovery_group_1_mgr(
 TYPE(NAME='MySQL.MGR',PROPERTIES('group-name'='246e9612-aaf1'))
);

ALTER DB_DISCOVERY HEARTBEAT db_discovery_group_1_heartbeat(
 PROPERTIES('keep-alive-cron'='0/10 * * * * ?')
);

ALTER DB_DISCOVERY RULE db_discovery_group_1 (
 RESOURCES(ds_0, ds_1),
 TYPE=db_discovery_group_1_mgr,
 HEARTBEAT=db_discovery_group_1_heartbeat
);

DROP DB_DISCOVERY RULE db_discovery_group_1;

DROP DB_DISCOVERY TYPE db_discovery_group_1_mgr;

DROP DB_DISCOVERY HEARTBEAT db_discovery_group_1_heartbeat;

```

## Encrypt

### Syntax

```

CREATE ENCRYPT RULE encryptRuleDefinition [, encryptRuleDefinition] ...

ALTER ENCRYPT RULE encryptRuleDefinition [, encryptRuleDefinition] ...

DROP ENCRYPT RULE tableName [, tableName] ...

```

```

encryptRuleDefinition:
 tableName(COLUMNS(columnDefinition [, columnDefinition] ...), QUERY_WITH_
CIPHER_COLUMN=queryWithCipherColumn)

columnDefinition:
 (NAME=columnName [, PLAIN=plainColumnName] , CIPHER=cipherColumnName,
encryptAlgorithm)

encryptAlgorithm:
 TYPE(NAME=encryptAlgorithmType [, PROPERTIES([algorithmProperties])])

algorithmProperties:
 algorithmProperty [, algorithmProperty] ...

algorithmProperty:
 key=value

```

- PLAIN specifies the plain column, CIPHER specifies the cipher column
- encryptAlgorithmType specifies the encryption algorithm type, please refer to [Encryption Algorithm](#)
- Duplicate tableName will not be created
- queryWithCipherColumn support uppercase or lowercase true or false

## Example

```

CREATE ENCRYPT RULE t_encrypt (
COLUMNS(
(NAME=user_id,PLAIN=user_plain,CIPHER=user_cipher,TYPE(NAME=AES,PROPERTIES('aes-
key-value'='123456abc'))),
(NAME=order_id, CIPHER=order_cipher,TYPE(NAME=MD5))
), QUERY_WITH_CIPHER_COLUMN=true),
t_encrypt_2 (
COLUMNS(
(NAME=user_id,PLAIN=user_plain,CIPHER=user_cipher,TYPE(NAME=AES,PROPERTIES('aes-
key-value'='123456abc'))),
(NAME=order_id, CIPHER=order_cipher,TYPE(NAME=MD5))
), QUERY_WITH_CIPHER_COLUMN=FALSE);

ALTER ENCRYPT RULE t_encrypt (
COLUMNS(
(NAME=user_id,PLAIN=user_plain,CIPHER=user_cipher,TYPE(NAME=AES,PROPERTIES('aes-
key-value'='123456abc'))),
(NAME=order_id, CIPHER=order_cipher,TYPE(NAME=MD5))
), QUERY_WITH_CIPHER_COLUMN=TRUE);

```

```
DROP ENCRYPT RULE t_encrypt,t_encrypt_2;
```

## Shadow

### Syntax

```
CREATE SHADOW RULE shadowRuleDefinition [, shadowRuleDefinition] ...

ALTER SHADOW RULE shadowRuleDefinition [, shadowRuleDefinition] ...

CREATE SHADOW ALGORITHM shadowAlgorithm [, shadowAlgorithm] ...

ALTER SHADOW ALGORITHM shadowAlgorithm [, shadowAlgorithm] ...

DROP SHADOW RULE ruleName [, ruleName] ...

DROP SHADOW ALGORITHM algorithmName [, algorithmName] ...

CREATE DEFAULT SHADOW ALGORITHM NAME = algorithmName

shadowRuleDefinition: ruleName(resourceMapping, shadowTableRule [, shadowTableRule]
...)

resourceMapping: SOURCE=resourceName, SHADOW=resourceName

shadowTableRule: tableName(shadowAlgorithm [, shadowAlgorithm] ...)

shadowAlgorithm: ([algorithmName,] TYPE(NAME=shadowAlgorithmType,
PROPERTIES([algorithmProperties] ...)))

algorithmProperties: algorithmProperty [, algorithmProperty] ...

algorithmProperty: key=value
```

- Duplicate ruleName cannot be created
- resourceMapping specifies the mapping relationship between the source database and the shadow library. You need to use the resource managed by RDL, please refer to [resource](#)
- shadowAlgorithm can act on multiple shadowTableRule at the same time
- If algorithmName is not specified, it will be automatically generated according to ruleName, tableName and shadowAlgorithmType
- shadowAlgorithmType currently supports VALUE\_MATCH, REGEX\_MATCH and SIMPLE\_HINT
- shadowTableRule can be reused by different shadowRuleDefinition, so when executing `DROP SHADOW RULE`, the corresponding shadowTableRule will not be removed

- `shadowAlgorithm` can be reused by different `shadowTableRule`, so when executing `ALTER SHADOW RULE`, the corresponding `shadowAlgorithm` will not be removed

### Example

```
CREATE SHADOW RULE shadow_rule(
SOURCE=demo_ds,
SHADOW=demo_ds_shadow,
t_order((simple_hint_algorithm, TYPE(NAME=SIMPLE_HINT, PROPERTIES("shadow"="true",
foo="bar"))),(TYPE(NAME=REGEX_MATCH, PROPERTIES("operation"="insert","column"=
"user_id", "regex"='[1]'))),
t_order_item((TYPE(NAME=VALUE_MATCH, PROPERTIES("operation"="insert","column"=
"user_id", "value"='1'))));

ALTER SHADOW RULE shadow_rule(
SOURCE=demo_ds,
SHADOW=demo_ds_shadow,
t_order((simple_hint_algorithm, TYPE(NAME=SIMPLE_HINT, PROPERTIES("shadow"="true",
foo="bar"))),(TYPE(NAME=REGEX_MATCH, PROPERTIES("operation"="insert","column"=
"user_id", "regex"='[1]'))),
t_order_item((TYPE(NAME=VALUE_MATCH, PROPERTIES("operation"="insert","column"=
"user_id", "value"='1'))));

CREATE SHADOW ALGORITHM
(simple_hint_algorithm, TYPE(NAME=SIMPLE_HINT, PROPERTIES("shadow"="true", "foo"=
"bar")),
(user_id_match_algorithm, TYPE(NAME=REGEX_MATCH,PROPERTIES("operation"="insert",
"column"="user_id", "regex"='[1]')));

ALTER SHADOW ALGORITHM
(simple_hint_algorithm, TYPE(NAME=SIMPLE_HINT, PROPERTIES("shadow"="false", "foo"=
"bar")),
(user_id_match_algorithm, TYPE(NAME=VALUE_MATCH,PROPERTIES("operation"="insert",
"column"="user_id", "value"='1')));

DROP SHADOW RULE shadow_rule;

DROP SHADOW ALGORITHM simple_hint_algorithm;

CREATE DEFAULT SHADOW ALGORITHM NAME = simple_hint_algorithm;
```

## RQL Syntax

RQL (Resource & Rule Query Language) responsible for resources/rules query.

## Resource Query

## Syntax

SHOW DATABASE RESOURCES [FROM *databaseName*]

## Return Value Description

Column	Description
name	Data source name
type	Data source type
host	Data source host
port	Data source port
db	Database name
attribute	Data source attribute

## Example

```
mysql> SHOW DATABASE RESOURCES;
+-----+-----+-----+-----+-----+-----+-----+-----+
| name | type | host | port | db | connection_timeout_milliseconds | idle_
timeout_milliseconds | max_lifetime_milliseconds | max_pool_size | min_pool_size |
read_only | other_attributes
+-----+-----+-----+-----+-----+-----+-----+-----+
```



## Rule Query

This chapter describes the syntax of rule query.

### Sharding

#### Syntax

##### Sharding Table Rule

```
SHOW SHARDING TABLE tableRule | RULES [FROM databaseName]

SHOW SHARDING ALGORITHMS [FROM databaseName]

SHOW UNUSED SHARDING ALGORITHMS [FROM databaseName]

SHOW SHARDING AUDITORS [FROM databaseName]

SHOW SHARDING TABLE RULES USED ALGORITHM algorithmName [FROM databaseName]

SHOW SHARDING KEY GENERATORS [FROM databaseName]

SHOW UNUSED SHARDING KEY GENERATORS [FROM databaseName]

SHOW SHARDING TABLE RULES USED KEY GENERATOR keyGeneratorName [FROM databaseName]

SHOW DEFAULT SHARDING STRATEGY

SHOW SHARDING TABLE NODES

tableRule:
 RULE tableName
```

- Support query all data fragmentation rules and specified table query
- Support query all sharding algorithms
- Support query all sharding audit algorithms

## Sharding Binding Table Rule

```
SHOW SHARDING BINDING TABLE RULES [FROM databaseName]
```

## Sharding Broadcast Table Rule

```
SHOW SHARDING BROADCAST TABLE RULES [FROM databaseName]
```

## Sharding Scaling Rule

```
SHOW SHARDING SCALING RULES [FROM databaseName]
```

## Return Value Description

### Sharding Table Rule

Column	Description
table	Logical table name
actual_data_nodes	Actual data node
actual_data_sources	Actual data source (Displayed when creating rules by RDL)
database_strategy_type	Database sharding strategy type
database_sharding_column	Database sharding column
<b>database_sharding_algorithm_type</b>	Database sharding algorithm type
database_sharding_algorithm_props	Database sharding algorithm properties
table_strategy_type	Table sharding strategy type
table_sharding_column	Table sharding column
<b>table_sharding_algorithm_type</b>	Table sharding algorithm type
table_sharding_algorithm_props	Table sharding algorithm properties
key_generate_column	Sharding key generator column
key_generator_type	Sharding key generator type
key_generator_props	Sharding key generator properties

## Sharding Algorithms

Column	Description
name	Sharding algorithm name
type	Sharding algorithm type
props	Sharding algorithm properties

## Unused Sharding Algorithms

Column	Description
name	Sharding algorithm name
type	Sharding algorithm type
props	Sharding algorithm properties

## Sharding auditors

Column	Description
name	Sharding audit algorithm name
type	Sharding audit algorithm type
props	Sharding audit algorithm properties

## Sharding key generators

Column	Description
name	Sharding key generator name
type	Sharding key generator type
props	Sharding key generator properties

## Unused Sharding Key Generators

Column	Description
name	Sharding key generator name
type	Sharding key generator type
props	Sharding key generator properties

## Default Sharding Strategy

Column	Description
name	Strategy name
type	Sharding strategy type
sharding_column	Sharding column
sharding_algorithm_name	Sharding algorithm name
sharding_algorithm_type	Sharding algorithm type
sharding_algorithm_props	Sharding algorithm properties

## Sharding Table Nodes

Column	Description
name	Sharding rule name
nodes	Sharding nodes

## Sharding Binding Table Rule

Column	Description
sharding_binding_tables	sharding Binding Table list

## Sharding Broadcast Table Rule

Column	Description
sharding_broadcast_tables	sharding Broadcast Table list

## Sharding Scaling Rule

Column	Description
name	name of sharding scaling rule
input	data read configuration
output	data write configuration
stream_channel	algorithm of stream channel
completion_detector	algorithm of completion detecting
data_consistency_checker	algorithm of data consistency checking

## Example

## Sharding Table Rule

## SHOW SHARDING TABLE RULES

SHOW SHARDING TABLE RULE *tableName*

```
mysql> SHOW SHARDING TABLE RULE t_order;
```

```

| table | actual_data_nodes | actual_data_sources | database_strategy_
type | database_sharding_column | database_sharding_algorithm_type | database_
sharding_algorithm_props | table_strategy_type | table_sharding_column |_
table_sharding_algorithm_type | table_sharding_algorithm_props |_
key_generate_column | key_generator_type | key_generator_props |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| t_order | ds_${0..1}.t_order_${0..1} | INLINE | algorithm-expression:ds_$
user_id | INLINE | order_id | INLINE |
| algorithm-expression:t_order_${order_id % 2} | order_id | SNOWFLAKE
| | |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set (0.01 sec)

```

#### SHOW SHARDING ALGORITHMS

```

mysql> SHOW SHARDING ALGORITHMS;
+-----+-----+-----+
| name | type | props |
+-----+-----+-----+
| t_order_inline | INLINE | algorithm-expression=t_order_${order_id % 2} |
| t_order_item_inline | INLINE | algorithm-expression=t_order_item_${order_id % 2} |
+-----+-----+-----+
2 row in set (0.01 sec)

```

#### SHOW UNUSED SHARDING ALGORITHMS

```

mysql> SHOW UNUSED SHARDING ALGORITHMS;
+-----+-----+-----+
| name | type | props |
+-----+-----+-----+
| t1_inline | INLINE | algorithm-expression=t_order_${order_id % 2} |
+-----+-----+-----+
1 row in set (0.01 sec)

```

## SHOW SHARDING AUDITORS

```
mysql> SHOW SHARDING AUDITORS;
+-----+-----+-----+
| name | type | props |
+-----+-----+-----+
| dml_audit | DML_SHARDING_CONDITIONS | |
+-----+-----+-----+
2 row in set (0.01 sec)
```

SHOW SHARDING TABLE RULES USED ALGORITHM *algorithmName*

```
mysql> SHOW SHARDING TABLE RULES USED ALGORITHM t_order_inline;
+-----+-----+
| type | name |
+-----+-----+
| table | t_order |
+-----+-----+
1 row in set (0.01 sec)
```

## SHOW SHARDING KEY GENERATORS

```
mysql> SHOW SHARDING KEY GENERATORS;
+-----+-----+-----+
| name | type | props |
+-----+-----+-----+
| t_order_snowflake | snowflake | |
| t_order_item_snowflake | snowflake | |
| uuid_key_generator | uuid | |
+-----+-----+-----+
3 row in set (0.01 sec)
```

## SHOW UNUSED SHARDING KEY GENERATORS

```
mysql> SHOW UNUSED SHARDING KEY GENERATORS;
+-----+-----+-----+
| name | type | props |
+-----+-----+-----+
| uuid_key_generator | uuid | |
+-----+-----+-----+
1 row in set (0.01 sec)
```

SHOW SHARDING TABLE RULES USED KEY GENERATOR *keyGeneratorName*

```
mysql> SHOW SHARDING TABLE RULES USED KEY GENERATOR keyGeneratorName;
+-----+-----+
| type | name |
+-----+-----+
| table | t_order |
+-----+-----+
```

```
1 row in set (0.01 sec)
```

*SHOW DEFAULT SHARDING STRATEGY*

```
mysql> SHOW DEFAULT SHARDING STRATEGY ;

+-----+-----+-----+-----+
| name | type | sharding_column | sharding_algorithm_name | sharding_
algorithm_type | sharding_algorithm_props
+-----+-----+-----+-----+
| TABLE | NONE | | | |
| | | | | |
| DATABASE | STANDARD | order_id | database_inline | INLINE
| | | {algorithm-expression=ds_${user_id % 2}} |
+-----+-----+-----+-----+
-----+
2 rows in set (0.07 sec)
```

*SHOW SHARDING TABLE NODES*

```
mysql> SHOW SHARDING TABLE NODES;
+-----+
| name | nodes
+-----+
| t_order | ds_0.t_order_0, ds_1.t_order_1, ds_0.t_order_2, ds_1.t_order_3 |
+-----+
1 row in set (0.02 sec)
```

### Sharding Binding Table Rule

```
mysql> SHOW SHARDING BINDING TABLE RULES;
+-----+
| sharding_binding_tables |
+-----+
| t_order,t_order_item |
| t1,t2
+-----+
2 rows in set (0.00 sec)
```

## Sharding Broadcast Table Rule

```
mysql> SHOW SHARDING BROADCAST TABLE RULES;
+-----+
| sharding_broadcast_tables |
+-----+
| t_1 |
| t_2 |
+-----+
2 rows in set (0.00 sec)
```

## Sharding Scaling Rule

```
mysql> SHOW SHARDING SCALING RULES;
+-----+
| name | input | output | stream_channel |
| completion_detector | data_consistency_checker | | |
+-----+
| sharding_scaling | {"workerThread":40,"batchSize":1000} | {"workerThread":40, "batchSize":1000} | {"type":"MEMORY","props":{"block-queue-size":"10000"}} | {"type":"IDLE","props":{"incremental-task-idle-seconds-threshold":"1800"}} | {"type":"DATA_MATCH","props":{"chunk-size":"1000"}} |
+-----+
1 row in set (0.00 sec)
```

## Single Table

### Syntax

```
SHOW SINGLE TABLE (tableRule | RULES) [FROM databaseName]

SHOW SINGLE TABLES

tableRule:
 RULE tableName
```

### Return Value Description

#### Single Table Rule

Column	Description
name	Rule name
resource_name	Data source name

#### Single Table

Column	Description
table_name	Single table name
resource_name	The resource name where the single table is located

### Example

*single table rules*

```
sql> SHOW SINGLE TABLES RULES;
+-----+-----+
| name | resource_name |
+-----+-----+
| default | ds_1 |
+-----+-----+
1 row in set (0.01 sec)
```

*single tables*

```
mysql> SHOW SINGLE TABLES;
+-----+-----+
| table_name | resource_name |
```

```
+-----+-----+
| t_single_0 | ds_0 |
| t_single_1 | ds_1 |
+-----+-----+
2 rows in set (0.02 sec)
```

## Readwrite-Splitting

### Syntax

```
SHOW READWRITE_SPLITTING RULES [FROM databaseName]
```

### Return Value Description

Column	Description
name	Rule name
auto_aware_data_source_name	Auto-aware discovery data source name (Display configuration dynamic readwrite splitting rules)
write_data_source_name	All read data source are offline, write data source whether the data source is responsible for read traffic
write_data_source_name	Write data source name
read_data_source_names	Read data source name list
load_balancer_type	Load balance algorithm type
load_balancer_props	Load balance algorithm parameter

### Example

#### Static Readwrite Splitting Rules

```
mysql> SHOW READWRITE_SPLITTING RULES;
+-----+-----+-----+-----+-----+-----+
| name | auto_aware_data_source_name | write_data_source_name | read_data_source_names | load_balancer_type | load_balancer_props |
+-----+-----+-----+-----+-----+-----+
| ms_group_0 | | ds_primary | ds_slave_0, |
| ds_slave_1 | random | | ds_slave_1, |
+-----+-----+-----+-----+-----+-----+
1 row in set (0.00 sec)
```

#### Dynamic Readwrite Splitting Rules

```
mysql> SHOW READWRITE_SPLITTING RULES FROM readwrite_splitting_db;
+-----+-----+-----+-----+-----+-----+
| name | auto_aware_data_source_name | write_data_source_query_enabled | write_data_source_name | read_data_source_names | load_balancer_type | load_balancer_props |
+-----+-----+-----+-----+-----+-----+
| readwrite_ds | ms_group_0 | random | read_weight=2:1 |
| | | |
+-----+-----+-----+-----+-----+-----+
1 row in set (0.01 sec)
```

### Static Readwrite Splitting Rules And Dynamic Readwrite Splitting Rules

```
mysql> SHOW READWRITE_SPLITTING RULES FROM readwrite_splitting_db;
+-----+-----+-----+-----+-----+-----+
| name | auto_aware_data_source_name | write_data_source_query_enabled | write_data_source_name | read_data_source_names | load_balancer_type | load_balancer_props |
+-----+-----+-----+-----+-----+-----+
| readwrite_ds | ms_group_0 | read_ds_0, read_ds_1 | random | read_weight=2:1 |
| write_ds | | | |
| | | random | read_ |
| weight=2:1 | | | |
+-----+-----+-----+-----+-----+-----+
1 row in set (0.00 sec)
```

## DB Discovery

### Syntax

```
SHOW DB_DISCOVERY RULES [FROM databaseName]

SHOW DB_DISCOVERY TYPES [FROM databaseName]

SHOW DB_DISCOVERY HEARTBEATS [FROM databaseName]
```

## Return Value Description

### DB Discovery Rule

Column	Description
group_name	Rule name
data_source_names	Data source name list
primary_data_source_name	Primary data source name
discovery_type	Database discovery service type
discovery_heartbeat	Database discovery service heartbeat

### DB Discovery Type

Column	Description
name	Type name
type	Type category
props	Type properties

### DB Discovery Heartbeat

Column	Description
name	Heartbeat name
props	Heartbeat properties

## Example

### DB Discovery Rule

```
mysql> SHOW DB_DISCOVERY RULES;
+-----+-----+-----+-----+
| group_name | data_source_names | primary_data_source_name | discovery_type |
|-----+-----+-----+-----+
| discovery_heartbeat |
+-----+-----+-----+-----+
| db_discovery_group_0 | ds_0,ds_1,ds_2 | ds_0 | {name=db_discovery_group_0_mgr, type=MySQL.MGR, props={group-name=92504d5b-6dec}} |
| {name=db_discovery_group_0_heartbeat, props={keep-alive-cron=0/5 * * * * ?}} |
+-----+-----+-----+-----+
```

```
1 row in set (0.20 sec)
```

#### DB Discovery Type

```
mysql> SHOW DB_DISCOVERY TYPES;
+-----+-----+-----+
| name | type | props |
+-----+-----+-----+
| db_discovery_group_0_mgr | MySQL.MGR | {group-name=92504d5b-6dec} |
+-----+-----+-----+
1 row in set (0.01 sec)
```

#### DB Discovery Heartbeat

```
mysql> SHOW DB_DISCOVERY HEARTBEATS;
+-----+-----+
| name | props |
+-----+-----+
| db_discovery_group_0_heartbeat | {keep-alive-cron=0/5 * * * *} |
+-----+-----+
1 row in set (0.01 sec)
```

## Encrypt

### Syntax

```
SHOW ENCRYPT RULES [FROM databaseName]
```

```
SHOW ENCRYPT TABLE RULE tableName [FROM databaseName]
```

- Support to query all data encryption rules and specify logical table name query

## Return Value Description

Column	Description
table	Logical table name
logic_column	Logical column name
logic_data_type	Logical column data type
cipher_column	Ciphertext column name
cipher_data_type	Ciphertext column data type
plain_column	Plaintext column name
plain_data_type	Plaintext column data type
assisted_query_column	Assisted query column name
assisted_query_data_type	Assisted query column data type
encryptor_type	Encryption algorithm type
encryptor_props	Encryption algorithm parameter
query_with_cipher_column	Whether to use encrypted column for query

## Example

### Show Encrypt Rules

```
mysql> SHOW ENCRYPT RULES FROM encrypt_db;
+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
| table | logic_column | logic_data_type | cipher_column | cipher_data_type | plain_column | plain_data_type | assisted_query_column | assisted_query_data_type | encryptor_type | encryptor_props | query_with_cipher_column |
+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
| t_encrypt | user_id | | user_cipher | | | |
| user_plain | | | | | | |
| AES | aes-key-value=123456abc | true | | | | |
| t_encrypt | order_id | | order_cipher | | | |
| | | | | | | |
| MD5 | | | | | | |
| t_encrypt_2 | user_id | | user_cipher | | | |
| user_plain | | | | | | |
| AES | aes-key-value=123456abc | false | | | | |
| t_encrypt_2 | order_id | | order_cipher | | | |
| | | | | | | |
| MD5 | | | | | | |
+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+
```

```
4 rows in set (0.78 sec)
```

Show Encrypt Table Rule Table Name

```
mysql> SHOW ENCRYPT TABLE RULE t_encrypt;
+-----+-----+-----+-----+-----+-----+
| table | logic_column | logic_data_type | cipher_column | cipher_data_type | plain_column | plain_data_type | assisted_query_column | assisted_query_data_type | encryptor_type | encryptor_props | query_with_cipher_column |
+-----+-----+-----+-----+-----+-----+
| t_encrypt | user_id | | user_cipher | | |
| user_plain | | | | | |
| AES | aes-key-value=123456abc | true | | |
| t_encrypt | order_id | | order_cipher | | |
| | | | | |
| MD5 | | | true | | |
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+
| table | logic_column | logic_data_type | cipher_column | cipher_data_type | plain_column | plain_data_type | assisted_query_column | assisted_query_data_type | encryptor_type | encryptor_props | query_with_cipher_column |
+-----+-----+-----+-----+-----+-----+
| t_encrypt | user_id | | user_cipher | | |
| user_plain | | | | | |
| AES | aes-key-value=123456abc | true | | |
| t_encrypt | order_id | | order_cipher | | |
| | | | | |
| MD5 | | | true | | |
+-----+-----+-----+-----+-----+-----+
2 rows in set (0.01 sec)

mysql> SHOW ENCRYPT TABLE RULE t_encrypt FROM encrypt_db;
+-----+-----+-----+-----+-----+-----+
| table | logic_column | logic_data_type | cipher_column | cipher_data_type | plain_column | plain_data_type | assisted_query_column | assisted_query_data_type | encryptor_type | encryptor_props | query_with_cipher_column |
+-----+-----+-----+-----+-----+-----+
| t_encrypt | user_id | | user_cipher | | |
| user_plain | | | | | |
| AES | aes-key-value=123456abc | true | | |
| t_encrypt | order_id | | order_cipher | | |
| | | | | |
| MD5 | | | true | | |
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+
| table | logic_column | logic_data_type | cipher_column | cipher_data_type | plain_column | plain_data_type | assisted_query_column | assisted_query_data_type | encryptor_type | encryptor_props | query_with_cipher_column |
+-----+-----+-----+-----+-----+-----+
| t_encrypt | user_id | | user_cipher | | |
| user_plain | | | | | |
| AES | aes-key-value=123456abc | true | | |
| t_encrypt | order_id | | order_cipher | | |
| | | | | |
| MD5 | | | true | | |
+-----+-----+-----+-----+-----+-----+
2 rows in set (0.01 sec))
```

## Shadow

### Syntax

```
SHOW SHADOW shadowRule | RULES [FROM databaseName]
```

```
SHOW SHADOW TABLE RULES [FROM databaseName]
```

```
SHOW SHADOW ALGORITHMS [FROM databaseName]
```

shadowRule:

```
 RULE ruleName
```

- Support querying all shadow rules and specified table query
- Support querying all shadow table rules
- Support querying all shadow algorithms

### Return Value Description

#### Shadow Rule

Column	Description
rule_name	Rule name
source_name	Source database
shadow_name	Shadow database
shadow_table	Shadow table

#### Shadow Table Rule

Column	Description
shadow_table	Shadow table
shadow_algorithm_name	Shadow algorithm name

#### Shadow Algorithms

Column	Description
shadow_algorithm_name	Shadow algorithm name
type	Shadow algorithm type
props	Shadow algorithm properties
is_default	Default

## Shadow Rule status

Column	Description
status	Enable

## Example

*SHOW SHADOW RULES*

```
mysql> SHOW SHADOW RULES;
+-----+-----+-----+-----+
| rule_name | source_name | shadow_name | shadow_table |
+-----+-----+-----+-----+
| shadow_rule_1 | ds_1 | ds_shadow_1 | t_order |
| shadow_rule_2 | ds_2 | ds_shadow_2 | t_order_item |
+-----+-----+-----+-----+
2 rows in set (0.02 sec)
```

*SHOW SHADOW RULE ruleName*

```
mysql> SHOW SHADOW RULE shadow_rule_1;
+-----+-----+-----+-----+
| rule_name | source_name | shadow_name | shadow_table |
+-----+-----+-----+-----+
| shadow_rule_1 | ds_1 | ds_shadow_1 | t_order |
+-----+-----+-----+-----+
1 rows in set (0.01 sec)
```

*SHOW SHADOW TABLE RULES*

```
mysql> SHOW SHADOW TABLE RULES;
+-----+-----+
| shadow_table | shadow_algorithm_name
| |
+-----+-----+
| t_order_1 | user_id_match_algorithm,simple_hint_algorithm_1
| |
+-----+-----+
1 rows in set (0.01 sec)
```

*SHOW SHADOW ALGORITHMS*

```
mysql> SHOW SHADOW ALGORITHMS;
+-----+-----+
```

```

| shadow_algorithm_name | type | props
| is_default | |
+-----+-----+-----+
| user_id_match_algorithm | REGEX_MATCH | operation=insert,column=user_id,
| regex=[1] | false | |
| simple_hint_algorithm_1 | SIMPLE_HINT | shadow=true,foo=bar
| false | |
+-----+-----+-----+
2 rows in set (0.01 sec)

```

## RAL Syntax

RAL (Resource & Rule Administration Language) responsible for the added-on feature of hint, transaction type switch, scaling execute planning and so on.

### Hint

Statement	Function	Example
SET READ WRITE_SPLITTING HINT SOURCE = [auto / write]	For current connection, set readwrite splitting routing strategy (automatic or forced to write data source)	SET <b>READWRITE_SPLITTINGHINT</b> SOURCE = write
SET SHARDING HINT DATABASE_VALUE = yy	For current connection, set sharding value for database sharding only, yy: sharding value	SET SHARDING HINT D ATABASE_VALUE = 100
ADD SHARDING HINT DATABASE_VALUE xx = yy	For current connection, add sharding value for table, xx: logic table, yy: database sharding value	ADD SHARDING HINT D ATABASE_VALUE t_order = 100
ADD SHARDING HINT TABLE_VALUE xx = yy	For current connection, add sharding value for table, xx: logic table, yy: table sharding value	ADD SHARDING HINT TABLE_VALUE t_order = 100
CLEAR HINT SETTINGS	For current connection, clear all hint settings	CLEAR HINT
CLEAR [SHARDING HINT / READ WRITE_SPLITTING HINT]	For current connection, clear hint settings of sharding or readwrite splitting	CLEAR READWR ITE_SPLITTING HINT
SHOW [SHARDING / READ WRITE_SPLITTING] HINT STATUS	For current connection, query hint settings of sharding or readwrite splitting	SHOW READWR ITE_SPLITTING HINT STATUS

## Scaling

Statement	Function	Example
SHOW SCALING LIST	Query running list	SHOW SCALING LIST
SHOW SCALING STATUS jobId	Query scaling status, xx: jobId	SHOW SCALING STATUS 1234
START SCALING jobId	Start scaling, xx: jobId	START SCALING 1234
STOP SCALING jobId	Stop scaling, xx: jobId	STOP SCALING 1234
DROP SCALING jobId	Drop scaling, xx: jobId	DROP SCALING 1234
RESET SCALING jobId	reset progress, xx: jobId	RESET SCALING 1234
CHECK SCALING jobId	Data consistency check with algorithm in <code>server.yaml</code> , xx: jobId	CHECK SCALING 1234
SHOW SCALING CHECK ALGORITHMS	Show available consistency check algorithms	SHOW SCALING CHECK ALGORITHMS
CHECK SCALING {jobId} by type{name={algorithmType}}	Data consistency check with defined algorithm	CHECK SCALING 1234 by type{name=DEFAULT}
STOP SCALING SOURCE WRITING jobId	The source ShardingSphere data source is discontinued, xx: jobId	STOP SCALING SOURCE WRITING 1234
RESTORE SCALING SOURCE WRITING jobId	Restore source data source writing, xx: jobId	RESTORE SCALING SOURCE WRITING 1234
APPLY SCALING jobId	Switch to target ShardingSphere metadata, xx: jobId	APPLY SCALING 1234

## Circuit Breaker

Statement	Function	Example
[ENABLE / DISABLE] READWRITE_SPLITTING (READ)? resourceName [FROM databaseName]	Enable or disable read data source	ENABLE READWRITE_SPLITTING READ resource_0
[ENABLE / DISABLE] INSTANCE instanceId	Enable or disable proxy instance	DISABLE INSTANCE instance_1
SHOW INSTANCE LIST	Query proxy instance information	SHOW INSTANCE LIST
SHOW READWRITE_SPLITTING (READ)? resourceName [FROM databaseName]	Query all read resources status	SHOW READWRITE_SPLITTING READ RESOURCES

## Global Rule

Statement	Function	Example
SHOW AUTHORITY RULE	Query authority rule configuration	SHOW AUTHORITY RULE
SHOW TRANSACTION RULE	Query transaction rule configuration	SHOW TRANSACTION RULE
SHOW SQL_PARSER RULE	Query SQL parser rule configuration	SHOW SQL_PARSER RULE
ALTER TRANSACTION RULE(DEFAULT:LT=xx,TYPE(NAME=xxx,PROPER TIES( "key1" = "value1", "key2" = "value2" ..)))	Alter transaction rule configuration, DEFAULT: default transaction type, support LOCAL, XA, BASE; NAME: name of transaction manager, support Atomikos, Narayana and Bitronix	ALTER TRANSACTION RULE(DEFAULT=XA,TYPE(NAME=Narayana, PROPER TIES( "databaseName" = "jbossts", "host" = "127.0.0.1" )))
ALTER SQL_PARSER RULE SQL_COMMENT_PARSE_ENABLE=xx,PARSE_TREE_CACHE( INITIAL_CAPACITY=xx, MAXIMUM_SIZE=xx, CURRENCY_LEVEL=xx), SQL_STATEMENT_CACHE( INITIAL_CAPACITY=xxx, MAXIMUM_SIZE=xxx, CURRENCY_LEVEL=xxx)	Alter SQL parser rule configuration, SQL_COMMENT_PARSE_ENABLE: whether to parse the SQL comment, PARSE_TREE_CACHE: local cache configuration of syntax tree, SQL_STATEMENT_CACHE: local cache of SQL statement	ALTER SQL_PARSER RULE SQL_COMMENT_PARSE_ENABLE=false,PARSE_TREE_CACHE( INITIAL_CAPACITY=10, MAXIMUM_SIZE=11, CURRENCY_LEVEL=1),SQL_STATEMENT_CACHE( INITIAL_CAPACITY=11, MAXIMUM_SIZE=11, CURRENCY_LEVEL=100)

**Other**

Statement	Function	Example
SHOW INSTANCE MODE	Query the mode configuration of the proxy	SHOW INSTANCE MODE
COUNT DATABASE RULES [FROM database]	Query the number of rules in a database	COUNT DATABASE RULES
SET VARIABLE pro xy_property_name = xx	proxy_property_name is one of properties configuration of proxy, name is split by underscore	SET VARIABLE sql_show = true
SET VARIABLE transaction_type = xx	Modify transaction_type of the current connection, supports LOCAL, XA, BASE	SET VARIABLE transaction_type = XA
SET VARIABLE agent_plugins_enabled = [TRUE / FALSE]	Set whether the agent plugins are enabled, the default value is false	SET VARIABLE agent_plugins_enabled = TRUE
SHOW ALL VARIABLES	Query proxy all properties configuration	SHOW ALL VARIABLES
SHOW VARIABLE variable_name	Query proxy variable, name is split by underscore	SHOW VARIABLE sql_show
PREVIEW SQL	Preview the actual SQLs	PREVIEW SELECT * FROM t_order
PARSE SQL	Parse SQL and output abstract syntax tree	PARSE SELECT * FROM t_order
REFRESH TABLE METADATA	Refresh the metadata of all tables	REFRESH TABLE METADATA
REFRESH TABLE METADATA [tableName / tableName FROM RESOURCE resourceName]	Refresh the metadata of a table	REFRESH TABLE METADATA t_order FROM resource ds_1
SHOW TABLE METADATA tableName [, tableName] ...	Query table metadata	SHOW TABLE METADATA t_order
EXPORT DATABASE CONFIG [FROM database_name] [, file= "file_path" ]	Query / export resources and rule configuration in database	EXPORT DATABASE CONFIG FROM resource adwrite_sp_litting_db
SHOW RULES USED RESOURCE resourceName [from database]	Query the rules for using the specified resource in database	SHOW RULES USED RESOURCE ds_0 FROM databaseName

## Notice

ShardingSphere-Proxy does not support hint by default, to support it, set proxy-hint-enabled to true in conf/server.yaml.

## Usage

This chapter will introduce how to use DistSQL to manage resources and rules in a distributed database.

### Pre-work

Use MySQL as example, can replace to other databases.

1. Start the MySQL service;
2. Create to be registered MySQL databases;
3. Create role and user in MySQL with creation permission for ShardingSphere-Proxy;
4. Start Zookeeper service;
5. Add mode and authentication configurations to server.yaml;
6. Start ShardingSphere-Proxy;
7. Use SDK or terminal connect to ShardingSphere-Proxy.

### Create Logic Database

1. Create logic database

```
CREATE DATABASE foo_db;
```

2. Use newly created logic database

```
USE foo_db;
```

### Resource Operation

More details please see concentrate rule examples.

## Rule Operation

More details please see concentrate rule examples.

### Notice

1. Currently, `DROP DATABASE` will only remove the logical distributed database, not the user's actual database;
2. `DROP TABLE` will delete all logical fragmented tables and actual tables in the database;
3. `CREATE DATABASE` will only create a logical distributed database, so users need to create actual databases in advance.

## Sharding

### Resource Operation

- Configure data source information

```
ADD RESOURCE ds_0 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_1,
USER=root,
PASSWORD=root
);

ADD RESOURCE ds_1 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_2,
USER=root,
PASSWORD=root
);
```

## Rule Operation

- Create sharding rule

```
CREATE SHARDING TABLE RULE t_order(
RESOURCES(ds_0,ds_1),
SHARDING_COLUMN=order_id,
TYPE(NAME=hash_mod,PROPERTIES("sharding-count"=4)),
KEY_GENERATE_STRATEGY(COLUMN=order_id,TYPE(NAME=snowflake))
);
```

- Create sharding table

```
CREATE TABLE `t_order` (
 `order_id` int NOT NULL,
 `user_id` int NOT NULL,
 `status` varchar(45) DEFAULT NULL,
 PRIMARY KEY (`order_id`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4
```

- Drop sharding table

```
DROP TABLE t_order;
```

- Drop sharding rule

```
DROP SHARDING TABLE RULE t_order;
```

- Drop resource

```
DROP RESOURCE ds_0, ds_1;
```

- Drop distributed database

```
DROP DATABASE foo_db;
```

## Readwrite\_splitting

### Resource Operation

```
ADD RESOURCE write_ds (
HOST=127.0.0.1,
PORT=3306,
DB=ds_0,
USER=root,
PASSWORD=root
),read_ds (
HOST=127.0.0.1,
PORT=3307,
DB=ds_0,
USER=root,
PASSWORD=root
);
```

## Rule Operation

- Create readwrite\_splitting rule

```
CREATE READWRITE_SPLITTING RULE group_0 (
 WRITE_RESOURCE=write_ds,
 READ_RESOURCES(read_ds),
 TYPE(NAME=random)
);
```

- Alter readwrite\_splitting rule

```
ALTER READWRITE_SPLITTING RULE group_0 (
 WRITE_RESOURCE=write_ds,
 READ_RESOURCES(read_ds),
 TYPE(NAME=random, PROPERTIES(read_weight='2:0'))
);
```

- Drop readwrite\_splitting rule

```
DROP READWRITE_SPLITTING RULE group_0;
```

- Drop resource

```
DROP RESOURCE write_ds, read_ds;
```

- Drop distributed database

```
DROP DATABASE readwrite_splitting_db;
```

## Encrypt

### Resource Operation

```
ADD RESOURCE ds_0 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=ds_0,
 USER=root,
 PASSWORD=root
);
```

## Rule Operation

- Create encrypt rule

```
CREATE ENCRYPT RULE t_encrypt (
 COLUMNS(
 (NAME=user_id,PLAIN=user_plain,CIPHER=user_cipher,TYPE(NAME=AES,PROPERTIES(
 'aes-key-value'='123456abc'))),
 (NAME=order_id,PLAIN=order_plain,CIPHER=order_cipher,TYPE(NAME=RC4,
 PROPERTIES('rc4-key-value'='123456abc'))))
);
```

- Create encrypt table

```
CREATE TABLE `t_encrypt` (
 `id` int(11) NOT NULL,
 `user_id` varchar(45) DEFAULT NULL,
 `order_id` varchar(45) DEFAULT NULL,
 PRIMARY KEY (`id`)
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

- Alter encrypt rule

```
ALTER ENCRYPT RULE t_encrypt (
 COLUMNS(
 (NAME=user_id,PLAIN=user_plain,CIPHER=user_cipher,TYPE(NAME=AES,PROPERTIES(
 'aes-key-value'='123456abc'))))
);
```

- Drop encrypt rule

```
DROP ENCRYPT RULE t_encrypt;
```

- Drop resource

```
DROP RESOURCE ds_0;
```

- Drop distributed database

```
DROP DATABASE encrypt_db;
```

## DB Discovery

### Resource Operation

```
ADD RESOURCE ds_0 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_0,
USER=root,
PASSWORD=root
),RESOURCE ds_1 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_1,
USER=root,
PASSWORD=root
),RESOURCE ds_2 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_2,
USER=root,
PASSWORD=root
);

```

### Rule Operation

- Create DB discovery rule

```
CREATE DB_DISCOVERY RULE db_discovery_group_0 (
RESOURCES(ds_0, ds_1),
TYPE(NAME=MySQL.MGR,PROPERTIES('group-name'='92504d5b-6dec')),
HEARTBEAT(PROPERTIES('keep-alive-cron'='0/5 * * * * ?'))
);
```

- Alter DB discovery rule

```
ALTER DB_DISCOVERY RULE db_discovery_group_0 (
RESOURCES(ds_0, ds_1, ds_2),
TYPE(NAME=MySQL.MGR,PROPERTIES('group-name'='92504d5b-6dec')),
HEARTBEAT(PROPERTIES('keep-alive-cron'='0/5 * * * * ?'))
);
```

- Drop db\_discovery rule

```
DROP DB_DISCOVERY RULE db_discovery_group_0;
```

- Drop db\_discovery type

```
DROP DB_DISCOVERY TYPE db_discovery_group_0_mgr;
```

- Drop db\_discovery heartbeat

```
DROP DB_DISCOVERY HEARTBEAT db_discovery_group_0_heartbeat;
```

- Drop resource

```
DROP RESOURCE ds_0,ds_1,ds_2;
```

- Drop distributed database

```
DROP DATABASE discovery_db;
```

## Shadow

### Resource Operation

```
ADD RESOURCE ds_0 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_0,
USER=root,
PASSWORD=root
),ds_1 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_1,
USER=root,
PASSWORD=root
),ds_2 (
HOST=127.0.0.1,
PORT=3306,
DB=ds_2,
USER=root,
PASSWORD=root
);
```

## Rule Operation

- Create shadow rule

```
CREATE SHADOW RULE group_0(
SOURCE=ds_0,
SHADOW=ds_1,
t_order((simple_hint_algorithm, TYPE(NAME=SIMPLE_HINT, PROPERTIES("foo"="bar"))),
(TYPE(NAME=REGEX_MATCH, PROPERTIES("operation"="insert", "column"="user_id", "regex"="^ [1] "))),
t_order_item((TYPE(NAME=SIMPLE_HINT, PROPERTIES("foo"="bar")))));
```

- Alter shadow rule

```
ALTER SHADOW RULE group_0(
SOURCE=ds_0,
SHADOW=ds_2,
t_order_item((TYPE(NAME=SIMPLE_HINT, PROPERTIES("foo"="bar")))));
```

- Drop shadow rule

```
DROP SHADOW RULE group_0;
```

- Drop resource

```
DROP RESOURCE ds_0,ds_1,ds_2;
```

- Drop distributed database

```
DROP DATABASE foo_db;
```

### 7.2.4 Logging

This chapter will introduce the detailed syntax of Logging which is used when users need to distinguish databases or users in the log. To achieve a specific goal, following configurations can be added to logback.xml:

#### To distinguish databases in the same log

```
<appender name="databaseConsole" class="ch.qos.logback.core.ConsoleAppender">
<encoder>
 <pattern>[%-5level] %d{yyyy-MM-dd HH:mm:ss.SSS} [%thread] [%X{database}]
%logger{36} - %msg%n</pattern>
</encoder>
</appender>

<logger name="ShardingSphere-SQL" level="info" additivity="false">
```

```

<appender-ref ref="databaseConsole" />
</logger>

```

### To distinguish databases and users in the same log

```

<appender name="databaseConsole" class="ch.qos.logback.core.ConsoleAppender">
 <encoder>
 <pattern>[%-5level] %d{yyyy-MM-dd HH:mm:ss.SSS} [%thread] [%X{database}] [%X{user}] %logger{36} - %msg%n</pattern>
 </encoder>
</appender>

<logger name="ShardingSphere-SQL" level="info" additivity="false">
 <appender-ref ref="databaseConsole" />
</logger>

```

### To split into different log files

```

<appender name="SiftingFile" class="ch.qos.logback.classic.sift.SiftingAppender">
 <discriminator>
 <key>database</key>
 <defaultValue>none</defaultValue>
 </discriminator>
 <sift>
 <appender name="File-${database}" class="ch.qos.logback.core.FileAppender">
 <file>logs/${database}.log</file>
 <append>true</append>
 <encoder charset="UTF-8">
 <pattern>[%-5level] %d{yyyy-MM-dd HH:mm:ss.SSS} [%thread] [%X{user}] %logger{36} - %msg%n</pattern>
 </encoder>
 </appender>
 </sift>
</appender>

<logger name="ShardingSphere-SQL" level="info" additivity="false">
 <appender-ref ref="SiftingFile" />
</logger>

```

## 7.2.5 Scaling

### Introduction

ShardingSphere-Scaling is a common solution for migrating data to ShardingSphere or scaling data in Apache ShardingSphere since **4.1.0**, current state is **Experimental** version.

### Build

#### Build&Deployment

1. Execute the following command to compile and generate the ShardingSphere-Proxy binary package:

```
git clone --depth 1 https://github.com/apache/shardingsphere.git
cd shardingsphere
mvn clean install -Dmaven.javadoc.skip=true -Dcheckstyle.skip=true -Drat.skip=true
-Djacoco.skip=true -DskipITs -DskipTests -Prelease
```

The binary packages: - /shardingsphere-distribution/shardingsphere-proxy-distribution/target/apache-shardingsphere-\${latest.release.version}-shardingsphere-proxy-bin.tar.gz

Or get binary package from [download page](#).

Scaling is an experimental feature, if scaling job fail, you could try nightly version, click here to [download nightly build](#).

2. Unzip the proxy distribution package, modify the configuration file `conf/config-sharding.yaml`. Please refer to [proxy startup manual](#) for more details.
3. Modify the configuration file `conf/server.yaml`. Please refer to [Mode Configuration](#) for more details. Type of mode must be `Cluster` for now, please start the registry center before running proxy.

Configuration Example:

```
mode:
 type: Cluster
repository:
 type: ZooKeeper
 props:
 namespace: governance_ds
 server-lists: localhost:2181
 retryIntervalMilliseconds: 500
 timeToLiveSeconds: 60
 maxRetries: 3
 operationTimeoutMilliseconds: 500
 overwrite: false
```

4. Enable scaling

Way 1. Modify scalingName and scaling configuration in conf/config-sharding.yaml.

Configuration Items Explanation:

```

rules:
- !SHARDING
 # ignored configuration

 scalingName: # Enabled scaling action config name
 scaling:
 <scaling-action-config-name> (+):
 input: # Data read configuration. If it's not configured, then part of its
configuration will take effect.
 workerThread: # Worker thread pool size for inventory data ingestion from
source. If it's not configured, then use system default value.
 batchSize: # Maximum records count of a DML select operation. If it's not
configured, then use system default value.
 rateLimiter: # Rate limit algorithm. If it's not configured, then system
will skip rate limit.
 type: # Algorithm type. Options:
 props: # Algorithm properties
 output: # Data write configuration. If it's not configured, then part of its
configuration will take effect.
 workerThread: # Worker thread pool size for data importing to target. If it
's not configured, then use system default value.
 batchSize: # Maximum records count of a DML insert/delete/update operation.
If it's not configured, then use system default value.
 rateLimiter: # Rate limit algorithm. If it's not configured, then system
will skip rate limit.
 type: # Algorithm type. Options:
 props: # Algorithm properties
 streamChannel: # Algorithm of channel that connect producer and consumer,
used for input and output. If it's not configured, then system will use MEMORY type
 type: # Algorithm type. Options: MEMORY
 props: # Algorithm properties
 block-queue-size: # Property: data channel block queue size. Available
for types: MEMORY
 completionDetector: # Completion detect algorithm. If it's not configured,
then system won't continue to do next steps automatically.
 type: # Algorithm type. Options: IDLE
 props: # Algorithm properties
 incremental-task-idle-seconds-threshold: # If incremental tasks is idle
more than so much seconds, then it could be considered as almost completed.
Available for types: IDLE
 dataConsistencyChecker: # Data consistency check algorithm. If it's not
configured, then system will skip this step.
 type: # Algorithm type. Options: DATA_MATCH, CRC32_MATCH
 props: # Algorithm properties
 chunk-size: # Maximum records count of a query operation for check

```

type of dataConsistencyChecker could be got by executing DistSQL SHOW SCALING CHECK ALGORITHMS. Simple comparison: - DATA\_MATCH : Support all types of databases, but it's not the best performant one. - CRC32\_MATCH : Support MySQL, performance is better than DATA\_MATCH.

Auto Mode Configuration Example:

```
rules:
- !SHARDING
 # ignored configuration

 scalingName: scaling_auto
 scaling:
 scaling_auto:
 input:
 workerThread: 40
 batchSize: 1000
 output:
 workerThread: 40
 batchSize: 1000
 streamChannel:
 type: MEMORY
 props:
 block-queue-size: 10000
 completionDetector:
 type: IDLE
 props:
 incremental-task-idle-seconds-threshold: 1800
 dataConsistencyChecker:
 type: DATA_MATCH
 props:
 chunk-size: 1000
```

Manual Mode Configuration Example:

```
rules:
- !SHARDING
 # ignored configuration

 scalingName: scaling_manual
 scaling:
 scaling_manual:
 input:
 workerThread: 40
 batchSize: 1000
 output:
 workerThread: 40
 batchSize: 1000
 streamChannel:
 type: MEMORY
```

```

 props:
 block-queue-size: 10000
 dataConsistencyChecker:
 type: DATA_MATCH
 props:
 chunk-size: 1000

```

Way 2: Configure scaling by DistSQL

Auto Mode Configuration Example:

```

CREATE SHARDING SCALING RULE scaling_auto (
 INPUT(
 WORKER_THREAD=40,
 BATCH_SIZE=1000
),
 OUTPUT(
 WORKER_THREAD=40,
 BATCH_SIZE=1000
),
 STREAM_CHANNEL(TYPE(NAME=MEMORY, PROPERTIES("block-queue-size"=10000))),
 COMPLETION_DETECTOR(TYPE(NAME=IDLE, PROPERTIES("incremental-task-idle-seconds-threshold"=1800))),
 DATA_CONSISTENCY_CHECKER(TYPE(NAME=DATA_MATCH, PROPERTIES("chunk-size"=1000)))
);

```

Manual Mode Configuration Example:

```

CREATE SHARDING SCALING RULE scaling_manual (
 INPUT(
 WORKER_THREAD=40,
 BATCH_SIZE=1000
),
 OUTPUT(
 WORKER_THREAD=40,
 BATCH_SIZE=1000
),
 STREAM_CHANNEL(TYPE(NAME=MEMORY, PROPERTIES("block-queue-size"=10000))),
 DATA_CONSISTENCY_CHECKER(TYPE(NAME=DATA_MATCH, PROPERTIES("chunk-size"=1000)))
);

```

Please refer to [RDL#Sharding](#) for more details.

## 5. Import JDBC driver dependency

If the backend database is in following table, please download JDBC driver jar and put it into \${shardingsphere-proxy}/lib directory.

RDBMS	JDBC driver	Reference
MySQL	<a href="#">mysql-connector-java-5.1. 47.jar</a>	<a href="#">Connector/J Versions</a>

## 6. Start up ShardingSphere-Proxy:

```
sh bin/start.sh
```

## 7. Check proxy log logs/stdout.log:

```
[INFO] [main] o.a.s.p.frontend.ShardingSphereProxy - ShardingSphere-Proxy start
success
```

It means proxy start up successfully.

## Shutdown

```
sh bin/stop.sh
```

## Manual

### Manual

### Environment

JAVA, JDK 1.8+.

The migration scene we support:

Source	Target
MySQL(5.1.15 ~ 5.7.x)	MySQL(5.1.15 ~ 5.7.x)
PostgreSQL(9.4 ~ )	PostgreSQL(9.4 ~ )
openGauss(2.1.0)	openGauss(2.1.0)

Supported features:

Feature	MySQL	PostgreSQL	openGauss
Inventory migration	Supported	Supported	Supported
Incremental migration	Supported	Supported	Supported
Create table automatically	Supported	Supported	Supported
DATA_MATCH data consistency check	Supported	Supported	Supported
CRC32_MATCH data consistency check	Supported	Unsupported	Unsupported

### Attention:

For RDBMS which Create table automatically feature is not supported, we need to create sharding tables manually.

## Privileges

### MySQL

#### 1. Enable binlog

Configuration Example of MySQL 5.7 my.cnf:

```
[mysqld]
server-id=1
log-bin=mysql-bin
binlog-format=row
binlog-row-image=full
max_connections=600
```

Execute the following SQL to confirm whether binlog is turned on or not:

```
show variables like '%log_bin%';
show variables like '%binlog%';
```

As shown below, it means binlog has been turned on:

Variable_name	Value
log_bin	ON
binlog_format	ROW
binlog_row_image	FULL

#### 2. Privileges of account that scaling use should include Replication privileges.

Execute the following SQL to confirm whether the user has migration permission or not:

```
SHOW GRANTS FOR 'user';
```

Result Example:

Grants for \${username}@\${host}
GRANT REPLICATION SLAVE, REPLICATION CLIENT ON *.* TO \${username}@\${host}
.....

## PostgreSQL

1. Enable `test_decoding` feature.
2. Adjust WAL configuration

Configuration Example of `postgresql.conf`:

```
wal_level = logical
max_replication_slots = 10
max_connections = 600
```

Please refer to [Write Ahead Log](#) and [Replication](#) for more details.

## DistSQL API for auto mode

### Preview current sharding rule

Example:

```
preview SELECT COUNT(1) FROM t_order;
```

Response:

```
mysql> preview SELECT COUNT(1) FROM t_order;
+-----+
| data_source_name | actual_sql
|-----+
| ds_0 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
| ds_1 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
+-----+
2 rows in set (0.65 sec)
```

### Start scaling job

1. Add new data source resources

Please refer to [RDL#Data Source](#) for more details.

Create database on underlying RDBMS first, it will be used in following DistSQL.

Example:

```

ADD RESOURCE ds_2 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_2?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=10,"idleTimeout"="30000")
), ds_3 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_3?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=10,"idleTimeout"="30000")
), ds_4 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_4?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=10,"idleTimeout"="30000")
);

```

## 2. Alter sharding table rule for tables to be scaled

We could scale all tables or partial tables. Binding tables must be scaled together.

Currently, scaling job could only be emitted by executing `ALTER SHARDING TABLE RULE` DistSQL.

Please refer to [RDL#Sharding](#) for more details.

`SHARDING TABLE RULE` support two types: `TableRule` and `AutoTableRule`. Following is a comparison of the two sharding rule types:

Type	AutoTableRule	TableRule
Def-initiation	Auto Sharding Algorithm	<code>'User-Defined Sharding Algorithm &lt; <a href="https://shardingsphere.apache.org/document/current/en/features/sharding/concept/sharding/#user-defined-sharding-algorithm">https://shardingsphere.apache.org/document/current/en/features/sharding/concept/sharding/#user-defined-sharding-algorithm</a>&gt;'</code>

Meaning of fields in DistSQL is the same as YAML configuration, please refer to [YAML Configuration#Sharding](#) for more details.

Example of alter `AutoTableRule`:

```

ALTER SHARDING TABLE RULE t_order (
RESOURCES(ds_2, ds_3, ds_4),
SHARDING_COLUMN=order_id,
TYPE(NAME=hash_mod,PROPERTIES("sharding-count"=6)),
KEY_GENERATE_STRATEGY(COLUMN=order_id,TYPE(NAME=snowflake))
);

```

`RESOURCES` is altered from `(ds_0, ds_1)` to `(ds_2, ds_3, ds_4)`, and `sharding-count` is altered from 4 to 6, it will emit scaling job.

Uncompleted example of alter `TableRule`:

```

ALTER SHARDING ALGORITHM database_inline (
 TYPE(NAME=INLINE, PROPERTIES("algorithm-expression"="ds_${user_id % 3 + 2}"))
);

ALTER SHARDING TABLE RULE t_order (
 DATANODES("ds_${2..4}.t_order_${0..1}"),
 DATABASE_STRATEGY(TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_
 ALGORITHM=database_inline),
 TABLE_STRATEGY(TYPE=standard, SHARDING_COLUMN=order_id, SHARDING_ALGORITHM=t_order_
 inline),
 KEY_GENERATE_STRATEGY(COLUMN=order_id, TYPE(NAME=snowflake))
), t_order_item (
 DATANODES("ds_${2..4}.t_order_item_${0..1}"),
 DATABASE_STRATEGY(TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_
 ALGORITHM=database_inline),
 TABLE_STRATEGY(TYPE=standard, SHARDING_COLUMN=order_id, SHARDING_ALGORITHM=t_order_
 item_inline),
 KEY_GENERATE_STRATEGY(COLUMN=order_item_id, TYPE(NAME=snowflake))
);

```

algorithm-expression of database\_inline is alerted from `ds_${user_id % 2}` to `ds_${user_id % 3 + 2}`, and DATANODES of t\_order is alerted from `ds_${0..1}`. `t_order_${0..1}` to `ds_${2..4}.t_order_${0..1}`, it will emit scaling job.

Currently, ALTER SHARDING ALGORITHM will take effect immediately, but table rule will not, it might cause inserting data into source side failure, so alter sharding table rule to AutoTableRule is recommended for now.

## List scaling jobs

Please refer to [RAL#Scaling](#) for more details.

Example:

```
show scaling list;
```

Response:

```

mysql> show scaling list;
+-----+-----+-----+-----+-----+
| id | tables | sharding_total_count | active |
create_time | stop_time |
+-----+-----+-----+-----+-----+
| 659853312085983232 | t_order_item, t_order | 2 | false |
2021-10-26 20:21:31 | 2021-10-26 20:24:01 |
| 660152090995195904 | t_order_item, t_order | 2 | false |
2021-10-27 16:08:43 | 2021-10-27 16:11:00 |

```

```
+-----+-----+-----+-----+
-----+
2 rows in set (0.04 sec)
```

## Get scaling progress

Example:

```
show scaling status {jobId};
```

Response:

```
mysql> show scaling status 660152090995195904;
+-----+-----+-----+-----+
-----+
| item | data_source | status | inventory_finished_percentage | incremental_idle_seconds |
+-----+-----+-----+-----+
-----+
| 0 | ds_1 | FINISHED | 100 | 2834
|
| 1 | ds_0 | FINISHED | 100 | 2834
|
+-----+-----+-----+-----+
-----+
2 rows in set (0.00 sec)
```

Current scaling job is finished, new sharding rule should take effect, and not if scaling job is failed.

status values:

Value	Description
PREPARING	preparing
RUNNING	running
EXECUTE_INVENTORY_TASK	inventory task running
EXE-CUTE_INCREMENTAL_TASK	incremental task running
FINISHED	finished (The whole process is completed, and the new rules have been taken effect)
PREPARING_FAILURE	preparation failed
XE-CUTE_INVENTORY_TASK_FAILURE	inventory task failed
EXE-CUTE_INCREMENTAL_TASK_FAILURE	incremental task failed

If status fails, you can check the log of proxy to view the error stack and analyze the problem.

## Preview new sharding rule

Example:

```
preview SELECT COUNT(1) FROM t_order;
```

Response:

```
mysql> PREVIEW SELECT COUNT(1) FROM t_order;
+-----+
-----+
| data_source_name | actual_sql
|-----+
| ds_2 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
| ds_3 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
| ds_4 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
+-----+
-----+
3 rows in set (0.21 sec)
```

## Other DistSQL

Please refer to [RAL#Scaling](#) for more details.

### DistSQL manual mode whole process example

On manual mode, data consistency check and switch configuration could be emitted manually. Please refer to [RAL#Scaling](#) for more details.

This example show how to migrate data from MySQL to proxy.

Most SQLs should be executed in proxy, except few ones mentioned for MySQL.

### Create source databases

It's not needed in practice. It just simulates databases for testing.

Execute SQLs in MySQL:

```
DROP DATABASE IF EXISTS scaling_ds_0;
CREATE DATABASE scaling_ds_0 DEFAULT CHARSET utf8;
```

```
DROP DATABASE IF EXISTS scaling_ds_1;
CREATE DATABASE scaling_ds_1 DEFAULT CHARSET utf8;
```

## Login proxy

```
mysql -h127.0.0.1 -P3307 -uroot -proot
```

## Create and configure logical database

Create logical database:

```
CREATE DATABASE scaling_db;
USE scaling_db
```

Add source database resource:

```
ADD RESOURCE ds_0 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_0?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=50,"idleTimeout"="60000")
), ds_1 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_1?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=50,"idleTimeout"="60000")
);
```

Configure rules: Configure tables of existing system in sharding rule, sharding table rules and INLINE algorithm will be used to fit existing tables name.

```
CREATE SHARDING ALGORITHM database_inline (
 TYPE(NAME=INLINE, PROPERTIES("algorithm-expression"="ds_${user_id % 2}"))
);
CREATE SHARDING ALGORITHM t_order_inline (
 TYPE(NAME=INLINE, PROPERTIES("algorithm-expression"="t_order_${order_id % 2}"))
);
CREATE SHARDING ALGORITHM t_order_item_inline (
 TYPE(NAME=INLINE, PROPERTIES("algorithm-expression"="t_order_item_${order_id % 2}"))
);

CREATE SHARDING TABLE RULE t_order (
 DATANODES("ds_${0..1}.t_order_${0..1}"),
 DATABASE_STRATEGY(TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_ALGORITHM=database_inline),
```

```

TABLE_STRATEGY(TYPE=standard,SHARDING_COLUMN=order_id,SHARDING_ALGORITHM=t_order_inline),
KEY_GENERATE_STRATEGY(COLUMN=order_id,TYPE(NAME=snowflake))
), t_order_item (
DATANODES("ds_${0..1}.t_order_item_${0..1}"),
DATABASE_STRATEGY(TYPE=standard,SHARDING_COLUMN=user_id,SHARDING_ALGORITHM=database_inline),
TABLE_STRATEGY(TYPE=standard,SHARDING_COLUMN=order_id,SHARDING_ALGORITHM=t_order_item_inline),
KEY_GENERATE_STRATEGY(COLUMN=order_item_id,TYPE(NAME=snowflake))
);

CREATE SHARDING SCALING RULE scaling_manual2 (
DATA_CONSISTENCY_CHECKER(TYPE(NAME=CRC32_MATCH))
);

```

### Create test tables and initialize records

It's not needed in practice.

```

CREATE TABLE t_order (order_id INT NOT NULL, user_id INT NOT NULL, status
VARCHAR(45) CHARSET utf8mb4, PRIMARY KEY (order_id));
CREATE TABLE t_order_item (item_id INT NOT NULL, order_id INT NOT NULL, user_id INT
NOT NULL, status VARCHAR(45) CHARSET utf8mb4, creation_date DATE, PRIMARY KEY
(item_id));

INSERT INTO T_ORDER (order_id, user_id, status) VALUES (1,2,'ok'),(2,4,'ok'),(3,6,
'ok'),(4,1,'ok'),(5,3,'ok'),(6,5,'ok');
INSERT INTO T_ORDER_ITEM (item_id, order_id, user_id, status) VALUES (1,1,2,'ok'),
(2,2,4,'ok'),(3,3,6,'ok'),(4,4,1,'ok'),(5,5,3,'ok'),(6,6,5,'ok');

```

### Run migration

Preview sharding:

```

mysql> PREVIEW SELECT COUNT(1) FROM t_order;
+-----+
| data_source_name | actual_sql
|-----+
| ds_0 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1
| ds_1 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1
+-----+

```

```
+-----+
-----+
2 rows in set (0.65 sec)
```

Create target databases in MySQL:

```
DROP DATABASE IF EXISTS scaling_ds_10;
CREATE DATABASE scaling_ds_10 DEFAULT CHARSET utf8;

DROP DATABASE IF EXISTS scaling_ds_11;
CREATE DATABASE scaling_ds_11 DEFAULT CHARSET utf8;

DROP DATABASE IF EXISTS scaling_ds_12;
CREATE DATABASE scaling_ds_12 DEFAULT CHARSET utf8;
```

Add target database resource:

```
ADD RESOURCE ds_2 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_10?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=50,"idleTimeout"="60000")
), ds_3 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_11?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=50,"idleTimeout"="60000")
), ds_4 (
 URL="jdbc:mysql://127.0.0.1:3306/scaling_ds_12?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=50,"idleTimeout"="60000")
);
```

Alter sharding rule to emit scaling job:

```
ALTER SHARDING ALGORITHM database_inline (
 TYPE(NAME=INLINE,PROPERTIES("algorithm-expression"="ds_${user_id % 3 + 2}"))
);

ALTER SHARDING TABLE RULE t_order (
 DATANODES("ds_${2..4}.t_order_${0..1}"),
 DATABASE_STRATEGY(TYPE=standard,SHARDING_COLUMN=user_id,SHARDING_ALGORITHM=database_inline),
 TABLE_STRATEGY(TYPE=standard,SHARDING_COLUMN=order_id,SHARDING_ALGORITHM=t_order_inline),
```

```

KEY_GENERATE_STRATEGY(COLUMN=order_id,TYPE(NAME=snowflake))
), t_order_item (
DATANODES("ds_${2..4}.t_order_item_${0..1}"),
DATABASE_STRATEGY(TYPE=standard,SHARDING_COLUMN=user_id,SHARDING_
ALGORITHM=database_inline),
TABLE_STRATEGY(TYPE=standard,SHARDING_COLUMN=order_id,SHARDING_ALGORITHM=t_order_
item_inline),
KEY_GENERATE_STRATEGY(COLUMN=order_item_id,TYPE(NAME=snowflake))
);

```

Query job progress:

```

mysql> SHOW SCALING LIST;
+-----+-----+-----+-----+
| id | tables | sharding_ |
| total_count | active | stop_time |
+-----+-----+-----+-----+
| 0130317c30317c3054317c7363616c696e675f6462 | t_order,t_order_item | 2
| true | 2022-04-16 17:22:19 | NULL |
+-----+-----+-----+-----+
1 row in set (0.34 sec)

mysql> SHOW SCALING STATUS 0130317c30317c3054317c7363616c696e675f6462;
+-----+-----+-----+-----+
| item | data_source | status | active | inventory_finished_
percentage | incremental_idle_seconds |
+-----+-----+-----+-----+
| 0 | ds_0 | EXECUTE_INCREMENTAL_TASK | true | 100
| | 8 | | |
| 1 | ds_1 | EXECUTE_INCREMENTAL_TASK | true | 100
| | 7 | | |
+-----+-----+-----+-----+
2 rows in set (0.02 sec)

```

When `status` is `EXECUTE_INCREMENTAL_TASK`, it means inventory migration stage is successful, it's running on incremental migration stage.

Choose an idle time of business system, stop source database writing or stop upper database operation.

Stop source writing in proxy:

```

mysql> STOP SCALING SOURCE WRITING 0130317c30317c3054317c7363616c696e675f6462;
Query OK, 0 rows affected (0.07 sec)

```

Data consistency check:

```
mysql> CHECK SCALING 0130317c30317c3054317c7363616c696e675f6462 BY TYPE
(NAME=CRC32_MATCH);
+-----+-----+-----+-----+
| table_name | source_records_count | target_records_count | records_count_
matched | records_content_matched |
+-----+-----+-----+-----+
| t_order | 6 | 6 | true
| true | | |
| t_order_item | 6 | 6 | true
| true | | |
+-----+-----+-----+-----+
2 rows in set (2.16 sec)
```

Apply metadata:

```
mysql> APPLY SCALING 0130317c30317c3054317c7363616c696e675f6462;
Query OK, 0 rows affected (0.22 sec)
```

Preview sharding again:

```
mysql> PREVIEW SELECT COUNT(1) FROM t_order;
+-----+-----+
| data_source_name | actual_sql
| |
+-----+-----+
| ds_2 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
| ds_3 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
| ds_4 | SELECT COUNT(1) FROM t_order_0 UNION ALL SELECT COUNT(1) FROM
t_order_1 |
+-----+-----+
3 rows in set (0.21 sec)
```

Sharding already take effect.

Optionally, unused `ds_0` and `ds_1` could be removed.

## 7.3 ShardingSphere-Sidecar

### 7.3.1 Introduction

ShardingSphere-Sidecar (TODO) defines itself as a cloud native database agent of the Kubernetes environment, in charge of all the access to the database in the form of sidecar.

It provides a mesh layer interacting with the database, we call this as Database Mesh.

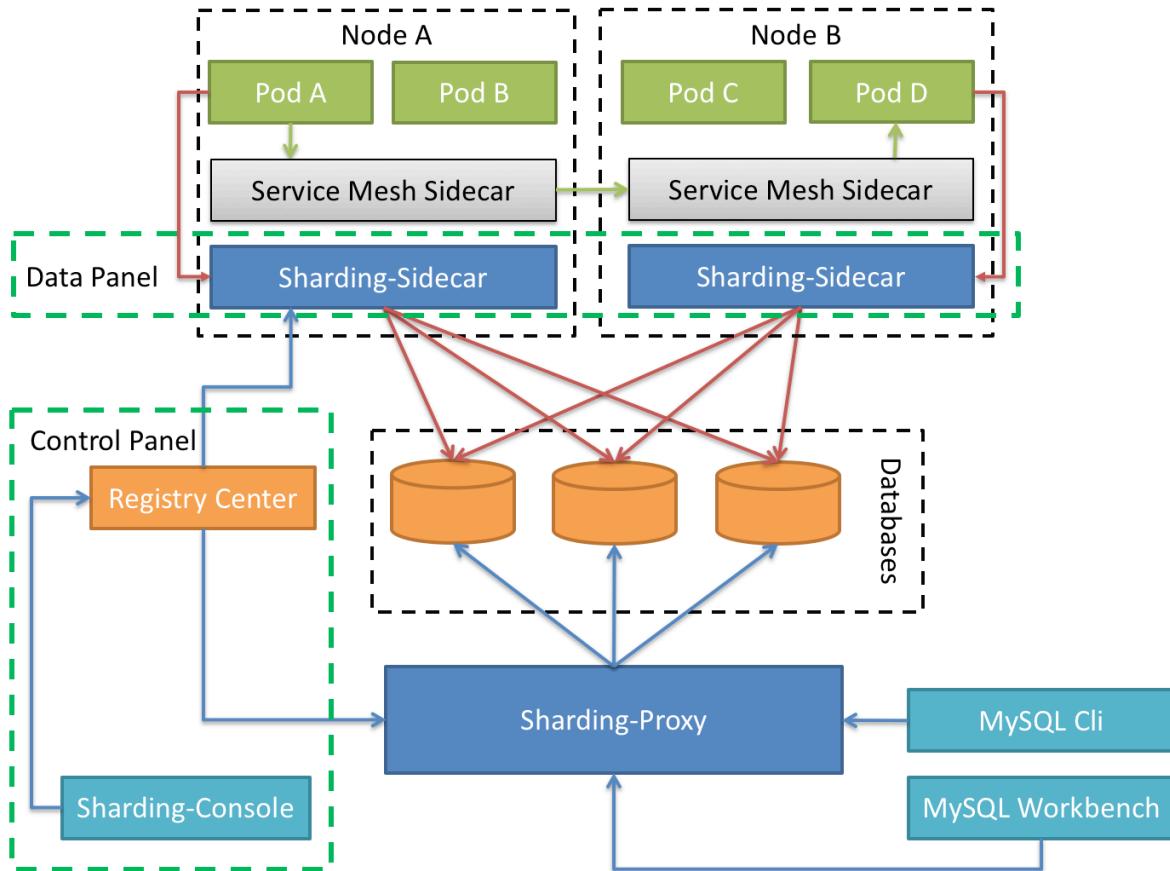


Figure8: ShardingSphere-Sidecar Architecture

### 7.3.2 Comparison

	ShardingSphere-JDBC	ShardingSphere-Proxy	ShardingSphere-Sidecar
Database	Any	MySQL/PostgreSQL	MySQL
Connections Count Cost	High	Low	High
Supported Languages	Java Only	Any	Any
Performance	Low loss	Relatively High loss	Low loss
Decentralization	Yes	No	Yes
Static Entry	No	Yes	No

The advantage of ShardingSphere-Sidecar lies in its cloud native support for Kubernetes and Mesos.

Apache ShardingSphere provides dozens of SPI based extensions. It is very convenient to customize the functions for developers.

This chapter lists all SPI extensions of Apache ShardingSphere. If there is no special requirement, users can use the built-in implementation provided by Apache ShardingSphere; advanced users can refer to the interfaces for customized implementation.

Apache ShardingSphere community welcomes developers to feed back their implementations to the [open-source community](#), so that more users can benefit from it.

## 8.1 Mode

### 8.1.1 SPI Interface

<i>SPI Name</i>	<i>Description</i>
StandalonePersistRepository	Standalone mode configuration information persistence
ClusterPersistRepository	Cluster mode configuration information persistence
GovernanceWatcher	Governance listener

### 8.1.2 Sample

#### StandalonePersistRepository

<i>Implementation Class</i>	<i>Description</i>
FileRepository	File-based persistence
H2Repository	H2-based persistence

## ClusterPersistRepository

<i>Implementation Class</i>	<i>Description</i>
CuratorZookeeperRepository	ZooKeeper-based persistence
EtcdRepository	Etcd-based persistence

## GovernanceWatcher

<i>Implementation Class</i>	<i>Description</i>
ComputeNodeStateChangedWatcher	Compute node state change listener
DatabaseLockChangedWatcher	Database lock state change listener
DistributedLockChangedWatcher	Distributed lock change listener
GlobalRuleChangedWatcher	The global rule configuration change listener
MetaDataChangedWatcher	Metadata change listener
PropertiesChangedWatcher	Property change listener
StorageNodeStateChangedWatcher	Storage node state change listener

## 8.2 Configuration

### 8.2.1 SPI Interface

<i>SPI Name</i>	<i>Description</i>
RuleBuilder	Used to convert user configurations into rule objects
YamlRuleConfigurationSwapper	Used to convert YAML configuration to standard user configuration
ShardingSphereYamlConstruct	Used to convert custom objects and YAML to and from each other

## 8.2.2 Sample

### RuleBuilder

<i>Implementation Class</i>	<i>Description</i>
AlgorithmProvidedReadWriteSplittingRuleBuilder	Used to convert algorithm-based read-write splitting user configuration into read-write splitting rule objects
AlgorithmProvidedDatabaseDiscoveryRuleBuilder	Used to convert algorithm-based database discovery user configuration into database discovery rule objects
AlgorithmProvidedShardingRuleBuilder	Used to convert algorithm-based sharding user configuration into sharding rule objects
AlgorithmProvidedEncryptionRuleBuilder	Used to convert algorithm-based encryption user configuration into encryption rule objects
AlgorithmProvidedShadowRuleBuilder	Used to convert algorithm-based shadow database user configuration into shadow database rule objects
ReadWriteSplittingRuleBuilder	Used to convert read-write splitting user configuration into read-write splitting rule objects
DatabaseDiscoveryRuleBuilder	Used to convert database discovery user configuration into database discovery rule objects
SingleTableRuleBuilder	Used to convert single-table user configuration into a single-table rule objects
AuthorityRuleBuilder	Used to convert authority user configuration into authority rule objects
ShardingRuleBuilder	Used to convert sharding user configuration into sharding rule objects
EncryptRuleBuilder	Used to convert encrypted user configuration into encryption rule objects
ShadowRuleBuilder	Used to convert shadow database user configuration into shadow database rule objects
TransactionRuleBuilder	Used to convert transaction user configuration into transaction rule objects
SQLParserRuleBuilder	Used to convert SQL parser user configuration into SQL parser rule objects

**YamlRuleConfigurationSwapper**

<i>Implementation Class</i>	<i>Description</i>
ReadWriteSplittingRuleConfigurationYamlSwapper	Used to convert algorithm-based read-write splitting configuration into read-write splitting standard configuration
DatabaseDiscoveryRuleConfigurationYamlSwapper	Used to convert algorithm-based database discovery configuration into database discovery standard configuration
ShardingRuleConfigurationYamlSwapper	Used to convert algorithm-based sharding configuration into sharding standard configuration
EncryptRuleConfigurationYamlSwapper	Used to convert algorithm-based encryption configuration into encryption standard configuration
ShadowRuleConfigurationYamlSwapper	Used to convert algorithm-based shadow database configuration into shadow database standard configuration
ReadWriteSplittingRuleConfigurationYamlSwapper	Used to convert the YAML configuration of read-write splitting into the standard configuration of read-write splitting
DatabaseDiscoveryRuleConfigurationYamlSwapper	Used to convert the YAML configuration of database discovery into the standard configuration of database discovery
AuthorityRuleConfigurationYamlSwapper	Used to convert the YAML configuration of authority rules into standard configuration of authority rules
ShardingRuleConfigurationYamlSwapper	Used to convert the YAML configuration of the sharding into the standard configuration of the sharding
EncryptRuleConfigurationYamlSwapper	Used to convert encrypted YAML configuration into encrypted standard configuration
ShadowRuleConfigurationYamlSwapper	Used to convert the YAML configuration of the shadow database into the standard configuration of the shadow database
TransactionRuleConfigurationYamlSwapper	Used to convert the YAML configuration of the transaction into the standard configuration of the transaction
SingleTableRuleConfigurationYamlSwapper	Used to convert the YAML configuration of the single table into the standard configuration of the single table
SQLParserRuleConfigurationYamlSwapper	Used to convert the YAML configuration of the SQL parser into the standard configuration of the SQL parser
SQLTranslatorRuleConfigurationYamlSwapper	Used to convert the YAML configuration of the SQL transformation to the SQL transformation standard configuration

## ShardingSphereYamlConstruct

<i>Implementation Class</i>	<i>Description</i>
NoneShardingStrategyConfigurationYamlConstruct	Used to convert non-sharding policy objects and YAML to and from each other

## 8.3 Kernel

### 8.3.1 SQLRouter

<i>SPI Name</i>	<i>Description</i>
SQLRouter	Used to process routing results

<i>Implementation Class</i>	<i>Description</i>
ReadWriteSplittingSQLRouter	Used to process read-write separation routing results
DatabaseDiscoverySQLRouter	Used to process database discovery routing results
SingleTableSQLRouter	Used to process single-table routing results
ShardingSQLRouter	Used to process sharding routing results
ShadowSQLRouter	Used to process shadow database routing results

### 8.3.2 SQLRewriteContextDecorator

<i>SPI Name</i>	<i>Description</i>
SQLRewriteContextDecorator	Used to process SQL rewrite results

<i>SPI Name</i>	<i>Description</i>
ShardingSQLRewriteContextDecorator	Used to process sharding SQL rewrite results
EncryptionSQLRewriteContextDecorator	Used to process encryption SQL rewrite results

### 8.3.3 SQLExecutionHook

<i>SPI Name</i>	<i>Description</i>
SQLExecutionHook	Hook of SQL execution

<i>Implementation Class</i>	<i>Description</i>
TransactionalSQLExecutionHook	Transaction hook of SQL execution

### 8.3.4 ResultProcessEngine

<i>SPI Name</i>	<i>Description</i>
ResultProcessEngine	Used by merge engine to process result set

<i>Implementation Class</i>	<i>Description</i>
ShardingResultMergerEngine	Used by merge engine to process sharding result set
EncryptResultDecoratorEngine	Used by merge engine to process encryption result set

### 8.3.5 StoragePrivilegeHandler

<i>SPI Name</i>	<i>Description</i>
StoragePrivilegeHandler	Use SQL dialect to process privilege metadata

<i>Implementation Class</i>	<i>Description</i>
PostgreSQLPrivilegeHandler	Use PostgreSQL dialect to process privilege metadata
SQLServerPrivilegeHandler	Use SQLServer dialect to process privilege metadata
OraclePrivilegeHandler	Use Oracle dialect to process privilege metadata
MySQLPrivilegeHandler	Use MySQL dialect to process privilege metadata

### 8.3.6 DynamicDataSourceStrategy

<i>SPI Name</i>	<i>Description</i>
DynamicDataSourceStrategy	Dynamic data source fetch strategy

<i>Implementation Class</i>	<i>Description</i>
DatabaseDiscoveryDynamicDataSourceStrategy	Use database discovery to dynamic fetch data source

## 8.4 DataSource

### 8.4.1 SPI Interface

SPI Name	Description
DatabaseType	Supported database types
DialectTableMetaDataLoader	Use SQL dialect to load meta data rapidly
DataSourcePoolMetaData	Data source connection pool metadata
DataSourcePoolActiveDetector	Data source connection pool active detector

### 8.4.2 Sample

#### DatabaseType Known Implementation Class

<i>Implementation Class</i>	<i>Description</i>
SQL92DatabaseType	SQL92 database type
MySQLDatabaseType	MySQL database
MariaDBDatabaseType	MariaDB database
PostgreSQLDatabaseType	PostgreSQL database
OracleDatabaseType	Oracle database
SQLServerDatabaseType	SQLServer database
H2DatabaseType	H2 database
OpenGaussDatabaseType	OpenGauss database

#### DialectTableMetaDataLoader Known Implementation Class

<i>Implementation Class</i>	<i>Description</i>
MySQLTableMetaDataLoader	Use MySQL dialect to load meta data
OracleTableMetaDataLoader	Use Oracle dialect to load meta data
PostgreSQLTableMetaDataLoader	Use PostgreSQL dialect to load meta data
SQLServerTableMetaDataLoader	Use SQLServer dialect to load meta data
H2TableMetaDataLoader	Use H2 dialect to load meta data
OpenGaussTableMetaDataLoader	Use OpenGauss dialect to load meta data

**DataSourcePoolMetaData Known Implementation Class**

<i>Implementation Class</i>	<i>Description</i>
DBCPDataSourcePoolMetaData	DBCP data source pool meta data
HikariDataSourcePoolMetaData	Hikari data source pool meta data

**DataSourcePoolActiveDetector Known Implementation Class**

<i>Implementation Class</i>	<i>Description</i>
DefaultDataSourcePoolActiveDetector	Default data source pool active detector
HikariDataSourcePoolActiveDetector	Hikari data source pool active detector

## 8.5 SQL Parser

### 8.5.1 DatabaseTypedSQLParserFacade

<i>SPI Name</i>	<i>Description</i>
DatabaseTypedSQLParserFacade	SQL parser facade for lexer and parser

<i>Implementation Class</i>	<i>Description</i>
MySQLParserFacade	SQL parser facade for MySQL
PostgreSQLParserFacade	SQL parser facade for PostgreSQL
SQLServerParserFacade	SQL parser facade for SQLServer
OracleParserFacade	SQL parser facade for Oracle
SQL92ParserFacade	SQL parser facade for SQL92
OpenGaussParserFacade	SQL parser facade for openGauss

### 8.5.2 SQLVisitorFacade

<i>SPI Name</i>	<i>Description</i>
SQLVisitorFacade	SQL AST visitor facade

<i>Implementation Class</i>	<i>Description</i>
MySQLStatementSQLVisitorFacade	SQL visitor of statement extracted facade for MySQL
PostgreSQLStatementSQLVisitorFacade	SQL visitor of statement extracted facade for PostgreSQL
SQLServerStatementSQLVisitorFacade	SQL visitor of statement extracted facade for SQLServer
OracleStatementSQLVisitorFacade	SQL visitor of statement extracted facade for Oracle
SQL92StatementSQLVisitorFacade	SQL visitor of statement extracted facade for SQL92

## 8.6 Proxy

### 8.6.1 SPI Interface

#### DatabaseProtocolFrontendEngine

Fully-qualified class name: `org.apache.shardingsphere.proxy.frontend.spi.DatabaseProtocolFrontendEngine <<https://github.com/apache/shardingsphere/blob/aa0d3026e00575114701be603ec189a02a45747/shardingsphere-proxy/shardingsphere-proxy-frontend/shardingsphere-proxy-frontend-spi/src/main/java/org/apache/shardingsphere/proxy/frontend/spi/DatabaseProtocolFrontendEngine.java>>`\_\_

SPI Name	Description
DatabaseProtocolFrontendEngine	Protocols for ShardingSphere-Proxy to parse and adapt for accessing databases

#### AuthorityProvideAlgorithm

Fully-qualified class name: `org.apache.shardingsphere.authority.spi.AuthorityProviderAlgorithm <<https://github.com/apache/shardingsphere/blob/aac0d3026e00575114701be603ec189a02a45747/shardingsphere-kernel/shardingsphere-authority/shardingsphere-authority-api/src/main/java/org/apache/shardingsphere/authority/spi/AuthorityProviderAlgorithm.java>>`\_\_

SPI Name	Description
AuthorityProviderAlgorithm	Loading logic for user permission

### 8.6.2 Example

#### DatabaseProtocolFrontendEngine

Known implementation class	Description
MySQLFrontendEngine	implementation based on database protocols of MySQL
PostgreSQLFrontendEngine	implementation based on database protocols of PostgreSQL
OpenGaussFrontendEngine <https://github.com/apache/shardingsphere/blob/dec5581af372e1e7daa/sphere-proxy/shardingsphere-proxy-frontend-opengauss/src/main/java/org/apache/shardingsphere/proxy/frontend/opengauss/OpenGaussFrontendEngine.java>`	implementation based on database protocols of openGauss

#### AuthorityProvideAlgorithm

Known implementation class	Type	Description
AllPermittingPrivilegeAlgorithm	ALL_PRIVILEGES_PROVIDER_ALGORITHM	Grant all permissions by default (no forensics), no interaction with the actual database
DatabasePermittedPrivilegesProviderAlgorithm	DATA_TABLE_PRIVILEGE_PROVIDER_ALGORITHM	Permissions configured by user-database-mappings

## 8.7 Data Sharding

### 8.7.1 SPI Interface

SPI Name	Description
ShardingAlgorithm	Sharding Algorithm
KeyGenerateAlgorithm	Distributed Key Generating Algorithm
ShardingAuditAlgorithm	Sharding audit algorithm
DatetimeService	Obtain the current date for routing
DatabaseSQLEntry	Obtain database dialects of current date

## 8.7.2 Sample

### ShardingAlgorithm Known Implementation Class

Implementation Class	Description
BoundaryBased RangeShardingAlgorithm	Boundary based range sharding algorithm
VolumeBased RangeShardingAlgorithm	Volume based range sharding algorithm
ComplexInlineShardingAlgorithm	Complex inline sharding algorithm
AutoIntervalShardingAlgorithm	Mutable interval sharding algorithm
ClassBasedShardingAlgorithm	Class based sharding algorithm
HintInlineShardingAlgorithm	Hint inline sharding algorithm
FixedIntervalShardingAlgorithm	Fixed interval sharding algorithm
HashModShardingAlgorithm	Hash modulo sharding algorithm
InlineShardingAlgorithm	Inline sharding algorithm
ModShardingAlgorithm	Modulo sharding algorithm
CosIdModShardingAlgorithm	Modulo sharding algorithm provided by CosId
CosIdIntervalShardingAlgorithm	Fixed interval sharding algorithm provided by CosId
CosIdSnowflakeIntervalShardingAlgorithm	Snowflake key-based fixed interval sharding algorithm provided by CosId

### KeyGenerateAlgorithm Known Implementation Class

Implementation Class	Description
SnowflakeKeyGenerateAlgorithm	Snowflake key generate algorithm
UUIDKeyGenerateAlgorithm	UUID key generate algorithm
CosIdKeyGenerateAlgorithm	CosId key generate algorithm
CosIdSnowflakeKeyGenerateAlgorithm	Snowflake key generate algorithm provided by CosId
NanoIdKeyGenerateAlgorithm	NanoId key generate algorithm

### ShardingAuditAlgorithm Known Implementation Class

Implementation Class	Description
DMLShardingConditionsShardingAuditAlgorithm	Prohibit DML auditing algorithm without sharding conditions

**DatetimeService Known Implementation Class**

<i>Implementation Class</i>	<i>Description</i>
DatabaseDatetimeServiceDelegate	Get the current time from the database for routing
SystemDatetimeService	Get the current time from the application system for routing

**DatabaseSQLEntry Known Implementation Class**

<i>Implementation Class</i>	<i>Description</i>
MySQLDatabaseSQLEntry	MySQL dialect for get current time
PostgreSQLDatabaseSQLEntry	PostgreSQL dialect for get current time
OracleDatabaseSQLEntry	Oracle dialect for get current time
SQLServerDatabaseSQLEntry	SQLServer dialect for get current time

## 8.8 Readwrite-splitting

### 8.8.1 ReadwriteSplittingType

<i>SPI Name</i>	<i>Description</i>
ReadWriteSplittingType	Readwrite-splitting type

<i>Implementation Class</i>	<i>Description</i>
StaticReadWriteSplittingType	Static readwrite-splitting type
DynamicReadWriteSplittingType	Dynamic readwrite-splitting type

### 8.8.2 ReplicaLoadBalanceAlgorithm

<i>SPI Name</i>	<i>Description</i>
ReplicaLoadBalanceAlgorithm	Load balance algorithm of replica databases

<i>Implementation Class</i>	<i>Description</i>
RoundRobinReplicaLoadBalanceAlgorithm	Round robin load balance algorithm of replica databases
RandomReplicaLoadBalanceAlgorithm	Random load balance algorithm of replica databases
WeightReplicaLoadBalanceAlgorithm	Weight load balance algorithm of replica databases

## 8.9 HA

### 8.9.1 SPI Interface

<i>SPI Name</i>	<i>Description</i>
DatabaseDiscoveryProviderAlgorithm	Database discovery provider algorithm

### 8.9.2 Sample

#### DatabaseDiscoveryProviderAlgorithm

<i>Implementation Class</i>	<i>Description</i>
MGRDatabaseDiscoveryProviderAlgorithm	MySQL MGR-based database discovery provider algorithm
MySQLNormalReplicationDatabaseDiscoveryProviderAlgorithm	Database discovery provider algorithm of MySQL's replication
OpenGaussNormalReplicationDatabaseDiscoveryProviderAlgorithm	Database discovery provider algorithm of open-Gauss's replication

## 8.10 Distributed Transaction

### 8.10.1 ShardingSphereTransactionManager

<i>SPI Name</i>	<i>Description</i>
ShardingSphereTransactionManager	Distributed transaction manager

<i>Implementation Class</i>	<i>Description</i>
XAShardingSphereTransactionManager	XA distributed transaction manager
SeataATShardingSphereTransactionManager	Seata distributed transaction manager

### 8.10.2 XATransactionManagerProvider

<i>SPI Name</i>	<i>Description</i>
XATransactionManagerProvider	XA distributed transaction manager

<i>Implementation Class</i>	<i>Description</i>
Atomikos TransactionManagerProvider	XA distributed transaction manager based on Atomikos
NarayanaXA TransactionManagerProvider	XA distributed transaction manager based on Narayana
BitronixXA TransactionManagerProvider	XA distributed transaction manager based on Bitronix

### 8.10.3 XADataSourceDefinition

<i>SPI Name</i>	<i>Description</i>
XADataSourceDefinition	Auto convert Non XA data source to XA data source

<i>Implementation Class</i>	<i>Description</i>
MySQLXAD ataSourceDefinition	Auto convert Non XA MySQL data source to XA MySQL data source
MariaDBXAD ataSourceDefinition	Auto convert Non XA MariaDB data source to XA MariaDB data source
PostgreSQLXAD ataSourceDefinition	Auto convert Non XA PostgreSQL data source to XA PostgreSQL data source
OracleXAD ataSourceDefinition	Auto convert Non XA Oracle data source to XA Oracle data source
SQLServerXAD ataSourceDefinition	Auto convert Non XA SQLServer data source to XA SQLServer data source
H2XAD ataSourceDefinition	Auto convert Non XA H2 data source to XA H2 data source

### 8.10.4 DataSourcePropertyProvider

<i>SPI Name</i>	<i>Description</i>
DataSourcePropertyProvider	Used to get standard properties of data source pool

<i>Implementation Class</i>	<i>Description</i>
HikariCPPPropertyProvider	Used to get standard properties of HikariCP

## 8.11 Scaling

### 8.11.1 ScalingEntry

<i>SPI Name</i>	<i>Description</i>
ScalingEntry	Entry of scaling

<i>Implementation Class</i>	<i>Description</i>
MySQLScalingEntry	MySQL entry of scaling
PostgreSQLScalingEntry	PostgreSQL entry of scaling
OpenGaussScalingEntry	openGauss entry of scaling

### 8.11.2 JobCompletionDetectAlgorithm

<i>SPI Name</i>	<i>Description</i>
JobCompletionDetectAlgorithm	Job completion check algorithm

<i>Implementation Class</i>	<i>Description</i>
IdleRuleAlgorithm	Incremental task idle time based algorithm

### 8.11.3 DataConsistencyCalculateAlgorithm

<i>SPI Name</i>	<i>Description</i>
DataConsistencyCalculateAlgorithm	Check data consistency algorithm

<i>Implementation Class</i>	<i>Description</i>
DataMatchDataConsistencyCalculateAlgorithm	Check data consistency with every records one by one
CRC32MatchDataConsistencyCalculateAlgorithm	Use CRC32 to check data consistency

## 8.12 SQL Checker

### 8.12.1 SQLChecker

<i>SPI Name</i>	<i>Description</i>
SQLChecker	SQL checker

<i>Implementation Class</i>	<i>Description</i>
AuthorityChecker	Authority checker
ShardingAuditChecker	Sharding audit checker

## 8.13 Encryption

### 8.13.1 SPI Interface

<i>SPI Name</i>	<i>Description</i>
EncryptAlgorithm	Data encrypt algorithm

### 8.13.2 Sample

#### EncryptAlgorithm Known Implementation Class

<i>Implementation Class</i>	<i>Description</i>
MD5EncryptAlgorithm	MD5 data encrypt algorithm
AESEncryptAlgorithm	AES data encrypt algorithm
RC4EncryptAlgorithm	RC4 data encrypt algorithm
SM3EncryptAlgorithm	SM3 data encrypt algorithm
SM4EncryptAlgorithm	SM4 data encrypt algorithm

## 8.14 Shadow DB

### 8.14.1 SPI Interface

<i>SPI Name</i>	<i>Description</i>
ShadowAlgorithm	shadow routing algorithm

### 8.14.2 Sample

<i>Implementation Class</i>	<i>Description</i>
ColumnValueMatchShadowAlgorithm	Match shadow algorithms based on field values
ColumnRegexMatchShadowAlgorithm	Regular matching shadow algorithm based on field value
SimpleHintShadowAlgorithm	Simple match shadow algorithm based on Hint

## 8.15 Observability

### 8.15.1 PluginDefinitionService

<i>SPI Name</i>	<i>Description</i>
PluginDefinitionService	Agent plugin definition

<i>Implementation Class</i>	<i>Description</i>
PrometheusPluginDefinitionService	Prometheus plugin
BaseLoggingPluginDefinitionService	Logging plugin
JaegerPluginDefinitionService	Jaeger plugin
OpenTelemetryTracingPluginDefinitionService	OpenTelemetryTracing plugin
OpenTracingPluginDefinitionService	OpenTracing plugin
ZipkinPluginDefinitionService	Zipkin plugin

### 8.15.2 PluginBootService

<i>SPI Name</i>	<i>Description</i>
PluginBootService	Plugin startup service definition

<i>Implementation Class</i>	<i>Description</i>
PrometheusPluginBootService	Prometheus plugin startup class
BaseLoggingPluginBootService	Logging plugin startup class
JaegerTracingPluginBootService	Jaeger plugin startup class
OpenTelemetryTracingPluginBootService	OpenTelemetryTracing plugin startup class
OpenTracingPluginBootService	OpenTracing plugin startup class
ZipkinTracingPluginBootService	Zipkin plugin startup class

This chapter contains a section of technical implementation and test process with Apache ShardingSphere, which provide the reference with users and developers.

## 9.1 Management

### 9.1.1 Data Structure in Registry Center

Under defined namespace, rules, props and metadata nodes persist in YAML, modifying nodes can dynamically refresh configurations. nodes node persist the runtime node of database access object, to distinguish different database access instances.

```
namespace
 |-rules # Global rule configuration
 |-props # Properties configuration
 |-metadata
 |-${databaseName}
 |-schemas
 |-${schemaName}
 |-tables
 |-${tableName}
 |...
 |-...
 |-versions
 |-${versionNumber}
 |-dataSources
 |-rules
 |...
 |-active_version # Active metadata version
 |...
 |-...
 |-nodes
 |-compute_nodes
 |-online
```

```
 | | | proxy
 | | | | UUID # Proxy instance identifier
 | | | |
 | | | jdbc
 | | | | UUID # JDBC instance identifier
 | | | |
 | | | status
 | | | | UUID
 | | | |
 | | | xa_recovery_id
 | | | | recovery_id
 | | | | | UUID
 | | | |
 | | | worker_id
 | | | | UUID
 | | | |
 | | | process_trigger
 | | | | process_list_id:UUID
 | | | |
 | | storage_nodes
 | | | disable
 | | | | ${schema_1.ds_0}
 | | | | ${schema_1.ds_1}
 | | | |
 | | | primary
 | | | | ${schema_2.ds_0}
 | | | | ${schema_2.ds_1}
 | | | |
```

/rules

global rule configurations, including configure the username and password for ShardingSphere-Proxy.

```
- !AUTHORITY
users:
 - root@%:root
 - sharding@127.0.0.1:sharding
provider:
 type: ALL_PERMITTED
```

## /props

Properties configuration. Please refer to [Configuration Manual](#) for more details.

```
kernel-executor-size: 20
sql-show: true
```

## /metadata/*databaseName*/versions/{**versionNumber**}/dataSources

A collection of multiple database connection pools, whose properties (e.g. DBCP, C3P0, Druid and HikariCP) are configured by users themselves.

```
ds_0:
 initializationFailTimeout: 1
 validationTimeout: 5000
 maxLifetime: 1800000
 leakDetectionThreshold: 0
 minimumIdle: 1
 password: root
 idleTimeout: 60000
 jdbcUrl: jdbc:mysql://127.0.0.1:3306/ds_0?serverTimezone=UTC&useSSL=false
 dataSourceClassName: com.zaxxer.hikari.HikariDataSource
 maximumPoolSize: 50
 connectionTimeout: 30000
 username: root
 poolName: HikariPool-1

ds_1:
 initializationFailTimeout: 1
 validationTimeout: 5000
 maxLifetime: 1800000
 leakDetectionThreshold: 0
 minimumIdle: 1
 password: root
 idleTimeout: 60000
 jdbcUrl: jdbc:mysql://127.0.0.1:3306/ds_1?serverTimezone=UTC&useSSL=false
 dataSourceClassName: com.zaxxer.hikari.HikariDataSource
 maximumPoolSize: 50
 connectionTimeout: 30000
 username: root
 poolName: HikariPool-2
```

**/metadata/*databaseName*/versions/{*versionNumber*}/rules**

Rule configurations, including sharding, readwrite-splitting, data encryption, shadow DB configurations.

- ! SHARDING
  - xxx
- ! READWRITE\_SPLITTING
  - xxx
- ! ENCRYPT
  - xxx

**/metadata/*databaseName*/schemas/{*schemaName*}/tables**

Use separate node storage for each table, dynamic modification of metadata content is not supported currently.

```

name: t_order # Table name
columns:
 id: # Column name
 caseSensitive: false
 dataType: 0
 generated: false
 name: id
 primaryKey: true
 order_id:
 caseSensitive: false
 dataType: 0
 generated: false
 name: order_id
 primaryKey: false
indexes: # Index
 t_user_order_id_index: # Index name
 name: t_user_order_id_index

```

**/nodes/compute\_nodes**

It includes running instance information of database access object, with sub-nodes as the identifiers of currently running instance, which is automatically generated at each startup using UUID. Those identifiers are temporary nodes, which are registered when instances are on-line and cleared when instances are off-line. The registry center monitors the change of those nodes to govern the database access of running instances and other things.

## /nodes/storage\_nodes

It is able to orchestrate replica database, delete or disable data dynamically.

## 9.2 Sharding

The major sharding processes of all the three ShardingSphere products are identical. According to whether query optimization is performed, they can be divided into standard kernel process and federation executor engine process. The standard kernel process consists of SQL Parse => SQL Route => SQL Rewrite => SQL Execute => Result Merge, which is used to process SQL execution in standard sharding scenarios. The federation executor engine process consists of SQL Parse => Logical Plan Optimize => Physical Plan Optimize => Plan Execute => Standard Kernel Process. The federation executor engine perform logical plan optimization and physical plan optimization. In the optimization execution phase, it relies on the standard kernel process to route, rewrite, execute, and merge the optimized logical SQL.

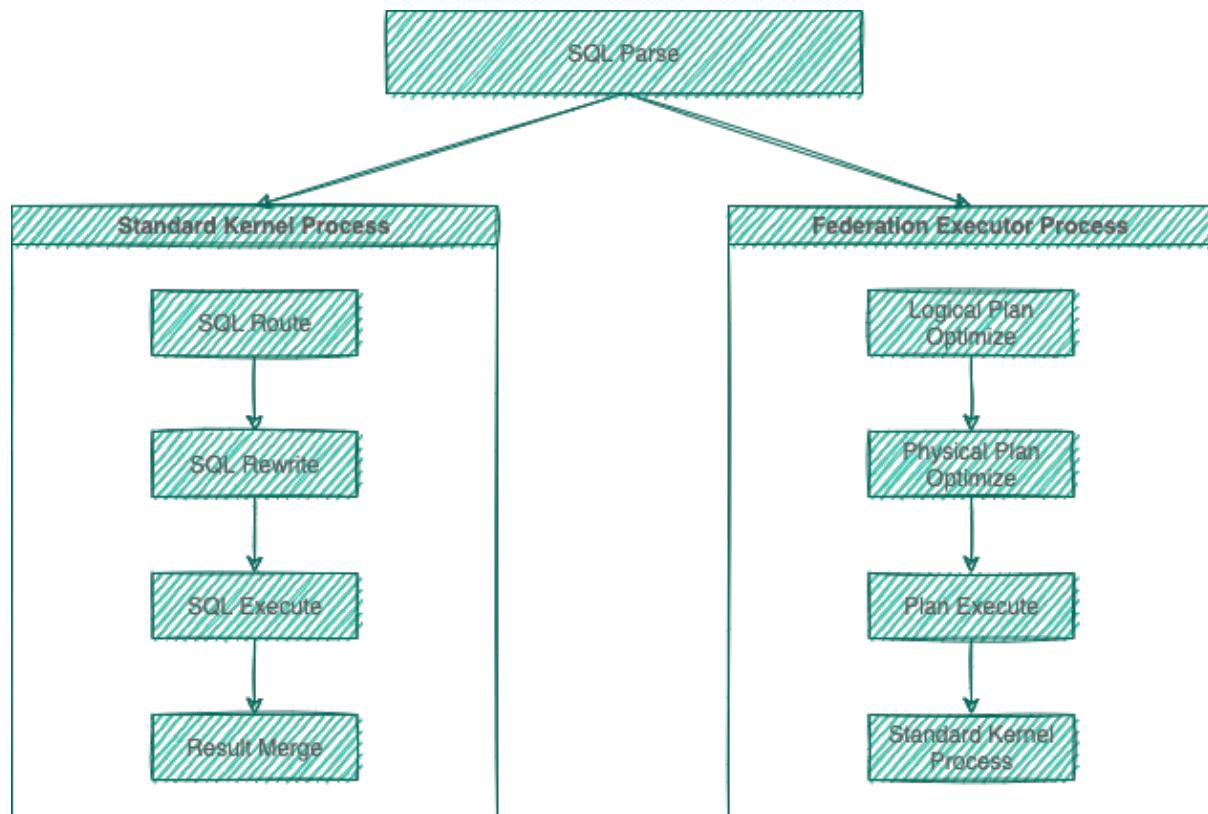


Figure1: Sharding Architecture Diagram

### 9.2.1 SQL Parsing

It is divided into lexical parsing and syntactic parsing. The lexical parser will split SQL into inseparable words, and then the syntactic parser will analyze SQL and extract the parsing context, which can include tables, options, ordering items, grouping items, aggregation functions, pagination information, query conditions and placeholders that may be revised.

### 9.2.2 SQL Route

It is the sharding strategy that matches users' configurations according to the parsing context and the route path can be generated. It supports sharding route and broadcast route currently.

### 9.2.3 SQL Rewrite

It rewrites SQL as statement that can be rightly executed in the real database, and can be divided into correctness rewrite and optimization rewrite.

### 9.2.4 SQL Execution

Through multi-thread executor, it executes asynchronously.

### 9.2.5 Result Merger

It merges multiple execution result sets to output through unified JDBC interface. Result merger includes methods as stream merger, memory merger and addition merger using decorator merger.

### 9.2.6 Query Optimization

Supported by federation executor engine(under development), optimization is performed on complex query such as join query and subquery. It also supports distributed query across multiple database instances. It uses relational algebra internally to optimize query plan, and then get query result through the best query plan.

### 9.2.7 Parse Engine

Compared to other programming languages, SQL is relatively simple, but it is still a complete set of programming language, so there is no essential difference between parsing SQL grammar and parsing other languages (Java, C and Go, etc.).

## Abstract Syntax Tree

The parsing process can be divided into lexical parsing and syntactic parsing. Lexical parser is used to divide SQL into indivisible atomic signs, i.e., Token. According to the dictionary provided by different database dialect, it is categorized into keyword, expression, literal value and operator. SQL is then converted into abstract syntax tree by syntactic parser.

For example, the following SQL:

```
SELECT id, name FROM t_user WHERE status = 'ACTIVE' AND age > 18
```

Its parsing AST (Abstract Syntax Tree) is this:

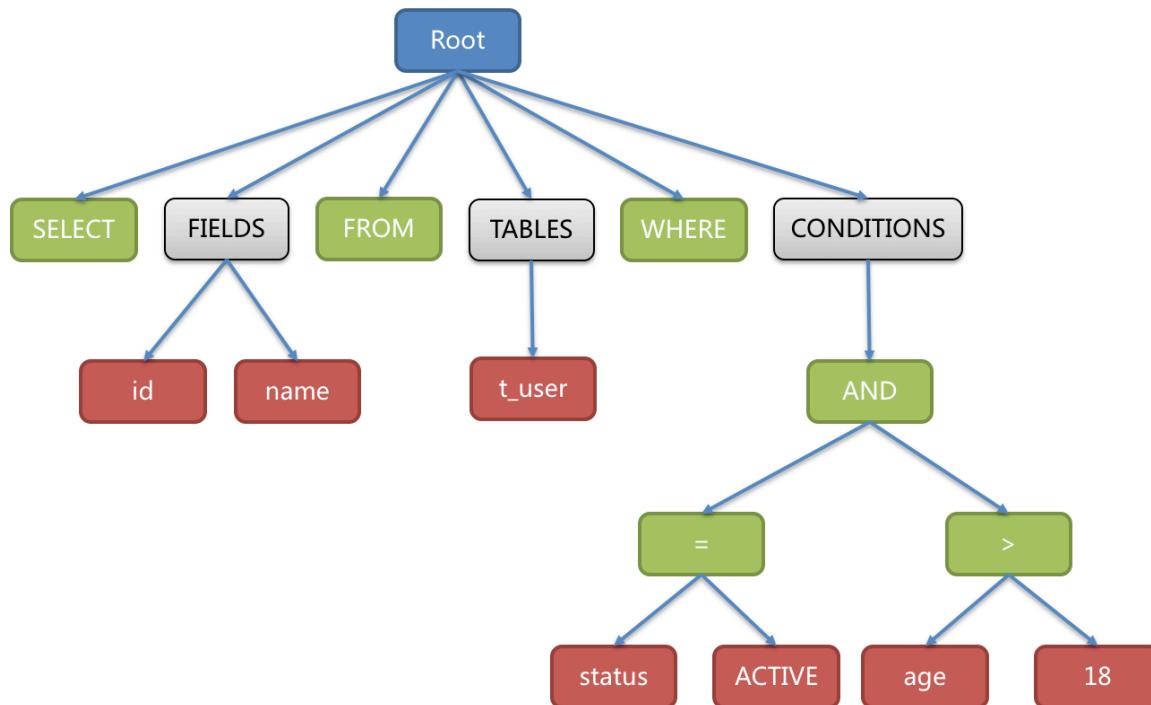


Figure2: SQL AST

To better understand, the Token of keywords in abstract syntax tree is shown in green; that of variables is shown in red; what's to be further divided is shown in grey.

At last, through traversing the abstract syntax tree, the context needed by sharding is extracted and the place that may need to be rewritten is also marked out. Parsing context for the use of sharding includes select items, table information, sharding conditions, auto-increment primary key information, Order By information, Group By information, and pagination information (Limit, Rownum and Top). One-time SQL parsing process is irreversible, each Token is parsed according to the original order of SQL in a high performance. Considering similarities and differences between SQL of all kinds of database dialect, SQL dialect dictionaries of different types of databases are provided in the parsing module.

## SQL Parser

### History

As the core of database sharding and table sharding, SQL parser takes the performance and compatibility as its most important index. ShardingSphere SQL parser has undergone the upgrade and iteration of 3 generations of products.

To pursue good performance and quick achievement, the first generation of SQL parser uses Druid before 1.4.x version. As tested in practice, its performance exceeds other parsers a lot.

The second generation of SQL parsing engine begins from 1.5.x version, ShardingSphere has adopted fully self-developed parsing engine ever since. Due to different purposes, ShardingSphere does not need to transform SQL into a totally abstract syntax tree or traverse twice through visitor. Using half parsing method, it only extracts the context required by data sharding, so the performance and compatibility of SQL parsing is further improved.

The third generation of SQL parsing engine begins from 3.0.x version. ShardingSphere tries to adopts ANTLR as a generator for the SQL parsing engine, and uses Visit to obtain SQL Statement from AST. Starting from version 5.0.x, the architecture of the parsing engine has been refactored. At the same time, it is convenient to directly obtain the parsing results of the same SQL to improve parsing efficiency by putting the AST obtained from the first parsing into the cache. Therefore, we recommend that users adopt PreparedStatement this SQL pre-compilation method to improve performance. Currently, users can also use ShardingSphere's SQL parsing engine independently to obtain AST and SQL Statements for a variety of mainstream relational databases. In the future, the SQL parsing engine will continue to provide powerful functions such as SQL formatting and SQL templating.

### Features

- Independent SQL parsing engine
- The syntax rules can be easily expanded and modified (using ANTLR)
- Support multiple dialects

Database	Status
MySQL	perfect supported
PostgreSQL	perfect supported
SQLServer	supported
Oracle	supported
SQL92	supported
openGauss	supported

- SQL format (developing)
- SQL parameterize (developing)

## API Usage

- Maven

```
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-sql-parser-engine</artifactId>
 <version>${project.version}</version>
</dependency>
<!-- According to the needs, introduce the parsing module of the specified dialect
(take MySQL as an example), you can add all the supported dialects, or just what
you need -->
<dependency>
 <groupId>org.apache.shardingsphere</groupId>
 <artifactId>shardingsphere-sql-parser-mysql</artifactId>
 <version>${project.version}</version>
</dependency>
```

- Get AST

```
CacheOption cacheOption = new CacheOption(128, 1024L);
SQLParserEngine parserEngine = new SQLParserEngine(sql, cacheOption);
ParseASTNode parseASTNode = parserEngine.parse(sql, useCache);
```

- GET SQLStatement

```
CacheOption cacheOption = new CacheOption(128, 1024L);
SQLParserEngine parserEngine = new SQLParserEngine(sql, cacheOption);
ParseASTNode parseASTNode = parserEngine.parse(sql, useCache);
SQLVisitorEngine sqlVisitorEngine = new SQLVisitorEngine(sql, "STATEMENT",
useCache, new Properties());
SQLStatement sqlStatement = sqlVisitorEngine.visit(parseASTNode);
```

- SQL Format

```
ParseASTNode parseASTNode = parserEngine.parse(sql, useCache);
SQLVisitorEngine sqlVisitorEngine = new SQLVisitorEngine(sql, "STATEMENT",
useCache, new Properties());
SQLStatement sqlStatement = sqlVisitorEngine.visit(parseASTNode);
```

example:

Original SQL	Formatted SQL
select a+1 as b, name n from table1 join table2 where id=1 and name= 'lu' ;	SELECT a + 1 AS b, name nFROM table1 JOIN table2WHERE id = 1 and name = 'lu' ;
select id, name, age, sex, ss, yy from table1 where id=1;	SELECT id , name , age , sex , ss , yy FROM table1WHERE id = 1;
select id, name, age, count(*) as n, (select id, name, age, sex from table2 where id=2) as sid, yyyy from table1 where id=1;	SELECT id , name , age , COUNT(*) AS n, ( SELECT id , name , age , sex FROM table2 WHERE id = 2 ) AS sid, yyyy FROM table1WHERE id = 1;
select id, name, age, sex, ss, yy from table1 where id=1 and name=1 and a=1 and b=2 and c=4 and d=3;	SELECT id , name , age , sex , ss , yy FROM table1WHERE id = 1 and name = 1 and a = 1 and b = 2 and c = 4 and d = 3;
ALTER TABLE t_order ADD column4 DATE, ADD column5 DATETIME, engine ss max_rows 10,min_rows 2, ADD column6 TIMESTAMP, ADD column7 TIME;	ALTER TABLE t_order ADD column4 DATE, ADD column5 DATETIME, ENGINE ss MAX_ROWS 10, MIN_ROWS 2, ADD column6 TIMESTAMP, ADD column7 TIME
CREATE TABLE IF NOT EXISTS runoob_tbl(runoob_id INT UNSIGNED AUTO_INCREMENT,runoob_title VARCHAR(100) NOT NULL,runoob_author VARCHAR(40) NOT NULL,runoob_test NATIONAL CHAR(40),submission_date DATE,PRIMARY KEY (runoob_id))ENGINE=InnoDB DEFAULT CHARSET=utf8;	CREATE TABLE IF NOT EXISTS runoob_tbl (runoob_id INT UNSIGNED AUTO_INCREMENT, runoob_title VARCHAR(100) NOT NULL, runoob_author VARCHAR(40) NOT NULL, runoob_test NATIONAL CHAR(40), submission_date DATE, PRIMARY KEY (runoob_id)) ENGINE = InnoDB DEFAULT CHARSET = utf8;
INSERT INTO t_order_item(order_id, user_id, status, creation_date) values (1, 1, 'insert', '2017-08-08'),(2, 2, 'insert', '2017-08-08') ON DUPLICATE KEY UPDATE status = 'init' ;	INSERT INTO t_order_item (order_id , user_id , status , creation_date)VALUES (1, 1, 'insert' , '2017-08-08' ), (2, 2, 'insert' , '2017-08-08' )ON DUPLICATE KEY UPDATE status = 'init' ;
INSERT INTO t_order SET order_id = 1, user_id = 1, status = convert(to_base64(aes_encrypt(1, 'key' )) USING utf8) ON DUPLICATE KEY UPDATE status = VALUES(status);	INSERT INTO t_order SET order_id = 1, user_id = 1, status = CONVERT(to_base64(aes_encrypt(1 , 'key' )) USING utf8)ON DUPLICATE KEY UPDATE status = VALUES(status);
INSERT INTO t_order (order_id, user_id, status) SELECT order_id, user_id, status FROM t_order WHERE order_id = 1;	INSERT INTO t_order (order_id , user_id , status) SELECT order_id , user_id , status FROM t_order WHERE order_id = 1;

## 9.2.8 Route Engine

It refers to the sharding strategy that matches databases and tables according to the parsing context and generates route path. SQL with sharding keys can be divided into single-sharding route (equal mark as the operator of sharding key), multiple-sharding route (IN as the operator of sharding key) and range sharding route (BETWEEN as the operator of sharding key). SQL without sharding key adopts broadcast route.

Sharding strategies can usually be set in the database or by users. Strategies built in the database are relatively simple and can generally be divided into last number modulo, hash, range, tag, time and so on. More flexible, sharding strategies set by users can be customized according to their needs. Together with automatic data migration, database middle layer can automatically shard and balance the data without users paying attention to sharding strategies, and thereby the distributed database can have the elastic scaling-out ability. In ShardingSphere's roadmap, elastic scaling-out ability will start from 4.x version.

### Sharding Route

It is used in the situation to route according to the sharding key, and can be sub-divided into 3 types, direct route, standard route and Cartesian product route.

#### Direct Route

The conditions for direct route are relatively strict. It requires to shard through Hint (use HintAPI to appoint the route to databases and tables directly). On the premise of having database sharding but not table sharding, SQL parsing and the following result merging can be avoided. Therefore, with the highest compatibility, it can execute any SQL in complex situations, including sub-queries, self-defined functions. Direct route can also be used in the situation where sharding keys are not in SQL. For example, set sharding key as 3.

```
hintManager.setDatabaseShardingValue(3);
```

If the routing algorithm is value % 2, when a logical database `t_order` corresponds to two physical databases `t_order_0` and `t_order_1`, the SQL will be executed on `t_order_1` after routing. The following is a sample code using the API.

```
String sql = "SELECT * FROM t_order";
try {
 HintManager hintManager = HintManager.getInstance();
 Connection conn = dataSource.getConnection();
 PreparedStatement pstmt = conn.prepareStatement(sql);
 hintManager.setDatabaseShardingValue(3);
 try (ResultSet rs = pstmt.executeQuery()) {
 while (rs.next()) {
 //...
 }
 }
}
```

```

 }
}
```

## Standard Route

Standard route is ShardingSphere's most recommended sharding method. Its application range is the SQL that does not include joint query or only includes joint query between binding tables. When the sharding operator is equal mark, the route result will fall into a single database (table); when sharding operators are BETWEEN or IN, the route result will not necessarily fall into the only database (table). So one logic SQL can finally be split into multiple real SQL to execute. For example, if sharding is according to the odd number or even number of order\_id, a single table query SQL is as the following:

```
SELECT * FROM t_order WHERE order_id IN (1, 2);
```

The route result will be:

```
SELECT * FROM t_order_0 WHERE order_id IN (1, 2);
SELECT * FROM t_order_1 WHERE order_id IN (1, 2);
```

The complexity and performance of the joint query are comparable with those of single-table query. For instance, if a joint query SQL that contains binding tables is as this:

```
SELECT * FROM t_order o JOIN t_order_item i ON o.order_id=i.order_id WHERE order_id IN (1, 2);
```

Then, the route result will be:

```
SELECT * FROM t_order_0 o JOIN t_order_item_0 i ON o.order_id=i.order_id WHERE order_id IN (1, 2);
SELECT * FROM t_order_1 o JOIN t_order_item_1 i ON o.order_id=i.order_id WHERE order_id IN (1, 2);
```

It can be seen that, the number of divided SQL is the same as the number of single tables.

## Cartesian Route

Cartesian route has the most complex situation, it cannot locate sharding rules according to the binding table relationship, so the joint query between non-binding tables needs to be split into Cartesian product combination to execute. If SQL in the last case is not configured with binding table relationship, the route result will be:

```
SELECT * FROM t_order_0 o JOIN t_order_item_0 i ON o.order_id=i.order_id WHERE order_id IN (1, 2);
SELECT * FROM t_order_0 o JOIN t_order_item_1 i ON o.order_id=i.order_id WHERE order_id IN (1, 2);
SELECT * FROM t_order_1 o JOIN t_order_item_0 i ON o.order_id=i.order_id WHERE order_id IN (1, 2);
```

```
SELECT * FROM t_order_1 o JOIN t_order_item_1 i ON o.order_id=i.order_id WHERE order_id IN (1, 2);
```

Cartesian product route has a relatively low performance, so it should be careful to use.

### Broadcast Route

For SQL without sharding key, broadcast route is used. According to SQL types, it can be divided into five types, schema & table route, database schema route, database instance route, unicast route and ignore route.

### Schema & Table Route

Schema & table route is used to deal with all the operations of physical tables related to its logic table, including DQL and DML without sharding key and DDL, etc. For example.

```
SELECT * FROM t_order WHERE good_prority IN (1, 10);
```

It will traverse all the tables in all the databases, match the logical table and the physical table name one by one and execute them if succeeded. After routing, they are:

```
SELECT * FROM t_order_0 WHERE good_prority IN (1, 10);
SELECT * FROM t_order_1 WHERE good_prority IN (1, 10);
SELECT * FROM t_order_2 WHERE good_prority IN (1, 10);
SELECT * FROM t_order_3 WHERE good_prority IN (1, 10);
```

### Database Schema Route

Database schema route is used to deal with database operations, including the SET database management order used to set the database and transaction control statement as TCL. In this case, all physical databases matched with the name are traversed according to logical database name, and the command is executed in the physical database. For example:

```
SET autocommit=0;
```

If this command is executed in t\_order, t\_order will have 2 physical databases. And it will actually be executed in both t\_order\_0 and t\_order\_1.

## Database Instance Route

Database instance route is used in DCL operation, whose authorization statement aims at database instances. No matter how many schemas are included in one instance, each one of them can only be executed once. For example:

```
CREATE USER customer@127.0.0.1 identified BY '123';
```

This command will be executed in all the physical database instances to ensure customer users have access to each instance.

## Unicast Route

Unicast route is used in the scenario of acquiring the information from some certain physical table. It only requires to acquire data from any physical table in any database. For example:

```
DESCRIBE t_order;
```

The descriptions of the two physical tables, t\_order\_0 and t\_order\_1 of t\_order have the same structure, so this command is executed once on any physical table.

## Ignore Route

Ignore route is used to block the operation of SQL to the database. For example:

```
USE order_db;
```

This command will not be executed in physical database. Because ShardingSphere uses logic Schema, there is no need to send the Schema shift order to the database.

The overall structure of route engine is as the following:

### 9.2.9 Rewrite Engine

The SQL written by engineers facing logic databases and tables cannot be executed directly in actual databases. SQL rewrite is used to rewrite logic SQL into rightly executable ones in actual databases, including two parts, correctness rewrite and optimization rewrite.

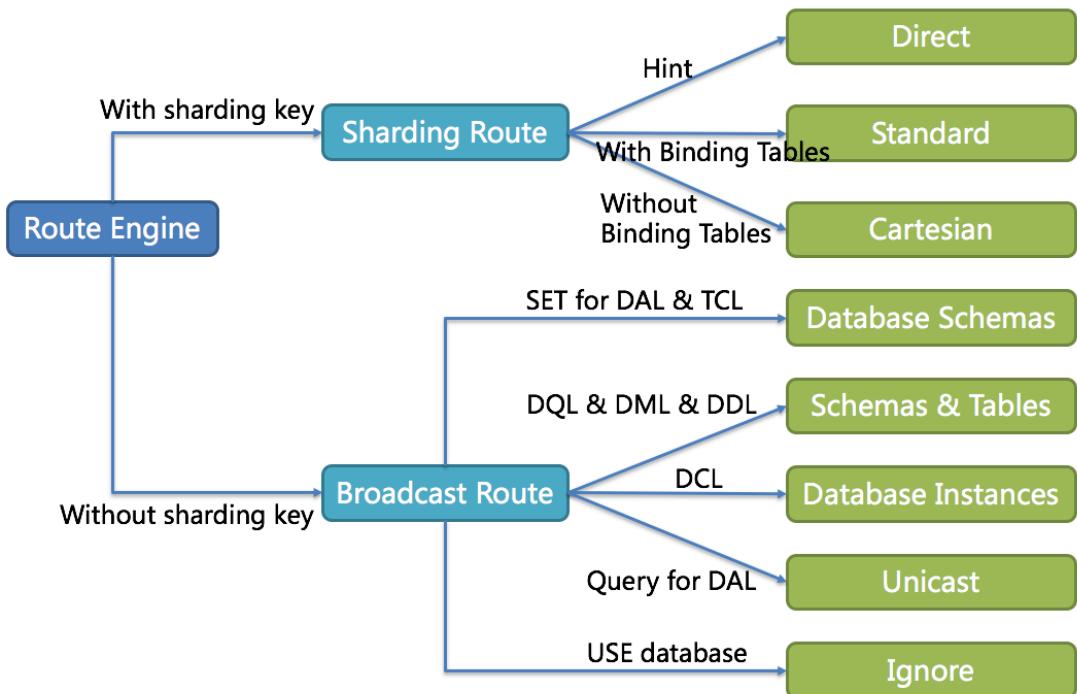


Figure3: Route Engine

### Correctness Rewrite

In situation with sharding tables, it requires to rewrite logic table names in sharding settings into actual table names acquired after routing. Database sharding does not require to rewrite table names. In addition to that, there are also column derivation, pagination information revision and other content.

### Identifier Rewrite

Identifiers that need to be rewritten include table name, index name and schema name. Table name rewrite refers to the process to locate the position of logic tables in the original SQL and rewrite it as the physical table. Table name rewrite is one typical situation that requires to parse SQL. From a most plain case, if the logic SQL is as follow:

```
SELECT order_id FROM t_order WHERE order_id=1;
```

If the SQL is configured with sharding key `order_id=1`, it will be routed to Sharding Table 1. Then, the SQL after rewrite should be:

```
SELECT order_id FROM t_order_1 WHERE order_id=1;
```

In this most simple kind of SQL, whether parsing SQL to abstract syntax tree seems unimportant, SQL can be rewritten only by searching for and substituting characters. But in the following situation, it is unable to rewrite SQL rightly merely by searching for and substituting characters:

```
SELECT order_id FROM t_order WHERE order_id=1 AND remarks=' t_order xxx';
```

The SQL rightly rewritten is supposed to be:

```
SELECT order_id FROM t_order_1 WHERE order_id=1 AND remarks=' t_order xxx';
```

Rather than:

```
SELECT order_id FROM t_order_1 WHERE order_id=1 AND remarks=' t_order_1 xxx';
```

Because there may be similar characters besides the table name, the simple character substitute method cannot be used to rewrite SQL. Here is another more complex SQL rewrite situation:

```
SELECT t_order.order_id FROM t_order WHERE t_order.order_id=1 AND remarks=' t_order xxx';
```

The SQL above takes table name as the identifier of the field, so it should also be revised when SQL is rewritten:

```
SELECT t_order_1.order_id FROM t_order_1 WHERE t_order_1.order_id=1 AND remarks=' t_order xxx';
```

But if there is another table name defined in SQL, it is not necessary to revise that, even though that name is the same as the table name. For example:

```
SELECT t_order.order_id FROM t_order AS t_order WHERE t_order.order_id=1 AND remarks=' t_order xxx';
```

SQL rewrite only requires to revise its table name:

```
SELECT t_order.order_id FROM t_order_1 AS t_order WHERE t_order.order_id=1 AND remarks=' t_order xxx';
```

Index name is another identifier that can be rewritten. In some databases (such as MySQL/SQLServer), the index is created according to the table dimension, and its names in different tables can repeat. In some other databases (such as PostgreSQL/Oracle), however, the index is created according to the database dimension, index names in different tables are required to be one and the only.

In ShardingSphere, schema management method is similar to that of the table. It uses logic schema to manage a set of data sources, so it requires to replace the logic schema written by users in SQL with physical database schema.

ShardingSphere only supports to use schema in database management statements but not in DQL and DML statements, for example:

```
SHOW COLUMNS FROM t_order FROM order_ds;
```

Schema rewrite refers to rewriting logic schema as a right and real schema found arbitrarily with unicast route.

## Column Derivation

Column derivation in query statements usually results from two situations. First, ShardingSphere needs to acquire the corresponding data when merging results, but it is not returned through the query SQL. This kind of situation aims mainly at GROUP BY and ORDER BY. Result merger requires sorting and ranking according to items of GROUP BY and ORDER BY field. But if sorting and ranking items are not included in the original SQL, it should be rewritten. Look at the situation where the original SQL has the information required by result merger:

```
SELECT order_id, user_id FROM t_order ORDER BY user_id;
```

Since user\_id is used in ranking, the result merger needs the data able to acquire user\_id. The SQL above is able to acquire user\_id data, so there is no need to add columns.

If the selected item does not contain the column required by result merger, it will need to add column, as the following SQL:

```
SELECT order_id FROM t_order ORDER BY user_id;
```

Since the original SQL does not contain user\_id needed by result merger, the SQL needs to be rewritten by adding columns, and after that, it will be:

```
SELECT order_id, user_id AS ORDER_BY_DERIVED_0 FROM t_order ORDER BY user_id;
```

What's to be mentioned, column derivation will only add the missing column rather than all of them; the SQL that includes \* in SELECT will also selectively add columns according to the meta-data information of tables. Here is a relatively complex SQL column derivation case:

```
SELECT o.* FROM t_order o, t_order_item i WHERE o.order_id=i.order_id ORDER BY user_id, order_item_id;
```

Suppose only t\_order\_item table contains order\_item\_id column, according to the meta-data information of tables, the user\_id in sorting item exists in table t\_order as merging result, but order\_item\_id does not exist in t\_order, so it needs to add columns. The SQL after that will be:

```
SELECT o.*, order_item_id AS ORDER_BY_DERIVED_0 FROM t_order o, t_order_item i WHERE o.order_id=i.order_id ORDER BY user_id, order_item_id;
```

Another situation of column derivation is using AVG aggregation function. In distributed situations, it is not right to calculate the average value with avg1 + avg2 + avg3 / 3, and it should be rewritten as (sum1 + sum2 + sum3) / (count1 + count2 + count3). This requires to rewrite the SQL that contains AVG as SUM and COUNT and recalculate the average value in result merger. Such as the following SQL:

```
SELECT AVG(price) FROM t_order WHERE user_id=1;
```

Should be rewritten as:

```
SELECT COUNT(price) AS AVG_DERIVED_COUNT_0, SUM(price) AS AVG_DERIVED_SUM_0 FROM t_order WHERE user_id=1;
```

Then it can calculate the right average value through result merger.

The last kind of column derivation is in SQL with INSERT. With database auto-increment key, there is no need to fill in primary key field. But database auto-increment key cannot satisfy the requirement of only one primary key being in the distributed situation. So ShardingSphere provides a distributed auto-increment key generation strategy, enabling users to replace the current auto-increment key invisibly with a distributed one without changing existing codes through column derivation. Distributed auto-increment key generation strategy will be expounded in the following part, here we only explain the content related to SQL rewrite. For example, if the primary key of t\_order is order\_id, and the original SQL is:

```
INSERT INTO t_order (`field1`, `field2`) VALUES (10, 1);
```

It can be seen that the SQL above does not include an auto-increment key, which will be filled by the database itself. After ShardingSphere set an auto-increment key, the SQL will be rewritten as:

```
INSERT INTO t_order (`field1`, `field2`, order_id) VALUES (10, 1, xxxxx);
```

Rewritten SQL will add auto-increment key name and its value generated automatically in the last part of INSERT FIELD and INSERT VALUE. xxxxx in the SQL above stands for the latter one.

If INSERT SQL does not contain the column name of the table, ShardingSphere can also automatically generate auto-increment key by comparing the number of parameter and column in the table meta-information. For example, the original SQL is:

```
INSERT INTO t_order VALUES (10, 1);
```

The rewritten SQL only needs to add an auto-increment key in the column where the primary key is:

```
INSERT INTO t_order VALUES (xxxxx, 10, 1);
```

When auto-increment key derives column, if the user writes SQL with placeholder, he only needs to rewrite parameter list but not SQL itself.

## Pagination Revision

The scenarios of acquiring pagination data from multiple databases is different from that of one single database. If every 10 pieces of data are taken as one page, the user wants to take the second page of data. It is not right to take, acquire LIMIT 10, 10 under sharding situations, and take out the first 10 pieces of data according to sorting conditions after merging. For example, if the SQL is:

```
SELECT score FROM t_score ORDER BY score DESC LIMIT 1, 2;
```

The following picture shows the pagination execution results without SQL rewrite.

As shown in the picture, if you want to acquire the second and the third piece of data ordered by score common in both tables, and they are supposed to be 95 and 90. Since the executed SQL can only acquire the second and the third piece of data from each table, i.e., 90 and 80 from t\_score\_0, 85 and 75 from

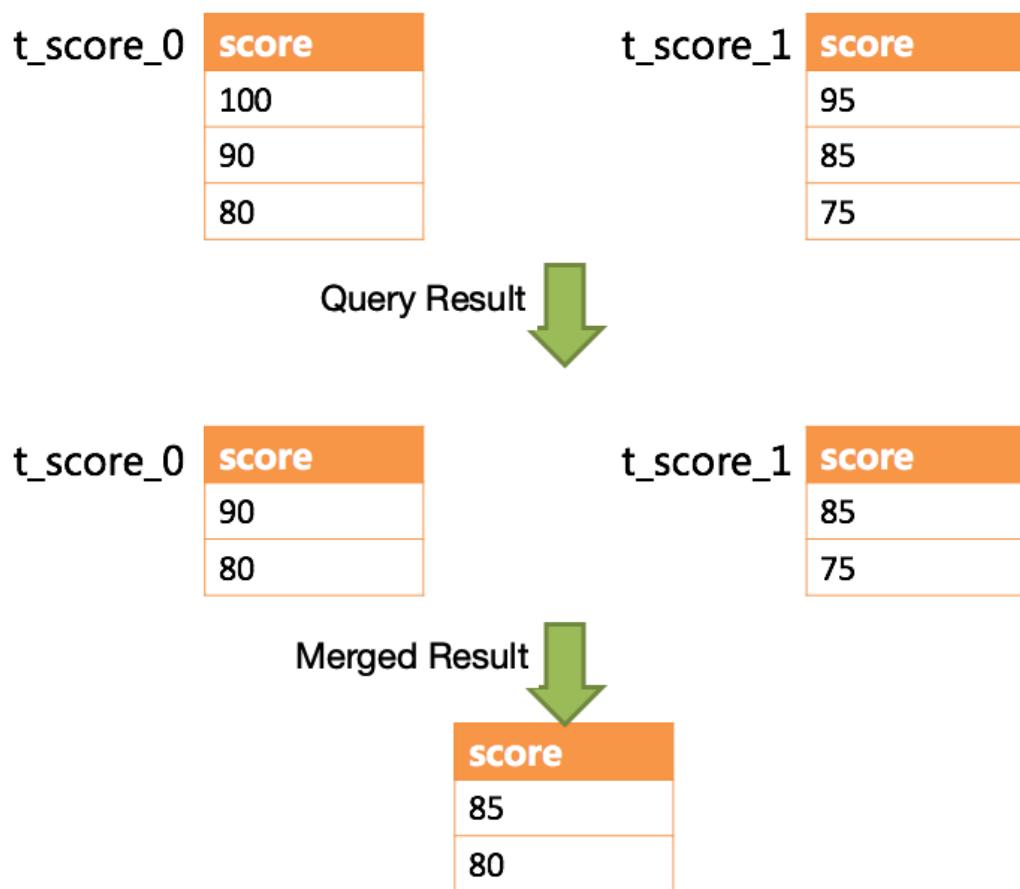


Figure4: Pagination without rewrite

t\_score\_1. When merging results, it can only merge from 90, 80, 85 and 75 already acquired, so the right result cannot be acquired anyway.

The right way is to rewrite pagination conditions as `LIMIT 0, 3`, take out all the data from the first two pages and combine sorting conditions to calculate the right data. The following picture shows the execution of pagination results after SQL rewrite.

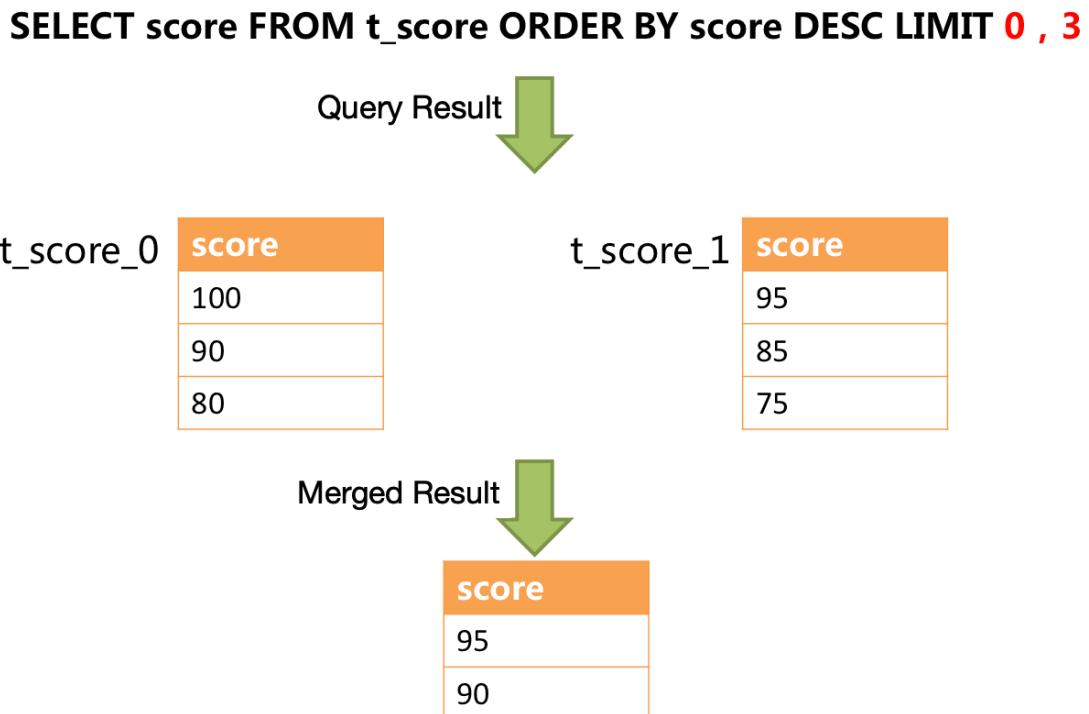


Figure5: Pagination with rewrite

The latter the offset position is, the lower the efficiency of using `LIMIT` pagination will be. There are many ways to avoid using `LIMIT` as pagination method, such as constructing a secondary index to record line record number and line offset amount, or using the tail ID of last pagination data as the pagination method of conditions of the next query.

When revising pagination information, if the user uses placeholder method to write SQL, he only needs to rewrite parameter list rather than SQL itself.

### Batch Split

When using batch inserted SQL, if the inserted data crosses sharding, the user needs to rewrite SQL to avoid writing excessive data into the database. The differences between insert operation and query operation are: though the query sentence has used sharding keys that do not exist in current sharding, they will not have any influence on data, but insert operation has to delete extra sharding keys. Take the following SQL for example:

```
INSERT INTO t_order (order_id, xxx) VALUES (1, 'xxx'), (2, 'xxx'), (3, 'xxx');
```

If the database is still divided into two parts according to odd and even number of order\_id, this SQL will be executed after its table name is revised. Then, both shards will be written with the same record. Though only the data that satisfies sharding conditions can be taken out from query statement, it is not reasonable for the schema to have excessive data. So the SQL should be rewritten as:

```
INSERT INTO t_order_0 (order_id, xxx) VALUES (2, 'xxx');
INSERT INTO t_order_1 (order_id, xxx) VALUES (1, 'xxx'), (3, 'xxx');
```

IN query is similar to batch insertion, but IN operation will not lead to wrong data query result. Through rewriting IN query, the query performance can be further improved. Like the following SQL:

```
SELECT * FROM t_order WHERE order_id IN (1, 2, 3);
```

Is rewritten as:

```
SELECT * FROM t_order_0 WHERE order_id IN (2);
SELECT * FROM t_order_1 WHERE order_id IN (1, 3);
```

The query performance will be further improved. For now, ShardingSphere has not realized this rewrite strategy, so the current rewrite result is:

```
SELECT * FROM t_order_0 WHERE order_id IN (1, 2, 3);
SELECT * FROM t_order_1 WHERE order_id IN (1, 2, 3);
```

Though the execution result of SQL is right, but it has not achieved the most optimized query efficiency.

## Optimization Rewrite

Its purpose is to effectively improve the performance without influencing the correctness of the query. It can be divided into single node optimization and stream merger optimization.

## Single Node Optimization

It refers to the optimization that stops the SQL rewrite from the route to the single node. After acquiring one route result, if it is routed to a single data node, result merging is unnecessary to be involved, so there is no need for rewrites as derived column, pagination information and others. In particular, there is no need to read from the first piece of information, which reduces the pressure for the database to a large extent and saves meaningless consumption of the network bandwidth.

## Stream Merger Optimization

It only adds sorting items and sorting orders identical with grouping items and ORDER BY to GROUP BY SQL, and they are used to transfer memory merger to stream merger. In the result merger part, stream merger and memory merger will be explained in detail.

The overall structure of rewrite engine is shown in the following picture.

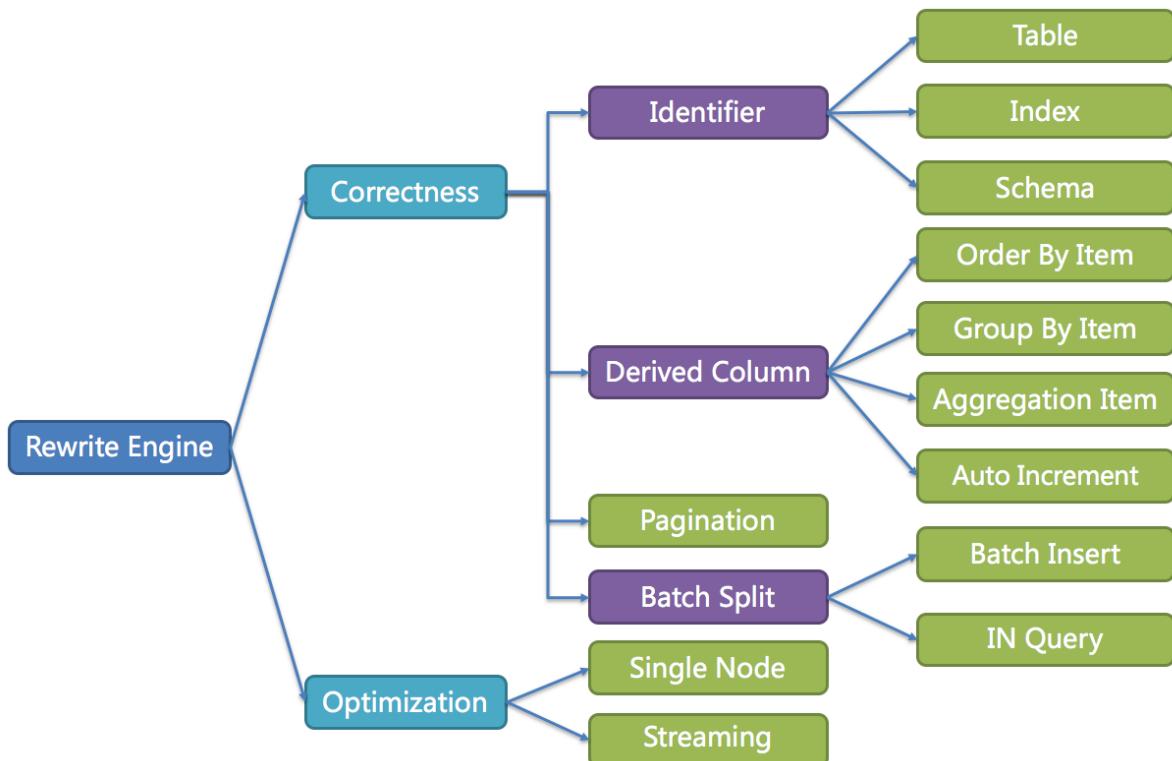


Figure6: Rewrite Engine

### 9.2.10 Execute Engine

ShardingSphere adopts a set of automatic execution engine, responsible for sending the true SQL, which has been routed and rewritten, to execute in the underlying data source safely and effectively. It does not simply send the SQL through JDBC to directly execute in the underlying data source, or put execution requests directly to the thread pool to concurrently execute, but focuses more on the creation of a balanced data source connection, the consumption generated by the memory usage, the maximum utilization of the concurrency and other problems. The objective of the execution engine is to automatically balance between the resource control and the execution efficiency.

#### Connection Mode

From the perspective of resource control, the connection number of the business side's visit of the database should be limited. It can effectively prevent some certain business from occupying excessive resource, exhausting database connection resources and influencing the normal use of other businesses. Especially when one database contains many tables, a logic SQL that does not contain any sharding key will produce a large amount of physical SQLs that fall into different tables in one database. If each physical SQL takes an independent connection, a query will undoubtedly take up excessive resources.

From the perspective of execution efficiency, holding an independent database connection for each sharding query can make effective use of multi-thread to improve execution efficiency. Opening an independent thread for each database connection can parallelize IO produced consumption. Holding an independent database connection for each sharding query can also avoid loading the query result to the memory too early. It is enough for independent database connections to maintain result set quotation and cursor position, and move the cursor when acquiring corresponding data.

Merging result set by moving down its cursor is called stream merger. It does not require to load all the query results to the memory. Thus, it is able to save memory resource effectively and reduce trash recycle frequency. When it is not able to make sure each sharding query holds an independent database connection, it requires to load all the current query results to the memory before reusing that database connection to acquire the query result from the next sharding table. Therefore, though the stream merger can be used, under this kind of circumstances, it will also degenerate to the memory merger.

The control and protection of database connection resources is one thing, adopting better merging model to save the memory resources of middleware is another thing. How to deal with the relationship between them is a problem that ShardingSphere execution engine should solve. To be accurate, if a sharding SQL needs to operate 200 tables under some database case, should we choose to create 200 parallel connection executions or a serial connection execution? Or to say, how to choose between efficiency and resource control?

Aiming at the above situation, ShardingSphere has provided a solution. It has put forward a Connection Mode concept divided into two types, `MEMORY_STRICTLY` mode and `CONNECTION_STRICTLY` mode.

## **MEMORY\_STRICTLY Mode**

The prerequisite to use this mode is that ShardingSphere does not restrict the connection number of one operation. If the actual executed SQL needs to operate 200 tables in some database instance, it will create a new database connection for each table and deal with them concurrently through multi-thread to maximize the execution efficiency. When the SQL is up to standard, it will choose stream merger in priority to avoid memory overflow or frequent garbage recycle.

## **CONNECTION\_STRICTLY Mode**

The prerequisite to use this mode is that ShardingSphere strictly restricts the connection consumption number of one operation. If the SQL to be executed needs to operate 200 tables in database instance, it will create one database connection and operate them serially. If shards exist in different databases, it will still be multi-thread operations for different databases, but with only one database connection being created for each operation in each database. It can prevent the problem brought by excessive occupation of database connection from one request. The mode chooses memory merger all the time.

The MEMORY\_STRICTLY mode is applicable to OLAP operation and can increase the system capacity by removing database connection restrictions. It is also applicable to OLTP operation, which usually has sharding keys and can be routed to a single shard. So it is a wise choice to control database connection strictly to make sure resources of online system databases can be used by more applications.

## **Automatic Execution Engine**

ShardingSphere uses which mode at first is up to users' setting and they can choose to use MEMORY\_STRICTLY mode or CONNECTION\_STRICTLY mode according to their actual business scenarios.

The solution gives users the right to choose, requiring them to know the advantages and disadvantages of both modes and make decision according to the actual business situations. No doubt, it is not the best solution due to increasing users' study cost and use cost.

This kind of dichotomy solution lacks flexible coping ability to switch between two modes with static initialization. In practical situations, route results of each time may differ with different SQL and placeholder indexes. It means some operations may need to use memory merger, while others are better to use stream merger. Connection modes should not be set by users before initializing ShardingSphere, but should be decided dynamically by the situation of SQL and placeholder indexes.

To reduce users' use cost and solve the dynamic connection mode problem, ShardingSphere has extracted the thought of automatic execution engine in order to eliminate the connection mode concept inside. Users do not need to know what are so called MEMORY\_STRICTLY mode and CONNECTION\_STRICTLY mode, but let the execution engine to choose the best solution according to current situations.

Automatic execution engine has narrowed the selection scale of connection mode to each SQL operation. Aiming at each SQL request, automatic execution engine will do real-time calculations and evaluations according to its route result and execute the appropriate connection mode automatically to strike the most optimized balance between resource control and efficiency. For automatic execution engine,

users only need to configure `maxConnectionSizePerQuery`, which represents the maximum connection number allowed by each database for one query.

The execution engine can be divided into two phases: preparation and execution.

### Preparation Phrase

As indicated by its name, this phrase is used to prepare the data to be executed. It can be divided into two steps: result set grouping and unit creation.

Result set grouping is the key to realize the internal connection model concept. According to the configuration option of `maxConnectionSizePerQuery`, execution engine will choose an appropriate connection mode combined with current route result.

Detailed steps are as follow:

1. Group SQL route results according to data source names.
2. Through the equation in the following picture, users can acquire the SQL route result group to be executed by each database case within the `maxConnectionSizePerQuery` permission range and calculate the most optimized connection mode of this request.

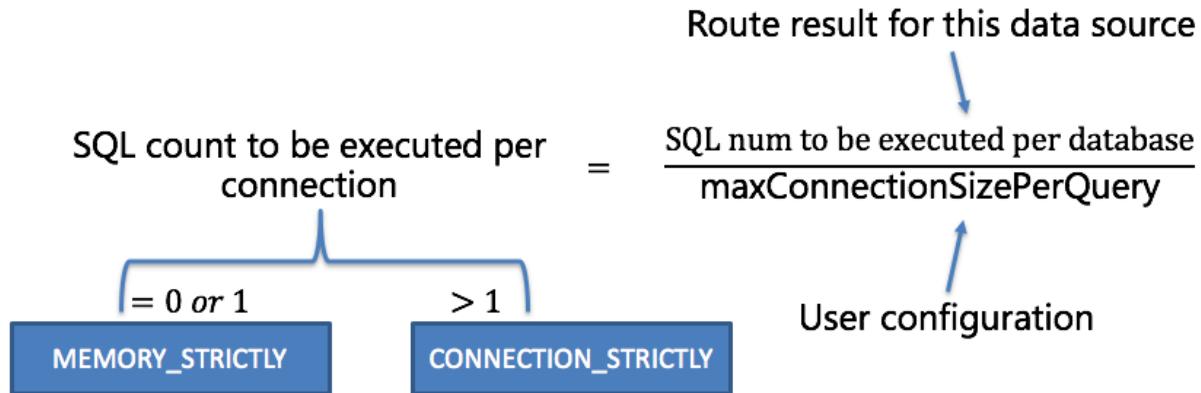


Figure7: Connection mode calculate formula

Within the range that `maxConnectionSizePerQuery` permits, when the request number that one connection needs to execute is more than 1, meaning current database connection cannot hold the corresponding data result set, it must uses memory merger. On the contrary, when it equals to 1, meaning current database connection can hold the according data result set, it can use stream merger.

Each choice of connection mode aims at each physical database; that is to say, if it is routed to more than one databases, the connection mode of each database may mix with each other and not be the same in one query.

Users can use the route group result acquired from the last step to create the execution unit. When the data source uses technologies, such as database connection pool, to control database connection number, there is some chance for deadlock, if it has not dealt with concurrency properly. As multiple

requests waiting for each other to release database connection resources, it will generate hunger wait and cause the crossing deadlock problem.

For example, suppose one query needs to acquire two database connections from a data source and apply them in two table sharding queries routed to one database. It is possible that Query A has already acquired a database connection from that data source and waits to acquire another connection; but in the same time, Query B has also finished it and waits. If the maximum connection number that the connection pool permits is 2, those two query requests will wait forever. The following picture has illustrated the deadlock situation:

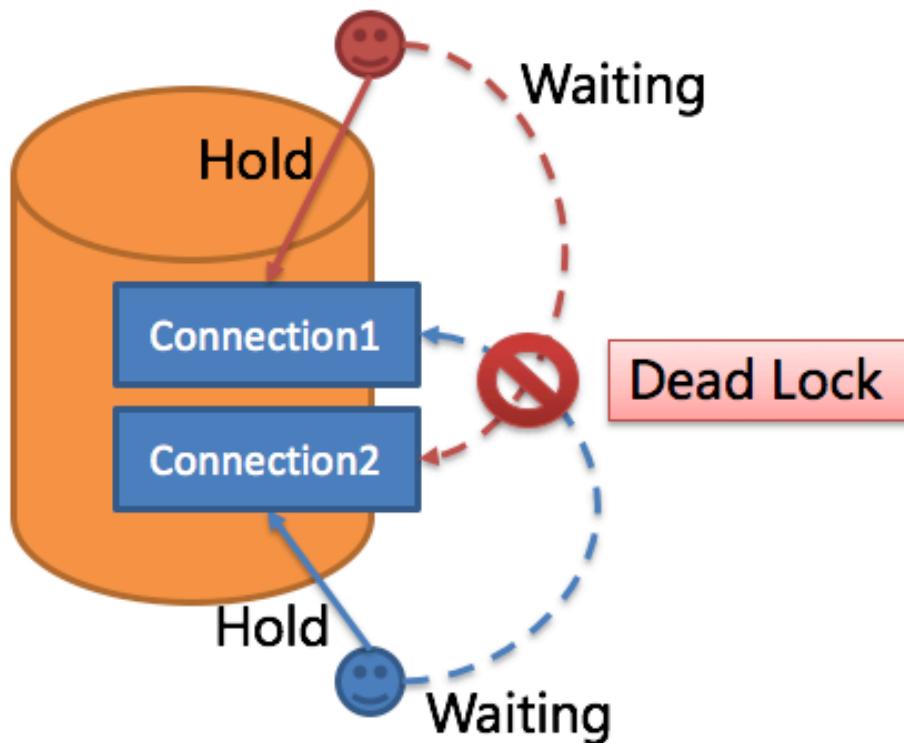


Figure8: Dead lock

To avoid the deadlock, ShardingSphere will go through synchronous processing when acquiring database connection. When creating execution units, it acquires all the database connections that this SQL requires for once with atomic method and reduces the possibility of acquiring only part of the resources. Due to the high operation frequency, locking the connection each time when acquiring it can decrease ShardingSphere's concurrency. Therefore, it has improved two aspects here:

1. Avoid the setting that locking only takes one database connection each time. Because under this kind of circumstance, two requests waiting for each other will not happen, so there is no need for locking. Most OLTP operations use sharding keys to route to the only data node, which will make the system in a totally unlocked state, thereby improve the concurrency efficiency further. In addition to routing to a single shard, readwrite-splitting also belongs to this category.

- Only aim at MEMORY\_STRICTLY mode to lock resources. When using CONNECTION\_STRICTLY mode, all the query result sets will release database connection resources after loading them to the memory, so deadlock wait will not appear.

### Execution Phrase

Applied in actually SQL execution, this phrase can be divided into two steps: group execution and merger result generation.

Group execution can distribute execution unit groups generated in preparation phrase to the underlying concurrency engine and send events according to each key steps during the execution process, such as starting, successful and failed execution events. Execution engine only focuses on message sending rather than subscribers of the event. Other ShardingSphere modules, such as distributed transactions, invoked chain tracing and so on, will subscribe focusing events and do corresponding operations. Through the connection mode acquired in preparation phrase, ShardingSphere will generate memory merger result set or stream merger result set, and transfer it to the result merger engine for the next step.

The overall structure of execution engine is shown as the following picture:

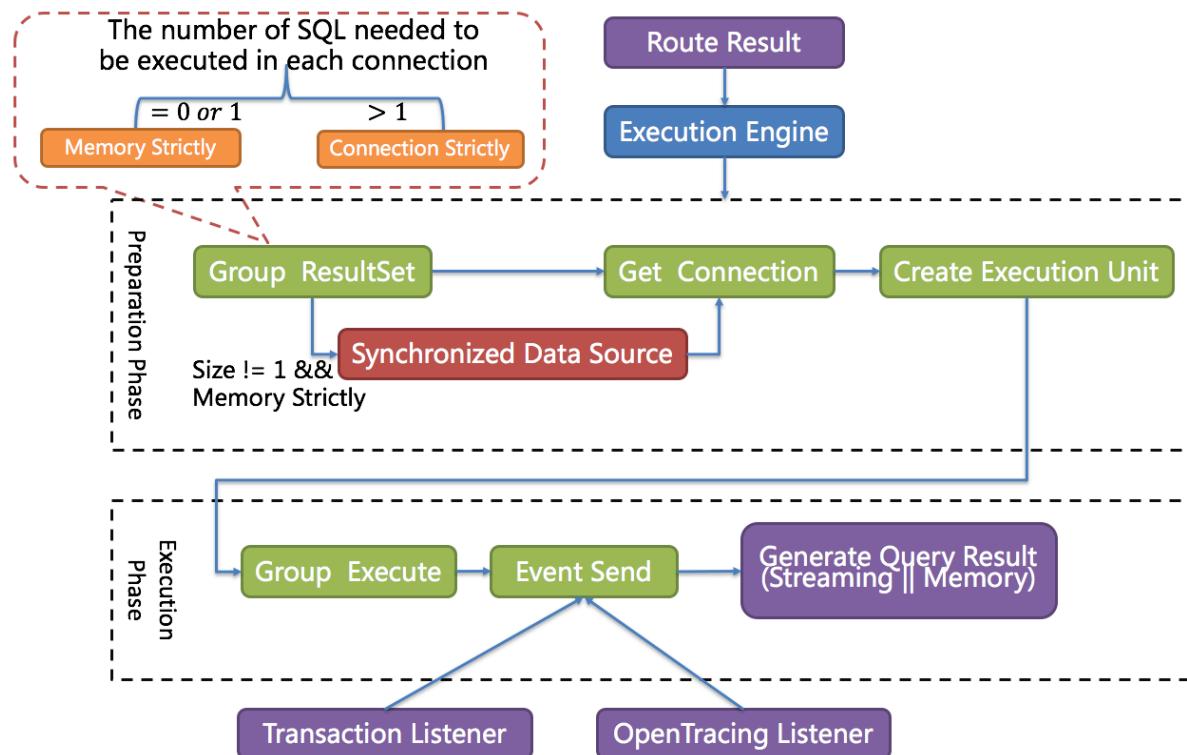


Figure9: Execute engine architecture

### 9.2.11 Merger Engine

Result merger refers to merging multi-data result set acquired from all the data nodes as one result set and returning it to the request end rightly.

In function, the result merger supported by ShardingSphere can be divided into five kinds, iteration, order-by, group-by, pagination and aggregation, which are in composition relation rather than clash relation. In structure, it can be divided into stream merger, memory merger and decorator merger, among which, stream merger and memory merger clash with each other; decorator merger can be further processed based on stream merger and memory merger.

Since the result set is returned from database line by line instead of being loaded to the memory all at once, the most prior choice of merger method is to follow the database returned result set, for it is able to reduce the memory consumption to a large extend.

Stream merger means, each time, the data acquired from the result set is able to return the single piece of right data line by line.

It is the most suitable one for the method that the database returns original result set. Iteration, order-by, and stream group-by belong to stream merger.

Memory merger needs to iterate all the data in the result set and store it in the memory first. after unified grouping, ordering, aggregation and other computations, it will pack it into data result set, which is visited line by line, and return that result set.

Decorator merger merges and reinforces all the result sets function uniformly. Currently, decorator merger has pagination merger and aggregation merger these two kinds.

#### Iteration Merger

As the simplest merger method, iteration merger only requires the combination of multiple data result sets into a single-direction chain table. After iterating current data result sets in the chain table, it only needs to move the element of chain table to the next position and iterate the next data result set.

#### Order-by Merger

Because there is ORDER BY statement in SQL, each data result has its own order. So it is enough only to order data value that the result set cursor currently points to, which is equal to sequencing multiple already ordered arrays, and therefore, order-by merger is the most suitable ordering algorithm in this situation.

When merging order inquiries, ShardingSphere will compare current data values in each result set (which is realized by Java Comparable interface) and put them into the priority queue. Each time when acquiring the next piece of data, it only needs to move down the result set in the top end of the line, reenter the priority order according to the new cursor and relocate its own position.

Here is an instance to explain ShardingSphere's order-by merger. The following picture is an illustration of ordering by the score. Data result sets returned by 3 tables are shown in the example and each one of them has already been ordered according to the score, but there is no order between 3 data

result sets. Order the data value that the result set cursor currently points to in these 3 result sets. Then put them into the priority queue. the data value of t\_score\_0 is the biggest, followed by that of t\_score\_2 and t\_score\_1 in sequence. Thus, the priority queue is ordered by the sequence of t\_score\_0, t\_score\_2 and t\_score\_1.

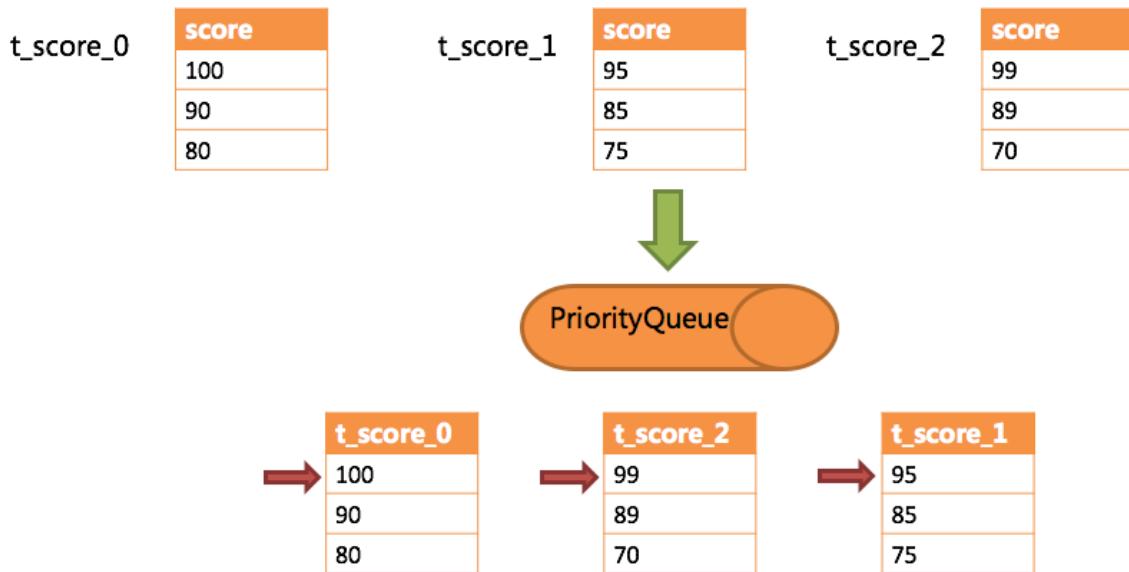


Figure10: Order by merger example 1

This diagram illustrates how the order-by merger works when using next invocation. We can see from the diagram that when using next invocation, t\_score\_0 at the first of the queue will be popped out. After returning the data value currently pointed by the cursor (i.e., 100) to the client end, the cursor will be moved down and t\_score\_0 will be put back to the queue.

While the priority queue will also be ordered according to the t\_score\_0 data value (90 here) pointed by the cursor of current data result set. According to the current value, t\_score\_0 is at the last of the queue, and in the second place of the queue formerly, the data result set of t\_score\_2, automatically moves to the first place of the queue.

In the second next operation, t\_score\_2 in the first position is popped out of the queue. Its value pointed by the cursor of the data result set is returned to the client end, with its cursor moved down to rejoin the queue, and the following will be in the same way. If there is no data in the result set, it will not rejoin the queue.

It can be seen that, under the circumstance that data in each result set is ordered while result sets are disordered, ShardingSphere does not need to upload all the data to the memory to order. In the order-by merger method, each next operation only acquires the right piece of data each time, which saves the memory consumption to a large extent.

On the other hand, the order-by merger has maintained the orderliness on horizontal axis and vertical axis of the data result set. Naturally ordered, vertical axis refers to each data result set itself, which is acquired by SQL with ORDER BY. Horizontal axis refers to the current value pointed by each data result

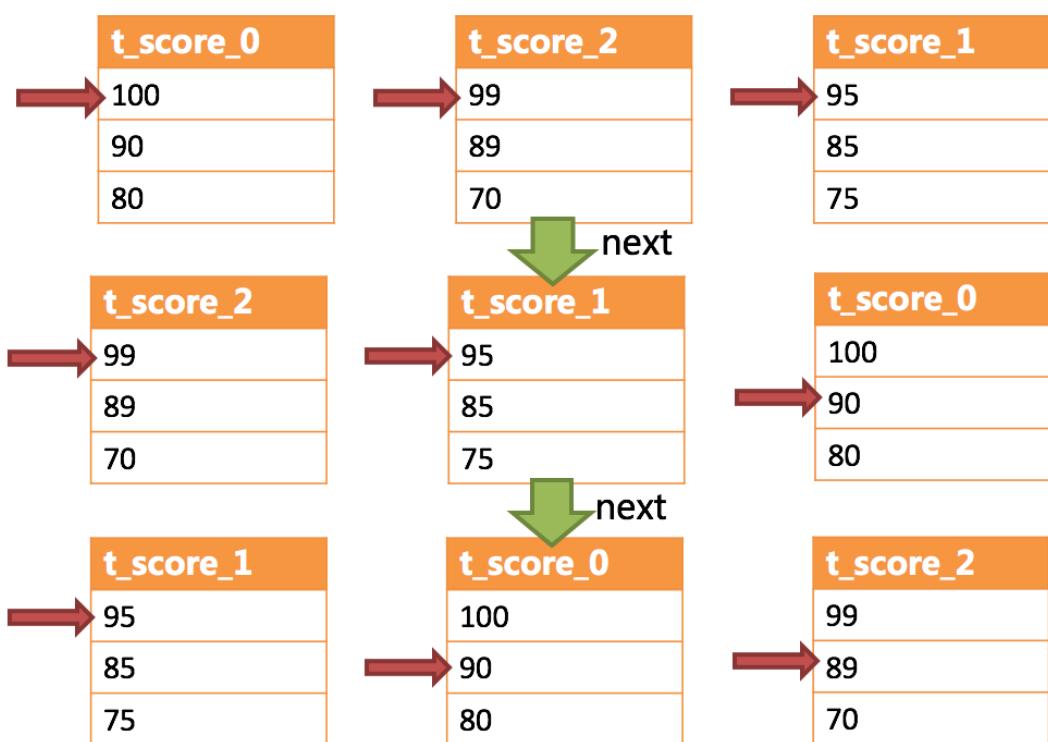


Figure11: Order by merger example 2

set, and its order needs to be maintained by the priority queue. Each time when the current cursor moves down, it requires to put the result set in the priority order again, which means only the cursor of the first data result set can be moved down.

### Group-by Merger

With the most complicated situation, group-by merger can be divided into stream group-by merger and memory group-by merger. Stream group-by merger requires SQL field and order item type (ASC or DESC) to be the same with group-by item. Otherwise, its data accuracy can only be maintained by memory merger.

For instance, if it is sharded by subject, table structure contains examinees' name (to simplify, name repetition is not taken into consideration) and score. The SQL used to acquire each examinee's total score is as follow:

```
SELECT name, SUM(score) FROM t_score GROUP BY name ORDER BY name;
```

When order-by item and group-by item are totally consistent, the data obtained is continuous. The data to group are all stored in the data value that data result set cursor currently points to, stream group-by merger can be used, as illustrated by the diagram:

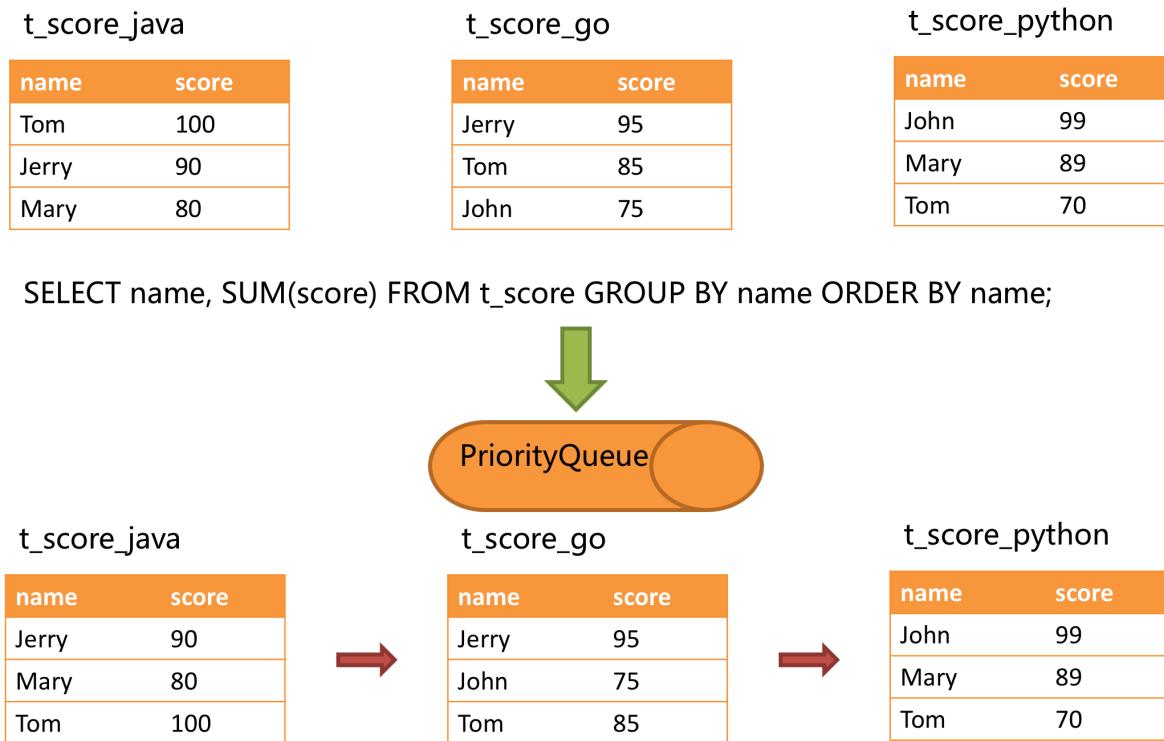


Figure12: Group by merger example 1

The merging logic is similar to that of order-by merger. The following picture shows how stream group-by merger works in next invocation.

We can see from the picture, in the first next invocation, `t_score_java` in the first position, along with other result set data also having the grouping value of "Jerry", will be popped out of the queue. After

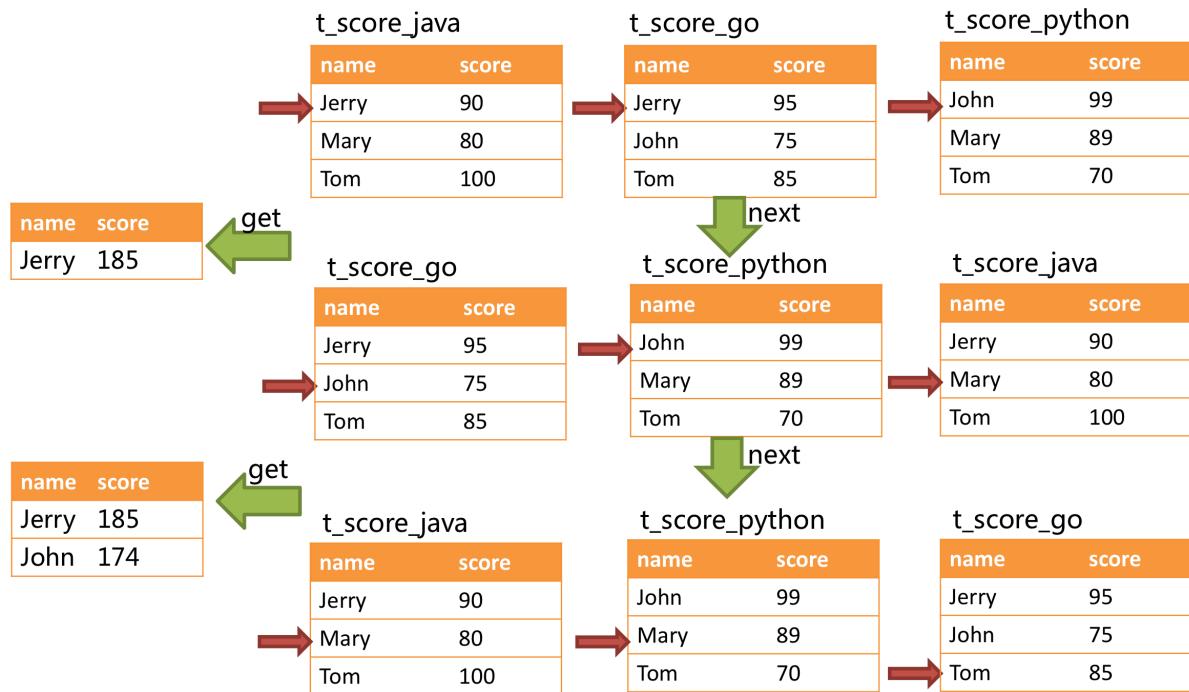


Figure13: Group by merger example 2

acquiring all the students' scores with the name of "Jerry", the accumulation operation will be proceeded. Hence, after the first `next` invocation is finished, the result set acquired is the sum of Jerry's scores. In the same time, all the cursors in data result sets will be moved down to a different data value next to "Jerry" and rearranged according to current result set value. Thus, the data that contains the second name "John" will be put at the beginning of the queue.

Stream group-by merger is different from order-by merger only in two points:

1. It will take out all the data with the same group item from multiple data result sets for once.
2. It does the aggregation calculation according to aggregation function type.

For the inconsistency between the group item and the order item, it requires to upload all the data to the memory to group and aggregate, since the relevant data value needed to acquire group information is not continuous, and stream merger is not able to use. For example, acquire each examinee's total score through the following SQL and order them from the highest to the lowest:

```
SELECT name, SUM(score) FROM t_score GROUP BY name ORDER BY score DESC;
```

Then, stream merger is not able to use, for the data taken out from each result set is the same as the original data of the diagram ordered by score in the upper half part structure.

When SQL only contains group-by statement, according to different database implementation, its sequencing order may not be the same as the group order. The lack of ordering statement indicates the order is not important in this SQL. Therefore, through SQL optimization re-write, ShardingSphere can automatically add the ordering item same as grouping item, converting it from the memory merger that consumes memory to stream merger.

## Aggregation Merger

Whether stream group-by merger or memory group-by merger processes the aggregation function in the same way. Therefore, aggregation merger is an additional merging ability based on what have been introduced above, i.e., the decorator mode. The aggregation function can be categorized into three types, comparison, sum and average.

Comparison aggregation function refers to MAX and MIN. They need to compare all the result set data and return its maximum or minimum value directly.

Sum aggregation function refers to SUM and COUNT. They need to sum up all the result set data.

Average aggregation function refers only to AVG. It must be calculated through SUM and COUNT of SQL re-write, which has been mentioned in SQL re-write, so we will state no more here.

## Pagination Merger

All the merger types above can be paginated. Pagination is the decorator added on other kinds of mergers. ShardingSphere augments its ability to paginate the data result set through the decorator mode. Pagination merger is responsible for filtering the data unnecessary to acquire.

ShardingSphere's pagination function can be misleading to users in that they may think it will take a large amount of memory. In distributed scenarios, it can only guarantee the data accuracy by rewriting `LIMIT 10000000, 10` to `LIMIT 0, 10000010`. Users can easily have the misconception that ShardingSphere uploads a large amount of meaningless data to the memory and has the risk of memory overflow. Actually, it can be known from the principle of stream merger, only memory group-by merger will upload all the data to the memory. Generally speaking, however, SQL used for OLAP grouping, is applied more frequently to massive calculation or small result generation rather than vast result data generation. Except for memory group-by merger, other cases use stream merger to acquire data result set. So ShardingSphere would skip unnecessary data through next method in result set, rather than storing them in the memory.

What's to be noticed, pagination with `LIMIT` is not the best practice actually, because a large amount of data still needs to be transmitted to ShardingSphere's memory space for ordering. `LIMIT` cannot search for data by index, so paginating with ID is a better solution on the premise that the ID continuity can be guaranteed. For example:

```
SELECT * FROM t_order WHERE id > 100000 AND id <= 100010 ORDER BY id;
```

Or search the next page through the ID of the last query result, for example:

```
SELECT * FROM t_order WHERE id > 10000000 LIMIT 10;
```

The overall structure of merger engine is shown in the following diagram:

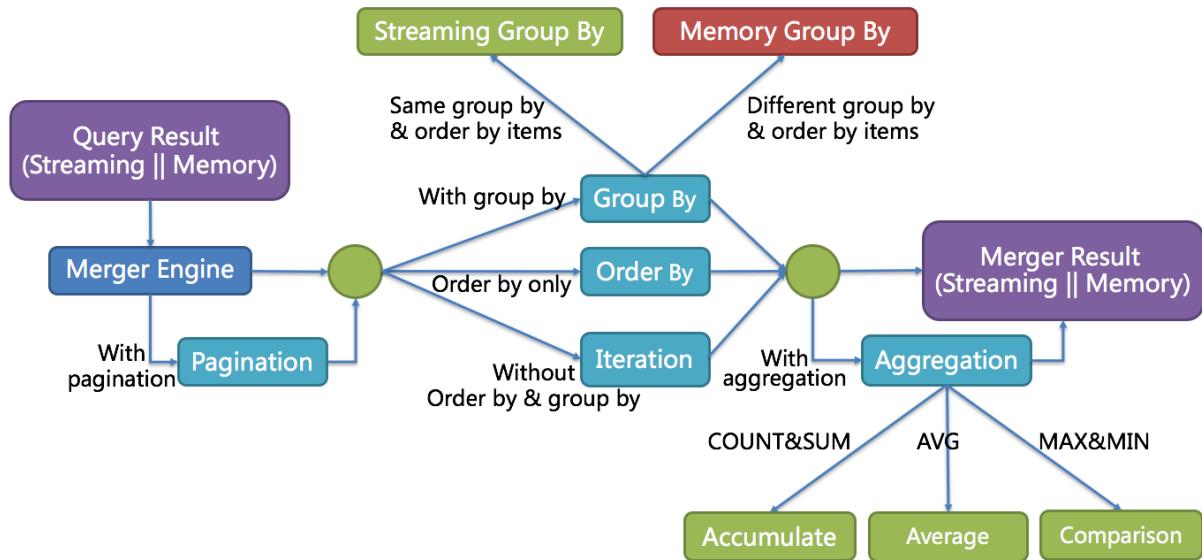


Figure14: Merge Architecture

## 9.3 Transaction

### 9.3.1 Navigation

This chapter mainly introduces the principles of the distributed transactions:

- 2PC transaction with XA
- BASE transaction with Seata

### 9.3.2 XA Transaction

`XAShardingSphereTransactionManager` is XA transaction manager of Apache ShardingSphere. Its main responsibility is manage and adapt multiple data sources, and sent corresponding transactions to concrete XA transaction manager.

#### Transaction Begin

When receiving `set autoCommit=0` from client, `XAShardingSphereTransactionManager` will use XA transaction managers to start overall XA transactions, which is marked by XID.

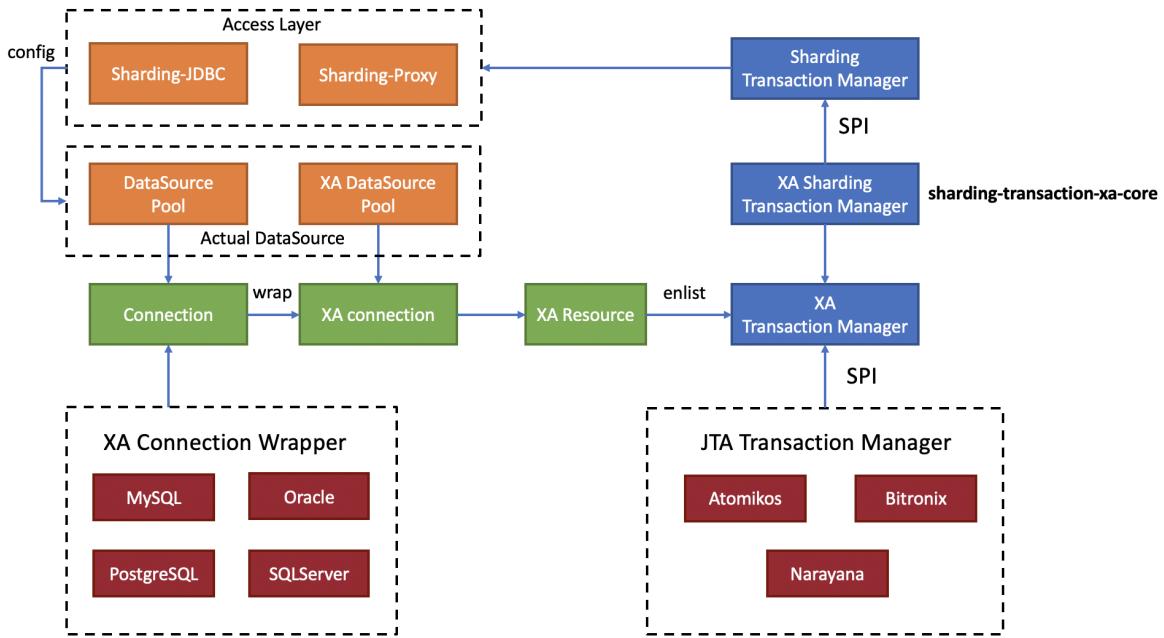


Figure15: Principle of ShardingSphere transaction XA

### Execute actual sharding SQL

After XAShardingSphereTransactionManager register the corresponding XAResource to the current XA transaction, transaction manager will send XAResource.start command to databases. After databases received XAResource.end command, all SQL operator will mark as XA transaction.

For example:

```
XAResource1.start ## execute in the enlist phase
statement.execute("sql1");
statement.execute("sql2");
XAResource1.end ## execute in the commit phase
```

sql1 and sql2 in example will be marked as XA transaction.

### Commit or Rollback

After XAShardingSphereTransactionManager receives the commit command in the access, it will delegate it to the actual XA manager. It will collect all the registered XAResource in the thread, before sending XAResource.end to mark the boundary for the XA transaction. Then it will send prepare command one by one to collect votes from XAResource. If all the XAResource feedback is OK, it will send commit command to finally finish it; If there is any No XAResource feedback, it will send rollback command to roll back. After sending the commit command, all XAResource exceptions will be submitted again according to the recovery log to ensure the atomicity and high consistency.

For example:

```

XAResource1.prepare ## ack: yes
XAResource2.prepare ## ack: yes
XAResource1.commit
XAResource2.commit

XAResource1.prepare ## ack: yes
XAResource2.prepare ## ack: no
XAResource1.rollback
XAResource2.rollback

```

### 9.3.3 Seata BASE transaction

When integrating Seata AT transaction, we need to integrate TM, RM and TC component into ShardingSphere transaction manager. Seata have proxied DataSource interface in order to RPC with TC. Similarly, Apache ShardingSphere faced to DataSource interface to aggregate data sources too. After Seata DataSource encapsulation, it is easy to put Seata AT transaction into Apache ShardingSphere sharding ecosystem.

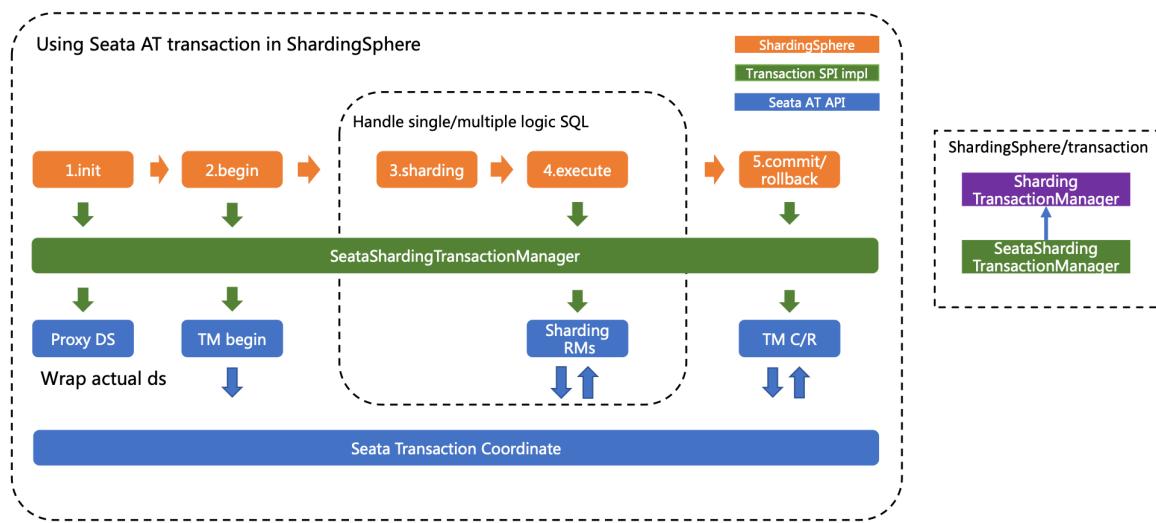


Figure16: Seata BASE transaction

## Init Seata Engine

When an application containing `ShardingSphereTransactionBaseSeataAT` startup, the user-configured `DataSource` will be wrapped into `seata DataSourceProxy` through `seata.conf`, then registered into RM.

## Transaction Begin

TM controls the boundaries of global transactions. TM obtains the global transaction ID by sending `Begin` instructions to TC. All branch transactions participate in the global transaction through this global transaction ID. The context of the global transaction ID will be stored in the thread local variable.

## Execute actual sharding SQL

Actual SQL in Seata global transaction will be intercepted to generate undo snapshots by RM and sends participate instructions to TC to join global transaction. Since actual sharding SQLs executed in multi-threads, global transaction context should transfer from main thread to child thread, which is exactly the same as context transfer between services.

## Commit or Rollback

When submitting a seata transaction, TM sends TC the commit and rollback instructions of the global transaction. TC coordinates all branch transactions for commit and rollback according to the global transaction ID.

## 9.4 Scaling

### 9.4.1 Principle Description

Consider about these challenges of ShardingSphere-Scaling, the solution is: Use two database clusters temporarily, and switch after the scaling is completed.

Advantages:

1. No effect for origin data during scaling.
2. No risk for scaling failure.
3. No limited by sharding strategies.

Disadvantages:

1. Redundant servers during scaling.
2. All data needs to be moved.

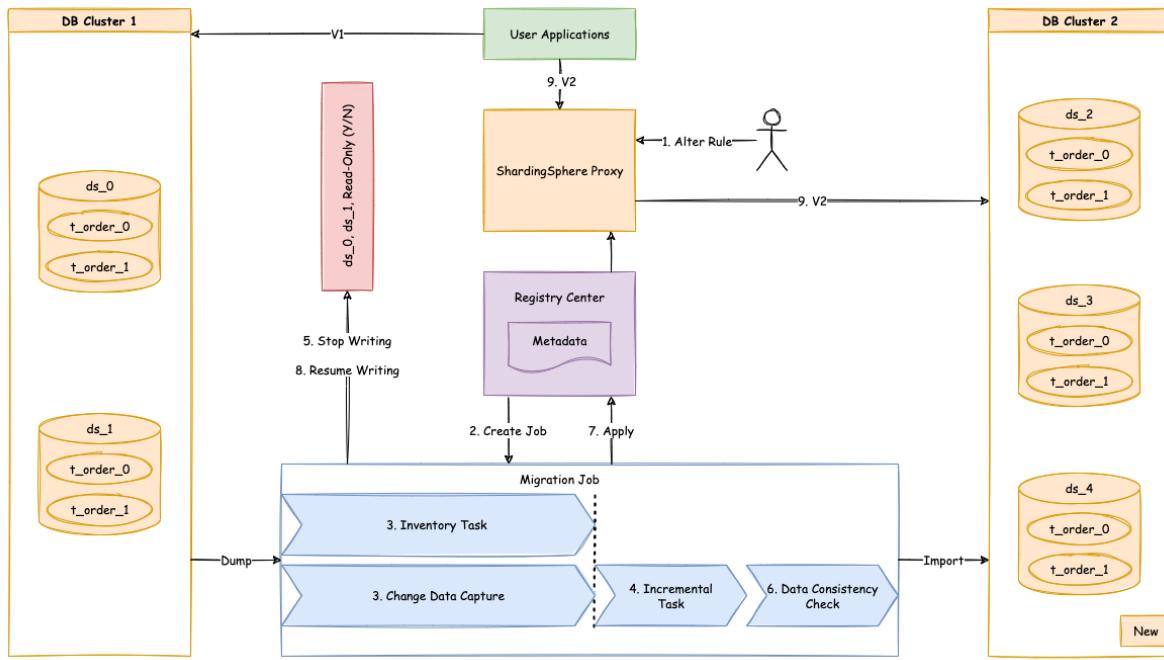


Figure17: Scaling Principle Overview

ShardingSphere-Scaling will analyze the sharding rules and extract information like datasource and data nodes. According the sharding rules, ShardingSphere-Scaling create a scaling job with 4 main phases.

1. Preparing Phase.
2. Inventory Phase.
3. Incremental Phase.
4. Switching Phase.

#### 9.4.2 Phase Description

##### Preparing Phase

ShardingSphere-Scaling will check the datasource connectivity and permissions, statistic the amount of inventory data, record position of log, shard tasks based on amount of inventory data and the parallelism set by the user.

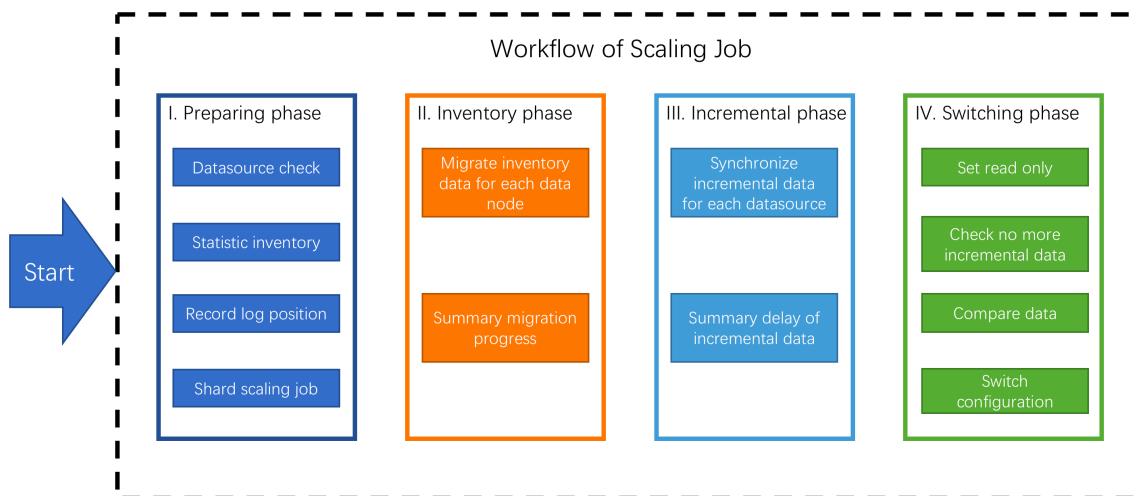


Figure18: Workflow

### Inventory Phase

Executing the Inventory data migration tasks sharded in preparing phase. ShardingSphere-Scaling uses JDBC to query inventory data directly from data nodes and write to the new cluster using new rules.

### Incremental Phase

The data in data nodes is still changing during the inventory phase, so ShardingSphere-Scaling need to synchronize these incremental data to new data nodes. Different databases have different implementations, but generally implemented by change data capture function based on replication protocols or WAL logs.

- MySQL: subscribe and parse binlog.
- PostgreSQL: official logic replication `test_decoding`.

These captured incremental data, Apache ShardingSphere also write to the new cluster using new rules.

### Switching Phase

In this phase, there may be a temporary read only time, make the data in old data nodes static so that the incremental phase complete fully. The read only time is range seconds to minutes, it depends on the amount of data and the checking data. After finished, Apache ShardingSphere can switch the configuration by register-center and config-center, make application use new sharding rule and new data nodes.

## 9.5 Encryption

### 9.5.1 Process Details

Apache ShardingSphere can encrypt the plaintext by parsing and rewriting SQL according to the encryption rule, and store the plaintext (optional) and ciphertext data to the database at the same time. Queries data only extracts the ciphertext data from database and decrypts it, and finally returns the plaintext to user. Apache ShardingSphere transparently process of data encryption, so that users do not need to know to the implementation details of it, use encrypted data just like as regular data. In addition, Apache ShardingSphere can provide a relatively complete set of solutions whether the online business system has been encrypted or the new online business system uses the encryption function.

#### Overall Architecture

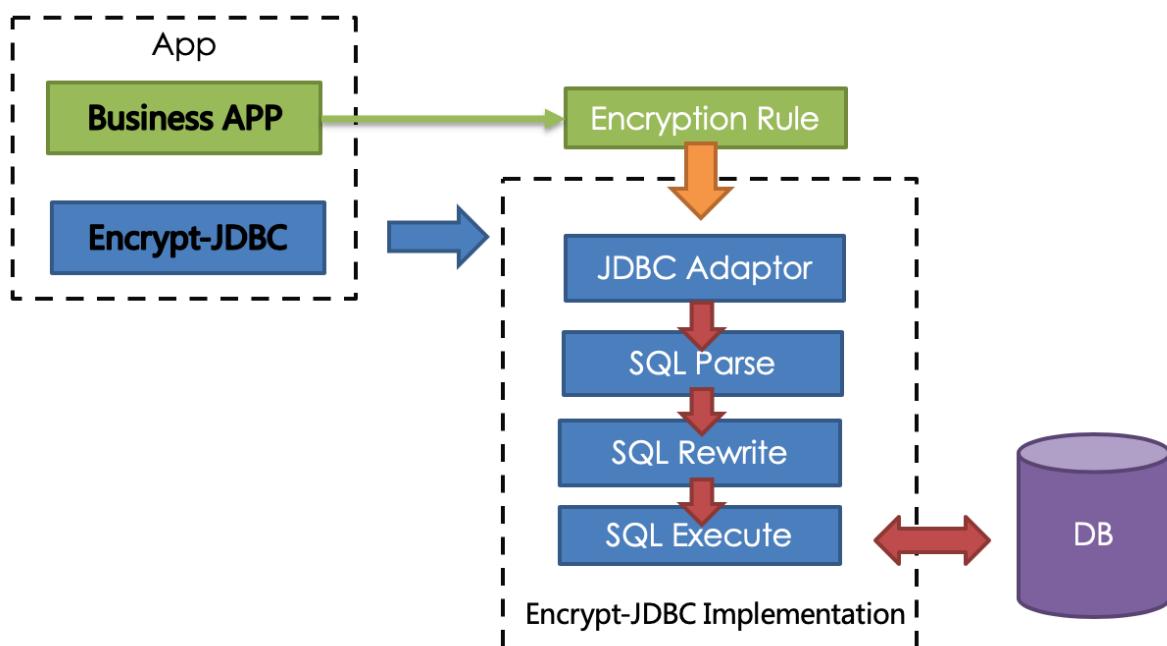


Figure19: 1

Encrypt module intercepts SQL initiated by user, analyzes and understands SQL behavior through the SQL syntax parser. According to the encryption rules passed by the user, find out the fields that need to be encrypted/decrypted and the encryptor/decryptor used to encrypt/decrypt the target fields, and then interact with the underlying database. ShardingSphere will encrypt the plaintext requested by the user and store it in the underlying database; and when the user queries, the ciphertext will be taken out of the database for decryption and returned to the end user. ShardingSphere shields the encryption of data, so that users do not need to perceive the process of parsing SQL, data encryption, and data decryption, just like using ordinary data.

## Encryption Rule

Before explaining the whole process in detail, we need to understand the encryption rules and configuration, which is the basis of understanding the whole process. The encryption configuration is mainly divided into four parts: data source configuration, encrypt algorithm configuration, encryption table rule configuration, and query attribute configuration. The details are shown in the following figure:

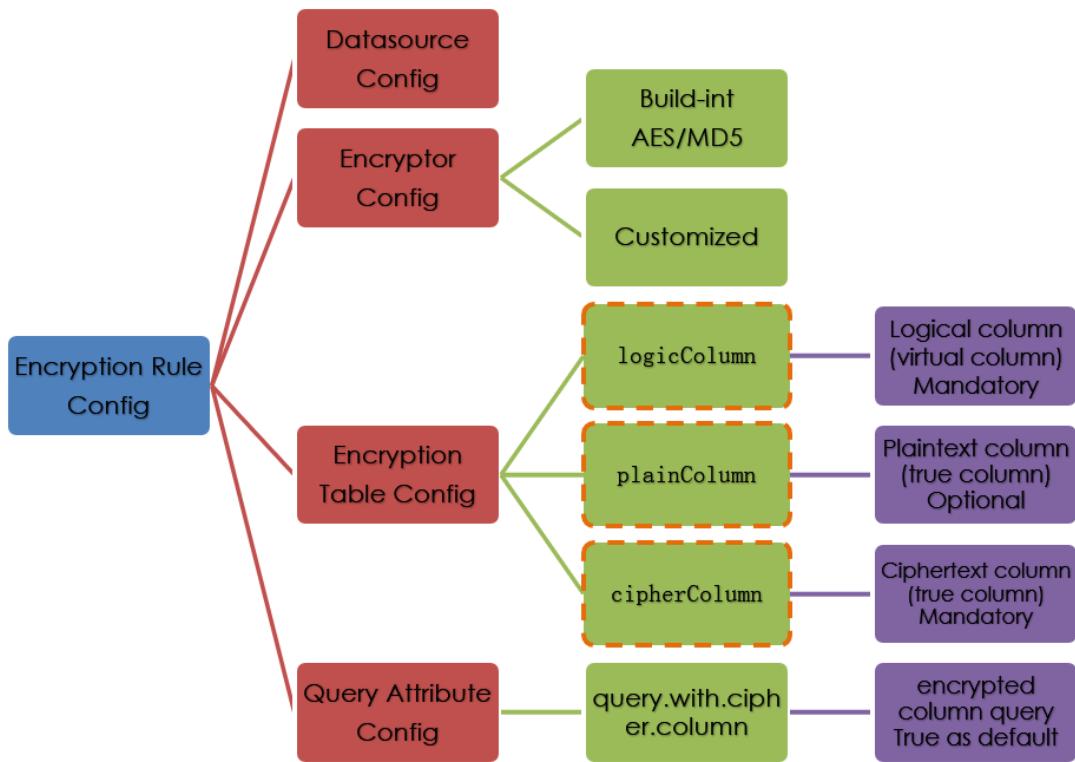


Figure20: 2

**Data Source Configuration:** The configuration of DataSource.

**Encrypt Algorithm Configuration:** What kind of encryption strategy to use for encryption and decryption. Currently ShardingSphere has five built-in encryption/decryption strategies: AES, MD5, RC4, SM3, SM4. Users can also implement a set of encryption/decryption algorithms by implementing the interface provided by Apache ShardingSphere.

**Encryption Table Configuration:** Show the ShardingSphere data table which column is used to store cipher column data (cipherColumn), what algorithm is used to encryption/decryption (encryptorName), which column is used to store assisted query data (assistedQueryColumn), what algorithm is used to encrypt/decrypt assisted query data (assistedQueryEncryptorName), which column is used to store plain text data (plainColumn), and which column users want to use for SQL writing (logicColumn)

How to understand Which column do users want to use to write SQL (logicColumn)?

We can understand according to the meaning of Apache ShardingSphere. The ultimate goal of Apache ShardingSphere is to shield the encryption of the underlying data, that is, we do not want users to know how the data is encrypted/decrypted, how to store plaintext data in

plainColumn, ciphertext data in cipherColumn, and store assisted query data to the assistedQueryColumn. In other words, we do not even want users to know the existence and use of plainColumn, cipherColumn and assistedQueryColumn. Therefore, we need to provide users with a column in conceptual. This column can be separated from the real column of the underlying database. It can be a real column in the database table or not, so that the user can freely change the plainColumn and The column name of cipherColumn, assistedQueryColumn. Or delete plainColumn and choose to never store plain text and only store cipher text. As long as the user's SQL is written according to this logical column, and the correct mapping relationship between logicColumn and plainColumn, cipherColumn, assistedQueryColumn is given in the encryption rule.

Why do you do this? The answer is at the end of the article, that is, to enable the online services to seamlessly, transparently, and safely carry out data encryption migration.

**Query Attribute configuration:** When the plaintext data and ciphertext data are stored in the underlying database table at the same time, this attribute switch is used to decide whether to directly query the plaintext data in the database table to return, or to query the ciphertext data and decrypt it through Apache ShardingSphere to return. This switch supports table level and whole rule level configuration, and table level has the highest priority.

### Encryption Process

For example, if there is a table in the database called t\_user, there are actually two fields pwd\_plain in this table, used to store plain text data, pwd\_cipher, used to store cipher text data, pwd\_assisted\_query, used to store the auxiliary query data, and define logicColumn as pwd. Then, when writing SQL, users should write to logicColumn, that is, `INSERT INTO t_user SET pwd = '123'`. Apache ShardingSphere receives the SQL, and through the encryption configuration provided by the user, finds that pwd is a logicColumn, so it decrypts the logical column and its corresponding plaintext data. As can be seen that \*\* Apache ShardingSphere has carried out the column-sensitive and data-sensitive mapping conversion of the logical column facing the user and the plaintext and ciphertext columns facing the underlying database. As shown below:

This is also the core meaning of Apache ShardingSphere, which is to separate user SQL from the underlying data table structure according to the encryption rules provided by the user, so that the SQL writer by user no longer depends on the actual database table structure. The connection, mapping, and conversion between the user and the underlying database are handled by Apache ShardingSphere. Why should we do this? It is still the same : in order to enable the online business to seamlessly, transparently and safely perform data encryption migration.

In order to make the reader more clearly understand the core processing flow of Apache ShardingSphere, the following picture shows the processing flow and conversion logic when using Apache ShardingSphere to add, delete, modify and check, as shown in the following figure.

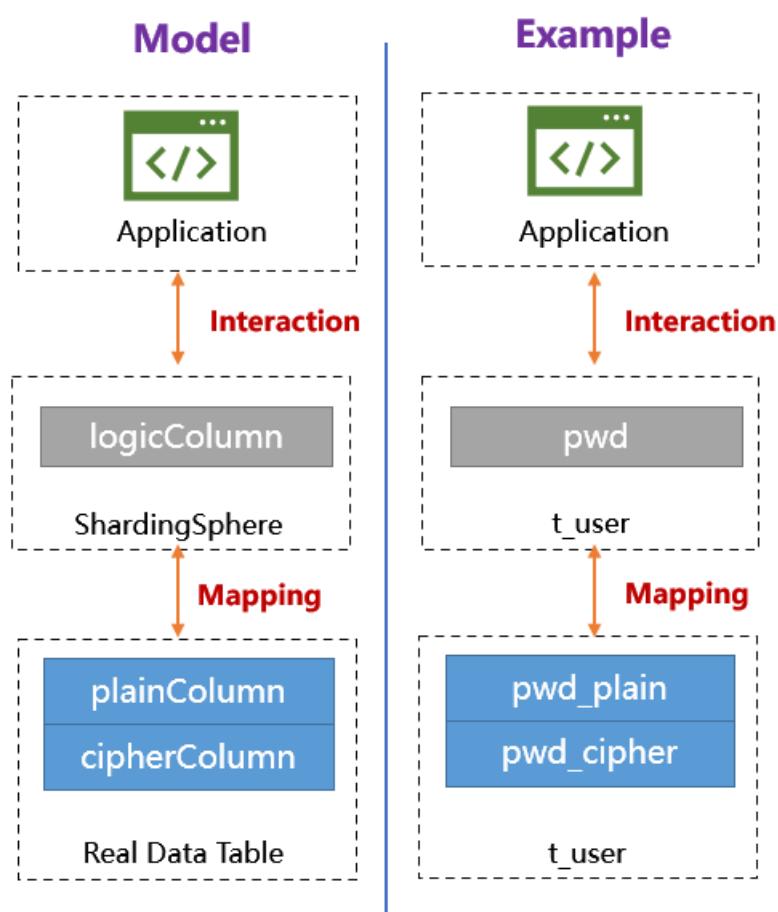


Figure21: 3

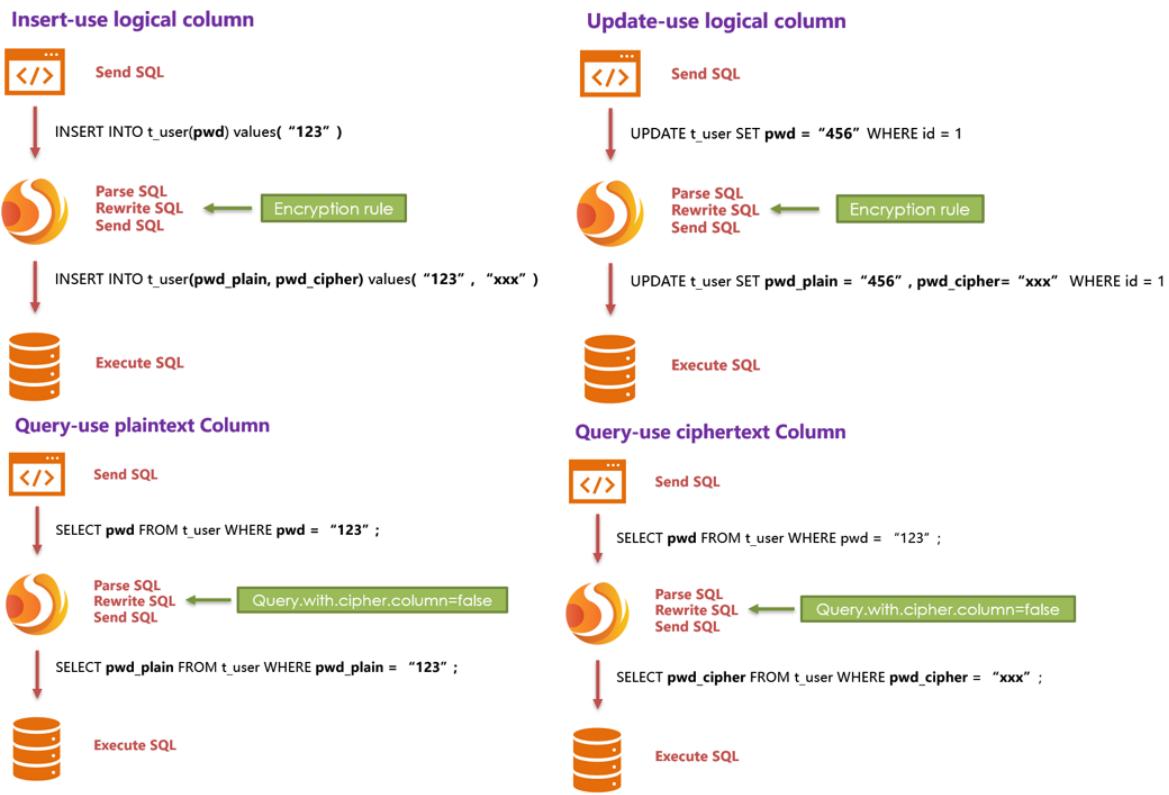


Figure22: 4

### 9.5.2 Detailed Solution

After understanding the Apache ShardingSphere encryption process, you can combine the encryption configuration and encryption process with the actual scenario. All design and development are to solve the problems encountered in business scenarios. So for the business scenario requirements mentioned earlier, how should ShardingSphere be used to achieve business requirements?

#### New Business

**Business scenario analysis:** The newly launched business is relatively simple because everything starts from scratch and there is no historical data cleaning problem.

**Solution description:** After selecting the appropriate encrypt algorithm, such as AES, you only need to configure the logical column (write SQL for users) and the ciphertext column (the data table stores the ciphertext data). It can also be different \*\*. The recommended configuration is as follows (shown in Yaml format):

```
- !ENCRYPT
 encryptors:
 aes_encryptor:
 type: AES
 props:
 aes-key-value: 123456abc
```

```

tables:
 t_user:
 columns:
 pwd:
 cipherColumn: pwd_cipher
 encryptorName: aes_encryptor
 assistedQueryColumn: pwd_assisted_query
 assistedQueryEncryptorName: pwd_assisted_query_cipher
 queryWithCipherColumn: true

```

With this configuration, Apache ShardingSphere only needs to convert logicColumn and cipherColumn, assistedQueryColumn. The underlying data table does not store plain text, only cipher text. This is also a requirement of the security audit part. If users want to store plain text and cipher text together in the database, they just need to add plainColumn configuration. The overall processing flow is shown below:

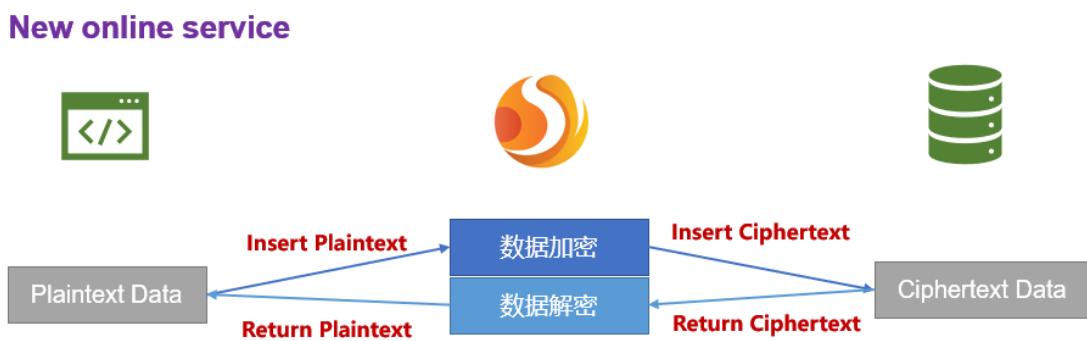


Figure23: 5

### Online Business Transformation

**Business scenario analysis:** As the business is already running online, there must be a large amount of plain text historical data stored in the database. The current challenges are how to enable historical data to be encrypted and cleaned, how to enable incremental data to be encrypted, and how to allow businesses to seamlessly and transparently migrate between the old and new data systems.

**Solution description:** Before providing a solution, let's brainstorm: First, if the old business needs to be desensitized, it must have stored very important and sensitive information. This information has a high gold content and the business is relatively important. If it is broken, the whole team KPI is over. Therefore, it is impossible to suspend business immediately, prohibit writing of new data, encrypt and clean all historical data with an encrypt algorithm, and then deploy the previously reconstructed code online, so that it can encrypt and decrypt online and incremental data. Such a simple and rough way, based on historical experience, will definitely not work.

Then another relatively safe approach is to rebuild a pre-release environment exactly like the pro-

duction environment, and then encrypt the **Inventory plaintext data** of the production environment through the relevant migration and washing tools and store it in the pre-release environment. The **Increment data** is encrypted by tools such as MySQL replica query and the business party 's own development, encrypted and stored in the database of the pre-release environment, and then the refactored code can be deployed to the pre-release environment. In this way, the production environment is a set of environment for **modified/queries with plain text as the core**; the pre-release environment is a set of **encrypt/decrypt queries modified with ciphertext as the core**. After comparing for a period of time, the production flow can be cut into the pre-release environment at night. This solution is relatively safe and reliable, but it takes more time, manpower, capital, and costs. It mainly includes: pre-release environment construction, production code rectification, and related auxiliary tool development. Unless there is no way to go, business developers generally go from getting started to giving up.

Business developers must hope: reduce the burden of capital costs, do not modify the business code, and be able to safely and smoothly migrate the system. So, the encryption function module of ShardingSphere was born. It can be divided into three steps:

1. Before system migration

Assuming that the system needs to encrypt the pwd field of t\_user, the business side uses Apache ShardingSphere to replace the standardized JDBC interface, which basically requires no additional modification (we also provide Spring Boot Starter, Spring Namespace, YAML and other access methods to achieve different services demand). In addition, demonstrate a set of encryption configuration rules, as follows:

```
-!ENCRYPT
encryptors:
 aes_encryptor:
 type: AES
 props:
 aes-key-value: 123456abc
tables:
 t_user:
 columns:
 pwd:
 plainColumn: pwd
 cipherColumn: pwd_cipher
 encryptorName: aes_encryptor
 assistedQueryColumn: pwd_assisted_query
 assistedQueryEncryptorName: pwd_assisted_query_cipher
 queryWithCipherColumn: false
```

According to the above encryption rules, we need to add a column called pwd\_cipher in the t\_user table, that is, cipherColumn, which is used to store ciphertext data. At the same time, we set plainColumn to pwd, which is used to store plaintext data, and logicColumn is also set to pwd. Because the previous SQL was written using pwd, that is, the SQL was written for logical columns, so the business code did not need to be changed. Through Apache ShardingSphere, for the incremental data, the plain text will be written to the pwd column, and the plain text will be encrypted and stored in the pwd\_cipher column.

At this time, because `queryWithCipherColumn` is set to false, for business applications, the plain text column of `pwd` is still used for query storage, but the cipher text data of the new data is additionally stored on the underlying database table `pwd_cipher`. The processing flow is shown below:

### Online Service Refactor-before migration

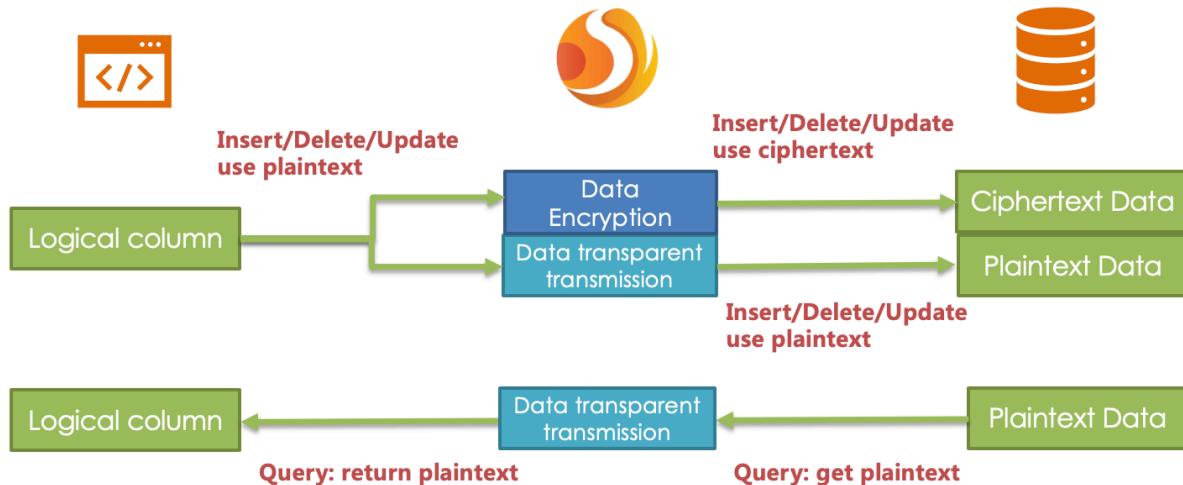


Figure24: 6

When the newly added data is inserted, it is encrypted as ciphertext data through Apache ShardingSphere and stored in the `cipherColumn`. Now it is necessary to process historical plaintext inventory data. **As Apache ShardingSphere currently does not provide the corresponding migration and washing tools, the business party needs to encrypt and store the plain text data in `pwd` to `pwd_cipher`.**

#### 2. During system migration

The incremental data has been stored by Apache ShardingSphere in the ciphertext column and the plaintext is stored in the plaintext column; after the historical data is encrypted and cleaned by the business party itself, the ciphertext is also stored in the ciphertext column. That is to say, the plaintext and the ciphertext are stored in the current database. Since the `queryWithCipherColumn = false` in the configuration item, the ciphertext has never been used. Now we need to set the `queryWithCipherColumn` in the encryption configuration to true in order for the system to cut the ciphertext data for query. After restarting the system, we found that the system business is normal, but Apache ShardingSphere has started to extract the ciphertext data from the database, decrypt it and return it to the user; and for the user's insert, delete and update requirements, the original data will still be stored in the plaintext column, the encrypted ciphertext data is stored in the ciphertext column.

Although the business system extracts the data in the ciphertext column and returns it after decryption; however, it will still save a copy of the original data to the plaintext column during storage. Why? The answer is: in order to be able to roll back the system. **Because as long as the ciphertext and plaintext always exist at the same time, we can freely switch the business query to `cipherColumn` or `plainColumn` through the configuration of the switch item.** In other words, if the system is switched to the ciphertext column for query, the system reports an error and needs to be rolled back. Then just set `queryWithCipherColumn = false`, Apache ShardingSphere will restore, that is, start using `plainColumn` to query again. The processing flow is shown in the following figure:

## Online Service Refactor-in migration

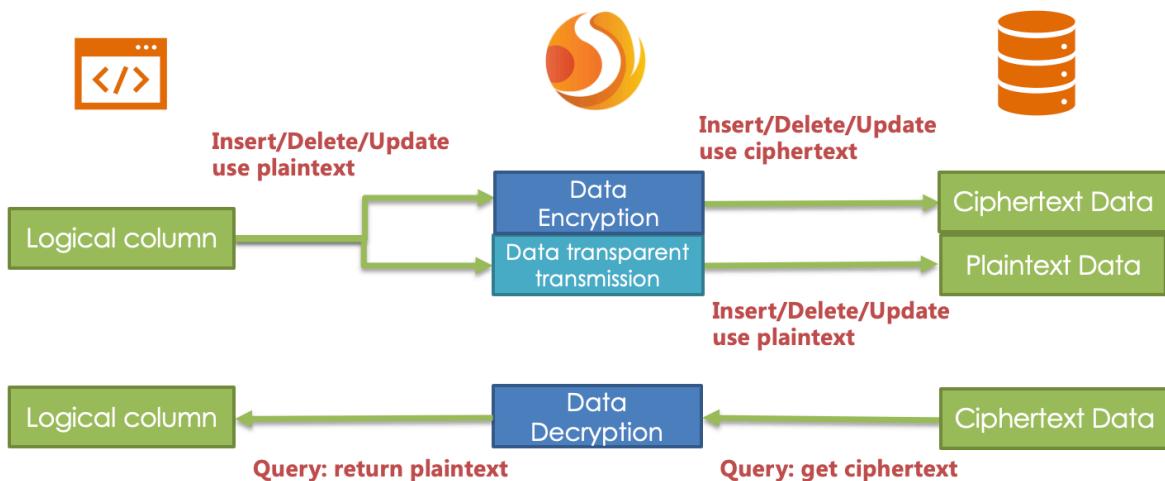


Figure25: 7

### 3. After system migration

Due to the requirements of the security audit department, it is generally impossible for the business system to keep the plaintext and ciphertext columns of the database permanently synchronized. We need to delete the plaintext data after the system is stable. That is, we need to delete plainColumn (ie pwd) after system migration. The problem is that now the business code is written for pwd SQL, delete the pwd in the underlying data table stored in plain text, and use pwd\_cipher to decrypt to get the original data, does that mean that the business side needs to rectify all SQL, thus Do not use the pwd column that is about to be deleted? Remember the core meaning of our encrypt module?

This is also the core meaning of encrypt module. According to the encryption rules provided by the user, the user SQL is separated from the underlying database table structure, so that the user's SQL writing no longer depends on the actual database table structure. The connection, mapping, and conversion between the user and the underlying database are handled by ShardingSphere.

Yes, because of the existence of logicColumn, users write SQL for this virtual column. Apache ShardingSphere can map this logical column and the ciphertext column in the underlying data table. So the encryption configuration after migration is:

```
- !ENCRYPT
encryptors:
 aes_encryptor:
 type: AES
 props:
 aes-key-value: 123456abc
tables:
 t_user:
 columns:
 pwd: # pwd 与 pwd_cipher 的转换映射
```

```

cipherColumn: pwd_cipher
encryptorName: aes_encryptor
assistedQueryColumn: pwd_assisted_query
assistedQueryEncryptorName: pwd_assisted_query_cipher
queryWithCipherColumn: true

```

The processing flow is as follows:

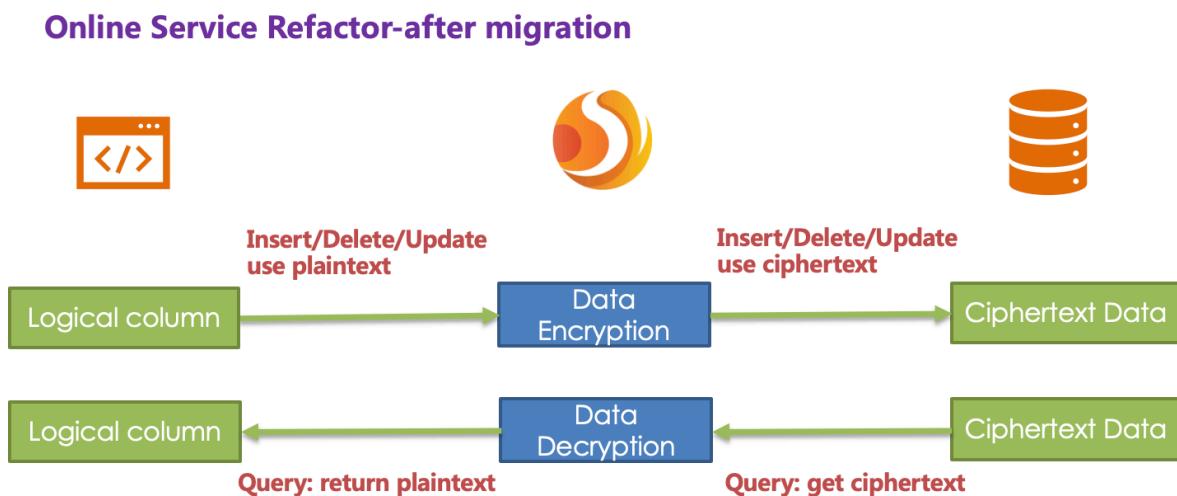


Figure26: 8

#### 4. System migration completed

Security audit department then requested, the business system needs to modify the key periodically or certain emergency security events trigger, we need to migrate the number of wash again, that is, use the old key decryption and then use the new key encryption. Both to and also to the problem came, the plaintext column data has been deleted, the amount of data in the database table tens of millions, the migration shuffle takes a certain amount of time, the migration shuffle process in the cipher column changes, the system also needs to provide services correctly. What to do? The answer is: auxiliary query column. **Because auxiliary query columns generally use algorithms such as irreversible MD5 and SM3, queries based on auxiliary columns are served correctly by the system even during the migration shuffle.**

So far, the online service encryption and rectification solutions have all been demonstrated. We provide Java, YAML, Spring Boot Starter, Spring Namespace multiple ways for users to choose to use, and strive to fulfill business requirements. The solution has been continuously launched on JD Digits, providing internal basic service support.

### 9.5.3 The advantages of Middleware encryption service

1. Transparent data encryption process, users do not need to pay attention to the implementation details of encryption.
2. Provide a variety of built-in, third-party (AKS) encryption strategies, users only need to modify the configuration to use.
3. Provides a encryption strategy API interface, users can implement the interface to use a custom encryption strategy for data encryption.
4. Support switching different encryption strategies.
5. For online services, it is possible to store plaintext data and ciphertext data synchronously, and decide whether to use plaintext or ciphertext columns for query through configuration. Without changing the business query SQL, the on-line system can safely and transparently migrate data before and after encryption.

### 9.5.4 Solution

Apache ShardingSphere has provided the encryption solution for data encryption, the `EncryptAlgorithm`.

On the one hand, Apache ShardingSphere has provided internal encryption and decryption implementations for users, which can be used by them only after configuration. On the other hand, to satisfy users' requirements for different scenarios, we have also opened relevant encryption and decryption interfaces, according to which, users can provide specific implementation types. Then, after simple configurations, Apache ShardingSphere can use encryption and decryption solutions defined by users themselves to desensitize data.

#### EncryptAlgorithm

The solution has provided two methods `encrypt()` and `decrypt()` to encrypt/decrypt data for encryption.

When users `INSERT`, `DELETE` and `UPDATE`, ShardingSphere will parse, rewrite and route SQL according to the configuration. It will also use `encrypt()` to encrypt data and store them in the database. When using `SELECT`, they will decrypt sensitive data from the database with `decrypt()` reversely and return them to users at last.

Currently, Apache ShardingSphere has provided five types of implementations for this kind of encrypt solution, MD5 (irreversible), AES (reversible), RC4 (reversible), SM3 (irreversible) and SM4 (reversible), which can be used after configuration.

## 9.6 Shadow

### 9.6.1 Overall Architecture

Apache ShardingSphere makes shadow judgments on incoming SQL by parsing SQL, according to the shadow rules set by the user in the configuration file, route to production DB or shadow DB.

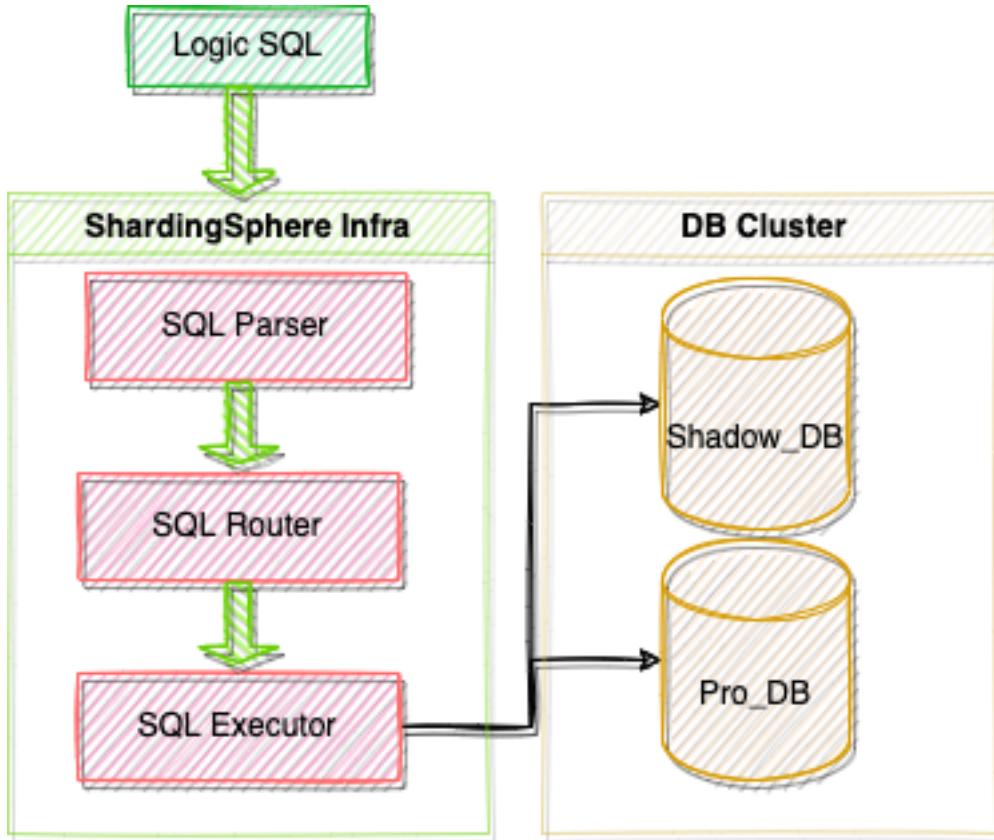


Figure27: Execute Process

### 9.6.2 Shadow Rule

Shadow rules include shadow data source mapping, shadow tables, and shadow algorithms.

**data-sources**: Production data source name and shadow data source name mappings.

**tables**: Shadow tables related to stress testing. Shadow tables must exist in the specified shadow DB, and the shadow algorithm needs to be specified.

**shadow-algorithms**: SQL routing shadow algorithm.

**default-shadow-algorithm-name**: Default shadow algorithm. Optional item, the default matching algorithm for tables that not configured with the shadow algorithm.

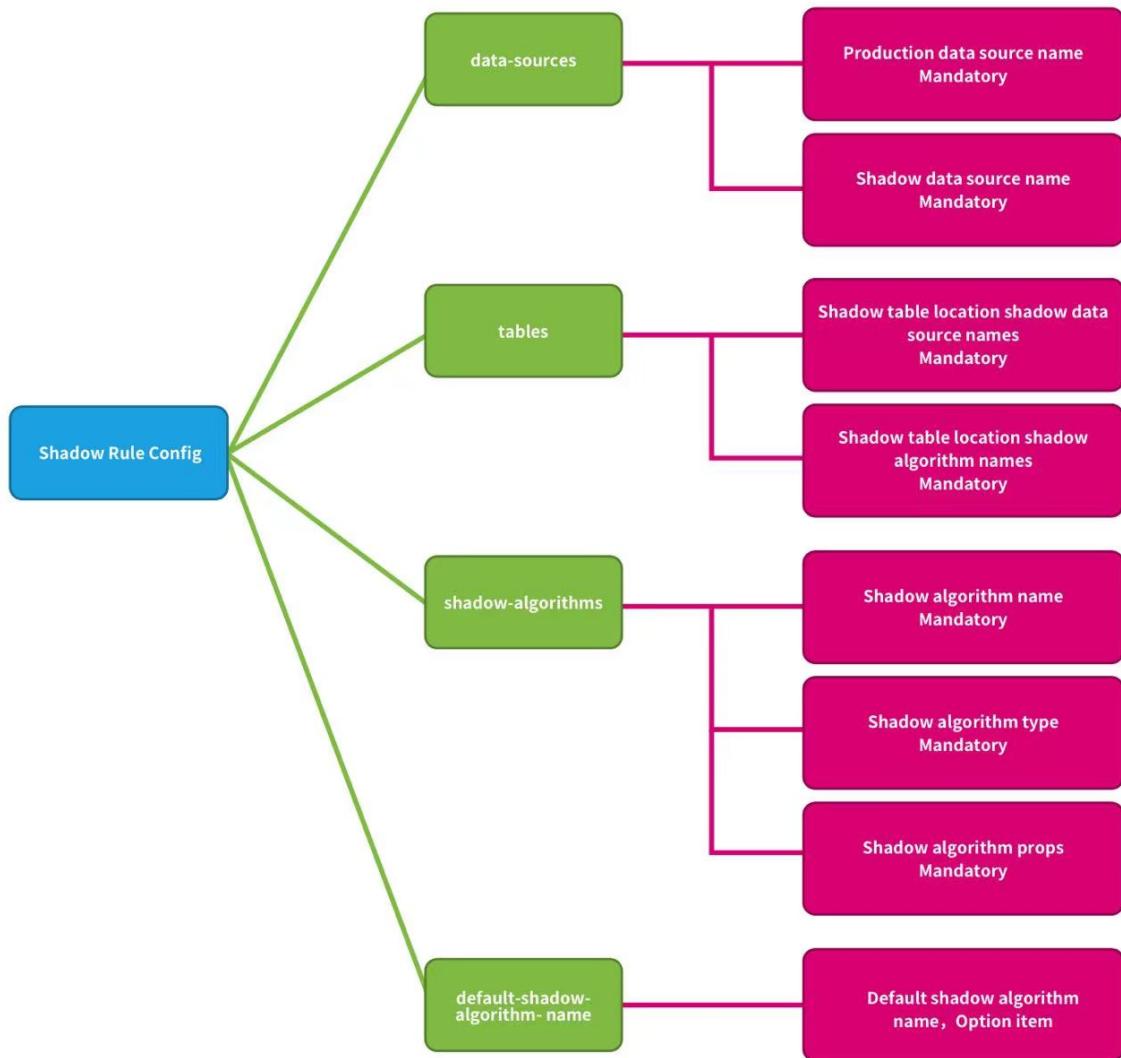


Figure28: Shadow Rule

### 9.6.3 Routing Process

Take the INSERT statement as an example. When writing data Apache ShardingSphere will parse the SQL, and then construct a routing chain according to the rules in the configuration file.

In the current version of the function, the shadow function is the last execution unit in the routing chain, that is, if there are other rules that require routing, such as sharding, Apache ShardingSphere will first route to a certain database according to the sharding rules, and then perform the shadow routing decision process.

It determined that the execution of SQL satisfies the configuration of the shadow rule, the data routed to the corresponding shadow database, and the production data remains unchanged.

### 9.6.4 Shadow Judgment Process

The Shadow DB performs shadow judgment on the executed SQL statements.

Shadow judgment supports two types of algorithms, users can choose one or combine them according to actual business needs.

#### DML Statement

Support two type shadow algorithms.

The shadow judgment first judges whether there is an intersection between SQL related tables and configured shadow tables.

If there is an intersection, determine the shadow algorithm associated with the shadow table of the intersection in turn, and any one of them was successful. SQL statement executed shadow DB.

If shadow tables have no intersection, or shadow algorithms are unsuccessful, SQL statement executed production DB.

#### DDL Statement

Only support note shadow algorithm.

In the pressure testing scenarios, DDL statements are not need tested generally. It is mainly used when initializing or modifying the shadow table in the shadow DB.

The shadow judgment first judges whether the executed SQL contains notes.

If contains notes, determine the note shadow algorithms in the shadow rule in turn, and any one of them was successful. SQL statement executed shadow DB.

The executed SQL does not contain notes, or shadow algorithms are unsuccessful, SQL statement executed production DB.

## 9.6.5 Shadow Algorithm

Shadow algorithm details, please refer to [List of built-in shadow algorithms](#)

## 9.6.6 Use Example

### Scenario

Assume that the e-commerce website wants to perform pressure testing on the order business, the pressure testing related table `t_order` is a shadow table, the production data executed to the `ds` production DB, and the pressure testing data executed to the database `ds_shadow` shadow DB.

### Shadow DB configuration

The configuration example of `config-shadow.yaml`(YAML):

```
databaseName: shadow_db

dataSources:
 ds:
 url: jdbc:mysql://127.0.0.1:3306/ds?serverTimezone=UTC&useSSL=false
 username: root
 password:
 connectionTimeoutMilliseconds: 30000
 idleTimeoutMilliseconds: 60000
 maxLifetimeMilliseconds: 1800000
 maxPoolSize: 50
 minPoolSize: 1
 shadow_ds:
 url: jdbc:mysql://127.0.0.1:3306/shadow_ds?serverTimezone=UTC&useSSL=false
 username: root
 password:
 connectionTimeoutMilliseconds: 30000
 idleTimeoutMilliseconds: 60000
 maxLifetimeMilliseconds: 1800000
 maxPoolSize: 50
 minPoolSize: 1

rules:
- !SHADOW
 dataSources:
 shadowDataSource:
 sourceDataSourceName: ds
 shadowDataSourceName: shadow_ds
 tables:
 t_order:
 dataSourceNames:
```

```

 - shadowDataSource
shadowAlgorithmNames:
 - simple-hint-algorithm
 - user-id-value-match-algorithm
shadowAlgorithms:
 simple-hint-algorithm:
 type: SIMPLE_HINT
 props:
 foo: bar
 user-id-insert-match-algorithm:
 type: VALUE_MATCH
 props:
 operation: insert
 column: user_id
 regex: 0

- !SQL_PARSER
sqlCommentParseEnabled: true

```

**Note:** If you use the Hint shadow algorithm, the parse SQL comment configuration item `sql-comment-parse-enabled: true` need to be turned on. turned off by default. please refer to [SQL-PARSER Configuration](#)

## Shadow DB environment

- Create the shadow DB `ds_shadow`.
- Create shadow tables, tables structure must be consistent with the production environment. Assume that the `t_order` table created in the shadow DB. Create table statement need to add SQL comment `/*foo:bar, ... */`.

```
CREATE TABLE t_order (order_id INT(11) primary key, user_id int(11) not null, ...)
/*foo:bar, ...*/
```

Execute to the shadow DB.

**Note:** If use the MySQL client for testing, the link needs to use the parameter `-c`, for example:

```
mysql> mysql -u root -h127.0.0.1 -P3306 -proot -c
```

Parameter description: keep the comment, send the comment to the server

Execute SQL containing annotations, for example:

```
SELECT * FROM table_name /*shadow:true,foo:bar*/;
```

Comment statement will be intercepted by the MySQL client if parameter `-c` not be used, for example:

```
SELECT * FROM table_name;
```

Affect test results.

### Shadow algorithm example

#### 1. Column shadow algorithm example

Assume that the `t_order` table contains a list of `user_id` to store the order user ID. The data of the order created by the user whose user ID is 0 executed to shadow DB, other data executed to production DB.

```
INSERT INTO t_order (order_id, user_id, ...) VALUES (xxx..., 0, ...)
```

No need to modify any SQL or code, only need to control the data of the testing to realize the pressure testing.

Column Shadow algorithm configuration (YAML):

```
shadowAlgorithms:
 user-id-insert-match-algorithm:
 type: VALUE_MATCH
 props:
 operation: insert
 column: user_id
 regex: 0
```

**Note:** When the shadow table uses the column shadow algorithm, the same type of shadow operation (INSERT, UPDATE, DELETE, SELECT) currently only supports a single column.

#### 2. Hint shadow algorithm example

Assume that the `t_order` table does not contain columns that can matching. Executed SQL statement need to add SQL note `/*foo:bar,.. .*/`

```
SELECT * FROM t_order WHERE order_id = xxx /*foo:bar,...*/
```

SQL executed to shadow DB, other data executed to production DB.

Note Shadow algorithm configuration (YAML):

```
shadowAlgorithms:
 simple-hint-algorithm:
 type: SIMPLE_HINT
 props:
 foo: bar
```

#### 3. Hybrid two shadow algorithm example

Assume that the pressure testing of the `t_order` gauge needs to cover the above two scenarios.

```
INSERT INTO t_order (order_id, user_id, ...) VALUES (xxx..., 0, ...);

SELECT * FROM t_order WHERE order_id = xxx /*foo:bar,...*/;
```

Both will be executed to shadow DB, other data executed to production DB.

2 type of shadow algorithm example (YAML):

```
shadowAlgorithms:
 user-id-value-match-algorithm:
 type: VALUE_MATCH
 props:
 operation: insert
 column: user_id
 value: 0
 simple-hint-algorithm:
 type: SIMPLE_HINT
 props:
 foo: bar
```

#### 4. Default shadow algorithm example

Assume that the column shadow algorithm used for the t\_order, all other shadow tables need to use the note shadow algorithm.

```
INSERT INTO t_order (order_id, user_id, ...) VALUES (xxx..., 0, ...);

INSERT INTO t_xxx_1 (order_item_id, order_id, ...) VALUES (xxx..., xxx..., ...) /
foo:bar,.../;

SELECT * FROM t_xxx_2 WHERE order_id = xxx /*foo:bar,...*/;

SELECT * FROM t_xxx_3 WHERE order_id = xxx /*foo:bar,...*/;
```

Both will be executed to shadow DB, other data executed to production DB.

Default shadow algorithm configuration (YAML):

```
rules:
- !SHADOW
dataSources:
 shadowDataSource:
 sourceDataSourceName: ds
 shadowDataSourceName: shadow_ds
tables:
 t_order:
 dataSourceNames:
 - shadowDataSource
 shadowAlgorithmNames:
 - simple-hint-algorithm
```

```

 - user-id-value-match-algorithm
shadowAlgorithms:
 simple-hint-algorithm:
 type: SIMPLE_HINT
 props:
 foo: bar
 user-id-insert-match-algorithm:
 type: VALUE_MATCH
 props:
 operation: insert
 column: user_id
 regex: 0
- !SQL_PARSER
 sqlCommentParseEnabled: true

```

**Note:** The default shadow algorithm only supports Hint shadow algorithm. When using ensure that the configuration items of props in the configuration file are less than or equal to those in the SQL comment, And the specific configuration of the configuration file should same as the configuration written in the SQL comment. The fewer configuration items in the configuration file, the looser the matching conditions

```

shadowAlgorithms:
 simple-note-algorithm:
 type: SIMPLE_HINT
 props:
 foo: bar
 foo1: bar1

```

For example, the ‘props’ item have 2 configure, the following syntax can be used in SQL:

```
SELECT * FROM t_xxx_2 WHERE order_id = xxx /*foo:bar, foo1:bar1*/
```

```
SELECT * FROM t_xxx_2 WHERE order_id = xxx /*foo:bar, foo1:bar1, foo2:bar2, ...*/
```

```

shadowAlgorithms:
 simple-note-algorithm:
 type: SIMPLE_HINT
 props:
 foo: bar

```

For example, the ‘props’ item have 1 configure, the following syntax can be used in SQL:

```
SELECT * FROM t_xxx_2 WHERE order_id = xxx /*foo:foo*/
```

```
SELECT * FROM t_xxx_2 WHERE order_id = xxx /*foo:foo, foo1:bar1, ...*/
```

## 9.7 Test

Apache ShardingSphere provides test engines for integration, module and performance.

### 9.7.1 Integration Test

Provide point to point test which connect real ShardingSphere and database instances.

They define SQLs in XML files, engine run for each database independently. All test engines designed to modify the configuration files to execute all assertions without any **Java code** modification. It does not depend on any third-party environment, ShardingSphere-Proxy and database used for testing are provided by docker image.

### 9.7.2 Module Test

Provide module test engine for complex modules.

They define SQLs in XML files, engine run for each database independently too. It includes SQL parser and SQL rewriter modules.

### 9.7.3 Performance Test

Provide multiple performance test methods, includes Sysbench, JMH or TPCC and so on.

### 9.7.4 Sysbench Test

### 9.7.5 Integration Test

The SQL parsing unit test covers both SQL placeholder and literal dimension. Integration test can be further divided into two dimensions of strategy and JDBC; the former one includes strategies as Sharding, table Sharding, database Sharding, and readwrite-splitting while the latter one includes Statement and PreparedStatement.

Therefore, one SQL can drive 5 kinds of database parsing \* 2 kinds of parameter transmission modes + 5 kinds of databases \* 5 kinds of Sharding strategies \* 2 kinds of JDBC operation modes = 60 test cases, to enable ShardingSphere to achieve the pursuit of high quality.

## Process

The Parameterized in JUnit will collect all test data, and pass to test method to assert one by one. The process of handling test data is just like a leaking hourglass:

## Configuration

- environment type
  - /shardingsphere-integration-test-suite/src/test/resources/env-native.properties
  - /shardingsphere-integration-test-suite/src/test/resources/env/SQL-TYPE/dataset.xml
  - /shardingsphere-integration-test-suite/src/test/resources/env/SQL-TYPE/schema.xml
- test case type
  - /shardingsphere-integration-test-suite/src/test/resources/cases/SQL-TYPE/SQL-TYPE-integration-test-cases.xml
  - /shardingsphere-integration-test-suite/src/test/resources/cases/SQL-TYPE/dataset/FEATURE-TYPE/\*.xml
- sql-case
  - /sharding-sql-test/src/main/resources/sql/sharding/SQL-TYPE/\*.xml

## Environment Configuration

Integration test depends on existed database environment, developer need to setup the configuration file for corresponding database to test:

Firstly, setup configuration file /shardingsphere-integration-test-suite/src/test/resources/env-native.properties, for example:

```
the switch for PK, concurrent, column index testing and so on
it.run.additional.cases=false

test scenarios, could define multiple rules
it.scenarios=db,tbl,dbtbl_with_replica_query,replica_query

database type, could define multiple databases(H2,MySQL,Oracle,SQLServer,
PostgreSQL)
it.cluster.databases=MySQL,PostgreSQL

MySQL configuration
it.mysql.host=127.0.0.1
it.mysql.port=13306
it.mysql.username=root
it.mysql.password=root

PostgreSQL configuration
```

```

it.postgresql.host=db.psql
it.postgresql.port=5432
it.postgresql.username=postgres
it.postgresql.password=postgres

SQLServer configuration
it.sqlserver.host=db.mssql
it.sqlserver.port=1433
it.sqlserver.username=sa
it.sqlserver.password=Jdbc1234

Oracle configuration
it.oracle.host=db.oracle
it.oracle.port=1521
it.oracle.username=jdbc
it.oracle.password=jdbc

```

Secondly, setup configuration file `/shardingsphere-integration-test-suite/src/test/resources/env/SQL-TYPE/dataset.xml`. Developer can set up metadata and expected data to start the data initialization in `dataset.xml`. For example:

```

<dataset>
 <metadata data-nodes="tbl.t_order_${0..9}">
 <column name="order_id" type="numeric" />
 <column name="user_id" type="numeric" />
 <column name="status" type="varchar" />
 </metadata>
 <row data-node="tbl.t_order_0" values="1000, 10, init" />
 <row data-node="tbl.t_order_1" values="1001, 10, init" />
 <row data-node="tbl.t_order_2" values="1002, 10, init" />
 <row data-node="tbl.t_order_3" values="1003, 10, init" />
 <row data-node="tbl.t_order_4" values="1004, 10, init" />
 <row data-node="tbl.t_order_5" values="1005, 10, init" />
 <row data-node="tbl.t_order_6" values="1006, 10, init" />
 <row data-node="tbl.t_order_7" values="1007, 10, init" />
 <row data-node="tbl.t_order_8" values="1008, 10, init" />
 <row data-node="tbl.t_order_9" values="1009, 10, init" />
</dataset>

```

Developer can customize DDL to create databases and tables in `schema.xml`.

## Assertion Configuration

So far have confirmed what kind of sql execute in which environment in upon configuration, here define the data for assert. There are two kinds of config for assert, one is at `/shardingsphere-integration-test-suite/src/test/resources/cases/SQL-TYPE/SQL-TYPE-integration-test-cases.xml`. This file just like an index, defined the sql, parameters and expected index position for execution. the SQL is the value for `sql-case-id`. For example:

```
<integration-test-cases>
 <dml-test-case sql-case-id="insert_with_all_placeholders">
 <assertion parameters="1:int, 1:int, insert:String" expected-data-file=
"insert_for_order_1.xml" />
 <assertion parameters="2:int, 2:int, insert:String" expected-data-file=
"insert_for_order_2.xml" />
 </dml-test-case>
</integration-test-cases>
```

Another kind of config for assert is the data, as known as the corresponding `expected-data-file` in `SQL-TYPE-integration-test-cases.xml`, which is at `/shardingsphere-integration-test-suite/src/test/resources/cases/SQL-TYPE/dataset/FEATURE-TYPE/*.xml`.

This file is very like the `dataset.xml` mentioned before, and the difference is that `expected-data-file` contains some other assert data, such as the return value after a sql execution. For examples:

```
<dataset update-count="1">
 <metadata data-nodes="db_${0..9}.t_order">
 <column name="order_id" type="numeric" />
 <column name="user_id" type="numeric" />
 <column name="status" type="varchar" />
 </metadata>
 <row data-node="db_0.t_order" values="1000, 10, update" />
 <row data-node="db_0.t_order" values="1001, 10, init" />
 <row data-node="db_0.t_order" values="2000, 20, init" />
 <row data-node="db_0.t_order" values="2001, 20, init" />
</dataset>
```

Util now, all config files are ready, just launch the corresponding test case is fine. With no need to modify any Java code, only set up some config files. This will reduce the difficulty for ShardingSphere testing.

## Running Integration Tests

### Run with Docker

```
./mvnw -B clean install -f shardingsphere-test/shardingsphere-integration-test/pom.xml -Pit.env.docker -Dit.cluster.adapters=proxy,jdbc -Dit.scenarios=${scenario_name_1,scenario_name_1,scenario_name_n} -Dit.cluster.databases=MySQL
```

Running the above command will build a Docker image apache/shardingsphere-proxy-test:latest for integration testing. The existing test Docker image can be reused without rebuilding if only the test code is modified. Use the following command to skip the image building and run the integration tests directly:

```
./mvnw -B clean install -f shardingsphere-test/shardingsphere-integration-test/shardingsphere-integration-test-suite/pom.xml -Pit.env.docker -Dit.cluster.adapters=proxy,jdbc -Dit.scenarios=${scenario_name_1,scenario_name_1,scenario_name_n} -Dit.cluster.databases=MySQL
```

### Notice

1. If Oracle needs to be tested, please add Oracle driver dependencies to the pom.xml.
2. 10 splitting-databases and 10 splitting-tables are used in the integrated test to ensure the test data is full, so it will take a relatively long time to run the test cases.

### 9.7.6 Performance Test

Provides result for each performance test tools.

### 9.7.7 Module Test

Provides test engine with each complex modules.

#### SQL Parser Test

##### Prepare Data

Not like Integration test, SQL parse test does not need a specific database environment, just define the sql to parse, and the assert data:

## SQL Data

As mentioned `sql-case-id` in Integration test, `test-case-id` could be shared in different module to test, and the file is at `shardingsphere-sql-parser/shardingsphere-sql-parser-test/src/main/resources/sql/supported/${SQL-TYPE}/*.xml`

## Assert Data

The assert data is at `shardingsphere-sql-parser/shardingsphere-sql-parser-test/src/main/resources/case/${SQL-TYPE}/*.xml` in that xml file, it could assert against the table name, token or sql condition and so on. For example:

```

<parser-result-sets>
 <parser-result sql-case-id="insert_with_multiple_values">
 <tables>
 <table name="t_order" />
 </tables>
 <tokens>
 <table-token start-index="12" table-name="t_order" length="7" />
 </tokens>
 <sharding-conditions>
 <and-condition>
 <condition column-name="order_id" table-name="t_order" operator="EQUAL">
 <value literal="1" type="int" />
 </condition>
 <condition column-name="user_id" table-name="t_order" operator="EQUAL">
 <value literal="1" type="int" />
 </condition>
 </and-condition>
 <and-condition>
 <condition column-name="order_id" table-name="t_order" operator="EQUAL">
 <value literal="2" type="int" />
 </condition>
 <condition column-name="user_id" table-name="t_order" operator="EQUAL">
 <value literal="2" type="int" />
 </condition>
 </and-condition>
 </sharding-conditions>
 </parser-result>
</parser-result-sets>

```

When these configs are ready, launch the test engine in `shardingsphere-sql-parser/shardingsphere-sql-parser-test` to test SQL parse.

## SQL Rewrite Test

### Target

Facing logic databases and tables cannot be executed directly in actual databases. SQL rewrite is used to rewrite logic SQL into rightly executable ones in actual databases, including two parts, correctness rewrite and optimization rewrite. rewrite tests are for these targets.

### Test

The rewrite tests are in the test folder under sharding-core/sharding-core-rewrite. Followings are the main part for rewrite tests:

- test engine
- environment configuration
- assert data

Test engine is the entrance of rewrite tests, just like other test engines, through Junit [Parameterized](#), read every and each data in the xml file under the target test type in test\resources, and then assert by the engine one by one

Environment configuration is the yaml file under test type under test\resources\yaml. The configuration file contains dataSources, shardingRule, encryptRule and other info. for example:

```
dataSources:
 db: !!com.zaxxer.hikari.HikariDataSource
 driverClassName: org.h2.Driver
 jdbcUrl: jdbc:h2:mem:db;DB_CLOSE_DELAY=-1;DATABASE_TO_UPPER=false;MODE=MYSQL
 username: sa
 password:

sharding Rules
rules:
- !SHARDING
 tables:
 t_account:
 actualDataNodes: db.t_account_${0..1}
 tableStrategy:
 standard:
 shardingColumn: account_id
 shardingAlgorithmName: account_table_inline
 keyGenerateStrategy:
 column: account_id
 keyGeneratorName: snowflake
 t_account_detail:
 actualDataNodes: db.t_account_detail_${0..1}
 tableStrategy:
 standard:
```

```

shardingColumn: order_id
shardingAlgorithmName: account_detail_table_inline
bindingTables:
- t_account, t_account_detail
shardingAlgorithms:
account_table_inline:
type: INLINE
props:
algorithm-expression: t_account_${account_id % 2}
account_detail_table_inline:
type: INLINE
props:
algorithm-expression: t_account_detail_${account_id % 2}
keyGenerators:
snowflake:
type: SNOWFLAKE

```

Assert data are in the xml under test type in test\resources. In the xml file, yaml-rule means the environment configuration file path, input contains the target SQL and parameters, output contains the expected SQL and parameters. The db-type described the type for SQL parse, default is SQL92. For example:

```

<rewrite-assertions yaml-rule="yaml/sharding/sharding-rule.yaml">
<!-- to change SQL parse type, change db-type -->
<rewrite-assertion id="create_index_for_mysql" db-type="MySQL">
<input sql="CREATE INDEX index_name ON t_account ('status')" />
<output sql="CREATE INDEX index_name ON t_account_0 ('status')" />
<output sql="CREATE INDEX index_name ON t_account_1 ('status')" />
</rewrite-assertion>
</rewrite-assertions>

```

After set up the assert data and environment configuration, rewrite test engine will assert the corresponding SQL without any Java code modification.

### 9.7.8 Scaling Integration Test

#### Objective

Verify the correctness of Scaling's own functionality and dependent modules.

## Environment

There are two types of environment preparation: Native and Docker

- Native Environment: For local debugging, you can use the IDE's debug mode for debugging
- Docker Environment: Environment run by Maven for cloud compiled environments and testing ShardingSphere-Proxy scenarios, e.g. GitHub Action

The current default Docker environment, involving ShardingSphere-Proxy, Zookeeper, database instances (MySQL, PostgreSQL), are automatically started via Docker.

Database type currently supports MySQL, PostgreSQL, openGauss

## Guide

Module path: shardingsphere-test/shardingsphere-integration-test/shardingsphere-integration-test-scaling

The Class distribution of the test is as follows.

Core Case: - MySQLGeneralScalingIT: Covered the most test scenarios, including part of the table migration, most variety of table fields, etc. - PostgreSQLGeneralScalingIT: Similar, except that the database type is PostgreSQL/openGauss and includes custom schema migration scenarios.

Primary Key Case:

- TextPrimaryKeyScalingIT: Support migration of tables with primary key of text type(e.g. UUID).

## Configuration File

Catalog: resources/env/ - /common: The Dist SQL used in the Scaling process. - /{SQL-TYPE}: database-level configuration files. - /scenario: The configuration file for the test scenario, mainly SQL, may be written differently for different databases. - it-env.properties: Stores the corresponding configuration information.

## Run Test Cases

All property values can be dynamically injected by means of the Maven command line -D.

`${image-name}` Indicates a legal docker image name, e.g., mysql:5.7, separated by commas if multiple. `-Dscaling.it.docker.postgresql.version=${image-name}` Indicates the version of PostgreSQL that needs to be tested. `-Dscaling.it.docker.mysql.version=${image-name}` Indicates the version of MySQL that needs to be tested.

## Native Environment Startup

Native environments require that ShardingSphere-Proxy (and its own dependent Cluster, such as Zookeeper) and the database be started locally, and that ShardingSphere-Proxy's port be 3307, modify the properties in the `it-env.properties` file `scaling.it.env.type=native`. The database port can be configured in `it-env.properties`, or not if it is the default port.

The startup method is as follows: Find the Case you need to test, such as `MySQLGeneralScalingIT`, and configure the corresponding VM Option before startup, add the following configuration.

```
-Dscaling.it.env.type=native -Dscaling.it.docker.mysql.version=${image-name}
```

Just start it under the IDE using the Junit.

## Docker Environment Startup

### Step 1: Packaging Image

```
./mvnw -B clean install -am -pl shardingsphere-test/shardingsphere-integration-test/shardingsphere-integration-test-scaling -Pit.env.docker -DskipTests
```

Running the above command will build a Docker image `apache/shardingsphere-proxy-test:latest` for integration testing. If you have only modified the test code, you can reuse the existing test image without rebuilding it.

**Docker environment configuration provides remote debugging port for ShardingSphere-Proxy, the default is 3308.** You can change it yourself in `ShardingSphereProxyDockerContainer`.

### Running Case

As with Native, only one parameter needs to be changed.

```
-Dscaling.it.env.type=docker
```

You can run the use case using the same IDE as Native, or you can run it using maven.

```
./mvnw -nsu -B install -f shardingsphere-test/shardingsphere-integration-test/shardingsphere-integration-test-scaling/pom.xml -Dscaling.it.env.type=DOCKER -Dscaling.it.docker.mysql.version=${image-name}
```

## Attentions

The commands in the Scaling integration test are basically executed in the ShardingSphere-Proxy, so if they fail, most of them require a debug of the ShardingSphere-Proxy, and the logs prefixed with :Scaling-Proxy are output from the ShardingSphere-Proxy container.

## 9.8 FAQ

### 9.8.1 [JDBC] Why there may be an error when configure both shardingsphere-jdbc-spring-boot-starter and a spring-boot-starter of certain datasource pool(such as druid)?

Answer:

1. Because the spring-boot-starter of certain datasource pool (such as druid) will be configured before shardingsphere-jdbc-spring-boot-starter and create a default datasource, then conflict occur when ShardingSphere-JDBC create datasources.
2. A simple way to solve this issue is removing the spring-boot-starter of certain datasource pool, shardingsphere-jdbc create datasources with suitable pools.

### 9.8.2 [JDBC] Why is xsd unable to be found when Spring Namespace is used?

Answer:

The use norm of Spring Namespace does not require to deploy xsd files to the official website. But considering some users' needs, we will deploy them to ShardingSphere's official website.

Actually, META-INF:raw-latex:spring.schemas in the jar package of shardingsphere-jdbc-spring-namespace has been configured with the position of xsd files: META-INF:raw-latex:namespace:raw-latex:`\sharding`.xsd and META-INF:raw-latex:namespace:raw-latex:`\replica`-query.xsd, so you only need to make sure that the file is in the jar package.

### 9.8.3 [JDBC] Found a JtaTransactionManager in spring boot project when integrating with transaction of XA

Answer:

1. shardingsphere-transaction-xa-core include atomikos, it will trigger auto-configuration mechanism in spring-boot, add @SpringBootApplication(exclude = JtaAutoConfiguration.class) will solve it.

#### 9.8.4 [Proxy] In Windows environment, could not find or load main class org.apache.shardingsphere.proxy.Bootstrap, how to solve it?

Answer:

Some decompression tools may truncate the file name when decompressing the ShardingSphere-Proxy binary package, resulting in some classes not being found.

The solutions:

Open cmd.exe and execute the following command:

```
tar zxvf apache-shardingsphere-${RELEASE.VERSION}-shardingsphere-proxy-bin.tar.gz
```

#### 9.8.5 [Proxy] How to add a new logic database dynamically when use ShardingSphere-Proxy?

Answer:

When using ShardingSphere-Proxy, users can dynamically create or drop logic database through Dist-SQL, the syntax is as follows:

```
CREATE DATABASE [IF NOT EXISTS] databaseName;

DROP DATABASE [IF EXISTS] databaseName;
```

Example:

```
CREATE DATABASE sharding_db;

DROP DATABASE sharding_db;
```

#### 9.8.6 [Proxy] How to use a suitable database tools connecting ShardingSphere-Proxy?

Answer:

1. ShardingSphere-Proxy could be considered as a mysql sever, so we recommend using mysql command line tool to connect to and operate it.
2. If users would like use a third-party database tool, there may be some errors cause of the certain implementation/options.
3. The currently tested third-party database tools are as follows:
  - Navicat: 11.1.13, 15.0.20.
  - DataGrip: 2020.1, 2021.1 (turn on “introspect using jdbc metadata” in idea or datagrip).
  - WorkBench: 8.0.25.

### 9.8.7 [Proxy] When using a client such as Navicat to connect to ShardingSphere-Proxy, if ShardingSphere-Proxy does not create a database or does not add a resource, the client connection will fail?

Answer:

1. Third-party database tools will send some SQL query metadata when connecting to ShardingSphere-Proxy. When ShardingSphere-Proxy does not create a database or does not add a resource, ShardingSphere-Proxy cannot execute SQL.
2. It is recommended to create database and resource first, and then use third-party database tools to connect.
3. Please refer to [Related introduction](#) the details about resource.

### 9.8.8 [Sharding] How to solve Cloud not resolve placeholder ... in string value ... error?

Answer:

`${...}` or `$->{...}` can be used in inline expression identifiers, but the former one clashes with place holders in Spring property files, so `$->{...}` is recommended to be used in Spring as inline expression identifiers.

### 9.8.9 [Sharding] Why does float number appear in the return result of inline expression?

Answer:

The division result of Java integers is also integer, but in Groovy syntax of inline expression, the division result of integers is float number. To obtain integer division result, `A/B` needs to be modified as `A.intdiv(B)`.

### 9.8.10 [Sharding] If sharding database is partial, should tables without sharding database & table configured in sharding rules?

Answer:

No, ShardingSphere will recognize it automatically.

### 9.8.11 [Sharding] When generic Long type `SingleKeyTableShardingAlgorithm` is used, why `ClassCastException: Integer can not cast to Long` exception appear?

Answer:

You must make sure the field in database table consistent with that in sharding algorithms. For example, the field type in database is int(11) and the sharding type corresponds to generic type is Integer, if you want to configure Long type, please make sure the field type in the database is bigint.

### 9.8.12 [Sharding:raw-latex:PROXY] When implementing the `StandardShardingAlgorithm` custom algorithm, the specific type of Comparable is specified as Long, and the field type in the database table is bigint, a `ClassCastException: Integer can not cast to Long` exception occurs.

Answer:

When implementing the `doSharding` method, it is not recommended to specify the specific type of Comparable in the method declaration, but to convert the type in the implementation of the `doSharding` method. You can refer to the `ModShardingAlgorithm#doSharding` method.

### 9.8.13 [Sharding] Why are the default distributed auto-augment key strategy provided by ShardingSphere not continuous and most of them end with even numbers?

Answer:

ShardingSphere uses snowflake algorithms as the default distributed auto-augment key strategy to make sure unrepeatable and decentralized auto-augment sequence is generated under the distributed situations. Therefore, auto-augment keys can be incremental but not continuous.

But the last four numbers of snowflake algorithm are incremental value within one millisecond. Thus, if concurrency degree in one millisecond is not high, the last four numbers are likely to be zero, which explains why the rate of even end number is higher.

In 3.1.0 version, the problem of ending with even numbers has been totally solved, please refer to: <https://github.com/apache/shardingsphere/issues/1617>

### 9.8.14 [Sharding] How to allow range query with using inline sharding strategy(BETWEEN AND, >, <, >=, <=)?

Answer:

1. Update to 4.1.0 above.
2. Configure(A tip here: then each range query will be broadcast to every sharding table):
  - Version 4.x: `allow.range.query.with.inline.sharding` to `true` (Default value is `false`).
  - Version 5.x: `allow-range-query-with-inline-sharding` to `true` in `InlineShardingStrategy` (Default value is `false`).

### 9.8.15 [Sharding] Why does my custom distributed primary key do not work after implementing KeyGenerateAlgorithm interface and configuring type property?

Answer:

Service Provider Interface (SPI) is a kind of API for the third party to implement or expand. Except implementing interface, you also need to create a corresponding file in `META-INF/services` to make the JVM load these SPI implementations.

More detail for SPI usage, please search by yourself.

Other ShardingSphere functionality implementation will take effect in the same way.

### 9.8.16 [Sharding] In addition to internal distributed primary key, does ShardingSphere support other native auto-increment keys?

Answer:

Yes. But there is restriction to the use of native auto-increment keys, which means they cannot be used as sharding keys at the same time.

Since ShardingSphere does not have the database table structure and native auto-increment key is not included in original SQL, it cannot parse that field to the sharding field. If the auto-increment key is not sharding key, it can be returned normally and is needless to be cared. But if the auto-increment key is also used as sharding key, ShardingSphere cannot parse its sharding value, which will make SQL routed to multiple tables and influence the rightness of the application.

The premise for returning native auto-increment key is that INSERT SQL is eventually routed to one table. Therefore, auto-increment key will return zero when INSERT SQL returns multiple tables.

### 9.8.17 [Encryption] How to solve that data encryption can't work with JPA?

Answer:

Because DDL for data encryption has not yet finished, JPA Entity cannot meet the DDL and DML at the same time, when JPA that automatically generates DDL is used with data encryption.

The solutions are as follows:

1. Create JPA Entity with logicColumn which needs to encrypt.
2. Disable JPA auto-ddl, For example setting auto-ddl=none.
3. Create table manually. Table structure should use cipherColumn,plainColumn and assistedQueryColumn to replace the logicColumn.

### 9.8.18 [DistSQL] How to set custom JDBC connection properties or connection pool properties when adding a data source using DistSQL?

Answer:

1. If you need to customize JDBC connection properties, please take the urlSource way to define dataSource.
2. ShardingSphere presets necessary connection pool properties, such as maxPoolSize, idleTimeout, etc. If you need to add or overwrite the properties, please specify it with PROPERTIES in the dataSource.
3. Please refer to [Related introduction](#) for above rules.

### 9.8.19 [DistSQL] How to solve Resource [xxx] is still used by [SingleTableRule]. exception when dropping a data source using DistSQL?

Answer:

1. Resources referenced by rules cannot be deleted
2. If the resource is only referenced by single table rule, and the user confirms that the restriction can be ignored, the optional parameter ignore single tables can be added to perform forced deletion

```
DROP RESOURCE dataSourceName [, dataSourceName] ... [ignore single tables]
```

### 9.8.20 [DistSQL] How to solve Failed to get driver instance for jdbcURL=xxx. exception when adding a data source using DistSQL?

Answer:

ShardingSphere Proxy do not have jdbc driver during deployment. Some example of this include mysql-connector. To use it otherwise following syntax can be used:

```
ADD RESOURCE dataSourceName [..., dataSourceName]
```

### 9.8.21 [Other] How to debug when SQL can not be executed rightly in ShardingSphere?

Answer:

sql.show configuration is provided in ShardingSphere-Proxy and post-1.5.0 version of ShardingSphere-JDBC, enabling the context parsing, rewritten SQL and the routed data source printed to info log. sql.show configuration is off in default, and users can turn it on in configurations.

A Tip: Property sql.show has changed to sql-show in version 5.x.

### 9.8.22 [Other] Why do some compiling errors appear? Why did not the IDEA index the generated codes?

Answer:

ShardingSphere uses lombok to enable minimal coding. For more details about using and installment, please refer to the official website of [lombok](#).

The codes under the package org.apache.shardingsphere.sql.parser.autogen are generated by ANTLR. You may execute the following command to generate codes:

```
./mvnw -Dcheckstyle.skip=true -Drat.skip=true -Dmaven.javadoc.skip=true -Djacoco.skip=true -DskipITs -DskipTests install -T1C
```

The generated codes such as org.apache.shardingsphere.sql.parser.autogen.PostgreSQLStatementParser may be too large to be indexed by the IDEA. You may configure the IDEA's property idea.max.intellisense.filesize=10000.

### 9.8.23 [Other] In SQLServer and PostgreSQL, why does the aggregation column without alias throw exception?

Answer:

SQLServer and PostgreSQL will rename aggregation columns acquired without alias, such as the following SQL:

```
SELECT SUM(num), SUM(num2) FROM tablexxx;
```

Columns acquired by SQLServer are empty string and (2); columns acquired by PostgreSQL are empty sum and sum(2). It will cause error because ShardingSphere is unable to find the corresponding column.

The right SQL should be written as:

```
SELECT SUM(num) AS sum_num, SUM(num2) AS sum_num2 FROM tablexxx;
```

### 9.8.24 [Other] Why does Oracle database throw “Order by value must implements Comparable” exception when using Timestamp Order By?

Answer:

There are two solutions for the above problem: 1. Configure JVM parameter “-oracle.jdbc.J2EE13Compliant=true” 2. Set System.getProperties().setProperty(“oracle.jdbc.J2EE13Compliant”, “true” ) codes in the initialization of the project.

Reasons:

```
org.apache.shardingsphere.sharding.merge.dql.orderby.OrderByValue#getOrderValues():
```

```
private List<Comparable<?>> getOrderValues() throws SQLException {
 List<Comparable<?>> result = new ArrayList<>(orderByItems.size());
 for (OrderByItem each : orderByItems) {
 Object value = queryResult.getValue(each.getIndex(), Object.class);
 Preconditions.checkState(null == value || value instanceof Comparable,
"Order by value must implements Comparable");
 result.add((Comparable<?>) value);
 }
 return result;
}
```

After using resultSet.getObject(int index), for TimeStamp oracle, the system will decide whether to return java.sql.TimeStamp or define oracle.sql.TIMESTAMP according to the property of oracle.jdbc.J2EE13Compliant. See oracle.jdbc.driver.TimestampAccessor#getObject(int var1) method in ojdbcs codes for more detail:

```
Object getObject(int var1) throws SQLException {
 Object var2 = null;
 if(this.rowSpaceIndicator == null) {
 DatabaseError.throwSqlException(21);
 }

 if(this.rowSpaceIndicator[this.indicatorIndex + var1] != -1) {
 if(this.externalType != 0) {
 switch(this.externalType) {
 case 93:
```

```

 return this.getTimestamp(var1);
 default:
 DatabaseError.throwSqlException(4);
 return null;
 }
}

if(this.statement.connection.j2ee13Compliant) {
 var2 = this.getTimestamp(var1);
} else {
 var2 = this.getTIMESTAMP(var1);
}
}

return var2;
}

```

### 9.8.25 [Other] In Windows environment, when cloning ShardingSphere source code through Git, why prompt filename too long and how to solve it?

Answer:

To ensure the readability of source code, the ShardingSphere Coding Specification requires that the naming of classes, methods and variables be literal and avoid abbreviations, which may result in Some source files have long names.

Since the Git version of Windows is compiled using msys, it uses the old version of Windows API, limiting the file name to no more than 260 characters.

The solutions are as follows:

Open cmd.exe (you need to add git to environment variables) and execute the following command to allow git supporting log paths:

```
git config --global core.longpaths true
```

If we use windows 10, also need enable win32 log paths in registry editor or group strategy (need reboot):  
 > Create the registry key HKLM\SYSTEM\CurrentControlSet\Control\FileSystem LongPathsEnabled (Type: REG\_DWORD) in registry editor, and be set to 1. > Or click “setting” button in system menu, print “Group Policy” to open a new window “Edit Group Policy”, and then click ‘Computer Configuration’ > ‘Administrative Templates’ > ‘System’ > ‘Filesystem’, and then turn on ‘Enable Win32 long paths’ option.

Reference material:

<https://docs.microsoft.com/zh-cn/windows/desktop/FileIO/naming-a-file> <https://ourcodeworld.com/articles/read/109/how-to-solve-filename-too-long-error-in-git-powershell-and-github-application-for-windows>

### 9.8.26 [Other] How to solve Type is required error?

Answer:

In Apache ShardingSphere, many functionality implementation are uploaded through SPI, such as Distributed Primary Key. These functions load SPI implementation by configuring the type, so the type must be specified in the configuration file.

### 9.8.27 [Other] How to speed up the metadata loading when service starts up?

Answer:

1. Update to 4.0.1 above, which helps speed up the process of loading table metadata.
2. Configure:
  - `max.connections.size.per.query`(Default value is 1) higher referring to connection pool you adopt(Version  $\geq$  3.0.0.M3 & Version  $<$  5.0.0).
  - `max-connections-size-per-query`(Default value is 1) higher referring to connection pool you adopt(Version  $\geq$  5.0.0).

### 9.8.28 [Other] The ANTLR plugin generates codes in the same level directory as src, which is easy to commit by mistake. How to avoid it?

Answer:

Goto [Settings -> Languages & Frameworks -> ANTLR v4 default project settings](#) and configure the output directory of the generated code as `target/gen` as shown:

### 9.8.29 [Other] Why is the database sharding result not correct when using Proxool?

Answer:

When using Proxool to configure multiple data sources, each one of them should be configured with alias. It is because Proxool would check whether existing alias is included in the connection pool or not when acquiring connections, so without alias, each connection will be acquired from the same data source.

The followings are core codes from ProxoolDataSource getConnection method in Proxool:

```
if(!ConnectionPoolManager.getInstance().isPoolExists(this.alias)) {
 this.registerPool();
}
```

For more alias usages, please refer to [Proxool](#) official website.

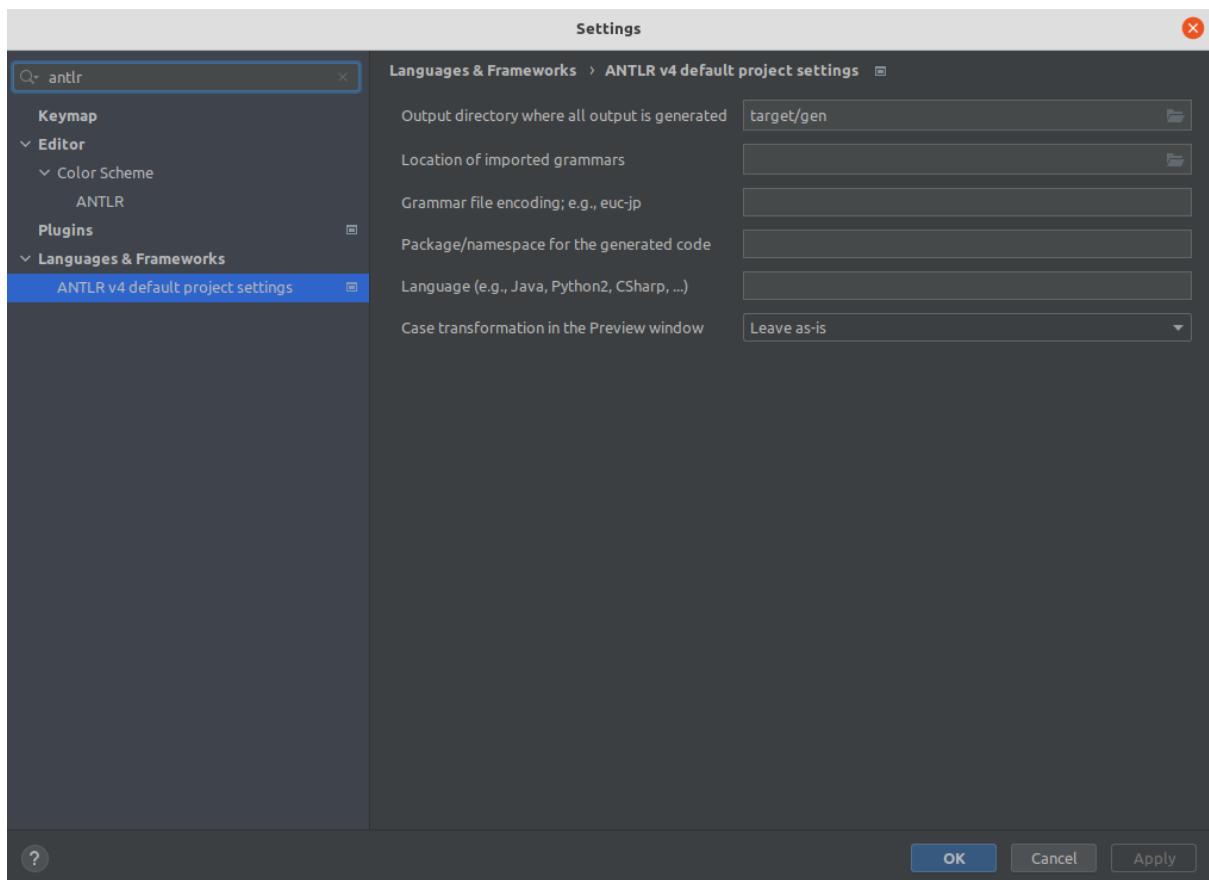


Figure29: Configure ANTLR plugin

### 9.8.30 [Other] The property settings in the configuration file do not take effect when integrating ShardingSphere with Spring Boot 2.x ?

Answer:

Note that the property name in the Spring Boot 2.x environment is constrained to allow only lowercase letters, numbers and short transverse lines, [a-z] [0-9] and -.

Reasons:

In the Spring Boot 2.x environment, ShardingSphere binds the properties through Binder, and the unsatisfied property name (such as camel case or underscore.) can throw a `NullPointerException` exception when the property setting does not work to check the property value. Refer to the following error examples:

Underscore case: database\_inline

```
spring.shardingsphere.rules.sharding.sharding-algorithms.database_inline.
type=INLINE
spring.shardingsphere.rules.sharding.sharding-algorithms.database_inline.props.
algorithm-expression=ds-$->{user_id % 2}
```

Caused by: org.springframework.beans.factory.BeanCreationException: Error creating bean with name 'database\_inline': Initialization of bean failed; nested exception is java.lang.NullPointerException: Inline sharding algorithm expression cannot be null.

...

Caused by: java.lang.NullPointerException: Inline sharding algorithm expression cannot be null.

```
 at com.google.common.base.Preconditions.checkNotNull(Preconditions.java:897)
 at org.apache.shardingsphere.sharding.algorithm.sharding.inline.
InlineShardingAlgorithm.getAlgorithmExpression(InlineShardingAlgorithm.java:58)
 at org.apache.shardingsphere.sharding.algorithm.sharding.inline.
InlineShardingAlgorithm.init(InlineShardingAlgorithm.java:52)
 at org.apache.shardingsphere.spring.boot.registry.
AbstractAlgorithmProvidedBeanRegistry.
postProcessAfterInitialization(AbstractAlgorithmProvidedBeanRegistry.java:98)
 at org.springframework.beans.factory.support.
AbstractAutowireCapableBeanFactory.
applyBeanPostProcessorsAfterInitialization(AbstractAutowireCapableBeanFactory.
java:431)
 ...

```

Camel case: databaseInline

```
spring.shardingsphere.rules.sharding.sharding-algorithms.databaseInline.type=INLINE
spring.shardingsphere.rules.sharding.sharding-algorithms.databaseInline.props.
algorithm-expression=ds-$->{user_id % 2}
```

```

Caused by: org.springframework.beans.factory.BeanCreationException: Error creating
bean with name 'databaseInline': Initialization of bean failed; nested exception is
java.lang.NullPointerException: Inline sharding algorithm expression cannot be
null.
...
Caused by: java.lang.NullPointerException: Inline sharding algorithm expression
cannot be null.
 at com.google.common.base.Preconditions.checkNotNull(Preconditions.java:897)
 at org.apache.shardingsphere.sharding.algorithm.sharding.inline.
InlineShardingAlgorithm.getAlgorithmExpression(InlineShardingAlgorithm.java:58)
 at org.apache.shardingsphere.sharding.algorithm.sharding.inline.
InlineShardingAlgorithm.init(InlineShardingAlgorithm.java:52)
 at org.apache.shardingsphere.spring.boot.registry.
AbstractAlgorithmProvidedBeanRegistry.
postProcessAfterInitialization(AbstractAlgorithmProvidedBeanRegistry.java:98)
 at org.springframework.beans.factory.support.
AbstractAutowireCapableBeanFactory.
applyBeanPostProcessorsAfterInitialization(AbstractAutowireCapableBeanFactory.
java:431)
 ...

```

From the exception stack, the `AbstractAlgorithmProvidedBeanRegistry.registerBean` method calls `PropertyUtil.containsPropertyPrefix(environment, prefix)`, and `PropertyUtil.containsPropertyPrefix(environment, prefix)` determines that the configuration of the specified prefix does not exist, while the method uses `Binder` in an unsatisfied property name (such as camelcase or underscore) causing property settings does not to take effect.

### 9.8.31 [ShardingSphere-JDBC] The `tableName` and `columnName` configured in yaml or properties leading incorrect result when loading Oracle metadata?

Answer:

Note that, in Oracle's metadata, the `tableName` and `columnName` is default UPPERCASE, while double-quoted such as `CREATE TABLE "TableName"("Id" number)` the `tableName` and `columnName` is the actual content double-quoted, refer to the following SQL for the reality in metadata:

```
SELECT OWNER, TABLE_NAME, COLUMN_NAME, DATA_TYPE FROM ALL_TAB_COLUMNS WHERE TABLE_
NAME IN ('TableName')
```

The ShardingSphere uses the `OracleTableMetaDataLoader` to load the metadata, keep the `tableName` and `columnName` in the yaml or properties consistent with the metadata.

The ShardingSphere assembled the SQL using the following code:

```
private String getTableMetaDataSQL(final Collection<String> tables, final
DatabaseMetaData metaData) throws SQLException {
 StringBuilder stringBuilder = new StringBuilder(28);
 if (versionContainsIdentityColumn(metaData)) {
```

```

 stringBuilder.append(", IDENTITY_COLUMN");
 }
 if (versionContainsCollation(metaData)) {
 stringBuilder.append(", COLLATION");
 }
 String collation = stringBuilder.toString();
 return tables.isEmpty() ? String.format(TABLE_META_DATA_SQL, collation)
 : String.format(TABLE_META_DATA_SQL_IN_TABLES, collation, tables.
stream().map(each -> String.format("'%s'", each)).collect(Collectors.joining(", "
)));
}

```

## 9.9 API Change Histories

This chapter contains a section of API change histories of different projects of Apache ShardingSphere: ShardingSphere-JDBC, ShardingSphere-Proxy and ShardingSphere-Sidecar.

### 9.9.1 ShardingSphere-JDBC

This chapter contains a section of API change histories of Apache ShardingSphere-JDBC.

#### YAML configuration

##### 5.0.0-alpha

#### Data Sharding

##### Configuration Item Explanation

```

dataSources: # Omit the data source configuration, please refer to the usage

rules:
- !SHARDING
 tables: # Sharding table configuration
 <logic-table-name> (+): # Logic table name
 actualDataNodes (?): # Describe data source names and actual tables (refer to
 Inline syntax rules)
 databaseStrategy (?): # Databases sharding strategy, use default databases
 sharding strategy if absent. sharding strategy below can choose only one.
 standard: # For single sharding column scenario
 shardingColumn: # Sharding column name
 shardingAlgorithmName: # Sharding algorithm name
 complex: # For multiple sharding columns scenario
 shardingColumns: # Sharding column names, multiple columns separated with
 comma

```

```
shardingAlgorithmName: # Sharding algorithm name
hint: # Sharding by hint
shardingAlgorithmName: # Sharding algorithm name
none: # Do not sharding
tableStrategy: # Tables sharding strategy, same as database sharding strategy
keyGenerateStrategy: # Key generator strategy
column: # Column name of key generator
keyGeneratorName: # Key generator name
autoTables: # Auto Sharding table configuration
t_order_auto: # Logic table name
actualDataSources (?): # Data source names
shardingStrategy: # Sharding strategy
standard: # For single sharding column scenario
shardingColumn: # Sharding column name
shardingAlgorithmName: # Auto sharding algorithm name
bindingTables (+): # Binding tables
- <logic_table_name_1, logic_table_name_2, ...>
- <logic_table_name_1, logic_table_name_2, ...>
broadcastTables (+): # Broadcast tables
- <table-name>
- <table-name>
defaultDatabaseStrategy: # Default strategy for database sharding
defaultTableStrategy: # Default strategy for table sharding
defaultKeyGenerateStrategy: # Default Key generator strategy

Sharding algorithm configuration
shardingAlgorithms:
<sharding-algorithm-name> (+): # Sharding algorithm name
type: # Sharding algorithm type
props: # Sharding algorithm properties
...

Key generate algorithm configuration
keyGenerators:
<key-generate-algorithm-name> (+): # Key generate algorithm name
type: # Key generate algorithm type
props: # Key generate algorithm properties
...

props:
...
```

## Replica Query

### Configuration Item Explanation

```
dataSources: # Omit the data source configuration, please refer to the usage

rules:
- !REPLICA_QUERY
 dataSources:
 <data-source-name> (+): # Logic data source name of replica query
 primaryDataSourceName: # Primary data source name
 replicaDataSourceNames:
 - <replica-data_source-name> (+) # Replica data source name
 loadBalancerName: # Load balance algorithm name

 # Load balance algorithm configuration
 loadBalancers:
 <load-balancer-name> (+): # Load balance algorithm name
 type: # Load balance algorithm type
 props: # Load balance algorithm properties
 # ...

 props:
 # ...
```

Please refer to [Built-in Load Balance Algorithm List](#) for more details about type of algorithm.

## Encryption

### Configuration Item Explanation

```
dataSource: # Omit the data source configuration, please refer to the usage

rules:
- !ENCRYPT
 tables:
 <table-name> (+): # Encrypt table name
 columns:
 <column-name> (+): # Encrypt logic column name
 cipherColumn: # Cipher column name
 assistedQueryColumn (?): # Assisted query column name
 plainColumn (?): # Plain column name
 encryptorName: # Encrypt algorithm name

 # Encrypt algorithm configuration
 encryptors:
 <encrypt-algorithm-name> (+): # Encrypt algorithm name
```

```
type: # Encrypt algorithm type
props: # Encrypt algorithm properties
...

queryWithCipherColumn: # Whether query with cipher column for data encrypt. User
you can use plaintext to query if have
```

Please refer to [Built-in Encrypt Algorithm List](#) for more details about type of algorithm.

## Shadow DB

### Configuration Item Explanation

```
dataSources: # Omit the data source configuration, please refer to the usage

rules:
- !SHADOW
 column: # Shadow column name
 sourceDataSourceNames: # Source Data Source names
 # ...
 shadowDataSourceNames: # Shadow Data Source names
 # ...

props:
...
```

## Governance

### Configuration Item Explanation

```
governance:
 name: # Governance name
 registryCenter: # Registry center
 type: # Governance instance type. Example:Zookeeper, etcd
 serverLists: # The list of servers that connect to governance instance,
 including IP and port number; use commas to separate
 overwrite: # Whether to overwrite local configurations with config center
 configurations; if it can, each initialization should refer to local configurations
```

## ShardingSphere-4.x

### Data Sharding

#### Configuration Item Explanation

```

dataSources: # Data sources configuration, multiple `data_source_name` available
 <data_source_name>: # <!!Data source pool implementation class> `!!` means class
 instantiation
 driverClassName: # Class name of database driver
 url: # Database URL
 username: # Database username
 password: # Database password
 # ... Other properties for data source pool

shardingRule:
 tables: # Sharding rule configuration, multiple `logic_table_name` available
 <logic_table_name>: # Name of logic table
 actualDataNodes: # Describe data source names and actual tables, delimiter as
 point, multiple data nodes separated with comma, support inline expression. Absent
 means sharding databases only. Example: ds${0..7}.tbl${0..7}

 databaseStrategy: # Databases sharding strategy, use default databases
 sharding strategy if absent. sharding strategy below can choose only one
 standard: # Standard sharding scenario for single sharding column
 shardingColumn: # Name of sharding column
 preciseAlgorithmClassName: # Precise algorithm class name used for `=`
 and `IN`. This class need to implements PreciseShardingAlgorithm, and require a no
 argument constructor
 rangeAlgorithmClassName: # Range algorithm class name used for
 `BETWEEN`. This class need to implements RangeShardingAlgorithm, and require a no
 argument constructor
 complex: # Complex sharding scenario for multiple sharding columns
 shardingColumns: # Names of sharding columns. Multiple columns
 separated with comma
 algorithmClassName: # Complex sharding algorithm class name. This class
 need to implements ComplexKeysShardingAlgorithm, and require a no argument
 constructor
 inline: # Inline expression sharding scenario for single sharding column
 shardingColumn: # Name of sharding column
 algorithmInlineExpression: # Inline expression for sharding algorithm
 hint: # Hint sharding strategy
 algorithmClassName: # Hint sharding algorithm class name. This class
 need to implements HintShardingAlgorithm, and require a no argument constructor
 none: # Do not sharding
 tableStrategy: # Tables sharding strategy, Same as databases sharding
 strategy
 keyGenerator:

```

```

column: # Column name of key generator
type: # Type of key generator, use default key generator if absent, and
there are three types to choose, that is, SNOWFLAKE/UUID
props: # Properties, Notice: when use SNOWFLAKE, `max.tolerate.time.
difference.milliseconds` for `SNOWFLAKE` need to be set. To use the generated value
of this algorithm as sharding value, it is recommended to configure `max.vibration.
offset`

bindingTables: # Binding table rule configurations
- <logic_table_name1, logic_table_name2, ...>
- <logic_table_name3, logic_table_name4, ...>
- <logic_table_name_x, logic_table_name_y, ...>
broadcastTables: # Broadcast table rule configurations
- table_name1
- table_name2
- table_name_x

defaultDataSourceName: # If table not configure at table rule, will route to
defaultDataSourceName
defaultDatabaseStrategy: # Default strategy for sharding databases, same as
databases sharding strategy
defaultTableStrategy: # Default strategy for sharding tables, same as tables
sharding strategy
defaultKeyGenerator:
type: # Type of default key generator, use user-defined ones or built-in ones,
e.g. SNOWFLAKE, UUID. Default key generator is `org.apache.shardingsphere.core.
keygen.generator.impl.SnowflakeKeyGenerator`
column: # Column name of default key generator
props: # Properties of default key generator, e.g. `max.tolerate.time.
difference.milliseconds` for `SNOWFLAKE`

masterSlaveRules: # Read-write splitting rule configuration, more details can
reference Read-write splitting part
<data_source_name>: # Data sources configuration, need consist with data source
map, multiple `data_source_name` available
 masterDataSourceName: # more details can reference Read-write splitting part
 slaveDataSourceNames: # more details can reference Read-write splitting part
 loadBalanceAlgorithmType: # more details can reference Read-write splitting
part
 props: # Properties configuration of load balance algorithm
 <property-name>: # property key value pair

props: # Properties
 sql.show: # To show SQLs or not, default value: false
 executor.size: # The number of working threads, default value: CPU count
 check.table.metadata.enabled: # To check the metadata consistency of all the
tables or not, default value : false
 max.connections.size.per.query: # The maximum connection number allocated by each
query of each physical database. default value: 1

```

## Read-Write Split

### Configuration Item Explanation

```

dataSources: # Omit data source configurations; keep it consistent with data
sharding

masterSlaveRule:
 name: # Read-write split data source name
 masterDataSourceName: # Master data source name
 slaveDataSourceNames: # Slave data source name
 - <data_source_name1>
 - <data_source_name2>
 - <data_source_name_x>
 loadBalanceAlgorithmType: # Slave database load balance algorithm type; optional
 value, ROUND_ROBIN and RANDOM, can be omitted if `loadBalanceAlgorithmClassName`
 exists
 props: # Properties configuration of load balance algorithm
 <property-name>: # property key value pair

 props: # Property configuration
 sql.show: # Show SQL or not; default value: false
 executor.size: # Executing thread number; default value: CPU core number
 check.table.metadata.enabled: # Whether to check table metadata consistency when
 it initializes; default value: false
 max.connections.size.per.query: # The maximum connection number allocated by each
 query of each physical database. default value: 1

```

Create a DataSource through the `YamlMasterSlaveDataSourceFactory` factory class:

```

DataSource dataSource = YamlMasterSlaveDataSourceFactory.
createDataSource(yamlFile);

```

## Data Masking

### Configuration Item Explanation

```

dataSource: # Ignore data sources configuration

encryptRule:
 encryptors:
 <encryptor-name>:
 type: # Encryptor type
 props: # Properties, e.g. `aes.key.value` for AES encryptor

```

```
 aes.key.value:
tables:
 <table-name>:
 columns:
 <logic-column-name>:
 plainColumn: # Plaintext column name
 cipherColumn: # Ciphertext column name
 assistedQueryColumn: # AssistedColumns for query, when use
ShardingQueryAssistedEncryptor, it can help query encrypted data
 encryptor: # Encrypt name
```

## Orchestration

### Configuration Item Explanation

```
dataSources: # Omit data source configurations
shardingRule: # Omit sharding rule configurations
masterSlaveRule: # Omit read-write split rule configurations
encryptRule: # Omit encrypt rule configurations

orchestration:
 name: # Orchestration instance name
 overwrite: # Whether to overwrite local configurations with registry center
 configurations; if it can, each initialization should refer to local configurations
 registry: # Registry center configuration
 type: # Registry center type. Example:zookeeper
 serverLists: # The list of servers that connect to registry center, including
 IP and port number; use commas to separate addresses, such as: host1:2181,
 host2:2181
 namespace: # Registry center namespace
 digest: # The token that connects to the registry center; default means there
 is no need for authentication
 operationTimeoutMilliseconds: # Default value: 500 milliseconds
 maxRetries: # Maximum retry time after failing; default value: 3 times
 retryIntervalMilliseconds: # Interval time to retry; default value: 500
 milliseconds
 timeToLiveSeconds: # Living time of temporary nodes; default value: 60 seconds
```

## ShardingSphere-3.x

### Data Sharding

#### Configuration Item Explanation

```

dataSources: # Data sources configuration, multiple `data_source_name` available
 <data_source_name>: # <!!Data source pool implementation class> `!!` means class
 instantiation
 driverClassName: # Class name of database driver
 url: # Database URL
 username: # Database username
 password: # Database password
 # ... Other properties for data source pool

shardingRule:
 tables: # Sharding rule configuration, multiple `logic_table_name` available
 <logic_table_name>: # Name of logic table
 actualDataNodes: # Describe data source names and actual tables, delimiter as
 point, multiple data nodes separated with comma, support inline expression. Absent
 means sharding databases only. Example: ds${0..7}.tbl${0..7}

 databaseStrategy: # Databases sharding strategy, use default databases
 sharding strategy if absent. sharding strategy below can choose only one
 standard: # Standard sharding scenario for single sharding column
 shardingColumn: # Name of sharding column
 preciseAlgorithmClassName: # Precise algorithm class name used for `=`
 and `IN`. This class need to implements PreciseShardingAlgorithm, and require a no
 argument constructor
 rangeAlgorithmClassName: # Range algorithm class name used for
 `BETWEEN`. This class need to implements RangeShardingAlgorithm, and require a no
 argument constructor
 complex: # Complex sharding scenario for multiple sharding columns
 shardingColumns: # Names of sharding columns. Multiple columns
 separated with comma
 algorithmClassName: # Complex sharding algorithm class name. This class
 need to implements ComplexKeysShardingAlgorithm, and require a no argument
 constructor
 inline: # Inline expression sharding scenario for single sharding column
 shardingColumn: # Name of sharding column
 algorithmInlineExpression: # Inline expression for sharding algorithm
 hint: # Hint sharding strategy
 algorithmClassName: # Hint sharding algorithm class name. This class
 need to implements HintShardingAlgorithm, and require a no argument constructor
 none: # Do not sharding
 tableStrategy: # Tables sharding strategy, Same as databases sharding
 strategy

```

```

keyGeneratorColumnName: # Column name of key generator, do not use Key
generator if absent
keyGeneratorClassName: # Key generator, use default key generator if absent.
This class need to implements KeyGenerator, and require a no argument constructor

logicIndex: # Name of logic index. If use `DROP INDEX XXX` SQL in Oracle/
PostgreSQL, This property needs to be set for finding the actual tables
bindingTables: # Binding table rule configurations
- <logic_table_name1, logic_table_name2, ...>
- <logic_table_name3, logic_table_name4, ...>
- <logic_table_name_x, logic_table_name_y, ...>
bindingTables: # Broadcast table rule configurations
- table_name1
- table_name2
- table_name_x

defaultDataSourceName: # If table not configure at table rule, will route to
defaultDataSourceName
defaultDatabaseStrategy: # Default strategy for sharding databases, same as
databases sharding strategy
defaultTableStrategy: # Default strategy for sharding tables, same as tables
sharding strategy
defaultKeyGeneratorClassName: # Default key generator class name, default value
is `io.shardingsphere.core.keygen.DefaultKeyGenerator`. This class need to
implements KeyGenerator, and require a no argument constructor

masterSlaveRules: # Read-write splitting rule configuration, more details can
reference Read-write splitting part
<data_source_name>: # Data sources configuration, need consist with data source
map, multiple `data_source_name` available
 masterDataSourceName: # more details can reference Read-write splitting part
 slaveDataSourceNames: # more details can reference Read-write splitting part
 loadBalanceAlgorithmType: # more details can reference Read-write splitting
part
 loadBalanceAlgorithmClassName: # more details can reference Read-write
splitting part
 configMap: # User-defined arguments
 key1: value1
 key2: value2
 keyx: valuex

props: # Properties
 sql.show: # To show SQLS or not, default value: false
 executor.size: # The number of working threads, default value: CPU count
 check.table.metadata.enabled: # To check the metadata consistency of all the
tables or not, default value : false

configMap: # User-defined arguments

```

```
key1: value1
key2: value2
keyx: valuex
```

## Read-Write Split

### Configuration Item Explanation

```
dataSources: # Ignore data sources configuration, same as sharding

masterSlaveRule:
 name: # Name of master slave data source
 masterDataSourceName: # Name of master data source
 slaveDataSourceNames: # Names of Slave data sources
 - <data_source_name1>
 - <data_source_name2>
 - <data_source_name_x>
 loadBalanceAlgorithmClassName: # Load balance algorithm class name. This class
need to implements MasterSlaveLoadBalanceAlgorithm, and require a no argument
constructor
 loadBalanceAlgorithmType: # Load balance algorithm type, values should be:
`ROUND_ROBIN` or `RANDOM`. Ignore if `loadBalanceAlgorithmClassName` is present

props: # Properties
 sql.show: # To show SQLs or not, default value: false
 executor.size: # The number of working threads, default value: CPU count
 check.table.metadata.enabled: # To check the metadata consistency of all the
tables or not, default value : false

configMap: # User-defined arguments
 key1: value1
 key2: value2
 keyx: valuex
```

Create a DataSource through the `YamlMasterSlaveDataSourceFactory` factory class:

```
DataSource dataSource = MasterSlaveDataSourceFactory.createDataSource(yamlFile);
```

## Orchestration

### Configuration Item Explanation

```

dataSources: # Ignore data sources configuration
shardingRule: # Ignore sharding rule configuration
masterSlaveRule: # Ignore master slave rule configuration

orchestration:
 name: # Name of orchestration instance
 overwrite: # Use local configuration to overwrite registry center or not
 registry: # Registry configuration
 serverLists: # Registry servers list, multiple split as comma. Example:
 host1:2181,host2:2181
 namespace: # Namespace of registry
 digest: # Digest for registry. Default is not need digest.
 operationTimeoutMilliseconds: # Operation timeout time in milliseconds, default
 value is 500 milliseconds
 maxRetries: # Max number of times to retry, default value is 3
 retryIntervalMilliseconds: # Time interval in milliseconds on each retry,
 default value is 500 milliseconds
 timeToLiveSeconds: # Time to live in seconds of ephemeral keys, default value
 is 60 seconds

```

## ShardingSphere-2.x

### Data Sharding

#### Configuration Item Explanation

```

dataSources:
 db0: !!org.apache.commons.dbcp.BasicDataSource
 driverClassName: org.h2.Driver
 url: jdbc:h2:mem:db0;DB_CLOSE_DELAY=-1;DATABASE_TO_UPPER=false;MODE=MySQL
 username: sa
 password:
 maxActive: 100
 db1: !!org.apache.commons.dbcp.BasicDataSource
 driverClassName: org.h2.Driver
 url: jdbc:h2:mem:db1;DB_CLOSE_DELAY=-1;DATABASE_TO_UPPER=false;MODE=MySQL
 username: sa
 password:
 maxActive: 100

shardingRule:
 tables:

```

```
config:
 actualDataNodes: db${0..1}.t_config
t_order:
 actualDataNodes: db${0..1}.t_order_${0..1}
 databaseStrategy:
 standard:
 shardingColumn: user_id
 preciseAlgorithmClassName: io.shardingjdbc.core.yaml.fixture.
SingleAlgorithm
 tableStrategy:
 inline:
 shardingColumn: order_id
 algorithmInlineExpression: t_order_${order_id % 2}
 keyGeneratorColumnName: order_id
 keyGeneratorClass: io.shardingjdbc.core.yaml.fixture.IncrementKeyGenerator
t_order_item:
 actualDataNodes: db${0..1}.t_order_item_${0..1}
 # The strategy of binding the rest of the tables in the table is the same as
the strategy of the first table
 databaseStrategy:
 standard:
 shardingColumn: user_id
 preciseAlgorithmClassName: io.shardingjdbc.core.yaml.fixture.
SingleAlgorithm
 tableStrategy:
 inline:
 shardingColumn: order_id
 algorithmInlineExpression: t_order_item_${order_id % 2}
bindingTables:
 - t_order,t_order_item
 # Default database sharding strategy
defaultDatabaseStrategy:
 none:
defaultTableStrategy:
 complex:
 shardingColumns: id, order_id
 algorithmClassName: io.shardingjdbc.core.yaml.fixture.MultiAlgorithm
props:
 sql.show: true
```

## Read-Write Split

### concept

In order to relieve the pressure on the database, the write and read operations are separated into different data sources. The write library is called the master library, and the read library is called the slave library. One master library can be configured with multiple slave libraries.

### Supported

1. Provides a read-write separation configuration with one master and multiple slaves, which can be used independently or with sub-databases and sub-meters.
2. Independent use of read-write separation to support SQL transparent transmission.
3. In the same thread and the same database connection, if there is a write operation, subsequent read operations will be read from the main library to ensure data consistency.
4. Spring namespace.
5. Hint-based mandatory main library routing.

### Unsupported

1. Data synchronization between the master library and the slave library.
2. Data inconsistency caused by the data synchronization delay of the master library and the slave library.
3. Double writing or multiple writing in the main library.

### rule configuration

```
dataSources:
 db_master: !!org.apache.commons.dbcp.BasicDataSource
 driverClassName: org.h2.Driver
 url: jdbc:h2:mem:db_master;DB_CLOSE_DELAY=-1;DATABASE_TO_UPPER=false;MODE=MYSQL
 username: sa
 password:
 maxActive: 100
 db_slave_0: !!org.apache.commons.dbcp.BasicDataSource
 driverClassName: org.h2.Driver
 url: jdbc:h2:mem:db_slave_0;DB_CLOSE_DELAY=-1;DATABASE_TO_UPPER=false;
 MODE=MYSQL
 username: sa
 password:
 maxActive: 100
 db_slave_1: !!org.apache.commons.dbcp.BasicDataSource
```

```

driverClassName: org.h2.Driver
url: jdbc:h2:mem:db_slave_1;DB_CLOSE_DELAY=-1;DATABASE_TO_UPPER=false;
MODE=MYSQL
username: sa
password:
maxActive: 100

masterSlaveRule:
 name: db_ms
 masterDataSourceName: db_master
 slaveDataSourceNames: [db_slave_0, db_slave_1]
 configMap:
 key1: value1

```

Create a DataSource through the MasterSlaveDataSourceFactory factory class:

```
DataSource dataSource = MasterSlaveDataSourceFactory.createDataSource(yamlFile);
```

## Orchestration

### Configuration Item Explanation

Zookeeper sharding table and database Orchestration Configuration Item Explanation

```

dataSources: Data sources configuration

shardingRule: Sharding rule configuration

orchestration: Zookeeper Orchestration Configuration
 name: Orchestration name
 overwrite: Whether to overwrite local configurations with config center
 configurations; if it can, each initialization should refer to local configurations
 zookeeper: Registry center Configuration
 namespace: Registry center namespace
 serverLists: The list of servers that connect to governance instance, including
 IP and port number, use commas to separate, such as: host1:2181,host2:2181
 baseSleepTimeMilliseconds: The initial millisecond value of the interval to
 wait for retry
 maxSleepTimeMilliseconds: The maximum millisecond value of the interval to wait
 for retry
 maxRetries: The maximum retry count
 sessionTimeoutMilliseconds: The session timeout milliseconds
 connectionTimeoutMilliseconds: The connecton timeout milliseconds
 digest: Permission token to connect to Zookeeper. default no authorization is
 required

```

Etd sharding table and database Orchestration Configuration Item Explanation

```
dataSources: Data sources configuration

shardingRule: Sharding rule configuration

orchestration: Etcd Orchestration Configuration
 name: Orchestration name
 overwrite: Whether to overwrite local configurations with config center
 configurations; if it can, each initialization should refer to local configurations
 etcd: Registry center Configuration
 serverLists: The list of servers that connect to governance instance, including
 IP and port number, use commas to separate, such as: http://host1:2379,http://
 host2:2379
 timeToLiveSeconds: Time to live seconds for ephemeral nodes
 timeoutMilliseconds: The request timeout milliseconds
 maxRetries: The maximum retry count
 retryIntervalMilliseconds: The retry interval milliseconds
```

Sharding table and database Data source construction method

```
DataSource dataSource = OrchestrationShardingDataSourceFactory.
createDataSource(yamlFile);
```

Read-Write split Data source construction method

```
DataSource dataSource = OrchestrationMasterSlaveDataSourceFactory.
createDataSource(yamlFile);
```

## Java API

### 5.0.0-beta

#### Sharding

##### Root Configuration

Class name: org.apache.shardingsphere.sharding.api.config.ShardingRuleConfiguration

Attributes:

Name	DataType	Description	Default Value
tables (+)	Collection<ShardingTableRuleConfiguration>	Sharding table rules	.
autoTables (+)	Collection<ShardingAutoTableRuleConfiguration>	Sharding automatic table rules	.
bindingTableGroups (*)	Collection<String>	Binding table rules	Empty
broadcastTables (*)	Collection<String>	Broadcast table rules	Empty
defaultDatabaseShardingStrategy (?)	Sharding StrategyConfiguration	Default database sharding strategy	Not sharding
defaultTableShardingStrategy (?)	Sharding StrategyConfiguration	Default table sharding strategy	Not sharding
defaultKeyGeneratorStrategy (?)	KeyGeneratorConfiguration	Default key generator	Snowflake
shardingAlgorithms (+)	Map<String, ShardingSphereAlgorithmConfiguration>	Sharding algorithm name and configurations	None
keyGenerators (?)	Map<String, ShardingSphereAlgorithmConfiguration>	Key generate algorithm name and configurations	None

## Sharding Table Configuration

Class name: org.apache.shardingsphere.sharding.api.config.ShardingTableRuleConfiguration

Attributes:

Name*	<i>DataType</i>	<i>Description</i>	<i>Default Value</i>
logic Table	String	Name of sharding logic table	.
actualDataNodes (?)	String	Describe data source names and actual tables, delimiter as point. Multiple data nodes split by comma, support inline expression	Broadcast table or databases sharding only
databaseShardingStrategy (?)	ShardingStrategyConfiguration	Databases sharding strategy	Use default databases sharding strategy
tableShardingStrategy (?)	ShardingStrategyConfiguration	Tables sharding strategy	Use default tables sharding strategy
keyGeneratorStrategy (?)	KeyGeneratorConfiguration	Key generator configuration	Use default key generator

### Sharding Automatic Table Configuration

Class name: org.apache.shardingsphere.sharding.api.config.ShardingAutoTableRuleConfiguration

Attributes:

<i>Name</i>	<i>DataType</i>	<i>Description</i>	<i>Default Value</i>
logicTable	String	Name of sharding logic table	.
actualDataSources (?)	String	Data source names. Multiple data nodes split by comma	Use all configured data sources
shardingStrategy (?)	ShardingStrategyConfiguration	Sharding strategy	Use default sharding strategy
keyGeneratorStrategy (?)	KeyGeneratorConfiguration	Key generator configuration	Use default key generator

## Sharding Strategy Configuration

### Standard Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.StandardShardingStrategyConfiguration

Attributes:

Name	DataType	Description
shardingColumn	String	Sharding column name
shardingAlgorithmName	String	Sharding algorithm name

### Complex Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.ComplexShardingStrategyConfiguration

Attributes:

Name	DataType	Description
shardingColumns	String	Sharding column name, separated by commas
shardingAlgorithmName	String	Sharding algorithm name

### Hint Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.HintShardingStrategyConfiguration

Attributes:

Name	DataType	Description
shardingAlgorithmName	String	Sharding algorithm name

### None Sharding Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.sharding.NoneShardingStrategyConfiguration

Attributes: None

Please refer to [Built-in Sharding Algorithm List](#) for more details about type of algorithm.

## Key Generate Strategy Configuration

Class name: org.apache.shardingsphere.sharding.api.config.strategy.keygen.KeyGenerateStrategyConfiguration

Attributes:

Name	DataType	Description
column	String	Column name of key generate
keyGeneratorName	String	key generate algorithm name

Please refer to [Built-in Key Generate Algorithm List](#) for more details about type of algorithm.

## Readwrite-splitting

### Root Configuration

Class name: ReadwriteSplittingRuleConfiguration

Attributes:

Name*	DataType	Description
dataSources (+)	Collection<ReadwriteSplittingDataSourceRuleConfiguration>	Data sources of write and reads
loadBalancers (*)	Map<String, ShardingSphereAlgorithmConfiguration>	Load balance algorithm name and configurations of replica data sources

## Readwrite-splitting Data Source Configuration

Class name: ReadwriteSplittingDataSourceRuleConfiguration

Attributes:

Name	DataType	Description	Default Value
name	String	Readwrite-splitting data source name	.
writeDataSourcesName	String	Write sources source name	.
readDataSourceNames (+)	Collection<String>	Read sources source name list	.
loadBalancerName (?)	String	Load balance algorithm name of replica sources	Round robin load balance algorithm

Please refer to [Built-in Load Balance Algorithm List](#) for more details about type of algorithm.

## Encryption

### Root Configuration

Class name: org.apache.shardingsphere.encrypt.api.config.EncryptRuleConfiguration

Attributes:

Name	DataType	Description	Default Value
tables (+)	Collection<EncryptTableRuleConfiguration>	Encrypt table rule configurations	
encryptors (+)	Map<String, ShardingSphereAlgorithmConfiguration>	Encrypt algorithm name and configurations	
queryWithCipherColumn (?)	boolean	Whether query with cipher column for data encrypt. User you can use plaintext to query if have	true

## Encrypt Table Rule Configuration

Class name: org.apache.shardingsphere.encrypt.api.config.rule.EncryptTableRuleConfiguration

Attributes:

• Name*	<i>DataType</i>	<i>Description</i>
name	String	Table name
columns (+)	Collection <EncryptColumnRuleConfiguration>	Encrypt column rule configurations

## Encrypt Column Rule Configuration

Class name: org.apache.shardingsphere.encrypt.api.config.rule.EncryptColumnRuleConfiguration

Attributes:

<i>Name</i>	<i>DataType</i>	<i>Description</i>
logicColumn	String	Logic column name
cipherColumn	String	Cipher column name
assistedQueryColumn (?)	String	Assisted query column name
plainColumn (?)	String	Plain column name
encryptorName	String	Encrypt algorithm name

## Encrypt Algorithm Configuration

Class name: org.apache.shardingsphere.infra.config.algorithm.ShardingSphereAlgorithmConfiguration

Attributes:

<i>Name</i>	<i>DataType</i>	<i>Description</i>
name	String	Encrypt algorithm name
type	String	Encrypt algorithm type
properties	Properties	Encrypt algorithm properties

Please refer to [Built-in Encrypt Algorithm List](#) for more details about type of algorithm.

## Shadow DB

### Root Configuration

Class name: org.apache.shardingsphere.shadow.api.config.ShadowRuleConfiguration

Attributes:

Name	Data Type	Description
column	String	Shadow field name in SQL, SQL with a value of true will be routed to the shadow database for execution
sourceDataSources	List <String>	Source data source names
shadowDataSources	List <String>	Shadow data source names

## Governance

### Configuration Item Explanation

### Management

#### Configuration Entrance

Class name: org.apache.shardingsphere.governance.repository.api.config.GovernanceConfiguration

Attributes:

Name	Data Type	Description
name	String	Governance instance name
registryCenterConfiguration	RegistryCenterConfiguration	Config of registry-center

The type of registryCenter could be Zookeeper or Etcd.

#### Governance Instance Configuration

Class name: org.apache.shardingsphere.governance.repository.api.config.ClusterPersistRepositoryConfiguration

Attributes:

Name *	Data Type *	Description
type	String	Governance instance type, such as: Zookeeper, etcd
serverLists	String	The list of servers that connect to governance instance, including IP and port number, use commas to separate, such as: host1:2181,host2:2181
props	Properties	Properties for center instance config, such as options of zookeeper
overwrite	boolean	Local configurations overwrite config center configurations or not; if they overwrite, each start takes reference of local configurations

#### ZooKeeper Properties Configuration

Name	Data Type *	Description	Default Value
digest (?)	String	Connect to authority tokens in registry center	No need for authority
operationTimeoutMilliseconds (?)	int	The operation timeout milliseconds	500 milliseconds
maxRetries (?)	int	The maximum retry count	3
retryIntervalMilliseconds (?)	int	The retry interval milliseconds	500 milliseconds
timeToLiveSeconds (?)	int	Time to live seconds for ephemeral nodes	60 seconds

#### Etcd Properties Configuration

Name	Data Type	Description	Default Value
timeToLiveSeconds (?)	long	Time to live seconds for data persist	30 seconds

**ShardingSphere-4.x****Sharding****ShardingDataSourceFactory**

<i>Name</i>	<i>DataType</i>	<i>Explanation</i>
dataSourceMap	Map<String, DataSource>	Data sources configuration
shardingRuleConfig	ShardingRuleConfiguration	Data sharding configuration rule
props (?)	Properties	Property configurations

**ShardingRuleConfiguration**

<i>Name</i>	<i>DataType</i>	<i>Explanation</i>
tableRuleConfigs	Collection	Sharding rule list
bindingTableGroups (?)	Collection	Binding table rule list
broadcastTables (?)	Collection	Broadcast table rule list
defaultDataSourceName (?)	String	Tables not configured with sharding rules will locate according to default data sources
defaultDatabaseShardingStrategyConfig (?)	ShardingStrategyConfiguration	Default database sharding strategy
defaultTableShardingStrategyConfig (?)	ShardingStrategyConfiguration	Default table sharding strategy
defaultKeyGeneratorConfig (?)	KeyGeneratorConfiguration	Default key generator configuration, use user-defined ones or built-in ones, e.g. SNOWFLAKE/UUID. Default key generator is org.apache.shardingsphere.core.keygen.generator.impl.SnowflakeKeyGenerator
masterSlaveRuleConfigs (?)	Collection	Read-write split rules, default indicates not using read-write split

**TableRuleConfiguration**

Name	DataType	Explanation
logicTable	String	Name of logic table
actual-DataNodes (?)	String	Describe data source names and actual tables, delimiter as point, multiple data nodes split by comma, support inline expression. Absent means sharding databases only. Example: ds: math:{0..7}.tbl{0..7}
database-ShardingStrategyConfig (?)	ShardingStrategy-Configuration	Databases sharding strategy, use default databases sharding strategy if absent
table-ShardingStrategyConfig (?)	ShardingStrategy-Configuration	Tables sharding strategy, use default databases sharding strategy if absent
key GeneratorConfig (?)	KeyGeneratorConfiguration	Key generator configuration, use default key generator if absent
encryptorConfiguration (?)	EncryptorConfiguration	Encrypt generator configuration

**StandardShardingStrategyConfiguration****Subclass of ShardingStrategyConfiguration.**

Name	DataType	Explanation
shardingColumn	String	Sharding column name
preciseShardingAlgorithm	PreciseShardingAlgorithm	Precise sharding algorithm used in = and IN
rangeShardingAlgorithm (?)	RangeShardingAlgorithm	Range sharding algorithm used in BETWEEN

### ComplexShardingStrategyConfiguration

The implementation class of `ShardingStrategyConfiguration`, used in complex sharding situations with multiple sharding keys.

Name	DataType	Explanation
shardingColumns	String	Sharding column name, separated by commas
shardingAlgorithm	Complex KeysShardingAlgorithm	Complex sharding algorithm

### InlineShardingStrategyConfiguration

The implementation class of `ShardingStrategyConfiguration`, used in sharding strategy of inline expression.

Name	DataType	Explanation
shardingColumns	String	Sharding column name, separated by commas
algorithmExpression	String	Inline expression of sharding strategies, should conform to groovy syntax; refer to <a href="#">Inline expression</a> for more details

### HintShardingStrategyConfiguration

The implementation class of `ShardingStrategyConfiguration`, used to configure hint sharding strategies.

Name	DataType	Description
shardingAlgorithm	HintShardingAlgorithm	Hint sharding algorithm

### NoneShardingStrategyConfiguration

The implementation class of `ShardingStrategyConfiguration`, used to configure none-sharding strategies.

## KeyGeneratorConfiguration

Name	DataType	Description
col- umn	String	Column name of key generator
type	String	Type of key generator, use user-defined ones or built-in ones, e.g. SNOWFLAKE, UUID
props	Proper- ties	The Property configuration of key generators

## Properties

Property configuration that can include these properties of these key generators.

SNOWFLAKE

Name	• Data Type*	Explanation
max.tolerate.time.difference.milliseconds (?)	long	The max tolerate time for different server's time difference in milliseconds, the default value is 10
max.vibration.offset (?)	int	The max upper limit value of vibrate number, range [0, 4096), the default value is 1. Notice: To use the generated value of this algorithm as sharding value, it is recommended to configure this property. The algorithm generates key mod $2^n$ ( $2^n$ is usually the sharding amount of tables or databases) in different milliseconds and the result is always 0 or 1. To prevent the above sharding problem, it is recommended to configure this property, its value is $(2^n)-1$

## Readwrite-splitting

### MasterSlaveDataSourceFactory

Name	DataType	Explanation
dataSourceMap	Map<String, DataSource>	Mapping of data source and its name
master SlaveRuleConfig	MasterSlaveRuleConfiguration	Master slave rule configuration
props (?)	Properties	Property configurations

### MasterSlaveRuleConfiguration

Name	DataType	Explanation
name	String	Readwrite-splitting data source name
masterDataSourceName	String	Master database source name
slaveDataSourceNames	Collection	Slave database source name list
loadBalanceAlgorithm (?)	MasterSlaveLoadBalanceAlgorithm	Slave database load balance

## Properties

Property configuration items, can be of the following properties.

Name	• Data Type*	Explanation
sql.show (?)	boolean	Print SQL parse and rewrite log or not, default value: false
executor.size (?)	int	Be used in work thread number implemented by SQL; no limits if it is 0. default value: 0
max.connections.size.per.query (?)	int	The maximum connection number allocated by each query of each physical database, default value: 1
check.table.metadata.enabled (?)	boolean	Check meta-data consistency or not in initialization, default value: false

## Data Masking

### EncryptDataSourceFactory

Name	DataType	Explanation
dataSource	DataSource	Data source
encryptRuleConfig	EncryptRuleConfiguration	encrypt rule configuration
props (?)	Properties	Property configurations

### EncryptRuleConfiguration

Name	DataType	Explanation
encryp-tors	Map<String, EncryptorRuleConfiguration>	Encryptor names and encryptors
tables	Map<String, EncryptTableRuleConfiguration>	Encrypt table names and encrypt tables

## Properties

Property configuration items, can be of the following properties.

Name	• Data Type*	Explanation
sql.show (?)	boolean	Print SQL parse and rewrite log or not, default value: false
query.with.cipher.column (?)	boolean	When there is a plainColumn, use cipherColumn or not to query, default value: true

## Orchestration

### OrchestrationShardingDataSourceFactory

Name	DataType	Explanation
dataSourceMap	Map<String, DataSource>	Same as `` ShardingDataSourceFactory``
shardingRuleConfig	ShardingRuleConfiguration	Same as `` ShardingDataSourceFactory``
props (?)	Properties	Same as `` ShardingDataSourceFactory``
orchestrationConfig	OrchestrationConfiguration	Orchestration rule configurations

### OrchestrationMasterSlaveDataSourceFactory

Name	DataType	Explanation
dataSourceMap	Map<String, DataSource>	Same as <code>MasterSlaveDataSourceFactory</code>
master SlaveRule-Config	MasterSlaveRuleConfiguration	Same as <code>MasterSlaveDataSourceFactory</code>
configMap (?)	Map<String, Object>	Same as <code>MasterSlaveDataSourceFactory</code>
props (?)	Properties	Same as `` <code>ShardingDataSourceFactory</code> ``
orchestrationConfig	OrchestrationConfiguration	Orchestration rule configurations

### OrchestrationEncryptDataSourceFactory

Name	DataType	Explanation
dataSource	DataSource	Same as ` <code>EncryptDataSourceFactory</code> `
encryptRuleConfig	EncryptRuleConfiguration	Same as ` <code>EncryptDataSourceFactory</code> `
props (?)	Properties	Same as ` <code>EncryptDataSourceFactory</code> `
orchestrationConfig	OrchestrationConfiguration	Orchestration rule configurations

### OrchestrationConfiguration

Name	DataType	Explanation
instanceConfiguration-Map	Map<String, CenterConfiguration>	config map of config-center&registry-center, the key is center's name, the value is the config-center/registry-center

## CenterConfiguration

Name	Data Type	Explanation
type	String	The type of center instance(zookeeper/etcd/apollo/nacos)
proper-ties	String	Properties for center instance config, such as options of zookeeper
orches-tra-tionType	String	The type of orchestration center: config-center or registry-center, if both, use "setOrchestrationType( "registry_center,config_center" );"
serverLists	String	Connect to server lists in center, including IP address and port number; addresses are separated by commas, such as host1:2181,host2:2181
names-pace(?)	String	Namespace of center instance

## Properties

Property configuration items, can be of the following properties.

Name	• Data Type*	Explanation
overwrite	boolean	Local configurations overwrite center configurations or not; if they overwrite, each start takes reference of local configurations

If type of center is zookeeper with config-center&registry-center, properties could be set with the follow options:

Name	• Data Type*	Explanation
digest (?)	String	Connect to authority tokens in registry center; default indicates no need for authority
operationTimeoutMilliseconds (?)	int	The operation timeout millisecond number, default to be 500 milliseconds
maxRetries (?)	int	The maximum retry count, default to be 3 times
retryIntervalMilliseconds (?)	int	The retry interval millisecond number, default to be 500 milliseconds
timeToLiveSeconds (?)	int	The living time for temporary nodes, default to be 60 seconds

If type of center is etcd with config-center&registry-center, properties could be set with the follow options:

Name	• Data Type*	Explanation
timeToLiveSeconds (?)	long	The etcd TTL in seconds, default to be 30 seconds

If type of center is apollo with config-center&registry-center, properties could be set with the follow options:

Name	• Data Type*	Explanation
appId (?)	String	Apollo appId, default to be "APOLLO_SHARDINGSPHERE"
env (?)	String	Apollo env, default to be "DEV"
clusterName (?)	String	Apollo clusterName, default to be "default"
administrator (?)	String	Apollo administrator, default to be ""
token (?)	String	Apollo token, default to be ""
portalUrl (?)	String	Apollo portalUrl, default to be ""
connectTimeout (?)	int	Apollo connectTimeout, default to be 1000 milliseconds
readTimeout (?)	int	Apollo readTimeout, default to be 5000 milliseconds

If type of center is nacos with config-center&registry-center, properties could be set with the follow options:

Name	Data Type	Explanation
group (?)	String	Nacos group, “SHARDING_SPHERE_DEFAULT_GROUP” in default
timeout (?)	long	Nacos timeout, default to be 3000 milliseconds

## ShardingSphere-3.x

### Sharding

#### ShardingDataSourceFactory

Name	DataType	Explanation
dataSourceMap	Map<String, DataSource>	Data sources configuration
shardingRuleConfig	ShardingRuleConfiguration	Data sharding configuration rule
configMap (?)	Map<String, Object>	Config map
props (?)	Properties	Property configurations

#### ShardingRuleConfiguration

Name	DataType	Explanation
tableRuleConfigs	Collection	Table rule configuration
bindingTableGroups (?)	Collection	Binding table groups
broadcastTables (?)	Collection	Broadcast table groups
defaultDataSourceName (?)	String	Tables not configured with sharding rules will locate according to default data sources
defaultDatabaseShardingStrategyConfig (?)	ShardingStrategyConfiguration	Default database sharding strategy
defaultTableShardingStrategyConfig (?)	ShardingStrategyConfiguration	Default table sharding strategy
defaultKeyGeneratorConfig (?)	KeyGenerator	Default key generator, default value is info.shardingsphere.core.key.DefaultKeyGenerator
masterSlaveRuleConfigs (?)	Collection	Read-write splitting rule configuration

**TableRuleConfiguration**

<i>Name</i>	<i>DataType</i>	<i>Explanation</i>
logicTable	String	Name of logic table
actual-DataNodes (?)	String	Describe data source names and actual tables, delimiter as point, multiple data nodes split by comma, support inline expression. Absent means sharding databases only. Example: ds: math:{0..7}.tbl{0..7}
database-ShardingStrategyConfig (?)	ShardingStrategy-Configuration	Databases sharding strategy, use default databases sharding strategy if absent
table-ShardingStrategyConfig (?)	ShardingStrategy-Configuration	Tables sharding strategy, use default databases sharding strategy if absent
logicIndex (?)	String	Name if logic index. If use DROP INDEX XXX SQL in Oracle/PostgreSQL, This property needs to be set for finding the actual tables
key GeneratorConfig (?)	String	Key generator column name, do not use Key generator if absent
keyGenerator (?)	KeyGenerator	Key generator, use default key generator if absent

**StandardShardingStrategyConfiguration**

Subclass of ShardingStrategyConfiguration.

<i>Name</i>	<i>DataType</i>	<i>Explanation</i>
shardingColumn	String	Sharding column name
preciseShardingAlgorithm	PreciseShardingAlgorithm	Precise sharding algorithm used in = and IN
rangeShardingAlgorithm (?)	RangeShardingAlgorithm	Range sharding algorithm used in BETWEEN

## ComplexShardingStrategyConfiguration

Subclass of ShardingStrategyConfiguration.

Name	DataType	Explanation
shardingColumns	String	Sharding column name, separated by commas
shardingAlgorithm	Complex KeysShardingAlgorithm	Complex sharding algorithm

## InlineShardingStrategyConfiguration

Subclass of ShardingStrategyConfiguration.

Name	DataType	Explanation
shardingColumns	String	Sharding column name, separated by commas
algorithmExpression	String	Inline expression of sharding strategies, should conform to groovy syntax; refer to Inline expression for more details

## HintShardingStrategyConfiguration

Subclass of ShardingStrategyConfiguration.

Name	DataType	Description
shardingAlgorithm	HintShardingAlgorithm	Hint sharding algorithm

## NoneShardingStrategyConfiguration

Subclass of ShardingStrategyConfiguration.

### Properties

Enumeration of properties.

Name	Data Type*	Explanation
sql.show (?)	boolean	Print SQL parse and rewrite log, default value: false
executor.size (?)	int	The number of SQL execution threads, zero means no limit. default value: 0
max.connections.size.per.query (?)	int	Max connection size for every query to every actual database. default value: 1
check.table.metadata.enabled (?)	boolean	Check the metadata consistency of all the tables, default value : false

## configMap

User-defined arguments.

## ReadWrite-splitting

### MasterSlaveDataSourceFactory

Name	DataType	Description
dataSourceMap	Map<String, DataSource>	Map of data sources and their names
masterSlaveRuleConfig	MasterSlaveRuleConfiguration	Master slave rule configuration
configMap (?)	Map<String, Object>	Config map
props (?)	Properties	Properties

### MasterSlaveRuleConfiguration

Name	DataType	Description
name	String	Name of master slave data source
masterDataSourceName	String	Name of master data source
slaveDataSourceNames	Collection	Names of Slave data sources
loadBalanceAlgorithm (?)	MasterSlaveLoadBalanceAlgorithm	Load balance algorithm

**configMap**

User-defined arguments.

**PropertiesConstant**

Enumeration of properties.

Name	• Dat aTy pe*	Description
sql.show (?)	boolean	To show SQLS or not, default value: false
executor.size (?)	int	The number of working threads, default value: CPU count
max.connections.size.per.query (?)	int	Max connection size for every query to every actual database. default value: 1
check.table.metadata.enabled (?)	boolean	Check the metadata consistency of all the tables, default value : false

**Orchestration****OrchestrationShardingDataSourceFactory**

Name	DataType	Explanation
dataSourceMap	Map<String, DataSource>	Same as `` ShardingDataSourceFactory``
shardingRuleConfig	ShardingRuleConfiguration	Same as `` ShardingDataSourceFactory``
configMap (?)	Map<String, Object>	Same with `` ShardingDataSourceFactory``
props (?)	Properties	Same as `` ShardingDataSourceFactory``
orchestrationConfig	OrchestrationConfiguration	Orchestration rule configurations

## OrchestrationMasterSlaveDataSourceFactory

Name	DataType	Explanation
dataSourceMap	Map<String, DataSource>	Same as MasterSlaveDataSourceFactory
masterSlaveRuleConfig	MasterSlaveRuleConfiguration	Same as MasterSlaveDataSourceFactory
configMap (?)	Map<String, Object>	Same as MasterSlaveDataSourceFactory
props (?)	Properties	Same as ``ShardingDataSourceFactory``
orchestrationConfig	OrchestrationConfiguration	Orchestration configurations

## OrchestrationConfiguration

Name	DataType	Explanation
name	String	Name of orchestration instance
overwrite	boolean	Use local configuration to overwrite registry center or not
regCenterConfig	RegistryCenterConfiguration	Registry center configuration

## RegistryCenterConfiguration

Name	DataType	Explanation
serverLists	String	Registry servers list, multiple split as comma. Example: host1:2181,host2:2181
namespace (?)	String	Namespace of registry
digest (?)	String	Digest for registry. Default is not need digest.
operationTimeoutMilliseconds (?)	int	Operation timeout time in milliseconds. Default value is 500 milliseconds.
maxRetries (?)	int	Max number of times to retry. Default value is 3
retryIntervalMilliseconds (?)	int	Time interval in milliseconds on each retry. Default value is 500 milliseconds.
timeToLiveSeconds (?)	int	Time to live in seconds of ephemeral keys. Default value is 60 seconds.

## ShardingSphere-2.x

### ReadWrite-splitting

#### concept

In order to relieve the pressure on the database, the write and read operations are separated into different data sources. The write library is called the master library, and the read library is called the slave library. One master library can be configured with multiple slave libraries.

#### Supported

1. Provides a readwrite-splitting configuration with one master and multiple slaves, which can be used independently or with sub-databases and sub-meters.
2. Independent use of readwrite-splitting to support SQL transparent transmission.
3. In the same thread and the same database connection, if there is a write operation, subsequent read operations will be read from the main library to ensure data consistency.
4. Spring namespace.
5. Hint-based mandatory main library routing.

#### Unsupported

1. Data synchronization between the master library and the slave library.
2. Data inconsistency caused by the data synchronization delay of the master library and the slave library.
3. Double writing or multiple writing in the main library.

### Code development example

#### only readwrite-splitting

```
// Constructing a readwrite-splitting data source, the readwrite-splitting data
source implements the DataSource interface, which can be directly processed as a
data source. masterDataSource, slaveDataSource0, slaveDataSource1, etc. are real
data sources configured using connection pools such as DBCP
Map<String, DataSource> dataSourceMap = new HashMap<>();
dataSourceMap.put("masterDataSource", masterDataSource);
dataSourceMap.put("slaveDataSource0", slaveDataSource0);
dataSourceMap.put("slaveDataSource1", slaveDataSource1);

// Constructing readwrite-splitting configuration
MasterSlaveRuleConfiguration masterSlaveRuleConfig = new
MasterSlaveRuleConfiguration();
```

```

masterSlaveRuleConfig.setName("ms_ds");
masterSlaveRuleConfig.setMasterDataSourceName("masterDataSource");
masterSlaveRuleConfig.getSlaveDataSourceNames().add("slaveDataSource0");
masterSlaveRuleConfig.getSlaveDataSourceNames().add("slaveDataSource1");

DataSource dataSource = MasterSlaveDataSourceFactory.
createDataSource(dataSourceMap, masterSlaveRuleConfig);

```

### sharding table and database + readwrite-splitting

```

// Constructing a readwrite-splitting data source, the readwrite-splitting data
// source implements the DataSource interface, which can be directly processed as a
// data source. masterDataSource, slaveDataSource0, slaveDataSource1, etc. are real
// data sources configured using connection pools such as DBCP
Map<String, DataSource> dataSourceMap = new HashMap<>();
dataSourceMap.put("masterDataSource0", masterDataSource0);
dataSourceMap.put("slaveDataSource00", slaveDataSource00);
dataSourceMap.put("slaveDataSource01", slaveDataSource01);

dataSourceMap.put("masterDataSource1", masterDataSource1);
dataSourceMap.put("slaveDataSource10", slaveDataSource10);
dataSourceMap.put("slaveDataSource11", slaveDataSource11);

// Constructing readwrite-splitting configuration
MasterSlaveRuleConfiguration masterSlaveRuleConfig0 = new
MasterSlaveRuleConfiguration();
masterSlaveRuleConfig0.setName("ds_0");
masterSlaveRuleConfig0.setMasterDataSourceName("masterDataSource0");
masterSlaveRuleConfig0.getSlaveDataSourceNames().add("slaveDataSource00");
masterSlaveRuleConfig0.getSlaveDataSourceNames().add("slaveDataSource01");

MasterSlaveRuleConfiguration masterSlaveRuleConfig1 = new
MasterSlaveRuleConfiguration();
masterSlaveRuleConfig1.setName("ds_1");
masterSlaveRuleConfig1.setMasterDataSourceName("masterDataSource1");
masterSlaveRuleConfig1.getSlaveDataSourceNames().add("slaveDataSource10");
masterSlaveRuleConfig1.getSlaveDataSourceNames().add("slaveDataSource11");

// Continue to create ShardingDataSource through ShardingSlaveDataSourceFactory
ShardingRuleConfiguration shardingRuleConfig = new ShardingRuleConfiguration();
shardingRuleConfig.getMasterSlaveRuleConfigs().add(masterSlaveRuleConfig0);
shardingRuleConfig.getMasterSlaveRuleConfigs().add(masterSlaveRuleConfig1);

DataSource dataSource = ShardingDataSourceFactory.createDataSource(dataSourceMap,
shardingRuleConfig);

```

## ShardingSphere-1.x

### Readwrite-splitting

#### concept

In order to relieve the pressure on the database, the write and read operations are separated into different data sources. The write library is called the master library, and the read library is called the slave library. One master library can be configured with multiple slave libraries.

#### Supported

1. Provides a readwrite-splitting configuration with one master and multiple slaves, which can be used independently or with sub-databases and sub-meters.
2. In the same thread and the same database connection, if there is a write operation, subsequent read operations will be read from the main library to ensure data consistency.
3. Spring namespace.
4. Hint-based mandatory main library routing.

#### Unsupported

1. Data synchronization between the master library and the slave library.
2. Data inconsistency caused by the data synchronization delay of the master library and the slave library.
3. Double writing or multiple writing in the main library.

#### Code development example

```
// Constructing a readwrite-splitting data source, the readwrite-splitting data
source implements the DataSource interface, which can be directly processed as a
data source. masterDataSource, slaveDataSource0, slaveDataSource1, etc. are real
data sources configured using connection pools such as DBCP
Map<String, DataSource> slaveDataSourceMap0 = new HashMap<>();
slaveDataSourceMap0.put("slaveDataSource00", slaveDataSource00);
slaveDataSourceMap0.put("slaveDataSource01", slaveDataSource01);
// You can choose the master-slave library load balancing strategy, the default is
ROUND_ROBIN, and there is RANDOM to choose from, or customize the load strategy
DataSource masterSlaveDs0 = MasterSlaveDataSourceFactory.createDataSource("ms_0",
"masterDataSource0", masterDataSource0, slaveDataSourceMap0,
MasterSlaveLoadBalanceStrategyType.ROUND_ROBIN);

Map<String, DataSource> slaveDataSourceMap1 = new HashMap<>();
```

```

slaveDataSourceMap1.put("slaveDataSource10", slaveDataSource10);
slaveDataSourceMap1.put("slaveDataSource11", slaveDataSource11);
DataSource masterSlaveDs1 = MasterSlaveDataSourceFactory.createDataSource("ms_1",
"masterDataSource1", masterDataSource1, slaveDataSourceMap1,
MasterSlaveLoadBalanceStrategyType.ROUND_ROBIN);

// Constructing readwrite-splitting configuration
Map<String, DataSource> dataSourceMap = new HashMap<>();
dataSourceMap.put("ms_0", masterSlaveDs0);
dataSourceMap.put("ms_1", masterSlaveDs1);

```

## Spring namespace configuration change history

### ShardingSphere-5.0.0-beta

#### Sharding

##### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/sharding/sharding-5.0.0.xsd>

<sharding:rule />

Name	Type	Description
id	Attribute	Spring Bean Id
table-rules (?)	Tag	Sharding table rule configuration
auto-table-rules (?)	Tag	Automatic sharding table rule configuration
binding-table-rules (?)	Tag	Binding table rule configuration
broadcast-table-rules (?)	Tag	Broadcast table rule configuration
default-database-strategy-ref (?)	Attribute	Default database strategy name
default-table-strategy-ref (?)	Attribute	Default table strategy name
default-key-generate-strategy-ref (?)	Attribute	Default key generate strategy name
default-sharding-column (?)	Attribute	Default sharding column name

<sharding:table-rule />

Name	Type	Description
logic-table	Attribute	Logic table name
actual-data-nodes	Attribute	Describe data source names and actual tables, delimiter as point, multiple data nodes separated with comma, support inline expression. Absent means sharding databases only.
actual-data-sources	Attribute	Data source names for auto sharding table
database-strategy-ref	Attribute	Database strategy name for standard sharding table
table-strategy-ref	Attribute	Table strategy name for standard sharding table
sharding-strategy-ref	Attribute	sharding strategy name for auto sharding table
key-generate-strategy-ref	Attribute	Key generate strategy name

<sharding:binding-table-rules />

Name	Type	Description
binding-table-rule (+)	Tag	Binding table rule configuration

<sharding:binding-table-rule />

Name	Type*	Description
logi c-tables	Attribute	Binding table name, multiple tables separated with comma

<sharding:broadcast-table-rules />

Name	Type	Description
broadcast-table-rule (+)	Tag	Broadcast table rule configuration

<sharding:broadcast-table-rule />

Name	Type	Description
table	Attribute	Broadcast table name

<sharding:standard-strategy />

Name	Type	Description
id	Attribute	Standard sharding strategy name
sharding-column	Attribute	Sharding column name
algorithm-ref	Attribute	Sharding algorithm name

<sharding:complex-strategy />

Name	Type	Description
id	Attribute	Complex sharding strategy name
sharding-columns	Attribute	Sharding column names, multiple columns separated with comma
algorithm-ref	Attribute	Sharding algorithm name

<sharding:hint-strategy />

Name	Type	Description
id	Attribute	Hint sharding strategy name
algorithm-ref	Attribute	Sharding algorithm name

<sharding:none-strategy />

Name	Type	Description
id	Attribute	Sharding strategy name

<sharding:key-generate-strategy />

Name	Type	Description
id	Attribute	Key generate strategy name
column	Attribute	Key generate column name
algorithm-ref	Attribute	Key generate algorithm name

<sharding:sharding-algorithm />

Name	Type	Description
id	Attribute	Sharding algorithm name
type	Attribute	Sharding algorithm type
props (?)	Tag	Sharding algorithm properties

<sharding:key-generate-algorithm />

Name	Type	Description
id	Attribute	Key generate algorithm name
type	Attribute	Key generate algorithm type
props (?)	Tag	Key generate algorithm properties

Please refer to [Built-in Sharding Algorithm List](#) and [Built-in Key Generate Algorithm List](#) for more details about type of algorithm.

### Attention

Inline expression identifier can use \${...} or \$->{...}, but \${...} is conflict with spring placeholder of properties, so use \$->{...} on spring environment is better.

### ReadWrite-Splitting

#### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/readwrite-splitting/readwrite-splitting-5.0.0.xsd>

<readwrite-splitting:rule />

Name	.	Description
	Type*	
id	Attribute	Spring Bean Id
data-source-rule (+)	Tag	Readwrite-splitting data source rule configuration

<readwrite-splitting:data-source-rule />

Name	Type	Description
id	Attribute	Readwrite-splitting data source rule name
write-data-source-name	Attribute	Write data source name
read-data-source-names	Attribute	Read data source names, multiple data source names separated with comma
load-balance-algorithm-ref	Attribute	Load balance algorithm name

<readwrite-splitting:load-balance-algorithm />

Name	Type	Description
id	Attribute	Load balance algorithm name
type	Attribute	Load balance algorithm type
props (?)	Tag	Load balance algorithm properties

Please refer to [Built-in Load Balance Algorithm List](#) for more details about type of algorithm. Please refer to [Use Norms](#) for more details about query consistent routing.

## Encryption

### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/encrypt/encrypt-5.0.0.xsd>

<encrypt:rule />

Name	Type *	Description	Default Value
id	Attribute	Spring Bean Id	
queryWithCipherColumn (?)	Attribute	Whether query with cipher column for data encrypt. User you can use plaintext to query if have	true
table (+)	Tag	Encrypt table configuration	

<encrypt:table />

Name	Type	Description
name	Attribute	Encrypt table name
column (+)	Tag	Encrypt column configuration

<encrypt:column />

Name	Type	Description
logic-column	Attribute	Column logic name
cipher-column	Attribute	Cipher column name
assisted-query-column (?)	Attribute	Assisted query column name
plain-column (?)	Attribute	Plain column name
encrypt-algorithm-ref	Attribute	Encrypt algorithm name

<encrypt:encrypt-algorithm />

Name	Type	Description
id	Attribute	Encrypt algorithm name
type	Attribute	Encrypt algorithm type
props (?)	Tag	Encrypt algorithm properties

Please refer to [Built-in Encrypt Algorithm List](#) for more details about type of algorithm.

## Shadow-DB

### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/shadow/shadow-5.0.0.xsd>

<shadow:rule />

Name	Type	Description
id	At-tribute	Spring Bean Id
column	At-tribute	Shadow column name
map-pings(?)	Tag	Mapping relationship between production database and shadow database

<shadow:mapping />

Name	Type	Description
product-data-source-name	Attribute	Production database name
shadow-data-source-name	Attribute	Shadow database name

## 4.x

### Sharding

### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/sharding/sharding.xsd>

<sharding:data-source />

Name	Type	Description
id	Attribute	Spring Bean Id
sharding-rule	Tag	Sharding rule configuration
props (?)	Tag	Properties

<sharding:sharding-rule />

Name	Type	Description
data-source-names	Attribute	Data source Bean list with comma separating multiple Beans
table-rules	Tag	Configuration objects of table sharding rules
binding-table-rules (?)	Tag	Binding table rule list
broadcast-table-rules (?)	Tag	Broadcast table rule list
default-data-source-name (?)	Attribute	Tables without sharding rules will be located through default data source
default-database-strategy-ref (?)	Attribute	Default database sharding strategy, which corresponds to id of ; default means the database is not split
default-table-strategy-ref (?)	Attribute	Default table sharding strategy, which corresponds to id of ; default means the database is not split
default-key-generator (?)	Attribute	Default key generator configuration, use user-defined ones or built-in ones, e.g. SNOWFLAKE/UUID. Default key generator is org.apache.shardingsphere.core.keygen.generator.impl.SnowflakeKeyGenerator
encrypt-rule (?)	Tag	Encrypt rule

<sharding:table-rules />

Name	Type	Description
table-rule (+)	Tag	Configuration objects of table sharding rules

<sharding:table-rule />

Name	Type	Description
logic-table	Attribute	Logic table name
actual-data-nodes (?)	Attribute	Describe data source names and actual tables, delimiter as point, multiple data nodes separated with comma, support inline expression. Absent means shard-databases only.
database-strategy-ref	Attribute	Database strategy name for standard sharding table
table-strategy-ref	Attribute	Table strategy name for standard sharding table
key-generate-strategy-ref	Attribute	Key generate strategy name

<sharding:binding-table-rules />

Name	Type	Description
binding-table-rule (+)	Tag	Binding table rule configuration

<sharding:binding-table-rule />

Name	Type*	Description
logi c-tables	Attribute	Binding table name, multiple tables separated with comma

<sharding:broadcast-table-rules />

Name	Type	Description
broadcast-table-rule (+)	Tag	Broadcast table rule configuration

<sharding:broadcast-table-rule />

Name	Type	Description
table	Attribute	Broadcast table name

<sharding:standard-strategy />

Name	Type	Description
id	Attribute	Standard sharding strategy name
sharding-column	Attribute	Sharding column name
precise-algorithm-ref(?)	Attribute	Precise algorithm reference, applied in = and IN; the class needs to implement PreciseShardingAlgorithm interface
range-algorithm-ref(?)	Attribute	Range algorithm reference, applied in BETWEEN; the class needs to implement RangeShardingAlgorithm interface

<sharding:complex-strategy />

Name	Type	Description
id	Attribute	Complex sharding strategy name
sharding-columns	Attribute	Sharding column names, multiple columns separated with comma
algorithm-ref	Attribute	Complex sharding algorithm reference; the class needs to implement ComplexKeysShardingAlgorithm interface

<sharding:inline-strategy />

Name	Type	Description
id	Attribute	Spring Bean Id
sharding-columns	Attribute	Sharding column names, multiple columns separated with comma
algorithm-ref	Attribute	Sharding algorithm inline expression, which needs to conform to groovy statements

<sharding:hint-database-strategy />

Name	Type	Description
id	Attribute	Hint sharding strategy name
algorithm-ref	Attribute	Hint sharding algorithm; the class needs to implement HintShardingAlgorithm interface

<sharding:none-strategy />

Name	Type	Description
id	Attribute	Spring Bean Id

<sharding:key-generator />

Name	Type	Description
col- umn	At- tribute	Auto-increment column name
type	At- tribute	Auto-increment key generator Type; self-defined generator or internal Type generator (SNOWFLAKE/UUID) can both be selected
props- ref	At- tribute	The Property configuration reference of key generators

Properties Property configuration that can include these properties of these key generators.

SNOWFLAKE | *Name* | *Data Type* | *Explanation* | | ----- | ----- | ----- | |  
 max.tolerate.time.difference.milliseconds (?) | long | The max tolerate time for different server's time difference in milliseconds, the default value is 10 | | max.vibration.offset (?) | int | The max upper limit value of vibrate number, range [0, 4096], the default value is 1. Notice: To use the generated value of this algorithm as sharding value, it is recommended to configure this property. The algorithm generates key mod  $2^n$  ( $2^n$  is usually the sharding amount of tables or databases) in different milliseconds and the result is always 0 or 1. To prevent the above sharding problem, it is recommended to configure this property, its value is  $(2^n)-1$  |

<sharding:encrypt-rules />

Name	Type	Description
encryptor-rule (+)	Tag	Encryptor rule

<sharding:encrypt-rule />

Name	Type	Description
encrypt:encrypt-rule(?)	Tag	Encrypt rule

<sharding:props />

Name	Type	Description
sql.show (?)	At- tribute	Show SQL or not; default value: false
exec utor.size (?)	At- tribute	Executing thread number; default value: CPU core number
max .connecti ons.size. per.query (?)	At- tribute	The maximum connection number that each physical database allocates to each query; default value: 1
check.tabl e.metadat a.enabled (?)	At- tribute	Whether to check meta-data consistency of sharding table when it initializes; default value: false
query. with.ciph er.column (?)	At- tribute	When there is a plainColumn, use cipherColumn or not to query, default value: true

## ReadWrite-Splitting

### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/masterslave/master-slave.xml>

<master-slave:data-source />

Name	Type	Explanation
id	Attribute	Spring Bean id
master-data-source-name	Attribute	Bean id of data source in master database
slave-data-source-names	Attribute	Bean id list of data source in slave database; multiple Beans are separated by commas
strategy-ref (?)	Attribute	Slave database load balance algorithm reference; the class needs to implement <code>MasterSlaveLoadBalanceAlgorithm</code> interface
strategy-type (?)	Attribute	Load balance algorithm type of slave database; optional value: ROUND_ROBIN and RANDOM; if there is <code>load-balance-algorithm-class-name</code> , the configuration can be omitted
config-map (?)	Tag	Users' self-defined configurations
props (?)	Tag	Attribute configurations

<master-slave:props />

Name	Type	Explanation
sql.show (?)	Attribute	Show SQL or not; default value: false
executor.size (?)	Attribute	Executing thread number; default value: CPU core number
max.connections.size.per.query (?)	Attribute	The maximum connection number that each physical database allocates to each query; default value: 1
check.table.metadata.enabled (?)	Attribute	Whether to check meta-data consistency of sharding table when it initializes; default value: false

<master-slave:load-balance-algorithm />

4.0.0-RC2 version added

Name	Type	Explanation
id	Attribute	Spring Bean Id
type	Attribute	Type of load balance algorithm, ‘RANDOM’ 或’ ROUND_ROBIN’ , support custom extension
props-ref (?)	Attribute	Properties of load balance algorithm

## Data Masking

### Configuration Item Explanation

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/encrypt/encrypt.xsd>

<encrypt:datasource />

Name	Type	Type
id	Attribute	Spring Bean Id
data-source-name	Attribute	Encrypt data source Bean Id
props (?)	Tag	Attribute configurations

<encrypt:encryptors />

Name	Type	Type
encryptor(+)	Tag	Encryptor configuration

<encrypt:encryptor />

Name	Type	Type
id	Attribute	Names of Encryptor
type	Attribute	Types of Encryptor, including MD5/AES or customize type
props-re	Attribute	Attribute configurations

<encrypt:tables />

Name	Type	Type
table(+)	Tag	Encrypt table configuration

<encrypt:table />

Name	Type	Type
column(+)	Tag	Encrypt column configuration

<encrypt:column />

Name	Type	Description
logic-column	Attribute	Column logic name
cipher-column	Attribute	Cipher column name
assisted-query-column (?)	Attribute	Assisted query column name
plain-column (?)	Attribute	Plain column name

<encrypt:props />

Name	Type	Description
sql.show (?)	At-tribute	Show SQL or not; default value: false
query.with.cipher.column (?)	At-tribute	When there is a plainColumn, use cipherColumn or not to query, default value: true

## Orchestration

### Data Sharding + Orchestration

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/orchestration/orchestration.xsd>

<orchestration:master-slave-data-source />

Name	Type	Description
id	At-tribute	Id
database-source-ref (?)	At-tribute	Orchestrated database Id
registry-center-ref	At-tribute	Registry center Id
overwrite	At-tribute	Whether to overwrite local configurations with registry center configurations; if it can, each initialization should refer to local configurations; default means not to overwrite

## Read-Write Split + Orchestration

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/orchestration/orchestration.xsd>

<orchestration:sharding-data-source />

Name	Type	Description
id	Attribute	Id
dat a-source-ref (?)	Attribute	Orchestrated database Id
registr y-center-ref	Attribute	Registry center Id
overwrite	Attribute	Use local configuration to overwrite registry center or not

## Data Masking + Orchestration

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/orchestration/orchestration.xsd>

<orchestration:encrypt-data-source />

Name	Type	Description
id	Attribute	Id
dat a-source-ref (?)	Attribute	Orchestrated database Id
registr y-center-ref	Attribute	Registry center Id
overwrite	Attribute	Use local configuration to overwrite registry center or not

## Orchestration registry center

Namespace: <http://shardingsphere.apache.org/schema/shardingsphere/orchestration/orchestration.xsd>

<orchestration:registry-center />

Name	Type	Description
id	At-tribute	Spring Bean Id of registry center
type	At-tribute	Registry center type. Example:zookeeper
server-lists	At-tribute	Registry servers list, multiple split as comma. Example: host1:2181,host2:2181
namespace (?)	At-tribute	Namespace of registry
digest (?)	At-tribute	Digest for registry. Default is not need digest
operation-timeout-milliseconds (?)	At-tribute	Operation timeout time in milliseconds, default value is 500 seconds
max-retries (?)	At-tribute	Max number of times to retry, default value is 3
retry-interval-milliseconds (?)	At-tribute	Time interval in milliseconds on each retry, default value is 500 milliseconds
time-to-live-seconds (?)	At-tribute	Living time of temporary nodes; default value: 60 seconds
props-ref (?)	At-tribute	Other customize properties of registry center

### 3.x

Attention Inline expression identifier can use \${...} or \${->...}, but \${...} is conflict with spring placeholder of properties, so use \${->...} on spring environment is better.

## Sharding

### Configuration Item Explanation

```

<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:p="http://www.springframework.org/schema/p"
 xmlns:context="http://www.springframework.org/schema/context"
 xmlns:tx="http://www.springframework.org/schema/tx"
 xmlns:sharding="http://shardingsphere.io/schema/shardingsphere/sharding"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-beans.xsd
 http://shardingsphere.io/schema/shardingsphere/sharding
 http://shardingsphere.io/schema/shardingsphere/sharding/sharding.xsd"/>

```

```
http://www.springframework.org/schema/context
http://www.springframework.org/schema/context/spring-
context.xsd
http://www.springframework.org/schema/tx
http://www.springframework.org/schema/tx/spring-tx.xsd">
<context:annotation-config />
<context:component-scan base-package="io.shardingsphere.example.spring.
namespace.jpa" />

<bean id="entityManagerFactory" class="org.springframework.orm.jpa.
LocalContainerEntityManagerFactoryBean">
 <property name="dataSource" ref="shardingDataSource" />
 <property name="jpaVendorAdapter">
 <bean class="org.springframework.orm.jpa.vendor.
HibernateJpaVendorAdapter" p:database="MYSQL" />
 </property>
 <property name="packagesToScan" value="io.shardingsphere.example.spring.
namespace.jpa.entity" />
 <property name="jpaProperties">
 <props>
 <prop key="hibernate.dialect">org.hibernate.dialect.MySQLDialect</
prop>
 <prop key="hibernate.hbm2ddl.auto">create</prop>
 <prop key="hibernate.show_sql">true</prop>
 </props>
 </property>
</bean>
<bean id="transactionManager" class="org.springframework.orm.jpa.
JpaTransactionManager" p:entityManagerFactory-ref="entityManagerFactory" />
<tx:annotation-driven />

<bean id="ds0" class="org.apache.commons.dbcp.BasicDataSource" destroy-method=
"close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="url" value="jdbc:mysql://localhost:3306/ds0" />
 <property name="username" value="root" />
 <property name="password" value="" />
</bean>

<bean id="ds1" class="org.apache.commons.dbcp.BasicDataSource" destroy-method=
"close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="url" value="jdbc:mysql://localhost:3306/ds1" />
 <property name="username" value="root" />
 <property name="password" value="" />
</bean>

<bean id="preciseModuloDatabaseShardingAlgorithm" class="io.shardingsphere.
example.spring.namespace.jpa.algorithm.PreciseModuloDatabaseShardingAlgorithm" />
```

```

<bean id="preciseModuloTableShardingAlgorithm" class="io.shardingsphere.example.spring.namespace.jpa.algorithm.PreciseModuloTableShardingAlgorithm" />

 <sharding:standard-strategy id="databaseShardingStrategy" sharding-column="user_id" precise-algorithm-ref="preciseModuloDatabaseShardingAlgorithm" />
 <sharding:standard-strategy id="tableShardingStrategy" sharding-column="order_id" precise-algorithm-ref="preciseModuloTableShardingAlgorithm" />

 <sharding:data-source id="shardingDataSource">
 <sharding:sharding-rule data-source-names="ds0,ds1">
 <sharding:table-rules>
 <sharding:table-rule logic-table="t_order" actual-data-nodes="ds$->{0..1}.t_order$->{0..1}" database-strategy-ref="databaseShardingStrategy" table-strategy-ref="tableShardingStrategy" generate-key-column-name="order_id" />
 <sharding:table-rule logic-table="t_order_item" actual-data-nodes="ds$->{0..1}.t_order_item$->{0..1}" database-strategy-ref="databaseShardingStrategy" table-strategy-ref="tableShardingStrategy" generate-key-column-name="order_item_id" />
 </sharding:table-rules>
 <sharding:binding-table-rules>
 <sharding:binding-table-rule logic-tables="t_order, t_order_item" />
 </sharding:binding-table-rules>
 <sharding:broadcast-table-rules>
 <sharding:broadcast-table-rule table="t_config" />
 </sharding:broadcast-table-rules>
 </sharding:sharding-rule>
 </sharding:data-source>
</beans>

```

## Readwrite-splitting

### Configuration Item Explanation

```

<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:context="http://www.springframework.org/schema/context"
 xmlns:p="http://www.springframework.org/schema/p"
 xmlns:tx="http://www.springframework.org/schema/tx"
 xmlns:master-slave="http://shardingsphere.io/schema/shardingsphere/masterslave"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-beans.xsd
 http://www.springframework.org/schema/context
 http://www.springframework.org/schema/tx
 http://shardingsphere.io/schema/shardingsphere/masterslave"
 >

```

```

 http://www.springframework.org/schema/context/spring-
context.xsd
 http://www.springframework.org/schema/tx
 http://www.springframework.org/schema/tx/spring-tx.xsd
 http://shardingsphere.io/schema/shardingsphere/masterslave
 http://shardingsphere.io/schema/shardingsphere/masterslave/
master-slave.xsd">
<context:annotation-config />
<context:component-scan base-package="io.shardingsphere.example.spring.
namespace.jpa" />

<bean id="entityManagerFactory" class="org.springframework.orm.jpa.
LocalContainerEntityManagerFactoryBean">
 <property name="dataSource" ref="masterSlaveDataSource" />
 <property name="jpaVendorAdapter">
 <bean class="org.springframework.orm.jpa.vendor.
HibernateJpaVendorAdapter" p:database="MYSQL" />
 </property>
 <property name="packagesToScan" value="io.shardingsphere.example.spring.
namespace.jpa.entity" />
 <property name="jpaProperties">
 <props>
 <prop key="hibernate.dialect">org.hibernate.dialect.MySQLDialect</
prop>
 <prop key="hibernate.hbm2ddl.auto">create</prop>
 <prop key="hibernate.show_sql">true</prop>
 </props>
 </property>
 </bean>
 <bean id="transactionManager" class="org.springframework.orm.jpa.
JpaTransactionManager" p:entityManagerFactory-ref="entityManagerFactory" />
 <tx:annotation-driven />

 <bean id="ds_master" class="org.apache.commons.dbcp.BasicDataSource" destroy-
method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="url" value="jdbc:mysql://localhost:3306/ds_master" />
 <property name="username" value="root" />
 <property name="password" value="" />
 </bean>

 <bean id="ds_slave0" class="org.apache.commons.dbcp.BasicDataSource" destroy-
method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="url" value="jdbc:mysql://localhost:3306/ds_slave0" />
 <property name="username" value="root" />
 <property name="password" value="" />
 </bean>

```

```

<bean id="ds_slave1" class="org.apache.commons.dbcp.BasicDataSource" destroy-
method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver" />
 <property name="url" value="jdbc:mysql://localhost:3306/ds_slave1" />
 <property name="username" value="root" />
 <property name="password" value="" />
</bean>

<bean id="randomStrategy" class="io.shardingsphere.api.algorithm.masterslave.
RandomMasterSlaveLoadBalanceAlgorithm" />
<master-slave:data-source id="masterSlaveDataSource" master-data-source-name=
"ds_master" slave-data-source-names="ds_slave0, ds_slave1" strategy-ref=
"randomStrategy">
 <master-slave:props>
 <prop key="sql.show">${sql_show}</prop>
 <prop key="executor.size">10</prop>
 <prop key="foo">bar</prop>
 </master-slave:props>
</master-slave:data-source>
</beans>

```

## Orchestration

### Configuration Item Explanation

```

<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:sharding="http://shardingsphere.io/schema/shardingsphere/
orchestration/sharding"
 xmlns:master-slave="http://shardingsphere.io/schema/shardingsphere/
orchestration/masterslave"
 xmlns:reg="http://shardingsphere.io/schema/shardingsphere/orchestration/reg"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-
beans.xsd
 http://shardingsphere.io/schema/shardingsphere/
orchestration/reg
 http://shardingsphere.io/schema/shardingsphere/
orchestration/reg/reg.xsd
 http://shardingsphere.io/schema/shardingsphere/
orchestration/sharding
 http://shardingsphere.io/schema/shardingsphere/
orchestration/sharding/sharding.xsd
 http://shardingsphere.io/schema/shardingsphere/
orchestration/masterslave"

```

```

 http://shardingsphere.io/schema/shardingsphere/
orchestration/masterslave/master-slave.xsd">

 <reg:registry-center id="regCenter" server-lists="localhost:2181" namespace=
"orchestration-spring-namespace-demo" overwtite="false" />
 <sharding:data-source id="shardingMasterSlaveDataSource" registry-center-ref=
"regCenter" />
 <master-slave:data-source id="masterSlaveDataSource" registry-center-ref=
"regCenter" />
</beans>

```

## 2.x

### Readwrite-splitting

#### The configuration example for Spring namespace

```

<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:context="http://www.springframework.org/schema/context"
 xmlns:sharding="http://shardingsphere.io/schema/shardingjdbc/sharding"
 xmlns:masterslave="http://shardingsphere.io/schema/shardingjdbc/masterslave"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-beans.xsd
 http://www.springframework.org/schema/context
 http://www.springframework.org/schema/context/spring-
context.xsd
 http://shardingsphere.io/schema/shardingjdbc/sharding
 http://shardingsphere.io/schema/shardingjdbc/sharding/
sharding.xsd
 http://shardingsphere.io/schema/shardingjdbc/masterslave
 http://shardingsphere.io/schema/shardingjdbc/masterslave/
master-slave.xsd
 ">
 <!-- Actual source data Configuration -->
 <bean id="dbtbl_0_master" class="org.apache.commons.dbcp.BasicDataSource"
destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="url" value="jdbc:mysql://localhost:3306/dbtbl_0_master"/>
 <property name="username" value="root"/>
 <property name="password" value=""/>
 </bean>

 <bean id="dbtbl_0_slave_0" class="org.apache.commons.dbcp.BasicDataSource"
destroy-method="close">

```

```

<property name="driverClassName" value="com.mysql.jdbc.Driver"/>
<property name="url" value="jdbc:mysql://localhost:3306/dbtbl_0_slave_0"/>
<property name="username" value="root"/>
<property name="password" value="" />
</bean>

<bean id="dbtbl_0_slave_1" class="org.apache.commons.dbcp.BasicDataSource"
destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="url" value="jdbc:mysql://localhost:3306/dbtbl_0_slave_1"/>
 <property name="username" value="root"/>
 <property name="password" value="" />
</bean>

<bean id="dbtbl_1_master" class="org.apache.commons.dbcp.BasicDataSource"
destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="url" value="jdbc:mysql://localhost:3306/dbtbl_1_master"/>
 <property name="username" value="root"/>
 <property name="password" value="" />
</bean>

<bean id="dbtbl_1_slave_0" class="org.apache.commons.dbcp.BasicDataSource"
destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="url" value="jdbc:mysql://localhost:3306/dbtbl_1_slave_0"/>
 <property name="username" value="root"/>
 <property name="password" value="" />
</bean>

<bean id="dbtbl_1_slave_1" class="org.apache.commons.dbcp.BasicDataSource"
destroy-method="close">
 <property name="driverClassName" value="com.mysql.jdbc.Driver"/>
 <property name="url" value="jdbc:mysql://localhost:3306/dbtbl_1_slave_1"/>
 <property name="username" value="root"/>
 <property name="password" value="" />
</bean>

<!-- Readwrite-splitting DataSource Configuration -->
<master-slave:data-source id="dbtbl_0" master-data-source-name="dbtbl_0_master"
slave-data-source-names="dbtbl_0_slave_0, dbtbl_0_slave_1" strategy-type="ROUND_
ROBIN" />
<master-slave:data-source id="dbtbl_1" master-data-source-name="dbtbl_1_master"
slave-data-source-names="dbtbl_1_slave_0, dbtbl_1_slave_1" strategy-type="ROUND_
ROBIN" />

<sharding:inline-strategy id="databaseStrategy" sharding-column="user_id"
algorithm-expression="dbtbl_${user_id % 2}" />

```

```

<sharding:inline-strategy id="orderTableStrategy" sharding-column="order_id"
algorithm-expression="t_order_${order_id % 4}" />

<sharding:data-source id="shardingDataSource">
 <sharding:sharding-rule data-source-names="dbtbl_0, dbtbl_1">
 <sharding:table-rules>
 <sharding:table-rule logic-table="t_order" actual-data-nodes=
"dbtbl_${0..1}.t_order_${0..3}" database-strategy-ref="databaseStrategy" table-
strategy-ref="orderTableStrategy"/>
 </sharding:table-rules>
 </sharding:sharding-rule>
</sharding:data-source>
</beans>

```

## Spring Boot Starter Configuration

### 5.0.0-beta

#### Sharding

#### Configuration Item Explanation

```

spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

Standard sharding table configuration
spring.shardingsphere.rules.sharding.tables.<table-name>.actual-data-nodes= #
Describe data source names and actual tables, delimiter as point, multiple data
nodes separated with comma, support inline expression. Absent means sharding
databases only.

Databases sharding strategy, use default databases sharding strategy if absent.
sharding strategy below can choose only one.

For single sharding column scenario
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.
standard.<sharding-algorithm-name>.sharding-column= # Sharding column name
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.
standard.<sharding-algorithm-name>.sharding-algorithm-name= # Sharding algorithm
name

For multiple sharding columns scenario
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.complex.
<sharding-algorithm-name>.sharding-columns= # Sharding column names, multiple
columns separated with comma
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.complex.
<sharding-algorithm-name>.sharding-algorithm-name= # Sharding algorithm name

```

```
Sharding by hint
spring.shardingsphere.rules.sharding.tables.<table-name>.database-strategy.hint.
<sharding-algorithm-name>.sharding-algorithm-name= # Sharding algorithm name

Tables sharding strategy, same as database sharding strategy
spring.shardingsphere.rules.sharding.tables.<table-name>.table-strategy.xxx= #
Omitted

Auto sharding table configuraiton
spring.shardingsphere.rules.sharding.auto-tables.<auto-table-name>.actual-data-
sources= # data source names

spring.shardingsphere.rules.sharding.auto-tables.<auto-table-name>.sharding-
strategy.standard.sharding-column= # Sharding column name
spring.shardingsphere.rules.sharding.auto-tables.<auto-table-name>.sharding-
strategy.standard.sharding-algorithm= # Auto sharding algorithm name

Key generator strategy configuration
spring.shardingsphere.rules.sharding.tables.<table-name>.key-generate-strategy.
column= # Column name of key generator
spring.shardingsphere.rules.sharding.tables.<table-name>.key-generate-strategy.key-
generator-name= # Key generator name

spring.shardingsphere.rules.sharding.binding-tables[0]= # Binding table name
spring.shardingsphere.rules.sharding.binding-tables[1]= # Binding table name
spring.shardingsphere.rules.sharding.binding-tables[x]= # Binding table name

spring.shardingsphere.rules.sharding.broadcast-tables[0]= # Broadcast tables
spring.shardingsphere.rules.sharding.broadcast-tables[1]= # Broadcast tables
spring.shardingsphere.rules.sharding.broadcast-tables[x]= # Broadcast tables

spring.shardingsphere.sharding.default-database-strategy.xxx= # Default strategy
for database sharding
spring.shardingsphere.sharding.default-table-strategy.xxx= # Default strategy for
table sharding
spring.shardingsphere.sharding.default-key-generate-strategy.xxx= # Default Key
generator strategy

Sharding algorithm configuration
spring.shardingsphere.rules.sharding.sharding-algorithms.<sharding-algorithm-name>.
type= # Sharding algorithm type
spring.shardingsphere.rules.sharding.sharding-algorithms.<sharding-algorithm-name>.
props.xxx= # Sharding algorithm properties

Key generate algorithm configuration
spring.shardingsphere.rules.sharding.key-generators.<key-generate-algorithm-name>.
type= # Key generate algorithm type
```

```
spring.shardingsphere.rules.sharding.key-generators.<key-generate-algorithm-name>.
props.xxx= # Key generate algorithm properties
```

Please refer to [Built-in sharding Algorithm List](#) and [Built-in keygen Algorithm List](#).

## Readwrite-splitting

### Configuration Item Explanation

```
spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.primary-data-source-name= # Write data source name
spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.replica-data-source-names= # Read data source names, multiple
data source names separated with comma
spring.shardingsphere.rules.readwrite-splitting.data-sources.<readwrite-splitting-
data-source-name>.load-balancer-name= # Load balance algorithm name

Load balance algorithm configuration
spring.shardingsphere.rules.readwrite-splitting.load-balancers.<load-balance-
algorithm-name>.type= # Load balance algorithm type
spring.shardingsphere.rules.readwrite-splitting.load-balancers.<load-balance-
algorithm-name>.props.xxx= # Load balance algorithm properties
```

Please refer to [Built-in Load Balance Algorithm List](#) for more details about type of algorithm.

## Encryption

### Configuration Item Explanation

```
spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
cipher-column= # Cipher column name
spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
assisted-query-column= # Assisted query column name
spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
plain-column= # Plain column name
spring.shardingsphere.rules.encrypt.tables.<table-name>.columns.<column-name>.
encryptor-name= # Encrypt algorithm name

Encrypt algorithm configuration
```

```
spring.shardingsphere.rules.encrypt.encryptors.<encrypt-algorithm-name>.type= #
Encrypt algorithm type
spring.shardingsphere.rules.encrypt.encryptors.<encrypt-algorithm-name>.props.xxx= # Encrypt algorithm properties
```

## Shadow DB

### Configuration Item Explanation

```
spring.shardingsphere.datasource.names= # Omit the data source configuration,
please refer to the usage

spring.shardingsphere.rules.shadow.column= # Shadow column name
spring.shardingsphere.rules.shadow-mappings.<product-data-source-name>= #
Shadow data source name
```

## Governance

### Configuration Item Explanation

## Management

```
spring.shardingsphere.governance.name= # Governance name
spring.shardingsphere.governance.registry-center.type= # Governance instance type.
Example:Zookeeper, etcd, Apollo, Nacos
spring.shardingsphere.governance.registry-center.server-lists= # The list of
servers that connect to governance instance, including IP and port number; use
commas to separate
spring.shardingsphere.governance.registry-center.props= # Other properties
spring.shardingsphere.governance.overwrite= # Whether to overwrite local
configurations with config center configurations; if it can, each initialization
should refer to local configurations
```

## Mixed Rules

### Configuration Item Explanation

```
data source configuration
spring.shardingsphere.datasource.names= write-ds0,write-ds1,write-ds0-read0,write-
ds1-read0

spring.shardingsphere.datasource.write-ds0.url= # Database URL connection
spring.shardingsphere.datasource.write-ds0.type= # Database connection pool type
name
```

```
spring.shardingsphere.datasource.write-ds0.driver-class-name= # Database driver
class name
spring.shardingsphere.datasource.write-ds0.username= # Database username
spring.shardingsphere.datasource.write-ds0.password= # Database password
spring.shardingsphere.datasource.write-ds0.xxx= # Other properties of database
connection pool

spring.shardingsphere.datasource.write-ds1.url= # Database URL connection
...Omit specific configuration.

spring.shardingsphere.datasource.write-ds0-read0.url= # Database URL connection
...Omit specific configuration.

spring.shardingsphere.datasource.write-ds1-read0.url= # Database URL connection
...Omit specific configuration.

Sharding rules configuration
Databases sharding strategy
spring.shardingsphere.rules.sharding.default-database-strategy.standard.sharding-
column=user_id
spring.shardingsphere.rules.sharding.default-database-strategy.standard.sharding-
algorithm-name=default-database-strategy-inline
Binding table rules configuration ,and multiple groups of binding-tables
configured with arrays
spring.shardingsphere.rules.sharding.binding-tables[0]=t_user,t_user_detail
spring.shardingsphere.rules.sharding.binding-tables[1]= # Binding table names,
multiple table name are separated by commas
spring.shardingsphere.rules.sharding.binding-tables[x]= # Binding table names,
multiple table name are separated by commas
Broadcast table rules configuration
spring.shardingsphere.rules.sharding.broadcast-tables= # Broadcast table names,
multiple table name are separated by commas

Table sharding strategy
The enumeration value of `ds_$->{0..1}` is the name of the logical data source
configured with readwrite-splitting
spring.shardingsphere.rules.sharding.tables.t_user.actual-data-nodes=ds_$->{0..1}.
t_user_$->{0..1}
spring.shardingsphere.rules.sharding.tables.t_user.table-strategy.standard.
sharding-column=user_id
spring.shardingsphere.rules.sharding.tables.t_user.table-strategy.standard.
sharding-algorithm-name=user-table-strategy-inline

Data encrypt configuration
Table `t_user` is the name of the logical table that uses for data sharding
configuration.
spring.shardingsphere.rules.encrypt.tables.t_user.columns.username.cipher-
column=username
```

```
spring.shardingsphere.rules.encrypt.tables.t_user.columns.username.encryptor-
name=name-encryptor
spring.shardingsphere.rules.encrypt.tables.t_user.columns.pwd.cipher-column=pwd
spring.shardingsphere.rules.encrypt.tables.t_user.columns.pwd.encryptor-name=pwd-
encryptor

Data encrypt algorithm configuration
spring.shardingsphere.rules.encrypt.encryptors.name-encryptor.type=AES
spring.shardingsphere.rules.encrypt.encryptors.name-encryptor.props.aes-key-
value=123456abc
spring.shardingsphere.rules.encrypt.encryptors.pwd-encryptor.type=AES
spring.shardingsphere.rules.encrypt.encryptors.pwd-encryptor.props.aes-key-
value=123456abc

Key generate strategy configuration
spring.shardingsphere.rules.sharding.tables.t_user.key-generate-strategy.
column=user_id
spring.shardingsphere.rules.sharding.tables.t_user.key-generate-strategy.key-
generator-name=snowflake

Sharding algorithm configuration
spring.shardingsphere.rules.sharding.sharding-algorithms.default-database-strategy-
inline.type=INLINE
The enumeration value of `ds_$->{user_id % 2}` is the name of the logical data
source configured with readwrite-splitting
spring.shardingsphere.rules.sharding.sharding-algorithms.default-database-strategy-
inline.algorithm-expression=ds$->{user_id % 2}
spring.shardingsphere.rules.sharding.sharding-algorithms.user-table-strategy-
inline.type=INLINE
spring.shardingsphere.rules.sharding.sharding-algorithms.user-table-strategy-
inline.props.algorithm-expression=t_user_$->{user_id % 2}

Key generate algorithm configuration
spring.shardingsphere.rules.sharding.key-generators.snowflake.type=SNOWFLAKE

read query configuration
ds_0,ds_1 is the logical data source name of the readwrite-splitting
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_0.write-data-
source-name=write-ds0
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_0.read-data-source-
names=write-ds0-read0
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_0.load-balancer-
name=read-random
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_1.write-data-
source-name=write-ds1
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_1.read-data-source-
names=write-ds1-read0
spring.shardingsphere.rules.readwrite-splitting.data-sources.ds_1.load-balancer-
name=read-random
```

```
Load balance algorithm configuration
spring.shardingsphere.rules.readwrite-splitting.load-balancers.read-random.
type=RANDOM
```

## Shardingsphere-4.x

### Data Sharding

#### Configuration Item Explanation

```
spring.shardingsphere.datasource.names= #Data source name; multiple data sources
are separated by commas

spring.shardingsphere.datasource.<data-source-name>.type= #Database connection pool
type name
spring.shardingsphere.datasource.<data-source-name>.driver-class-name= #Database
driver class name
spring.shardingsphere.datasource.<data-source-name>.url= #Database url connection
spring.shardingsphere.datasource.<data-source-name>.username= #Database username
spring.shardingsphere.datasource.<data-source-name>.password= #Database password
spring.shardingsphere.datasource.<data-source-name>.xxx= #Other properties of
database connection pool

spring.shardingsphere.sharding.tables.<logic-table-name>.actual-data-nodes= #It is
consisted of data source name + table name, separated by decimal points; multiple
tables are separated by commas and support inline expressions; default means using
existing data sources and logic table names to generate data nodes; it can be
applied in broadcast tables (each database needs a same table for relevance query,
dictionary table mostly) or the situation with sharding database but without
sharding table (table structures of all the databases are consistent)

#Database sharding strategy; default means using default database sharding
strategy; it can only choose one of the following sharding strategies

#It is applied in standard sharding situation of single-sharding key
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy.
standard.sharding-column= #Sharding column name
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy.
standard.precise-algorithm-class-name= #Precise algorithm class name, applied in =
and IN; the class needs to implement PreciseShardingAlgorithm interface and provide
parameter-free constructor
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy.
standard.range-algorithm-class-name= #Range sharding algorithm class name, applied
in BETWEEN, optional; the class should implement RangeShardingAlgorithm interface
and provide parameter-free constructor
```

```

#It is applied in complex sharding situations with multiple sharding keys
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy.complex.
sharding-columns= #Sharding column name, with multiple columns separated by commas
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy.complex.
algorithm-class-name= #Complex sharding algorithm class name; the class needs to
implement ComplexKeysShardingAlgorithm interface and provide parameter-free
constructor

#Inline expression sharding strategy
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy.inline.
sharding-column= #Sharding column name
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy.inline.
algorithm-expression= #Inline expression of sharding algorithm, which needs to
conform to groovy statements

#Hint Sharding Strategy
spring.shardingsphere.sharding.tables.<logic-table-name>.database-strategy_hint.
algorithm-class-name= #Hint algorithm class name; the class needs to implement
HintShardingAlgorithm interface and provide parameter-free constructor

#Table sharding strategy, same as database sharding strategy
spring.shardingsphere.sharding.tables.<logic-table-name>.table-strategy.xxx=
#Omitted

spring.shardingsphere.sharding.tables.<logic-table-name>.key-generator.column=
#Auto-increment column name; default means not using auto-increment key generator
spring.shardingsphere.sharding.tables.<logic-table-name>.key-generator.type= #Auto-
increment key generator type; default means using default auto-increment key
generator; user defined generator or internal generator (SNOWFLAKE, UUID) can both
be selected
spring.shardingsphere.sharding.tables.<logic-table-name>.key-generator.props.
<property-name>= #Properties, Notice: when use SNOWFLAKE, `max.tolerate.time.
difference.milliseconds` for `SNOWFLAKE` need to be set. To use the generated value
of this algorithm as sharding value, it is recommended to configure `max.vibration.
offset`'

spring.shardingsphere.sharding.binding-tables[0]= #Binding table rule list
spring.shardingsphere.sharding.binding-tables[1]= #Binding table rule list
spring.shardingsphere.sharding.binding-tables[x]= #Binding table rule list

spring.shardingsphere.sharding.broadcast-tables[0]= #Broadcast table rule list
spring.shardingsphere.sharding.broadcast-tables[1]= #Broadcast table rule list
spring.shardingsphere.sharding.broadcast-tables[x]= #Broadcast table rule list

spring.shardingsphere.sharding.default-data-source-name= #Tables without sharding
rules will be located through default data source
spring.shardingsphere.sharding.default-database-strategy.xxx= #Default database
sharding strategy

```

```

spring.shardingsphere.sharding.default-table-strategy.xxx= #Default table sharding
strategy
spring.shardingsphere.sharding.default-key-generator.type= #Default auto-increment
key generator of type; it will use org.apache.shardingsphere.core.keygen.generator.
impl.SnowflakeKeyGenerator in default; user defined generator or internal generator
(SNOWFLAKE or UUID) can both be used
spring.shardingsphere.sharding.default-key-generator.props.<property-name>= #Auto-
increment key generator property configuration, such as max.tolerate.time.
difference.milliseconds of SNOWFLAKE algorithm

spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
master-data-source-name= #Refer to readwrite-splitting part for more details
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[0]= #Refer to readwrite-splitting part for more details
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[1]= #Refer to readwrite-splitting part for more details
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[x]= #Refer to readwrite-splitting part for more details
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-class-name= #Refer to readwrite-splitting part for more
details
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-type= #Refer to readwrite-splitting part for more details

spring.shardingsphere.props.sql.show= #Show SQL or not; default value: false
spring.shardingsphere.props.executor.size= #Executing thread number; default value:
CPU core number

```

## Readwrite Split

### Configuration Item Explanation

```

#Omit data source configurations; keep it consistent with data sharding

spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
master-data-source-name= #Data source name of master database
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[0]= #Data source name list of slave database
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[1]= #Data source name list of slave database
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[x]= #Data source name list of slave database
spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-class-name= #Load balance algorithm class name; the class
needs to implement MasterSlaveLoadBalanceAlgorithm interface and provide parameter-
free constructor

```

```

spring.shardingsphere.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-type= #Load balance algorithm class of slave database;
optional value: ROUND_ROBIN and RANDOM; if there is load-balance-algorithm-class-
name, the configuration can be omitted

spring.shardingsphere.props.sql.show= #Show SQL or not; default value: false
spring.shardingsphere.props.executor.size= #Executing thread number; default value:
CPU core number
spring.shardingsphere.props.check.table.metadata.enabled= #Whether to check meta-
data consistency of sharding table when it initializes; default value: false

```

## Data Masking

### Configuration Item Explanation

```

#Omit data source configurations; keep it consistent with data sharding

spring.shardingsphere.encrypt.encryptors.<encryptor-name>.type= #Type of encryptor,
use user-defined ones or built-in ones, e.g. MD5/AES
spring.shardingsphere.encrypt.encryptors.<encryptor-name>.props.<property-name>=
#Properties, Notice: when use AES encryptor, `aes.key.value` for AES encryptor need
to be set
spring.shardingsphere.encrypt.tables.<table-name>.columns.<logic-column-name>.
plainColumn= #Plain column name
spring.shardingsphere.encrypt.tables.<table-name>.columns.<logic-column-name>.
cipherColumn= #Cipher column name
spring.shardingsphere.encrypt.tables.<table-name>.columns.<logic-column-name>.
assistedQueryColumn= #AssistedColumns for query, when use
ShardingQueryAssistedEncryptor, it can help query encrypted data
spring.shardingsphere.encrypt.tables.<table-name>.columns.<logic-column-name>.
encryptor= #Encryptor name

```

## Orchestration

### Configuration Item Explanation

```

#Omit data source, data sharding, readwrite split and data masking configurations

spring.shardingsphere.orchestration.name= #Orchestration instance name
spring.shardingsphere.orchestration.overwrite= #Whether to overwrite local
configurations with registry center configurations; if it can, each initialization
should refer to local configurations
spring.shardingsphere.orchestration.registry.type= #Registry center type.
Example:zookeeper
spring.shardingsphere.orchestration.registry.server-lists= #The list of servers
that connect to registry center, including IP and port number; use commas to
separate

```

```

spring.shardingsphere.orchestration.registry.namespace= #Registry center namespace
spring.shardingsphere.orchestration.registry.digest= #The token that connects to
the registry center; default means there is no need for authentication
spring.shardingsphere.orchestration.registry.operation-timeout-milliseconds= #The
millisecond number for operation timeout; default value: 500 milliseconds
spring.shardingsphere.orchestration.registry.max-retries= #Maximum retry time after
failing; default value: 3 times
spring.shardingsphere.orchestration.registry.retry-interval-milliseconds= #Interval
time to retry; default value: 500 milliseconds
spring.shardingsphere.orchestration.registry.time-to-live-seconds= #Living time of
temporary nodes; default value: 60 seconds
spring.shardingsphere.orchestration.registry.props= #Customize registry center
props.

```

## shardingsphere-3.x

### Sharding

#### Configuration Item Explanation

```

sharding.jdbc.datasource.names= #Names of data sources. Multiple data sources
separated with comma

sharding.jdbc.datasource.<data-source-name>.type= #Class name of data source pool
sharding.jdbc.datasource.<data-source-name>.driver-class-name= #Class name of
database driver
sharding.jdbc.datasource.<data-source-name>.url= #Database URL
sharding.jdbc.datasource.<data-source-name>.username= #Database username
sharding.jdbc.datasource.<data-source-name>.password= #Database password
sharding.jdbc.datasource.<data-source-name>.xxx= #Other properties for data source
pool

sharding.jdbc.config.sharding.tables.<logic-table-name>.actual-data-nodes=
#Describe data source names and actual tables, delimiter as point, multiple data
nodes separated with comma, support inline expression. Absent means sharding
databases only. Example: ds${0..7}.tbl${0..7}

#Databases sharding strategy, use default databases sharding strategy if absent.
sharding strategy below can choose only one.

#Standard sharding scenario for single sharding column
sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy.standard.
sharding-column= #Name of sharding column
sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy.standard.
precise-algorithm-class-name= #Precise algorithm class name used for '=' and 'IN'.
This class need to implements PreciseShardingAlgorithm, and require a no argument
constructor

```

```

sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy.standard.
range-algorithm-class-name= #Range algorithm class name used for `BETWEEN`. This
class need to implements RangeShardingAlgorithm, and require a no argument
constructor

#Complex sharding scenario for multiple sharding columns
sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy.complex.
sharding-columns= #Names of sharding columns. Multiple columns separated with comma
sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy.complex.
algorithm-class-name= #Complex sharding algorithm class name. This class need to
implements ComplexKeysShardingAlgorithm, and require a no argument constructor

#Inline expression sharding scenario for single sharding column
sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy.inline.
sharding-column= #Name of sharding column
sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy.inline.
algorithm-expression= #Inline expression for sharding algorithm

#Hint sharding strategy
sharding.jdbc.config.sharding.tables.<logic-table-name>.database-strategy_hint.
algorithm-class-name= #Hint sharding algorithm class name. This class need to
implements HintShardingAlgorithm, and require a no argument constructor

#Tables sharding strategy, Same as database- sharding strategy
sharding.jdbc.config.sharding.tables.<logic-table-name>.table-strategy.xxx= #Ignore

sharding.jdbc.config.sharding.tables.<logic-table-name>.key-generator-column-name=
#Column name of key generator, do not use Key generator if absent
sharding.jdbc.config.sharding.tables.<logic-table-name>.key-generator-class-name=
#Key generator, use default key generator if absent. This class need to implements
KeyGenerator, and require a no argument constructor

sharding.jdbc.config.sharding.tables.<logic-table-name>.logic-index= #Name if logic
index. If use `DROP INDEX XXX` SQL in Oracle/PostgreSQL, This property needs to be
set for finding the actual tables

sharding.jdbc.config.sharding.binding-tables[0]= #Binding table rule configurations
sharding.jdbc.config.sharding.binding-tables[1]= #Binding table rule configurations
sharding.jdbc.config.sharding.binding-tables[x]= #Binding table rule configurations

sharding.jdbc.config.sharding.broadcast-tables[0]= #Broadcast table rule
configurations
sharding.jdbc.config.sharding.broadcast-tables[1]= #Broadcast table rule
configurations
sharding.jdbc.config.sharding.broadcast-tables[x]= #Broadcast table rule
configurations

sharding.jdbc.config.sharding.default-data-source-name= #If table not configure at
table rule, will route to defaultDataSourceName

```

```

sharding.jdbc.config.sharding.default-database-strategy.xxx= #Default strategy for
sharding databases, same as databases sharding strategy
sharding.jdbc.config.sharding.default-table-strategy.xxx= #Default strategy for
sharding tables, same as tables sharding strategy
sharding.jdbc.config.sharding.default-key-generator-class-name= #Default key
generator class name, default value is `io.shardingsphere.core.keygen.
DefaultKeyGenerator`. This class need to implements KeyGenerator, and require a no
argument constructor

sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
master-data-source-name= #more details can reference readwrite-splitting part
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[0]= #more details can reference readwrite-splitting part
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[1]= #more details can reference readwrite-splitting part
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[x]= #more details can reference readwrite-splitting part
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-class-name= #more details can reference readwrite-splitting
part
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-type= #more details can reference readwrite-splitting part
sharding.jdbc.config.config.map.key1= #more details can reference Readwrite-
splitting part
sharding.jdbc.config.config.map.key2= #more details can reference Readwrite-
splitting part
sharding.jdbc.config.config.map.keyx= #more details can reference Readwrite-
splitting part

sharding.jdbc.config.props.sql.show= #To show SQLS or not, default value: false
sharding.jdbc.config.props.executor.size= #The number of working threads, default
value: CPU count

sharding.jdbc.config.config.map.key1= #User-defined arguments
sharding.jdbc.config.config.map.key2= #User-defined arguments
sharding.jdbc.config.config.map.keyx= #User-defined arguments

```

## Readwrite-splitting

### Configuration Item Explanation

```

#Ignore data sources configuration, same as sharding

sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
master-data-source-name= #Name of master data source
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[0]= #Name of master data source

```

```

sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[1]= #Names of Slave data sources
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
slave-data-source-names[x]= #Names of Slave data sources
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-class-name= #Load balance algorithm class name. This class
need to implements MasterSlaveLoadBalanceAlgorithm, and require a no argument
constructor
sharding.jdbc.config.sharding.master-slave-rules.<master-slave-data-source-name>.
load-balance-algorithm-type= #Load balance algorithm type, values should be:
`ROUND_ROBIN` or `RANDOM`. Ignore if `load-balance-algorithm-class-name` is present

sharding.jdbc.config.config.map.key1= #User-defined arguments
sharding.jdbc.config.config.map.key2= #User-defined arguments
sharding.jdbc.config.config.map.keyx= #User-defined arguments

sharding.jdbc.config.props.sql.show= #To show SQLS or not, default value: false
sharding.jdbc.config.props.executor.size= #The number of working threads, default
value: CPU count
sharding.jdbc.config.props.check.table.metadata.enabled= #Check the metadata
consistency of all the tables, default value: false

```

## Orchestration

### Configuration Item Explanation

```

#Ignore data sources, sharding and readwrite splitting configuration

sharding.jdbc.config.sharding.orchestration.name= #Name of orchestration instance
sharding.jdbc.config.sharding.orchestration.overwrite= #Use local configuration to
overwrite registry center or not
sharding.jdbc.config.sharding.orchestration.registry.server-lists= #Registry servers
list, multiple split as comma. Example: host1:2181,host2:2181
sharding.jdbc.config.sharding.orchestration.registry.namespace= #Namespace of
registry
sharding.jdbc.config.sharding.orchestration.registry.digest= #Digest for registry.
Default is not need digest.
sharding.jdbc.config.sharding.orchestration.registry.operation-timeout-
milliseconds= #Operation timeout time in milliseconds, default value is 500
milliseconds
sharding.jdbc.config.sharding.orchestration.registry.max-retries= #Max number of
times to retry, default value is 3
sharding.jdbc.config.sharding.orchestration.registry.retry-interval-milliseconds=
#Time interval in milliseconds on each retry, default value is 500 milliseconds
sharding.jdbc.config.sharding.orchestration.registry.time-to-live-seconds= #Time to
live in seconds of ephemeral keys, default value is 60 seconds

```

## Shardingsphere-2.x

### Sharding

#### Configuration Item Explanation

```

Ignore data sources configuration
sharding.jdbc.config.sharding.default-data-source-name= #Tables without sharding
rules will be located through default data source
sharding.jdbc.config.sharding.default-database-strategy.inline.sharding-column=
#Name of database sharding column
sharding.jdbc.config.sharding.default-database-strategy.inline.algorithm-
expression= #Inline expression for database sharding algorithm
sharding.jdbc.config.sharding.tables.t_order.actualDataNodes= #Describe data source
names and actual tables, delimiter as point, multiple data nodes separated with
comma, support inline expression. Absent means sharding databases only. Example: ds
${0..7}.tbl${0..7}
sharding.jdbc.config.sharding.tables.t_order.tableStrategy.inline.shardingColumn=
#Name of table sharding column
sharding.jdbc.config.sharding.tables.t_order.tableStrategy.inline.
algorithmInlineExpression= #Inline expression for table sharding algorithm
sharding.jdbc.config.sharding.tables.t_order.keyGeneratorColumnName= #Column name
of key generator, do not use Key generator if absent

sharding.jdbc.config.sharding.tables.<logic-table-name>.key-generator-column-name=
#Column name of key generator, do not use Key generator if absent
sharding.jdbc.config.sharding.tables.<logic-table-name>.key-generator-class-name=
#Key generator, use default key generator if absent. This class need to implements
KeyGenerator, and require a no argument constructor

```

### Readwrite-splitting

#### Configuration Item Explanation

```

Ignore data sources configuration

sharding.jdbc.config.masterslave.load-balance-algorithm-type= #Load balance
algorithm class of slave database; optional value: ROUND_ROBIN and RANDOM; if there
is load-balance-algorithm-class-name, the configuration can be omitted
sharding.jdbc.config.masterslave.name= # master name
sharding.jdbc.config.masterslave.master-data-source-name= #Name of master data
source
sharding.jdbc.config.masterslave.slave-data-source-names= #Name of master data
source

```

## Orchestration

### Configuration Item Explanation

```
Ignore data sources configuration
sharding.jdbc.config.orchestration.name= #Name of orchestration instance
sharding.jdbc.config.orchestration.overwrite= #Use local configuration to overwrite
registry center or not

sharding.jdbc.config.sharding.orchestration.name= #Name of orchestration instance
sharding.jdbc.config.sharding.orchestration.overwrite= #Use local configuration to
overwrite registry center or not
sharding.jdbc.config.sharding.orchestration.registry.server-lists= #Rgistry servers
list, multiple split as comma. Example: host1:2181,host2:2181
sharding.jdbc.config.sharding.orchestration.registry.namespace= #Namespace of
registry
sharding.jdbc.config.sharding.orchestration.registry.digest= #Digest for registry.
Default is not need digest.
sharding.jdbc.config.sharding.orchestration.registry.operation-timeout-
milliseconds= #Operation timeout time in milliseconds, default value is 500
milliseconds
sharding.jdbc.config.sharding.orchestration.registry.max-retries= #Max number of
times to retry, default value is 3
sharding.jdbc.config.sharding.orchestration.registry.retry-interval-milliseconds=
#Time interval in milliseconds on each retry, default value is 500 milliseconds
sharding.jdbc.config.sharding.orchestration.registry.time-to-live-seconds= #Time to
live in seconds of ephemeral keys, default value is 60 seconds

The configuration in Zookeeper
sharding.jdbc.config.orchestration.zookeeper.namespace= #Namespace of zookeeper
registry
sharding.jdbc.config.orchestration.zookeeper.server-lists= #Zookeeper Rgistry
servers list, multiple split as comma. Example: host1:2181,host2:2181

The configuration in Etcd
sharding.jdbc.config.orchestration.etcd.server-lists= #Etcd Rgistry servers list,
multiple split as comma. Example: host1:2181,host2:2181
```

## 9.9.2 ShardingSphere-Proxy

### 5.0.0-beta

#### Data Source Configuration Item Explanation

```

schemaName: # Logic schema name.

dataSources: # Data sources configuration, multiple <data-source-name> available.
<data-source-name>: # Different from ShardingSphere-JDBC configuration, it does
not need to be configured with database connection pool.
 url: # Database URL.
 username: # Database username.
 password: # Database password.
 connectionTimeoutMilliseconds: # Connection timeout milliseconds.
 idleTimeoutMilliseconds: # Idle timeout milliseconds.
 maxLifetimeMilliseconds: # Maximum life milliseconds.
 maxPoolSize: 50 # Maximum connection count in the pool.
 minPoolSize: 1 # Minimum connection count in the pool.

rules: # Keep consist with ShardingSphere-JDBC configuration.
...

```

#### Authentication

It is used to verify the authentication to log in ShardingSphere-Proxy, which must use correct user name and password after the configuration of them.

```

rules:
 - !AUTHORITY
 users:
 - root@localhost:root # <username>@<hostname>:<password>
 - sharding@:sharding
 provider:
 type: NATIVE # Must be explicitly specified.

```

If the hostname is % or empty, it means no restrict to the user's host.

The type of the provider must be explicitly specified. Refer to [5.11 Proxy](#) for more implementations.

## Proxy Properties

```

props:
 sql-show: # Whether show SQL or not in log. Print SQL details can help developers
 debug easier. The log details include: logic SQL, actual SQL and SQL parse result.
 Enable this property will log into log topic ShardingSphere-SQL, log level is INFO.
 sql-simple: # Whether show SQL details in simple style.
 executor-size: # The max thread size of worker group to execute SQL. One
 ShardingSphereDataSource will use a independent thread pool, it does not share
 thread pool even different data source in same JVM.
 max-connections-size-per-query: # Max opened connection size for each query.
 check-table-metadata-enabled: # Whether validate table meta data consistency when
 application startup or updated.
 proxy-frontend-flush-threshold: # Flush threshold for every records from
 databases for ShardingSphere-Proxy.
 proxy-transaction-type: # Default transaction type of ShardingSphere-Proxy.
 Include: LOCAL, XA and BASE.
 proxy-opentracing-enabled: # Whether enable opentracing for ShardingSphere-Proxy.
 proxy-hint-enabled: # Whether enable hint for ShardingSphere-Proxy. Using Hint
 will switch proxy thread mode from IO multiplexing to per connection per thread,
 which will reduce system throughput.
 xa-transaction-manager-type: # XA Transaction manager type. Include: Atomikos,
 Narayana and Bitronix.

```

## 5.0.0-alpha

### Data Source Configuration Item Explanation

```

schemaName: # Logic schema name.

dataSourceCommon:
 username: # Database username.
 password: # Database password.
 connectionTimeoutMilliseconds: # Connection timeout milliseconds.
 idleTimeoutMilliseconds: # Idle timeout milliseconds.
 maxLifetimeMilliseconds: # Maximum life milliseconds.
 maxPoolSize: 50 # Maximum connection count in the pool.
 minPoolSize: 1 # Minimum connection count in the pool.

dataSources: # Data sources configuration, multiple <data-source-name> available.
 <data-source-name>: # Different from ShardingSphere-JDBC configuration, it does
 not need to be configured with database connection pool.
 url: # Database URL.
 rules: # Keep consist with ShardingSphere-JDBC configuration.
 # ...

```

## Override dataSourceCommon Configuration

If you want to override the ‘dataSourceCommon’ property, configure it separately for each data source.

```
dataSources: # Data sources configuration, multiple <data-source-name> available.
 <data-source-name>: # Different from ShardingSphere-JDBC configuration, it does
 not need to be configured with database connection pool.
 url: # Database URL.
 username: # Database username, Override dataSourceCommon username property.
 password: # Database password, Override dataSourceCommon password property.
 connectionTimeoutMilliseconds: # Connection timeout milliseconds, Override
 dataSourceCommon connectionTimeoutMilliseconds property.
 idleTimeoutMilliseconds: # Idle timeout milliseconds, Override dataSourceCommon
 idleTimeoutMilliseconds property.
 maxLifetimeMilliseconds: # Maximum life milliseconds, Override dataSourceCommon
 maxLifetimeMilliseconds property.
 maxPoolSize: 50 # Maximum connection count in the pool, Override
 dataSourceCommon maxPoolSize property.
 minPoolSize: 1 # Minimum connection count in the pool, Override
 dataSourceCommon minPoolSize property.
```

## Authentication

It is used to verify the authentication to log in ShardingSphere-Proxy, which must use correct user name and password after the configuration of them.

```
authentication:
 users:
 root: # Self-defined username.
 password: root # Self-defined password.
 sharding: # Self-defined username.
 password: sharding # Self-defined password.
 authorizedSchemas: sharding_db, replica_query_db # Schemas authorized to this
 user, please use commas to connect multiple schemas. Default authorized schemas is
 all of the schemas.
```

## Proxy Properties

```
props:
 sql-show: # Whether show SQL or not in log. Print SQL details can help developers
 debug easier. The log details include: logic SQL, actual SQL and SQL parse result.
 Enable this property will log into log topic ShardingSphere-SQL, log level is INFO.
 sql-simple: # Whether show SQL details in simple style.
 acceptor-size: # The max thread size of accepter group to accept TCP connections.
 executor-size: # The max thread size of worker group to execute SQL. One
 ShardingSphereDataSource will use a independent thread pool, it does not share
 thread pool even different data source in same JVM.
```

```

max-connections-size-per-query: # Max opened connection size for each query.
check-table-metadata-enabled: # Whether validate table meta data consistency when
application startup or updated.
query-with-cipher-column: # Whether query with cipher column for data encrypt.
User you can use plaintext to query if have.
proxy-frontend-flush-threshold: # Flush threshold for every records from
databases for ShardingSphere-Proxy.
proxy-transaction-type: # Default transaction type of ShardingSphere-Proxy.
Include: LOCAL, XA and BASE.
proxy-opentracing-enabled: # Whether enable opentracing for ShardingSphere-Proxy.
proxy-hint-enabled: # Whether enable hint for ShardingSphere-Proxy. Using Hint
will switch proxy thread mode from IO multiplexing to per connection per thread,
which will reduce system throughput.

```

## ShardingSphere-4.x

### Data Source and Sharding Configuration Item Explanation

#### Data Sharding

```

schemaName: # Logic data schema name.

dataSources: # Data source configuration, which can be multiple data_source_name.
 <data_source_name>: # Different from Sharding-JDBC configuration, it does not
 need to be configured with database connection pool.
 url: # Database url connection.
 username: # Database username.
 password: # Database password.
 connectionTimeoutMilliseconds: 30000 # Connection timeout.
 idleTimeoutMilliseconds: 60000 # Idle timeout setting.
 maxLifetimeMilliseconds: 1800000 # Maximum lifetime.
 maxPoolSize: 65 # Maximum connection number in the pool.

shardingRule: #Omit data sharding configuration and be consistent with Sharding-
JDBC configuration.

```

#### Read-write splitting

```

schemaName: # Logic data schema name.

dataSources: # Omit data source configurations; keep it consistent with data
sharding.

masterSlaveRule: # Omit data source configurations; keep it consistent with
Sharding-JDBC.

```

## Data Masking

```

dataSource: # Ignore data sources configuration.

encryptRule:
 encryptors:
 <encryptor-name>:
 type: # encryptor type.
 props: # Properties, e.g. `aes.key.value` for AES encryptor.
 aes.key.value:
 tables:
 <table-name>:
 columns:
 <logic-column-name>:
 plainColumn: # plaintext column name.
 cipherColumn: # ciphertext column name.
 assistedQueryColumn: # AssistedColumns for query, when use
ShardingQueryAssistedEncryptor, it can help query encrypted data.
 encryptor: # encrypt name.
 props:
 query.with.cipher.column: true #Whether use cipherColumn to query or not

```

## Overall Configuration Explanation

### Orchestration

It is the same with Sharding-JDBC configuration.

### Proxy Properties

```

Omit configurations that are the same with Sharding-JDBC.

props:
 acceptor.size: # The thread number of accept connection; default to be 2 times of
cpu core.
 proxy.transaction.type: # Support LOCAL, XA, BASE; Default is LOCAL transaction,
for BASE type you should copy ShardingTransactionManager associated jar to lib
directory.
 proxy.opentracing.enabled: # Whether to enable opentracing, default not to
enable; refer to [APM](https://shardingsphere.apache.org/document/current/en/
features/orchestration/apm/) for more details.
 check.table.metadata.enabled: # Whether to check metadata consistency of sharding
table when it initializes; default value: false.

```

## Authentication

It is used to verify the authentication to log in Sharding-Proxy, which must use correct user name and password after the configuration of them.

```
authentication:
 users:
 root: # self-defined username.
 password: root # self-defined password.
 sharding: # self-defined username.
 password: sharding # self-defined password.
 authorizedSchemas: sharding_db, masterslave_db # schemas authorized to this
user, please use commas to connect multiple schemas. Default authorizedSchemas is
all of the schemas.
```

## ShardingSphere-3.x

### Data sources and sharding rule configuration reference

#### Data Sharding

```
schemaName: # Logic database schema name.

dataSources: # Data sources configuration, multiple `data_source_name` available.
 <data_source_name>: # Different with Sharding-JDBC, do not need configure data
 source pool here.
 url: # Database URL.
 username: # Database username.
 password: # Database password.
 autoCommit: true # The default config of hikari connection pool.
 connectionTimeout: 30000 # The default config of hikari connection pool.
 idleTimeout: 60000 # The default config of hikari connection pool.
 maxLifetime: 1800000 # The default config of hikari connection pool.
 maximumPoolSize: 65 # The default config of hikari connection pool.

 shardingRule: # Ignore sharding rule configuration, same as Sharding-JDBC.
```

#### Read-write splitting

```
schemaName: # Logic database schema name.

dataSources: # Ignore data source configuration, same as sharding.

masterSlaveRule: # Ignore read-write splitting rule configuration, same as
Sharding-JDBC.
```

## Global configuration reference

### Orchestration

Same as configuration of Sharding-JDBC.

### Proxy Properties

```
Ignore configuration which same as Sharding-JDBC.

props:
 acceptor.size: # Max thread count to handle client's requests, default value is
CPU*2.
 proxy.transaction.enabled: # Enable transaction, only support XA now, default
value is false.
 proxy.opentracing.enabled: # Enable open tracing, default value is false. More
details please reference[APM](https://shardingsphere.apache.org/document/current/
en/features/orchestration/apm/).
 check.table.metadata.enabled: # To check the metadata consistency of all the
tables or not, default value : false.
```

### Authorization

To perform Authorization for Sharding Proxy when login in. After configuring the username and password, you must use the correct username and password to login into the Proxy.

```
authentication:
 username: root
 password:
```

## 9.10 DistSQL

This chapter will introduce the detailed syntax of DistSQL.

### 9.10.1 Syntax

This chapter describes the syntax of DistSQL in detail, and introduces use of DistSQL with practical examples.

## RDL Syntax

RDL (Resource & Rule Definition Language) responsible for definition of resources/rules.

### Resource Definition

This chapter describes the syntax of resource definition.

#### ADD RESOURCE

##### Description

The ADD RESOURCE syntax is used to add resources for the currently selected database.

##### Syntax

```

AddResource ::=

 'ADD' 'RESOURCE' dataSource (',' dataSource)*

dataSource ::=

 dataSourceName '(' ('HOST' '=' hostName , 'PORT' '=' port , 'DB' '=' dbName
 | 'URL' '=' url) ',' 'USER' '=' user (',' 'PASSWORD' '=' password)? (','

 'PROPERTIES' '(' (key '=' value) (',' key '=' value)* ')')? ')'

dataSourceName ::=

 identifier

hostname ::=

 identifier | ip

dbName ::=

 identifier

port ::=

 int

password ::=

 identifier | int | string

user ::=

 identifier

url ::=

 identifier | string

```

### Supplement - Before adding resources, please confirm that a database has been created in Proxy, and execute the use command to successfully select a database - Confirm that the added resource can be connected normally, otherwise it will not be added successfully - dataSourceName is case-sensitive - dataSourceName needs to be unique within the current database - dataSourceName name only allows letters, numbers and \_, and must start with a letter - poolProperty is used to customize connection pool parameters, key must be the same as the connection pool parameter name, value supports int and String types - When password contains special characters, it is recommended to use the string form; for example, the string form of password@123 is "password@123"

### Example - Add resource using standard mode

```
ADD RESOURCE ds_0 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=db_0,
 USER=root,
 PASSWORD=root
);
```

- Add resource and set connection pool parameters using standard mode

```
ADD RESOURCE ds_1 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=db_1,
 USER=root,
 PASSWORD=root
 PROPERTIES("maximumPoolSize"=10)
);
```

- Add resource and set connection pool parameters using URL patterns

```
ADD RESOURCE ds_2 (
 URL="jdbc:mysql://127.0.0.1:3306/db_2?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=10, "idleTimeout"="30000")
);
```

## Reserved word

```
ADD, RESOURCE, HOST, PORT, DB, USER, PASSWORD, PROPERTIES, URL
```

### Related links - [Reserved word](#)

## ALTER RESOURCE

### Description

The ALTER RESOURCE syntax is used to alter resources for the currently selected database.

### Syntax

```

AlterResource ::=

 'ALTER' 'RESOURCE' dataSource (',' dataSource)*

dataSource ::=

 dataSourceName '(' ('HOST' '=' hostName ',' 'PORT' '=' port ',' 'DB' '=' dbName
 | 'URL' '=' url) ',' 'USER' '=' user (',' 'PASSWORD' '=' password)? (','
 'PROPERTIES' '(' (key '=' value) (',' key '=' value)* ')')? ')'

dataSourceName ::=

 identifier

hostname ::=

 identifier | ip

dbName ::=

 identifier

port ::=

 int

password ::=

 identifier | int | string

user ::=

 identifier

url ::=

 identifier | string

```

### Supplement - Before altering the resources, please confirm that a database exists in Proxy, and execute the use command to successfully select a database - dataSourceName is case-sensitive - dataSourceName needs to be unique within the current database - dataSourceName name only allows letters, numbers and \_, and must start with a letter - poolProperty is used to customize connection pool parameters, key must be the same as the connection pool parameter name, value supports int and String types - When password contains special characters, it is recommended to use the string form; for example, the string form of password@123 is "password@123"

### Example - Alter resource using standard mode

```
ALTER RESOURCE ds_0 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=db_0,
 USER=root,
 PASSWORD=root
);
```

- Alter resource and set connection pool parameters using standard mode

```
ALTER RESOURCE ds_1 (
 HOST=127.0.0.1,
 PORT=3306,
 DB=db_1,
 USER=root,
 PASSWORD=root
 PROPERTIES("maximumPoolSize"=10)
);
```

- Alter resource and set connection pool parameters using URL patterns

```
ALTER RESOURCE ds_2 (
 URL="jdbc:mysql://127.0.0.1:3306/db_2?serverTimezone=UTC&useSSL=false",
 USER=root,
 PASSWORD=root,
 PROPERTIES("maximumPoolSize"=10,"idleTimeout"="30000")
);
```

## Reserved word

```
ALTER, RESOURCE, HOST, PORT, DB, USER, PASSWORD, PROPERTIES, URL
```

### Related links - [Reserved word](#)

## DROP RESOURCE

### Description

The `DROP RESOURCE` syntax is used to drop resources from the current database

## Syntax

```
DropResource ::=
 'DROP' 'RESOURCE' ('IF' 'EXISTS')? dataSourceName (',' dataSourceName)* (
 'IGNORE' 'SINGLE' 'TABLES')?
```

## Supplement

- DROP RESOURCE will only drop resources in Proxy, the real data source corresponding to the resource will not be dropped
- Unable to drop resources already used by rules. Resources are still in used. will be prompted when removing resources used by rules
- The resource need to be removed only contains SINGLE TABLE RULE, and when the user confirms that this restriction can be ignored, the IGNORE SINGLE TABLES keyword can be added to remove the resource ### Example
- Drop a resource

```
DROP RESOURCE ds_0;
```

- Drop multiple resources

```
DROP RESOURCE ds_1, ds_2;
```

- Ignore single table rule remove resource

```
DROP RESOURCE ds_1 IGNORE SINGLE TABLES;
```

- Drop the resource if it exists

```
DROP RESOURCE IF EXISTS ds_2;
```

## Reserved word

```
DROP, RESOURCE, IF, EXISTS, IGNORE, SINGLE, TABLES
```

## Related links

- Reserved word

## Rule Definition

This chapter describes the syntax of rule definition.

## Sharding

This chapter describes the syntax of sharding.

## CREATE SHARDING ALGORITHM

### Description

The CREATE SHARDING ALGORITHM syntax is used to create a sharding algorithm for the currently selected database.

### Syntax

```
CreateShardingAlgorithm ::=
 'CREATE' 'SHARDING' 'ALGORITHM' shardingAlgorithmName '(' algorithmDefinition ')'

algorithmDefinition ::=
 'TYPE' '(' 'NAME' '=' algorithmType (',' 'PROPERTIES' '(' propertyDefinition ')')? ')'

propertyDefinition ::=
 (key '=' value) (',' key '=' value)*

shardingAlgorithmName ::=
 identifier

algorithmType ::=
 identifier
```

## Supplement

- `algorithmType` is the sharding algorithm type. For detailed sharding algorithm type information, please refer to [Sharding Algorithm](#)

## Example

### 1. Create sharding algorithms

```
-- create a sharding algorithm of type INLINE
CREATE SHARDING ALGORITHM inline_algorithm (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${user_id % 2}"))
);

-- create a sharding algorithm of type AUTO_INTERVAL
CREATE SHARDING ALGORITHM interval_algorithm (
 TYPE(NAME=auto_interval, PROPERTIES("datetime-lower"="2022-01-01 00:00:00",
 "datetime-upper"="2022-01-03 00:00:00", "sharding-seconds"="86400"))
);
```

## Reserved word

CREATE、SHARDING、ALGORITHM、TYPE、NAME、PROPERTIES

## Related links

- [Reserved word](#)

## CREATE SHARDING TABLE RULE

### Description

The `CREATE SHARDING TABLE RULE` syntax is used to add sharding table rule for the currently selected database

## Syntax

```

CreateShardingTableRule ::=

 'CREATE' 'SHARDING' 'TABLE' 'RULE' (tableDefinition | autoTableDefinition) (',' (tableDefinition | autoTableDefinition))*

tableDefinition ::=

 tableName '(' 'DATANODES' '(' dataNode (',' dataNode)* ')') (',' 'DATABASE_STRATEGY' '(' strategyDefinition ')')? (',' 'TABLE_STRATEGY' '(' strategyDefinition ')')? (',' 'KEY_GENERATE_STRATEGY' '(' keyGenerateStrategyDefinition ')')? ')'

autoTableDefinition ::=

 tableName '(' 'RESOURCES' '(' resourceName (',' resourceName)* ')' ',' 'SHARDING_COLUMN' '=' columnName ',' algorithmDefinition (',' 'KEY_GENERATE_STRATEGY' '(' keyGenerateStrategyDefinition ')')? ')'

strategyDefinition ::=

 'TYPE' '=' strategyType ',' ('SHARDING_COLUMN' | 'SHARDING_COLUMNS') '=' columnName ',' algorithmDefinition

keyGenerateStrategyDefinition ::=

 'KEY_GENERATE_STRATEGY' '(' 'COLUMN' '=' columnName ',' ('KEY_GENERATOR' '=' algorithmName | algorithmDefinition) ')'

algorithmDefinition ::=

 ('SHARDING_ALGORITHM' '=' algorithmName | 'TYPE' '(' 'NAME' '=' algorithmType (',' 'PROPERTIES' '(' propertyDefinition ')')? ')')

propertyDefinition ::=

 (key '=' value) (',' key '=' value)*

tableName ::=

 identifier

resourceName ::=

 identifier

columnName ::=

 identifier

algorithmName ::=

 identifier

```

## Supplement

- `tableDefinition` is defined for standard sharding table rule; `autoTableDefinition` is defined for auto sharding table rule. For standard sharding rules and auto sharding rule, refer to [Data Sharding](#).
- use standard sharding table rule
  - `DATANODES` can only use resources that have been added to the current database, and can only use `INLINE` expressions to specify required resources
  - `DATABASE_STRATEGY`, `TABLE_STRATEGY` are the database sharding strategy and the table sharding strategy, which are optional, and the default strategy is used when not configured
  - The attribute `TYPE` in `strategyDefinition` is used to specify the type of [Sharding Algorithm](#), currently only supports `STANDARD`, `COMPLEX`. Using `COMPLEX` requires specifying multiple sharding columns with `SHARDING_COLUMNS`.
- use auto sharding table rule
  - `RESOURCES` can only use resources that have been added to the current database, and the required resources can be specified by enumeration or `INLINE` expression
  - Only auto sharding algorithm can be used, please refer to [Auto Sharding Algorithm](#)
- `algorithmType` is the sharding algorithm type, please refer to [Sharding Algorithm](#)
- The auto-generated algorithm naming rule is `tableName_strategyType_shardingAlgorithmType`
- The auto-generated primary key strategy naming rule is `tableName_strategyType`
- `KEY_GENERATE_STRATEGY` is used to specify the primary key generation strategy, which is optional. For the primary key generation strategy, please refer to [Distributed Primary Key](#)

## Example

### 1. Standard sharding table rule

- **Create standard sharding table rule by specifying sharding algorithms**

```
-- create sharding algorithms
CREATE SHARDING ALGORITHM database_inline (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${user_id % 2}"))
), table_inline (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${order_id % 2}"))
);

-- create a sharding rule by specifying sharding algorithms
CREATE SHARDING TABLE RULE t_order (
 DATANODES("ds_${0..1}.t_order_${0..1}"),
 DATABASE_STRATEGY(TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_
ALGORITHM=database_inline),
```

```
 TABLE_STRATEGY(TYPE=standard, SHARDING_COLUMN=order_id, SHARDING_
ALGORITHM=table_inline)
);
```

- Use the default sharding database strategy, create standard sharding table rule by specifying a sharding algorithm

```
-- create sharding algorithms
CREATE SHARDING ALGORITHM database_inline (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${user_id % 2}"))
), table_inline (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${order_id % 2}"))
);

-- create a default sharding database strategy
CREATE DEFAULT SHARDING DATABASE STRATEGY (
 TYPE = standard, SHARDING_COLUMN=order_id, SHARDING_ALGORITHM=database_inline
);

-- create a sharding table rule by specifying a sharding algorithm
CREATE SHARDING TABLE RULE t_order (
 DATANODES("ds_${0..1}.t_order_${0..1}"),
 TABLE_STRATEGY(TYPE=standard, SHARDING_COLUMN=order_id, SHARDING_
ALGORITHM=table_inline)
);
```

- Use both the default sharding and the default sharding strategy, create standard sharding table rule

```
-- create sharding algorithms
CREATE SHARDING ALGORITHM database_inline (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${user_id % 2}"))
), table_inline (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${order_id % 2}"))
);

-- create a default sharding database strategy
CREATE DEFAULT SHARDING DATABASE STRATEGY (
 TYPE = standard, SHARDING_COLUMN=order_id, SHARDING_ALGORITHM=database_inline
);

-- create a default sharding table strategy
CREATE DEFAULT SHARDING TABLE STRATEGY (
 TYPE = standard, SHARDING_COLUMN=order_id, SHARDING_ALGORITHM=table_inline
);
```

```
-- create a sharding table rule
CREATE SHARDING TABLE RULE t_order (
 DATANODES("ds_${0..1}.t_order_${0..1}")
);
```

- **Create standard sharding table rule and sharding algorithms at the same time**

```
CREATE SHARDING TABLE RULE t_order (
 DATANODES("ds_${0..1}.t_order_${0..1}"),
 DATABASE_STRATEGY(TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_
ALGORITHM(TYPE(NAME=inline, PROPERTIES("algorithm-expression"="ds_${user_id % 2}
"))),
 TABLE_STRATEGY(TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_
ALGORITHM(TYPE(NAME=inline, PROPERTIES("algorithm-expression"="ds_${order_id % 2}
"))))
);
```

## 2. Auto sharding table rule

- **create auto sharding table rule**

```
CREATE SHARDING TABLE RULE t_order (
 RESOURCES(ds_0, ds_1),
 SHARDING_COLUMN=order_id, TYPE(NAME=MOD, PROPERTIES("sharding-count"=4))
);
```

## Reserved word

```
CREATE, SHARDING, TABLE, RULE, DATANODES, DATABASE_STRATEGY, TABLE_STRATEGY, KEY_
GENERATE_STRATEGY, RESOURCES, SHARDING_COLUMN, TYPE, SHARDING_COLUMN, KEY_
GENERATOR, SHARDING_ALGORITHM, COLUMN, NAME, PROPERTIES
```

## Related links

- Reserved word
- [CREATE SHARDING ALGORITHM](#)
- [CREATE DEFAULT\\_SHARDING STRATEGY](#)

## CREATE DEFAULT SHARDING STRATEGY

### Description

The CREATE DEFAULT SHARDING STRATEGY syntax is used to create a default sharding strategy

### Syntax

```

CreateDefaultShardingStrategy ::=

 'CREATE' 'DEFAULT' 'SHARDING' ('DATABASE' | 'TABLE') 'STRATEGY' '|(
 shardingStrategy ')'

shardingStrategy ::=

 'TYPE' '=' strategyType ',' ('SHARDING_COLUMN' '=' columnName | 'SHARDING_
 COLUMNS' '=' columnNames) ',' ('SHARDING_ALGORITHM' '=' algorithmName | |
 algorithmDefinition)

algorithmDefinition ::=

 'TYPE' '(' 'NAME' '=' algorithmType (',' 'PROPERTIES' '(' propertyDefinition
 ')')? ')'

columnNames ::=

 columnName (',' columnName)+

columnName ::=

 identifier

algorithmName ::=

 identifier

algorithmType ::=

 identifier

```

### Supplement

- When using the complex sharding algorithm, multiple sharding columns need to be specified using SHARDING\_COLUMNS
- algorithmType is the sharding algorithm type. For detailed sharding algorithm type information, please refer to [Sharding Algorithm](#)

## Example

### 1.Create a default sharding strategy by using an existing sharding algorithm

```
-- create a sharding algorithm
CREATE SHARDING ALGORITHM database_inline (
 TYPE(NAME=inline, PROPERTIES("algorithm-expression"="t_order_${order_id % 2}"))
);

-- create a default sharding database strategy
CREATE DEFAULT SHARDING DATABASE STRATEGY (
 TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_ALGORITHM=database_inline
);
```

### 2.Create sharding algorithm and default sharding table strategy at the same time

```
-- create a default sharding table strategy
CREATE DEFAULT SHARDING TABLE STRATEGY (
 TYPE=standard, SHARDING_COLUMN=user_id, SHARDING_ALGORITHM(TYPE(NAME=inline,
PROPERTIES("algorithm-expression"="t_order_${user_id % 2}")))
);
```

## Related links

- [CREATE SHARDING ALGORITHM](#)

## CREATE SHARDING BINDING TABLE RULE

### Description

The CREATE SHARDING BINDING TABLE RULE syntax is used to add binding relationships and create binding table rules for tables with sharding table rules

### Syntax

```
CreateBindingTableRule ::=

 'CREATE' 'SHARDING' 'BINDING' 'TABLE' 'RULES' bindingTableDefinition (','
bindingTableDefinition)*

bindingTableDefinition ::=
 '(' tableName (',' tableName)* ')'
```

```
tableName ::=
 identifier
```

## Supplement

- Creating binding relationships rules can only use sharding tables
- A sharding table can only have one binding relationships
- The sharding table for creating binding relationships needs to use the same resources and the same actual tables. For example `ds_{0..1}.t_order_{0..1}` 与 `ds_{0..1}.t_order_item_{0..1}`
- The sharding table for creating binding relationships needs to use the same sharding algorithm for the sharding column. For example `t_order_{order_id % 2}` and `t_order_item_{order_item_id % 2}`
- Only one binding rule can exist, but can contain multiple binding relationships, so can not execute `CREATE SHARDING BINDING TABLE RULE` more than one time. When a binding table rule already exists but a binding relationship needs to be added, you need to use `ALTER SHARDING BINDING TABLE RULE` to modify the binding table rule

## Example

### 1.Create a binding table rule

```
-- Before creating a binding table rule, you need to create sharding table rules t_order, t_order_item
CREATE SHARDING BINDING TABLE RULES (t_order,t_order_item);
```

### 2.Create multiple binding table rules

```
-- Before creating binding table rules, you need to create sharding table rules t_order, t_order_item, t_product, t_product_item
CREATE SHARDING BINDING TABLE RULES (t_order,t_order_item),(t_product,t_product_item);
```

## Related links

- [CREATE SHARDING TABLE RULE](#)

## CREATE SHARDING BROADCAST TABLE RULE

### Description

The CREATE SHARDING BROADCAST TABLE RULE syntax is used to create broadcast table rules for tables that need to be broadcast (broadcast tables)

### Syntax

```
CreateBroadcastTableRule ::=
 'CREATE' 'SHARDING' 'BROADCAST' 'TABLE' 'RULES' '(' tableName (',' tableName)* ')'

tableName ::=
 identifier
```

### Supplement

- tableName can use an existing table or a table that will be created
- Only one broadcast rule can exist, but can contain multiple broadcast tables, so can not execute CREATE SHARDING BROADCAST TABLE RULE more than one time. When the broadcast table rule already exists but the broadcast table needs to be added, you need to use ALTER BROADCAST TABLE RULE to modify the broadcast table rule

### Example

#### Create sharding broadcast table rule

```
-- Add t_province, t_city to broadcast table rules
CREATE SHARDING BROADCAST TABLE RULES (t_province, t_city);
```

## CREATE SHARDING KEY GENERATOR

### Description

The `CREATE SHARDING KEY GENERATOR` syntax is used to add a distributed primary key generator for the currently selected logic database

### Syntax

```

CreateShardingAlgorithm ::=

 'CREATE' 'SHARDING' 'KEY' 'GENERATOR' keyGeneratorName '(' algorithmDefinition ')'
 '

algorithmDefinition ::=

 'TYPE' '(' 'NAME' '=' algorithmType (',' 'PROPERTIES' '(' propertyDefinition ')')? ')'

propertyDefinition ::=

 (key '=' value) (',' key '=' value)*

keyGeneratorName ::=

 identifier

algorithmType ::=

 identifier

```

### Supplement

- `algorithmType` is the key generate algorithm type. For detailed key generate algorithm type information, please refer to [KEY GENERATE ALGORITHM](#)

### Example

#### Create a distributed primary key generator

```

CREATE SHARDING KEY GENERATOR snowflake_key_generator (
 TYPE(NAME=SNOWFLAKE, PROPERTIES("max-vibration-offset"=3))
);

```

## Reserved word

```
CREATE、SHARDING、KEY、GENERATOR、TYPE、NAME、PROPERTIES
```

## Related links

- Reserved word

## RQL Syntax

RQL (Resource & Rule Query Language) responsible for resources/rules query.

## Resource Query

This chapter describes the syntax of resource query.

### SHOW RESOURCE

#### Description

The SHOW RESOURCE syntax is used to query the resources that have been added to the specified database.

#### Syntax

```
ShowResource ::=
 'SHOW' 'DATABASE' 'RESOURCES' ('FROM' databaseName)?

databaseName ::=
 identifier
```

#### Supplement

- When databaseName is not specified, the default is the currently used DATABASE; if DATABASE is not used, it will prompt No database selected.

### Return Value Description

Column	Description
name	Data source name
type	Data source type
host	Data source host
port	Data source port
db	Database name
attribute	Data source attribute

### ### Example

- Query resources for the specified database

```
SHOW DATABASE RESOURCES FROM sharding db;
```

name	type	host	port	db	connection_timeout_milliseconds	idle_timeout_milliseconds	max_lifetime_milliseconds	max_pool_size	min_pool_size	read_only	other_attributes
ds_0	MySQL	127.0.0.1	3306	db_0	30000 1800000	50	1		60000		

- Query resources for the current database

```
SHOW DATABASE RESOURCES;
```

name	type	host	port	db	connection_timeout_milliseconds	idle_timeout_milliseconds	max_lifetime_milliseconds	max_pool_size	min_pool_size	read_only	other_attributes
------	------	------	------	----	---------------------------------	---------------------------	---------------------------	---------------	---------------	-----------	------------------

## SHOW UNUSED RESOURCE

## Description

The `SHOW UNUSED RESOURCE` syntax is used to query resources in the specified database that have not been referenced by rules.

## Syntax

```
ShowUnusedResource ::=
 'SHOW' 'UNUSED' 'DATABASE'? 'RESOURCES' ('FROM' databaseName)?

databaseName ::=
 identifier
```

## Supplement

- When `databaseName` is not specified, the default is the currently used `DATABASE`; if `DATABASE` is not used, it will prompt `No database selected.`

### ### Return Value Description

Column	Description
name	Data source name
type	Data source type
host	Data source host
port	Data source port
db	Database name
attribute	Data source attribute

### ### Example

- Query resources for the specified database

```
SHOW UNUSED DATABASE RESOURCES FROM sharding_db;
```

name	type	host	port	db	connection_timeout_milliseconds	idle_timeout_milliseconds	max_lifetime_milliseconds	max_pool_size	min_pool_size	read_only	other_attributes
------	------	------	------	----	---------------------------------	---------------------------	---------------------------	---------------	---------------	-----------	------------------

```

+-----+-----+-----+-----+-----+
| ds_0 | MySQL | 127.0.0.1 | 3306 | db_0 | 30000
+-----+-----+-----+-----+-----+
| 1800000 | 50 | 1 | 60000
+-----+-----+-----+-----+
false | {"dataSourceProperties": {"cacheServerConfiguration": "true",
"elideSetAutoCommits": "true", "useServerPrepStmts": "true", "cachePrepStmts": "true",
"rewriteBatchedStatements": "true", "cacheResultSetMetadata": "false",
"useLocalSessionState": "true", "maintainTimeStats": "false", "prepStmtCacheSize": "2000000",
"tinyInt1isBit": "false", "prepStmtCacheSqlLimit": "2048",
"zeroDateTimeBehavior": "round", "netTimeoutForStreamingResults": "0"}, "healthCheckProperties": {}, "initializationFailTimeout": 1, "validationTimeout": 5000,
"leakDetectionThreshold": 0, "registerMbeans": false, "allowPoolSuspension": false,
"autoCommit": true, "isolateInternalQueries": false} |
+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+
| 1 rows in set (0.26 sec)

```

- Query resources for the current database

```
SHOW UNUSED DATABASE RESOURCES;
```

```

+-----+-----+-----+-----+-----+
| name | type | host | port | db | connection_timeout_milliseconds | idle_
| | | | | | | timeout_
| | | | | | | milliseconds
| | | | | | | max_
| | | | | | | pool_
| | | | | | | size
| | | | | | | min_
| | | | | | | pool_
| | | | | | | size
| | | | | | | read_
| | | | | | | only
| | | | | | | other_
| | | | | | | attributes
+-----+-----+-----+-----+-----+

```

## SHOW RULES USED RESOURCE

## Description

The `SHOW RULES USED RESOURCE` syntax is used to query the rules that use the specified resource in the specified database.

## Syntax

```

showRulesUsedResource ::=

 'SHOW' 'RULES' 'USED' 'RESOURCES' resourceName ('FROM' databaseName)?

resourceName ::=

 IDENTIFIER | STRING

databaseName ::=

 IDENTIFIER

```

## Supplement

- When `databaseName` is not specified, the default is the currently used `DATABASE`; if `DATABASE` is not used, it will prompt `No database selected`.

## Return Value Description

Column	Description
<code>type</code>	<code>features</code>
<code>name</code>	Data source name

## Example

- Query the rules that use the specified resource in the specified database

```
SHOW RULES USED RESOURCE ds_0 FROM sharding_db;
```

```
+-----+-----+
| type | name |
+-----+-----+
| sharding | t_order |
| sharding | t_order_item |
+-----+-----+
2 rows in set (0.00 sec)
```

- Query the rules that use the specified resource in the current database

```
SHOW RULES USED RESOURCE ds_0;
```

```
+-----+-----+
| type | name |
+-----+-----+
| sharding | t_order |
+-----+-----+
```

```
| sharding | t_order_item |
+-----+-----+
2 rows in set (0.00 sec)
```

## Rule Query

This chapter describes the syntax of rule query.

### Sharding

This chapter describes the syntax of sharding.

## SHOW SHARDING TABLE RULE

### Description

The SHOW SHARDING TABLE RULE syntax is used to query the sharding table rule in the specified database.

### Syntax

```
ShowShardingTableRule ::=
 'SHOW' 'SHARDING' 'TABLE' ('RULE' tableName | 'RULES') ('FROM' databaseName)?

tableName ::=
 identifier

databaseName ::=
 identifier
```

### Supplement

- When databaseName is not specified, the default is the currently used DATABASE. If DATABASE is not used, No database selected will be prompted.

### Return value description

Column	Description
table	Logical table name
actual_data_nodes	Actual data node
actual_data_sources	Actual data source (Displayed when creating rules by RDL)
database_strategy_type	Database sharding strategy type
database_sharding_column	Database sharding column
<b>database_sharding_algorithm_type</b>	Database sharding algorithm type
database_sharding_algorithm_props	Database sharding algorithm properties
table_strategy_type	Table sharding strategy type
table_sharding_column	Table sharding column
<b>table_sharding_algorithm_type</b>	Table sharding algorithm type
table_sharding_algorithm_props	Table sharding algorithm properties
key_generate_column	Sharding key generator column
key_generator_type	Sharding key generator type
key_generator_props	Sharding key generator properties

### Example - Query the sharding table rules of the specified logical database

```
SHOW SHARDING TABLE RULES FROM sharding_db;
```

```
+-----+-----+-----+
+-----+-----+-----+
| table | actual_data_nodes | actual_data_sources | database_strategy_type |
database_sharding_column | database_sharding_algorithm_type | database_sharding_
algorithm_props | table_strategy_type | table_sharding_column | table_sharding_
algorithm_type | table_sharding_algorithm_props | key_generate_column | key_
generator_type | key_generator_props |
+-----+-----+-----+
+-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
| t_order | | ds_0,ds_1 | |
| mod | | order_id | |
| sharding-count=4 | | mod | |
| | | | |
| t_order_item | | ds_0,ds_1 | |
| mod | | order_id | |
| sharding-count=4 | | mod | |
| | | | |
```

```
2 rows in set (0.12 sec)
```

- Query the sharding table rules of the current logic database

```
SHOW SHARDING TABLE RULES;
```

```
+-----+-----+-----+
+-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
| table | actual_data_nodes | actual_data_sources | database_strategy_type |
| database_sharding_column | database_sharding_algorithm_type | database_sharding_
| algorithm_props | table_strategy_type | table_sharding_column | table_sharding_
| algorithm_type | table_sharding_algorithm_props | key_generate_column | key_
| generator_type | key_generator_props |
+-----+-----+-----+
+-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
| t_order | | ds_0,ds_1 | |
| | | | |
| | mod | order_id | mod |
| sharding-count=4 | | | |
| | | | |
| | | | |
| t_order_item | | ds_0,ds_1 | |
| | | | |
| | mod | order_id | mod |
| sharding-count=4 | | | |
| | | | |
+-----+-----+-----+
+-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
2 rows in set (0.12 sec)
```

- Query the specified sharding table rule

```
SHOW SHARDING TABLE RULE t_order;
```

```
+-----+-----+-----+
+-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
-----+-----+-----+
| table | actual_data_nodes | actual_data_sources | database_strategy_type |
| database_sharding_column | database_sharding_algorithm_type | database_sharding_
| algorithm_props | table_strategy_type | table_sharding_column | table_sharding_
| algorithm_type | table_sharding_algorithm_props | key_generate_column | key_
| generator_type | key_generator_props |
+-----+-----+-----+
9.10. DistSQL
502
```

```

+-----+-----+-----+
+-----+-----+-----+
+-----+-----+-----+
+-----+-----+-----+
| t_order | | ds_0,ds_1 | | | |
| | | | |
| | mod | | order_id | | mod |
| | sharding-count=4 | | | |
| | | | |
+-----+-----+-----+
+-----+-----+-----+
+-----+-----+-----+
+-----+-----+-----+
+-----+-----+-----+
1 rows in set (0.12 sec)

```

## RAL Syntax

RAL (Resource & Rule Administration Language) responsible for the added-on feature of hint, transaction type switch, scaling, sharding execute planning and so on.

### Reserved word

#### Resource definition

```
ADD, RESOURCE, HOST, PORT, DB, USER, PASSWORD, PROPERTIES, URL
```

### Supplement

- The above reserved words are not case-sensitive

# 10

## Downloads

### 10.1 Latest Releases

Apache ShardingSphere is released as source code tarballs with corresponding binary tarballs for convenience. The downloads are distributed via mirror sites and should be checked for tampering using GPG or SHA-512.

#### 10.1.1 Apache ShardingSphere - Version: 5.1.2 ( Release Date: June 17th, 2022 )

- Source Codes: [SRC](#) ( [ASC](#), [SHA512](#) )
- ShardingSphere-JDBC Binary Distribution: [TAR](#) ( [ASC](#), [SHA512](#) )
- ShardingSphere-Proxy Binary Distribution: [TAR](#) ( [ASC](#), [SHA512](#) )
- ShardingSphere-Agent Binary Distribution: [TAR](#) ( [ASC](#), [SHA512](#) )

### 10.2 All Releases

Find all releases in the [Archive repository](#). Find all incubator releases in the [Archive incubator repository](#).

### 10.3 Verify the Releases

#### PGP signatures KEYS

It is essential that you verify the integrity of the downloaded files using the PGP or SHA signatures. The PGP signatures can be verified using GPG or PGP. Please download the KEYS as well as the asc signature files for relevant distribution. It is recommended to get these files from the main distribution directory and not from the mirrors.

```
gpg -i KEYS
```

or

```
pgpk -a KEYS
```

or

```
pgp -ka KEYS
```

To verify the binaries/sources you can download the relevant asc files for it from main distribution directory and follow the below guide.

```
gpg --verify apache-shardingsphere-*****.asc apache-shardingsphere-*****
```

or

```
pgpv apache-shardingsphere-*****.asc
```

or

```
pgp apache-shardingsphere-*****.asc
```