
Apache ShenYu document

Apache ShenYu

Jul 11, 2023

Contents

1	Architecture	1
2	What is the Apache ShenYu?	2
3	Why named Apache ShenYu	3
4	Features	4
5	Mind map	5
6	Quick Start (docker)	6
6.1	Run Apache ShenYu Admin	6
6.2	Run Apache ShenYu Bootstrap	6
6.3	Set router	6
7	Plugin	8
8	Selector & Rule	9
9	Data Caching & Data Sync	10
10	Prerequisite	12
11	Stargazers over time	13
12	Contributor and Support	14
13	Known Users	15
14	Design	16
14.1	Design principle	17
14.1.1	Client	17
14.1.2	Server	19
14.2	Http Registry	20
14.3	Zookeeper Registry	20

14.4	Etcd Registry	21
14.5	Consul Registry	21
14.6	Nacos Register	22
14.7	SPI	23
14.8	Plugin	23
14.9	Selector And Rule	24
14.10	Traffic filtering	24
14.11	Plugin, Selector And Rule	24
14.12	Resource Permission	25
14.13	Data Permission	26
14.14	Meta Data	27
14.15	Dictionary Management	28
14.16	API Documentation	28
14.17	Registry Center	29
14.18	Metrics Center	29
14.19	Load Balance	29
14.20	RateLimiter	29
14.21	Match Strategy	29
14.22	Parameter Data	30
14.23	Predicate Judge	30
14.24	Develop Phase	30
14.25	Prepare Phase	30
14.26	Runtime Phase	30
14.27	Preface	31
14.28	Principle Analysis	31
14.28.1	Zookeeper Synchronization	32
14.28.2	WebSocket Synchronization	32
14.28.3	Http Long Polling	34
14.28.4	Nacos Synchronization	34
14.28.5	Etcd Synchronization	35
14.28.6	Consul Synchronization	35
15	Deployment	36
15.1	Download shell script	36
15.2	execute script	36
15.3	Initialize the shenyu-admin database	36
15.4	Modify the configuration file	37
15.5	Execute docker-compose	37
15.6	Environmental Preparation	37
15.7	Start Apache ShenYu Admin	37
15.8	Start Apache ShenYu Bootstrap	38
15.9	Start Nginx	38
15.9.1	Getting Started	39
15.10	Build from source	39
15.11	Greeting ETCD	39

15.12 Greeting Nacos	40
15.12.1 Greeting Zookeeper	41
15.13 Start Apache ShenYu Admin	42
15.14 Start Apache ShenYu Bootstrap	43
15.15 Example 1: Using h2 as a database	43
15.15.1 1. Create Namespace and ConfigMap	43
15.15.2 2. Create shenyu-admin	49
15.15.3 3. Create shenyu-bootstrap	51
15.16 Example 2: Use MySQL as the database	52
15.16.1 1. Create Namespace and ConfigMap	52
15.16.2 2. Create shenyu-admin	58
15.16.3 3. Create shenyu-bootstrap	60
15.17 Test Access	61
15.18 Start Apache ShenYu Admin	61
15.19 Build your own gateway (recommended)	61
15.20 Environmental preparation	62
15.21 Download the compiled code	63
15.22 Create Docker Network	64
15.23 Start Apache ShenYu Admin	64
15.24 Start Apache ShenYu Bootstrap	65
15.25 Environmental preparation	66
15.26 Start Apache ShenYu Bootstrap	66
15.27 Selector and rule configuration	66
15.28 by postman	67
15.29 by curl	67
15.30 Database Initialize	68
15.30.1 Mysql	68
15.30.2 PostgreSql	69
15.30.3 Oracle	69
16 Quick Start	70
16.1 Environment to prepare	70
16.2 Run the shenyu-examples-brpc project	71
16.3 Test	72
16.4 Prepare For Environment	72
16.5 Run the shenyu-examples-grpc project	73
16.6 Test	74
16.7 Streaming	75
16.8 Environment to prepare	79
16.9 Run the shenyu-examples-websocket project	80
16.10 Test	80
16.11 Annexes	80
16.12 Environment to prepare	82
16.13 Run the shenyu-examples-motan project	83
16.14 Test	84

16.15 Environment to prepare	84
16.16 Run the shenyu-examples-dubbo project	86
16.17 Test	88
16.18 Environment to prepare	91
16.19 Run the shenyu-examples-tars project	91
16.20 Test	93
16.21 Environment to prepare	94
16.22 Run the shenyu-examples-sofa project	95
16.23 Test	102
16.24 Environment to prepare	103
16.25 Run the shenyu-examples-http project	104
16.26 Test	105
16.27 Environment to prepare	107
16.28 Run the shenyu-examples-springcloud project	109
16.29 Test	111
17 User Guide	114
17.1 Export API Documentation to shenyu-admin	114
18 Plugin Center	115
19 Developer	116
19.1 Description	116
19.2 Default Implementation	116
19.3 Extensions	117
19.4 Description	118
19.5 Get token	119
19.6 Registration Services	120
19.7 Registration Metadata	121
19.8 Preparation	123
19.9 Start integration test locally	123
19.10 Description	123
19.11 Single Responsibility Plugins	124
19.12 Matching Traffic Processing Plugin	125
19.13 Subscribe your plugin data and do customized jobs	128
19.14 Dynamic loading	129
19.14.1 Plugin loading path details	130
19.15 Plugin jar upload	130
19.16 Description	130
19.17 Extension	130
19.18 Description	132
19.19 Time Consumption	132
19.20 Netty Optimization	132
19.21 Description	133
19.22 Plugin	133
19.22.1 saveOrUpdate	133

Request Method	134
Path	134
Request Parameters	134
Example	134
19.22.2 CleanAll	134
Request Method	134
Path	135
19.22.3 Clean Plugin	135
Request Method	135
Path	135
RequestParam	135
19.22.4 Delete plugin	135
Request Method	135
Path	135
RequestParam	135
19.22.5 Delete All Plugin	136
Request Method	136
Path	136
19.22.6 Find plugin by name	136
Request Method	136
Path	136
RequestParam	136
19.22.7 Save or Update Selector	136
Request Method	137
Path	137
RequestParam	137
Example	138
Result	138
19.22.8 Add Selector And Rules	138
Request Method	139
Path	139
RequestParam	139
Example	140
19.22.9 Delete Selector	141
Request Method	141
Path	141
RequestParam	141
19.22.10Find All Selector	141
Request Method	141
Path	142
RequestParam	142
19.22.11Save or Update Rule Data	142
Request Method	142
Path	142
RequestParam	142

Example	143
Result	144
19.22.12Delete rule data	144
Request Method	144
Path	144
RequestParam	144
19.22.13Find Rule data List	144
Request Method	145
Path	145
RequestParam	145
19.23 Meta data	145
19.23.1 Save Or Update	145
Request Method	145
Path	145
RequestParam	145
19.23.2 Delete	146
Request Method	146
Path	146
RequestParam	146
19.24 App Sign Data	147
19.24.1 Save Or Update	147
Request Method	147
Path	147
RequestParam	147
19.24.2 Delete	148
Request Method	148
Path	148
RequestParam	148
19.25 Description	148
19.26 CORS Support	148
19.27 Filtering Spring Boot health check	149
19.28 Extending org.apache.shenyu.web.filter.AbstractWebFilter	150
19.29 Description	151
19.30 Default Implementation	151
19.31 Implement through a Plugin	151
19.32 Description	152
19.33 IO And Work Thread	152
19.34 Business Thread	152
19.35 Type Switching	152
19.36 description	152
19.37 File Upload	152
19.38 File Download	153
19.39 Description	153
19.40 Extension	153

20 Benchmark Test	155
20.1 Hardware	155
20.1.1 Back-end Mock Service Server:	155
20.1.2 Gateway node server:	155
20.2 ShenYu Version	155
20.3 Test Tool	155
20.4 Test Case Description	156
20.4.1 Instruction	156
20.4.2 JVM Configuration	156
20.4.3 Public Configuration	156
20.4.4 WebClient Configuration	158
20.4.5 Netty Client Configuration	158
20.5 Benchmark Test Results	159
20.5.1 Direct Access to Back-end Test Result	160
Test Result	160
Screenshot of Test Result	160
20.5.2 Access to Back-end Services via NettyClient Test Result	160
Screenshot of Test Result	161
20.5.3 Access to Back-end Services via WebClient Test Result	161
Test Result	161
Screenshot of Test Result	161

Architecture



2

What is the Apache ShenYu?

This is an asynchronous, high-performance, cross-language, responsive API gateway.

3

Why named Apache ShenYu

ShenYu (神禹) is the honorific name of Chinese ancient monarch Xia Yu (also known in later times as Da Yu), who left behind the touching story of the three times he crossed the Yellow River for the benefit of the people and successfully managed the flooding of the river. He is known as one of the three greatest kings of ancient China, along with Yao and Shun.

- Firstly, the name ShenYu is to promote the traditional virtues of our Chinese civilisation.
 - Secondly, the most important thing about the gateway is the governance of the traffic.
 - Finally, the community will do things in a fair, just, open and meritocratic way, paying tribute to ShenYu while also conforming to the Apache Way.
-

4

Features

- Proxy: Support for Apache® Dubbo™, Spring Cloud, gRPC, Motan, SOFA, TARS, WebSocket, MQTT
 - Security: Sign, OAuth 2.0, JSON Web Tokens, WAF plugin
 - API governance: Request, response, parameter mapping, Hystrix, RateLimiter plugin
 - Observability: Tracing, metrics, logging plugin
 - Dashboard: Dynamic traffic control, visual backend for user menu permissions
 - Extensions: Plugin hot-swapping, dynamic loading
 - Cluster: NGINX, Docker, Kubernetes
 - Language: provides .NET, Python, Go, Java client for API register
-

Mind map



Quick Start (docker)

6.1 Run Apache ShenYu Admin

```
docker pull apache/shenyu-admin
docker network create shenyu
docker run -d -p 9095:9095 --net shenyu apache/shenyu-admin
```

Default account: **admin**

Default password: **123456**

6.2 Run Apache ShenYu Bootstrap

```
docker pull apache/shenyu-bootstrap
docker run -d -p 9195:9195 -e "shenyu.local.enabled=true" --net shenyu apache/
shenyu-bootstrap
```

6.3 Set router

- Real requests : <http://127.0.0.1:8080/helloworld>,

```
{
  "name" : "Shenyu",
  "data" : "hello world"
}
```

- Set routing rules (Standalone)

Add localKey: 123456 to Headers. If you need to customize the localKey, you can use the sha512 tool to generate the key based on plaintext and update the shenyu.local.sha512Key property.

```
curl --location --request POST 'http://localhost:9195/shenyu/plugin/
selectorAndRules' \
--header 'Content-Type: application/json' \
--header 'localKey: 123456' \
--data-raw '{
    "pluginName": "divide",
    "selectorHandler": "[{\\"upstreamUrl\\":\\"127.0.0.1:8080\\"]}",
    "conditionDataList": [
        {
            "paramType": "uri",
            "operator": "match",
            "paramValue": "/**"
        }
    ],
    "ruleDataList": [
        {
            "ruleHandler": "{\\"loadBalance\\":\\"random\\"}",
            "conditionDataList": [
                {
                    "paramType": "uri",
                    "operator": "match",
                    "paramValue": "/**"
                }
            ]
        }
    ]
}'
```

- Proxy request : http://localhost:9195/helloworld

```
{
    "name" : "Shenyu",
    "data" : "hello world"
}
```

Plugin

Whenever a request comes in, Apache ShenYu will execute it by all enabled plugins through the chain of responsibility.

As the heart of Apache ShenYu, plugins are extensible and hot-pluggable.

Different plugins do different things.

Of course, users can also customize plugins to meet their own needs.

If you want to customize, see [custom-plugin](#).

8

Selector & Rule

According to your HTTP request headers, selectors and rules are used to route your requests.

Selector is your first route, It is coarser grained, for example, at the module level.

Rule is your second route and what do you think your request should do. For example a method level in a module.

The selector and the rule match only once, and the match is returned. So the coarsest granularity should be sorted last.

Data Caching & Data Sync

Since all data have been cached using ConcurrentHashMap in the JVM, it's very fast.

Apache ShenYu dynamically updates the cache by listening to the ZooKeeper node (or WebSocket push, HTTP long polling) when the user changes configuration information in the background management.





10

Prerequisite

- JDK 1.8+
-

11

Stargazers over time

12

Contributor and Support

- How to Contribute
 - Mailing Lists
-

13

Known Users

In order of registration, More access companies are welcome to register at <https://github.com/apache/shenyu/issues/68> (For open source users only) .

All Users : Known Users

14

Design

Application client access means to access your microservice to ShenYu gateway, currently supports HTTP, Dubbo, Spring Cloud, gRPC, Motan, Sofa, Tars and other protocols access.


Connecting the application client to ShenYu gateway is realized through the registration center, which involves the registration of the client and the synchronization of the server data. The registry supports HTTP, ZooKeeper, Etcd, Consul, and Nacos.

Refer to the client access configuration in the user documentation for [Application Client Access Config](#)

.

14.1 Design principle


14.1.1 Client

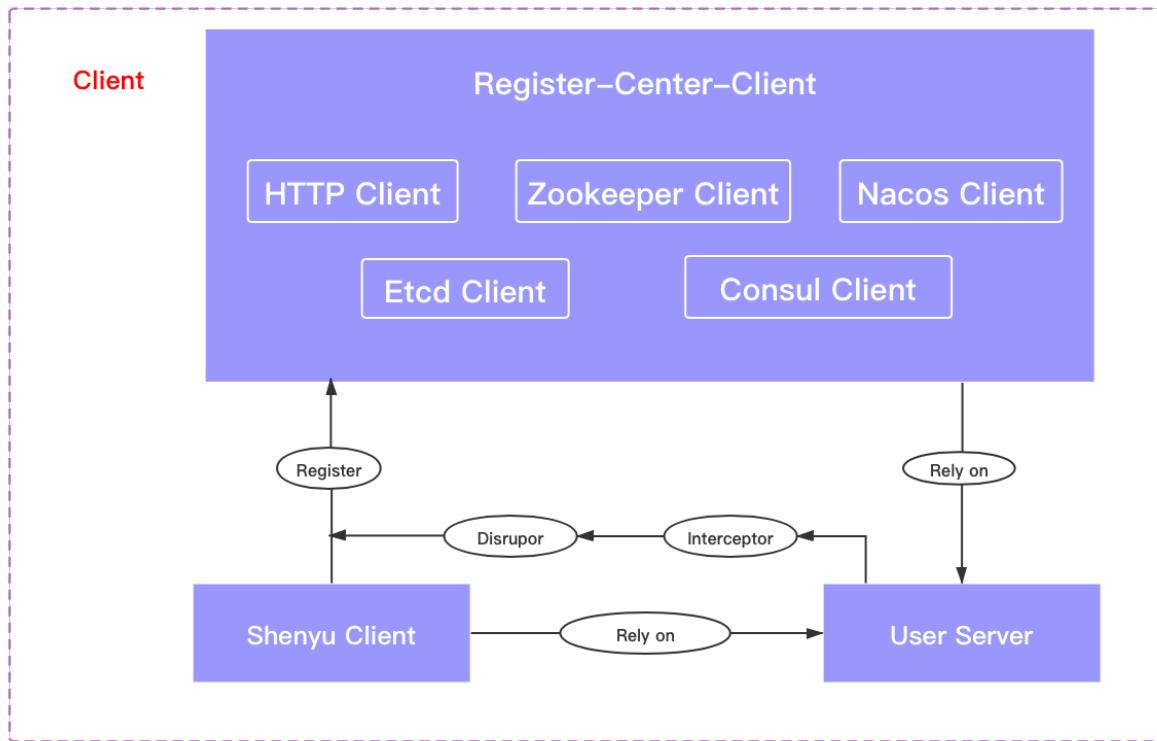

Declare the registry client type, such as HTTP or ZooKeeper, in your microservice configuration. Use SPI to load and initialize the corresponding registry client when the application starts, implement the post-processor interface associated with the Spring Bean, get the service interface information to register in it, and place the obtained information into Disruptor.

The Registry client reads data from the Disruptor and registers the interface information with shenyu-admin, where the Disruptor decouples data from operations for scaling.

14.1.2 Server

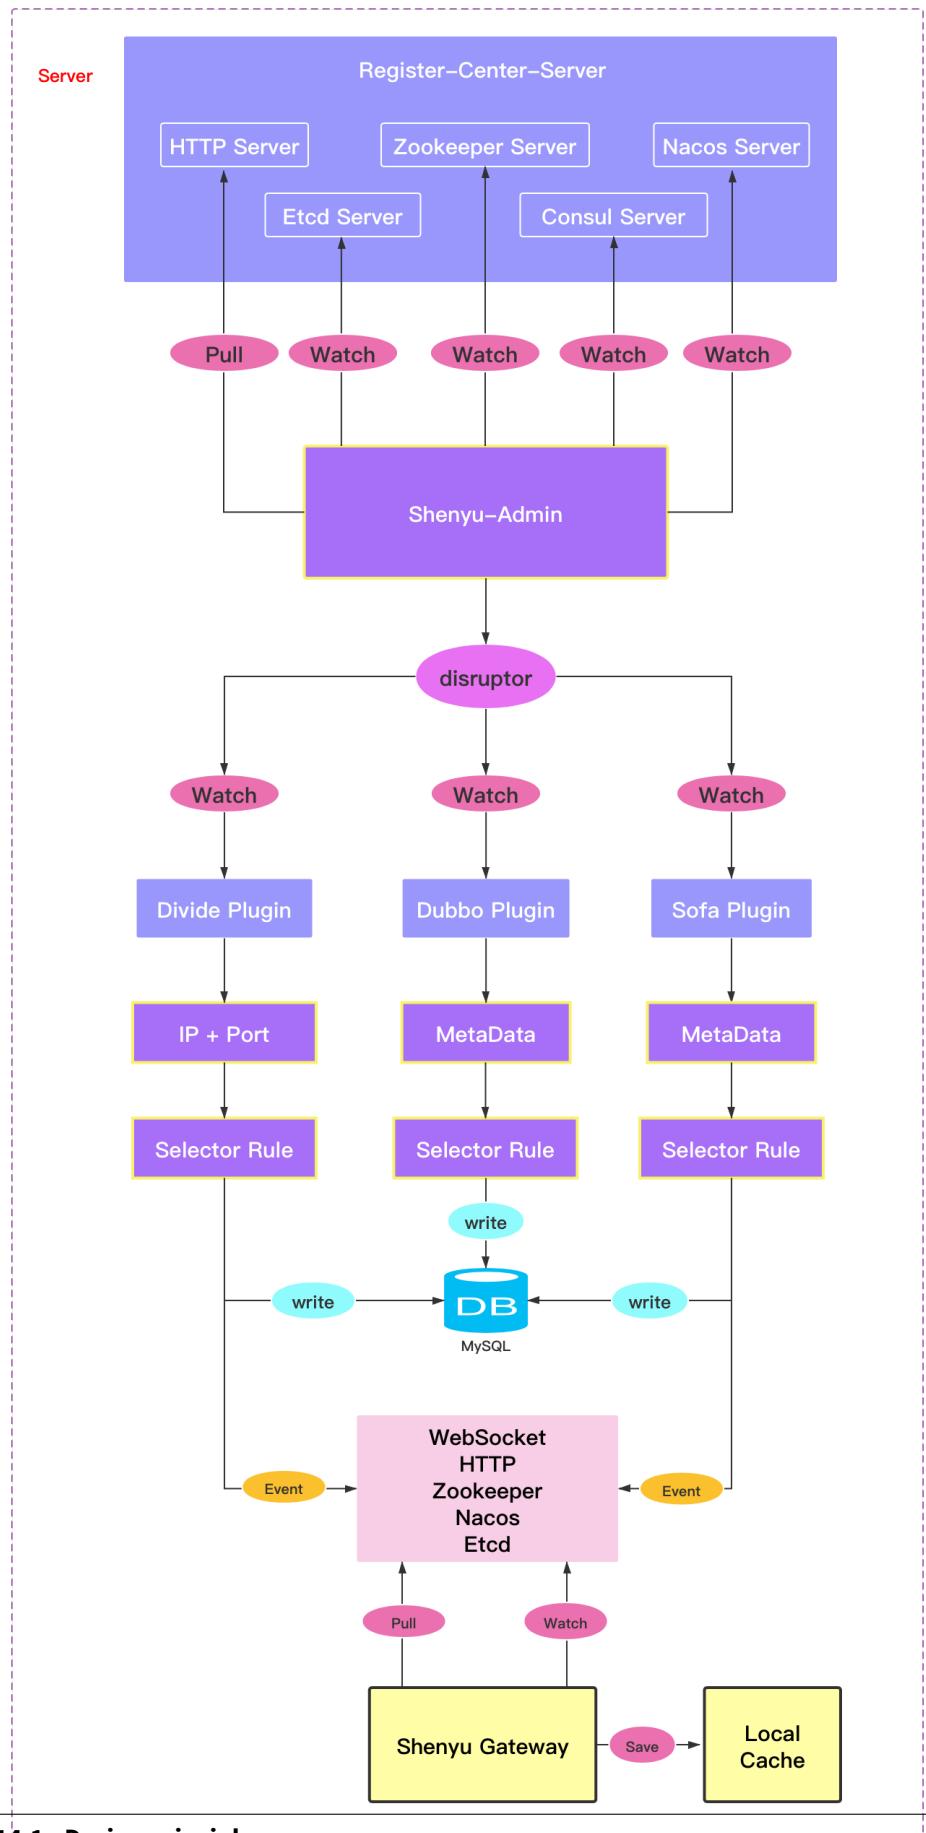

Declare the registry server type, such as HTTP or ZooKeeper, in the Shenyu-Admin configuration. When shenyu-admin is started, it will read the configuration type, load and initialize the corresponding registry server, and when the registry server receives the interface information registered by shenyu-client, it will put it into Disruptor, which will trigger the registration processing logic to update the interface information and publish a synchronous event.

Disruptor provides data and operations decoupling for expansion. If there are too many registration requests, resulting in abnormal registration, there is also a data buffer role.

14.2 Http Registry

The principle of HTTP service registration is relatively simple. After Shenyu-Client is started, the relevant service registration interface of Shenyu-Admin will be called to upload data for registration.

After receiving the request, shenyu-admin will update the data and publish the data synchronization event to synchronize the interface information to ShenYu Gateway.

14.3 Zookeeper Registry

Zookeeper storage struct is:

```

shenyu
  register
    metadata
      ${rpcType}
        ${contextPath}
          ${ruleName} : save metadata data of
  MetaDataRegisterDTO
    uri
      ${rpcType}
        ${contextPath}
          ${ip:port} : save uri data of UriRegisterDTO
          ${ip:port}

```

shenyu-client starts up, the service interface information (MetaDataRegisterDTO/UriRegisterDTO) wrote above the Zookeeper nodes.

shenyu-admin uses the Watch mechanism of Zookeeper to monitor events such as data update and deletion, and triggers the corresponding registration processing logic after data changes. Upon receipt of a change to the MetadataregisterDTO node, the data change and data synchronization event publication of the selector and rule is triggered. Upon receipt of a UriRegisterDTO node change, the upstream of the selector is triggered to publish an update and data synchronization event.

14.4 Etcd Registry

Etcd storage struct is:

```

shenyu
  +-- register
    +-- metadata
      +-- ${rpcType}
        +-- ${contextPath}
          +-- ${ruleName} : save metadata data of
  MetaDataRegisterDTO
    +-- uri
      +-- ${rpcType}
        +-- ${contextPath}
          +-- ${ip:port} : save uri data of UriRegisterDTO
            +-- ${ip:port}

```

shenyu-client starts up, the service interface information (MetaDataRegisterDTO/UriRegisterDTO) wrote in Ephemeral way above Etcd of the node.

shenyu-admin uses Etcd's Watch mechanism to monitor events such as data update and deletion, and triggers the corresponding registration processing logic after data changes. Upon receipt of a change to the MetadataregisterDTO node, the data change and data synchronization event publication of the selector and rule is triggered. Upon receipt of a UriRegisterDTO node change, the upstream of the selector is triggered to publish an update and data synchronization event.

14.5 Consul Registry

Consul register client will save UriRegisterDTO to service instance metadata, and UriRegisterDTO will disappear with service unregister.

Key	Value
url	[{"appName": "http", "contextPath": "/http", "rpcType": "http", "host": "192.168.3.125", "port": 8189}]

And Consul register client will save MetaDataRegisterDTO to Key/Value store, storage struct is:

```

shenyu
  +-- register
    +-- metadata

```

```

    |   |   |
    |   |   +-- ${rpcType}
    |   |   |
    |   |   +-- ${contextPath}
    |   |
    |   +-- ${ruleName} : save metadata data of
MetaDataRegisterDTO
  
```

When shenyu-client is started, The service interface information (MetaDataRegisterDTO/URIRegisterDTO) on the Metadata of the ServiceInstance (URIRegisterDTO) and Key-Value (MetaDataRegisterDTO), Store as described above.

shenyu-admin senses the update and deletion of data by monitoring the change of index of Catalog and KeyValue, and triggers the corresponding registration processing logic after the change of data. Upon receipt of a change to the MetadateregisterDTO node, the data change and data synchronization event publication of the selector and rule is triggered. Upon receipt of a UriRegisterDTO node change, the upstream of the selector is triggered to publish an update and data synchronization event.

14.6 Nacos Register

Nacos registration is divided into two parts: URI and Metadata. URI is registered by instance. In case of service exception, the relevant URI data node will be deleted automatically and send events to the subscriber, and the subscriber will carry out relevant offline processing. Metadata is registered by configuration without any related up-down operation. When a URI instance is registered, the Metadata configuration will be published accordingly. The subscriber monitors data changes and carries out update processing.

The URI instance registration command rules are as follows:

```
shenyu.register.service.${rpcType}
```

Listens on all RpcType nodes initially, and the \${contextPath} instances registered under them are distinguished by IP and Port, and carry their corresponding contextPath information. After the URI instance is offline, it triggers the update and data synchronization event publication of the selector's upstream.

When the URI instance goes online, the corresponding Metadata data will be published. The node name command rules are as follows:

```
shenyu.register.service.${rpcType}.${contextPath}
```

The subscriber side continues to listen for all Metadata configurations, triggering selector and rule data changes and data synchronization events after the initial subscription and configuration update.

14.7 SPI

<i>SPI Name</i>	<i>Description</i>
ShenyuClientRegisterRepository	ShenYu client register SPI

<i>Implementation Class</i>	<i>Description</i>
HttpClientRegisterRepository	Http client register repository
ZookeeperClientRegisterRepository	Zookeeper client register repository
EtcdClientRegisterRepository	Etcd client register repository
ConsulClientRegisterRepository	Consul client register repository
NacosClientRegisterRepository	Nacos client register repository

<i>SPI Name</i>	<i>Description</i>
ShenyuServerRegisterRepository	ShenYu server register SPI

<i>Implementation Class</i>	<i>Description</i>
ShenyuHttpRegistryController	Http server repository
ZookeeperServerRegisterRepository	Zookeeper server registry repository
EtcdServerRegisterRepository	Etcd server registry repository
ConsulServerRegisterRepository	Consul server registry repository
NacosServerRegisterRepository	Nacos server registry repository

ShenYu gateway realizes flow control through plugins, selectors and rules. For related data structure, please refer to the previous [Apache ShenYu Admin Database Design](#) .

14.8 Plugin

In Apache ShenYu Admin System, each plugin uses Handle (JSON format) fields to represent different processing, and the plugin processing is used to manage and edit the custom processing fields in the JSON.

The main purpose of this feature is to enable plugins to handle templated configurations.

14.9 Selector And Rule

Selector and rule are the most soul of Apache ShenYu Gateway. Master it and you can manage any traffic.

A plugin has multiple selectors, and one selector corresponds to multiple rules. The selector is the first level filter of traffic, and the rule is the final filter. For a plugin, we want to meet the traffic criteria based on our configuration before the plugin will be executed. Selectors and rules are designed to allow traffic to perform what we want under certain conditions. The rules need to be understood first.

The execution logic of plugin, selector and rule is as follows. When the traffic enters into ShenYu gateway, it will first judge whether there is a corresponding plugin and whether the plugin is turned on. Then determine whether the traffic matches the selector of the plugin. It then determines whether the traffic matches the rules of the selector. If the request traffic meets the matching criteria, the plugin will be executed. Otherwise, the plugin will not be executed. Process the next one. ShenYu gateway is so through layers of screening to complete the flow control.

14.10 Traffic filtering

Traffic filtering is the soul of the selector and the rule, corresponding to the matching conditions in the selector and the rule. According to different traffic filtering rules, we can deal with various complex scenes. Traffic filtering can fetch data from Http requests such as Header, URI, Query, Cookie, etc.


You can then use Match, =, SpEL, Regex, Groovy, Exclude, etc, to Match the desired data. Multi-group matching Adds matching policies that can use And/Or.

please refer to [Selector And Rule Config](#) for details.

Apache Shenyu Admin is the management system of the gateway, which can manage all plugins, selectors and rules visually, set users, roles and resources.

14.11 Plugin, Selector And Rule


- **Plugin:** ShenYu uses the plugin design idea to realize the hot plug of the plugin, which is easy to expand. Built-in rich plugins, including RPC proxy, circuit breaker and current limiting, authority and certification, monitoring, and more.
- **Selector:** Each plugin can set multiple selectors to carry out preliminary filtering of traffic.
- **Rule:** Multiple rules can be set per selector for more fine-grained control of flow.
- **The Database Table UML Diagram:**

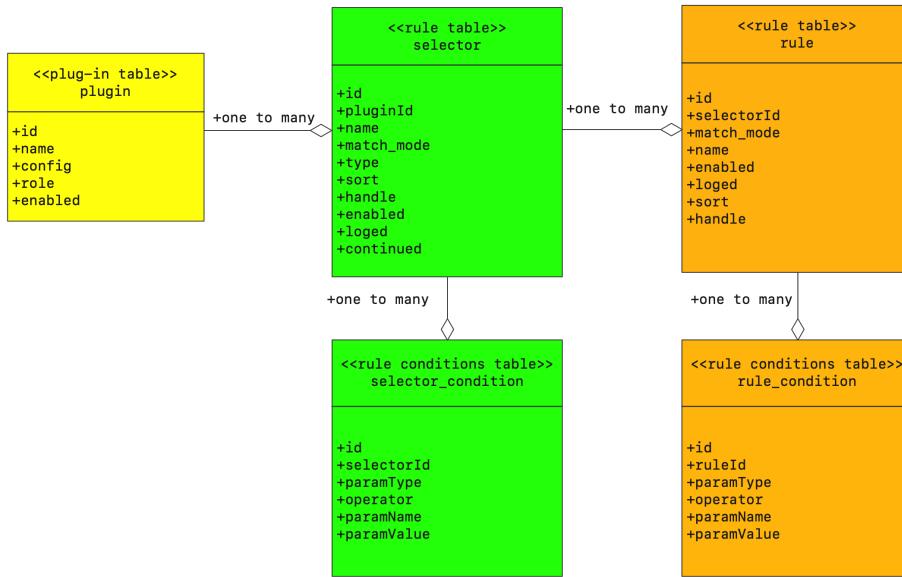

- Detailed design:
 - One plugin corresponds to multiple selectors, one selector corresponds to multiple rules.
 - One selector corresponds to multiple match conditions, one rule corresponds to multiple match conditions.
 - Each rule handles differently in corresponding plugin according to field handler, field handler is a kind of data of JSON string type. You can view detail during the use of shenyu-admin.

14.12 Resource Permission

- The resource are the menus and buttons in the shenyu-admin console.
- Resource Permission use database to store user name, role, resource data and relationship.



- The Resource Permission Table UML Diagram:
- Detailed design:
 - one user corresponds to multiple role, one role corresponds to multiple resources.

14.13 Data Permission

- Data Permission use database to store the relationship between users, selectors and rules.



- The Data Permission Table UML Diagram:
- Detailed design:
 - The most important table is **data_permission**, where a user corresponds to multiple data permissions.
 - The field **data_type** distinguishes between different types of data, which corresponds to the following: 0 -> selector, 1 -> rule.
 - The field **data_id** holds the primary key id of the corresponding type.

14.14 Meta Data

- Metadata is used for generic invoke by gateway.
- For each interface method, there is one piece of metadata.
- The Database Table UML Diagram:
- Detailed design:
 - **path**: When the gateway is requested, a piece of data will be matched according to path, and then the subsequent process will be carried out.
 - **rpc_ext**: Used to hold extended information for the RPC proxy.

14.15 Dictionary Management

- Dictionary management is used to maintain and manage public data dictionaries.
- The Database Table UML Diagram:

14.16 API Documentation

- The API document tables used to maintain and manage API documents.
- The API document (such as json, md, html, etc.) of common specifications (such as OpenApi3.0 and yapi) can be imported into shenyu-admin and finally stored in the API document tables.
- API documents of other common specifications can be generated through the API document tables.
- The Database Table UML Diagram:
- Detailed design:
 - A tag can have multiple child tags, the level of tags is unlimited, the lowest leaf node is API.
 - Interfaces with the same path but supporting multiple http methods, they are counted as multiple APIs.
 - An API has multiple request parameters and response fields.
 - A parameter/field has its own type (model), and each type have multiple fields.
 - A field has its own type, which corresponds to multiple values.
 - A value can be used as either a request example value, or a response example value (for example, 200 indicates OK, and 400 indicates illegal parameters).
 - The query, header and body, all of them are json stored in mock_request_record, but body does not support special types such as file.
 - The ext of the tag table stores the full amount of json data of its parent tag (including the parent tag of the parent tag, and so on).
 - The ext of the api table may store the IP list and the service name of SpringCloud.
 - The type of the parameter table mainly includes requestUrlParam, requestHeader, requestBody, requestPathVariable, responseHeader, and responseBody; If the returned type is a special type (such as file), do not associate model_id.
 - The ext of the field table stores generic type in json format (convenient for subsequent expansion), such as {"genericTypes": [model_id1, model_id2]}; model_id indicates which type has this field, self_model_id indicates which type of this field.
 - The is_example of detail table indicates whether a value is a request sample value, true is a request sample value, and false is a response value.

SPI, called Service Provider Interface, is a built-in JDK Service that provides discovery function and a dynamic replacement discovery mechanism.

`shenyu-spi` is a custom SPI extension implementation for Apache ShenYu gateway. The design and implementation principles refer to [SPI Extension Implementations](#).

14.17 Registry Center

Consul, Etcd, Http, Nacos and Zookeeper are supported. The expansion of the registry including client and server, interface respectively `ShenyuServerRegisterRepository` and `ShenyuClientRegisterRepository`.

14.18 Metrics Center

Responsible for service monitoring, loading concrete implementation through SPI, currently support Prometheus, service interface is `MetricsService`.

14.19 Load Balance

Select one of the service providers to call. Currently, the supported algorithms are `Has`, `Random`, and `RoundRobin`, and the extended interface is `LoadBalance`.

14.20 RateLimiter

In the `RateLimiter` plugin, which stream limiting algorithm to use, currently supporting `Concurrent`, `LeakyBucket`, `SlidingWindow` and `TokenBucket`, the extension interface is `RateLimiterAlgorithm`.

14.21 Match Strategy

Which matching method to use when adding selectors And rules, currently supports `And`, `Or`, `And` and the extension interface is `MatchStrategy`.

14.22 Parameter Data

Currently, URI, RequestMethod, Query, Post, IP, Host, Cookie, and Header are supported. The extended interface is `ParameterData`.

14.23 Predicate Judge

Which conditional policy to use when adding selectors and rules currently supports Match, Contains, Equals, Groovy, Regex, SpEL, TimerAfter, TimerBefore and Exclude. The extension interface is `PredicateJudge`.

Apache ShenYu is a Java native API Gateway for service proxy, protocol conversion and API governance. Currently, ShenYu has good scalability in the Java language. However, ShenYu's support for multiple languages is still relatively weak.

WASM(WebAssembly) bytecode is designed to be encoded in a size- and load-time-efficient binary format. WebAssembly aims to leverage the common hardware features available on various platforms to execute in browsers at machine code speed.

WASI(WebAssembly System Interface) allows WASM to run in non browser environments such as Linux.

The goal of `WASMPlugin` is to be able to run WASM bytecode. Other languages, as long as their code can be compiled into WASM bytecode (such as Rust/golang/C++), can be used to write ShenYu plugins.

14.24 Develop Phase

14.25 Prepare Phase

14.26 Runtime Phase

This document explains the principle of data synchronization. Data synchronization refers to the strategy used to synchronize data to ShenYu gateway after shenyu-admin background operation data. ShenYu gateway currently supports ZooKeeper, WebSocket, HTTP Long Polling, Nacos, Etcd and Consul for data synchronization.

See [Data Synchronization Configuration](#) for configuration information about data synchronization.

14.27 Preface

Gateway is the entrance of request and it is a very important part in micro service architecture, therefore the importance of gateway high availability is self-evident. When we use gateway, we have to change configuration such as flow rule, route rule for satisfying business requirement. Therefore, the dynamic configuration of the gateway is an important factor to ensure the high availability of the gateway.

In the actual use of Apache ShenYu Gateway, users also feedback some problems:

- Apache ShenYu depends on ZooKeeper, how to use Etcd, Consul, Nacos and other registry center?
- Apache ShenYu depends on Redis and InfluxDB, and do not use limiting plugins or monitoring plugins. Why need these?
- Why not use configuration center for configuration synchronization?
- Why can't updates be configured dynamically?
- Every time you want to query the database, Redis is a better way.

According to the feedback of users, we have also partially reconstructed ShenYu. The current data synchronization features are as follows:

- All configuration is cached in ShenYu gateway memory, each request uses local cache, which is very fast.
- Users can modify any data in the background of shenyu-admin, and immediately synchronize to the gateway memory.
- Support ShenYu plugin, selector, rule data, metadata, signature data and other data synchronization.
- All plugin selectors and rules are configured dynamically and take effect immediately, no service restart required.
- Data synchronization mode supports Zookeeper, HTTP long polling, Websocket, Nacos, Etcd and Consul.

14.28 Principle Analysis

The following figure shows the process of data synchronization of ShenYu. ShenYu Gateway will synchronize configuration data from configuration service at startup, and support push-pull mode to get configuration change information, and then update local cache. The administrator can change the user permissions, rules, plugins and traffic configuration in the admin system(shenyu-admin), and synchronize the change information to ShenYu Gateway through the push-pull mode. Whether the mode is push or pull depends on the synchronization mode used.

In the original version, the configuration service relied on the Zookeeper implementation to manage the back-end push of changes to the gateway. Now, WebSocket, HTTP long polling, ZooKeeper, Nacos, Etcd, and Consul can now be supported by specifying the corresponding synchronization policy by setting `shenyu.sync.${strategy}` in the configuration file. The default WebSocket synchronization

policy can be used to achieve second level data synchronization. However, it is important to note that Apache ShenYu Gateway and shenyu-admin must use the same synchronization policy.

As showing picture below,shenyu-admin will issue a configuration change notification through EventPublisher after users change configuration,EventDispatcher will handle this modification and send configuration to corresponding event handler according to configured synchronization strategy.

- If it is a websocket synchronization strategy,it will push modified data to shenyu-web, and corresponding `WebSocketDataHandler` handler will handle shenyu-admin data push at the gateway layer
- If it is a zookeeper synchronization strategy,it will push modified data to zookeeper, and the `ZookeeperSyncCache` will monitor the data changes of zookeeper and process them
- If it is a http synchronization strategy,shenyu-web proactively initiates long polling requests,90 seconds timeout by default,if there is no modified data in shenyu-admin,http request will be blocked,if there is a data change, it will respond to the changed data information,if there is no data change after 60 seconds,then respond with empty data,gateway continue to make http request after getting response,this kind of request will repeat.

14.28.1 Zookeeper Synchronization


The zookeeper-based synchronization principle is very simple,it mainly depends on zookeeper watch mechanism,shenyu-web will monitor the configured node,when shenyu-admin starts,all the data will be written to zookeeper,it will incrementally update the nodes of zookeeper when data changes,at the same time, shenyu-web will monitor the node for configuration information, and update the local cache once the information changes

Apache ShenYu writes the configuration information to the zookeeper node, and it is meticulously designed. If you want to learn more about the code implementation, refer to the source code `ZookeeperSyncDataService`.

14.28.2 WebSocket Synchronization

The mechanism of websocket and zookeeper is similar,when the gateway and the shenyu-admin establish a websocket connection,shenyu-admin will push all data at once,it will automatically push incremental data to shenyu-web through websocket when configured data changes

When we use websocket synchronization,pay attention to reconnect after disconnection,which also called keep heartbeat.Apache ShenYu uses `java-websocket`,a third-party library,to connect to websocket. If you want to learn more about the code implementation, refer to the source code `WebSocketSyncDataService`.

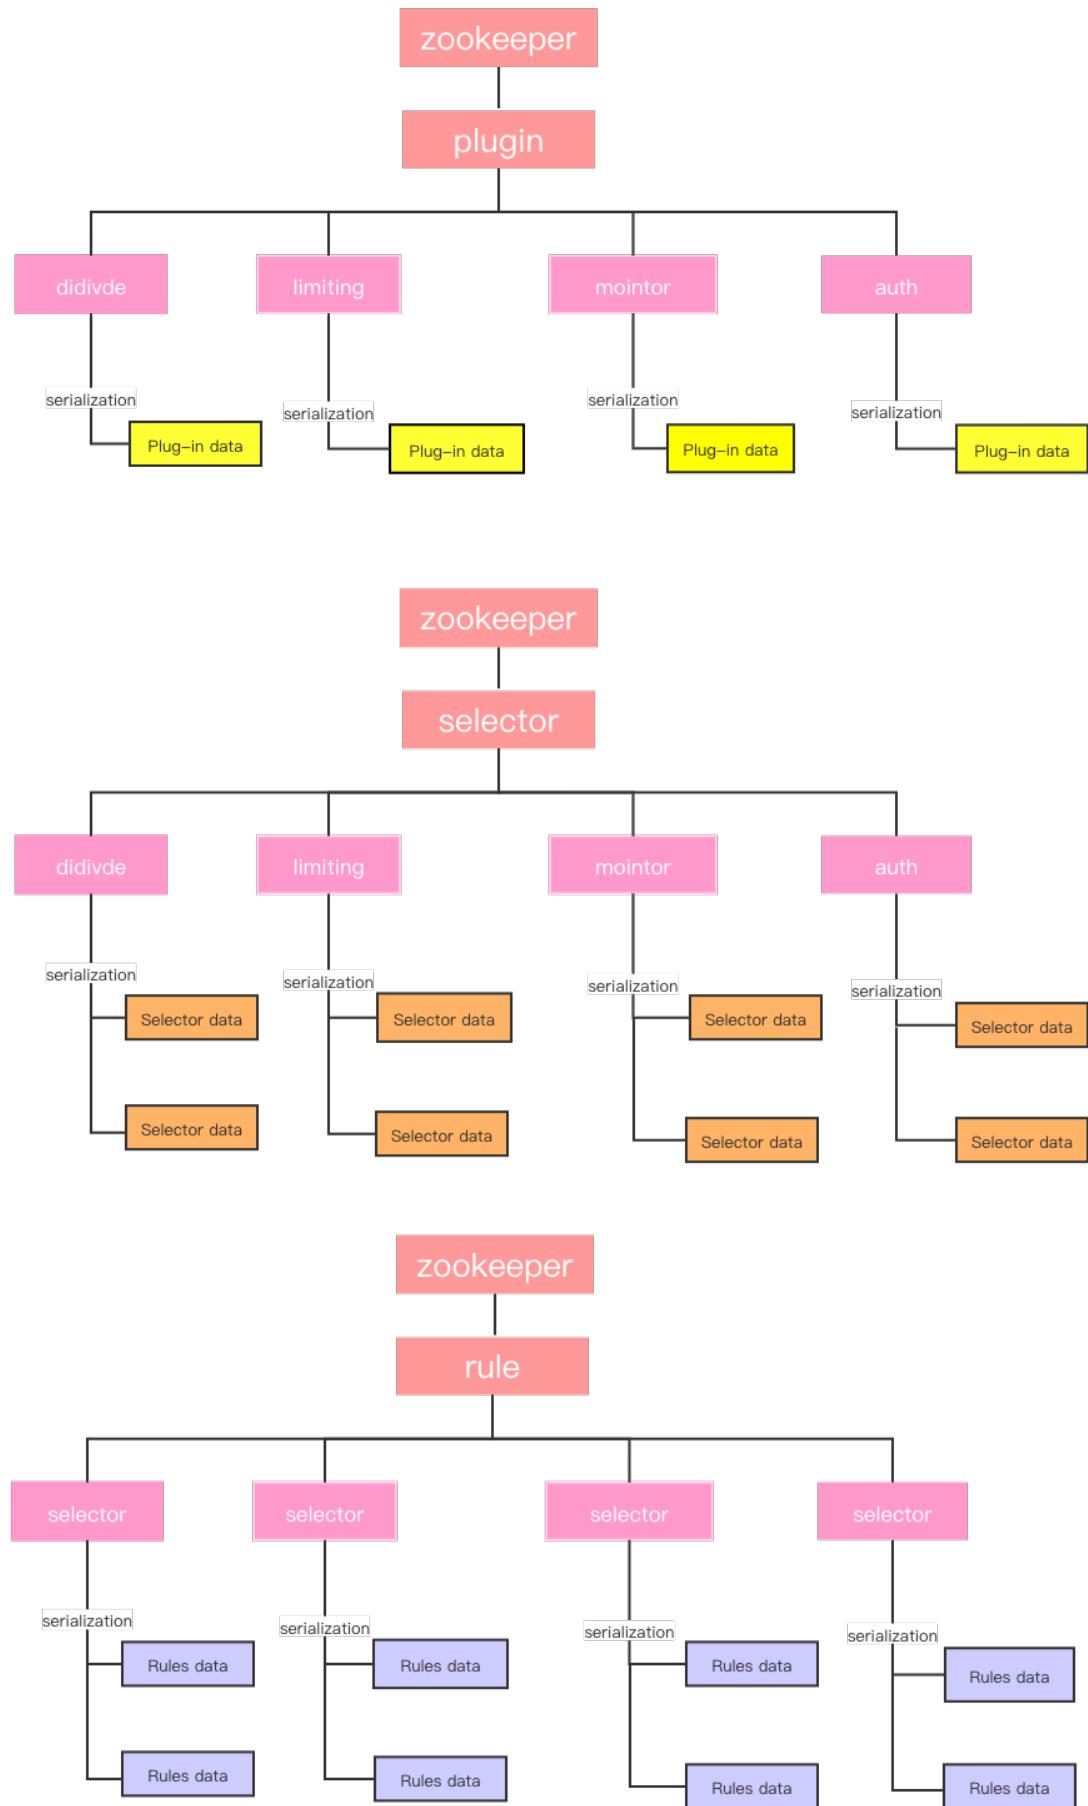

14.28.3 Http Long Polling

The mechanism of zookeeper and websocket data synchronization is relatively simple, but http synchronization will be relatively complicated. ShenYu borrows the design ideas of Apollo and Nacos and realizes http long polling data synchronization using their advantages. Note that this is not traditional ajax long polling.

http long polling mechanism as above, shenyu-web gateway requests shenyu-admin configuration services, timeout is 90 seconds, it means gateway layer request configuration service will wait at most 90 seconds, this is convenient for shenyu-admin configuration service to respond modified data in time, and therefore we realize near real-time push.

After the http request reaches shenyu-admin, it does not respond immediately, but uses the asynchronous mechanism of Servlet3.0 to asynchronously respond to the data. First of all, put long polling request task `LongPollingClient` into `BlochingQueue`, and then start scheduling task, execute after 60 seconds, this aims to remove the long polling request from the queue after 60 seconds, even there is no configured data change. Because even if there is no configuration change, gateway also need to know, otherwise it will wait, and there is a 90 seconds timeout when the gateway requests configuration services.

If the administrator changes the configuration data during this period, the long polling requests in the queue will be removed one by one, and respond which group's data has changed (we distribute plugins, rules, flow configuration, user configuration data into different groups). After gateway receives response, it only knows which Group has changed its configuration, it need to request again to get group configuration data. Someone may ask, why don't you write out the changed data directly? We also discussed this issue deeply during development, because the http long polling mechanism can only guarantee quasi real-time, if gateway layer does not handle it in time, or administrator updates configuration frequently, we probably missed some configuration change push. For security, we only inform that a certain Group information has changed.

When shenyu-web gateway layer receives the http response information, pull modified information (if exists), and then request shenyu-admin configuration service again, this will repeatedly execute. If you want to learn more about the code implementation, refer to the source code `HttpSyncDataService`.

14.28.4 Nacos Synchronization

The synchronization principle of Nacos is basically similar to that of ZooKeeper, and it mainly depends on the configuration management of Nacos. The path of each configuration node is similar to that of ZooKeeper.

ShenYu gateway will monitor the configured node. At startup, if there is no configuration node in Nacos, it will write the synchronous full amount of data into Nacos. When the sequential data send changes, it will update the configuration node in Nacos in full amount. The local cache is updated.

If you want to learn more about the code implementation, please refer to the source code `NacosSyncDataService` and the official documentation for Nacos .

14.28.5 Etcd Synchronization

Etcd data synchronization principle is similar to Zookeeper, mainly relying on Etcd's watch mechanism, and each configuration node path is the same as that of Zookeeper.

The native API for Etcd is a bit more complicated to use, so it's somewhat encapsulated.

ShenYu gateway will listen to the configured node. When startup, if there is no configuration node in Etcd, it will write the synchronous full amount of data into Etcd. When the sequential data send changes, it will update the configuration node in Etcd incrementally.

If you want to learn more about the code implementation, refer to the source `EtcdSyncDataService`.

14.28.6 Consul Synchronization

Consul data synchronization principle is that the gateway regularly polls Consul's configuration center to get the configuration version number for local comparison.

ShenYu gateway will poll the configured nodes regularly, and the default interval is 1s. When startup, if there is no configuration node in Consul, write the synchronous full amount of data into Consul, then incrementally update the configuration node in Consul when the subsequent data is sent to change. At the same time, Apache ShenYu Gateway will regularly poll the node of configuration information and pull the configuration version number for comparison with the local one. The local cache is updated when the version number is changed.

If you want to learn more about the code implementation, refer to the source `ConsulsyncDataService`.

15

Deployment

This article introduces the use of docker-compose to deploy the Apache ShenYu gateway.

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites document](#).

15.1 Download shell script

```
curl -O https://raw.githubusercontent.com/apache/shenyu/master/shenyu-dist/shenyu-docker-compose-dist/src/main/resources/install.sh
```

15.2 execute script

This script will download the required configuration files and mysql-connector, and can be executed repeatedly if the download fails.

```
sh ./install.sh #The latest configuration is pulled by default. If you need to deploy the released version, you can add a parameter to indicate the version number, such as: v2.4.2 or latest
```

15.3 Initialize the shenyu-admin database

Refer to the database initialization documentation to initialize the database.

15.4 Modify the configuration file

Modify the configuration file downloaded by the script to set up configurations such as JDBC.

15.5 Execute docker-compose

```
cd shenyu-{VERSION}
docker-compose -f ./shenyu-{VERSION}/docker-compose.yaml up -d
```

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites document](#).

This article introduces how to deploy the Shenyu gateway in cluster environment.

In this part, you can see [ShenYu Binary Packages Deployment](#) before deploying.

15.6 Environmental Preparation

- Two or more Gateway Bootstrap servers, these servers must install JDK1.8+.
- A server for Gateway Admin, this server must install mysql/pgsql/h2 and JDK1.8+.
- A server for nginx.

15.7 Start Apache ShenYu Admin

- download and unzip `apache-shenyu-${current.version}-admin-bin.tar.gz` in your Gateway Admin server.
- config your database, go to the `/conf` directory, and modify `spring.profiles.active` of the configuration in `application.yaml` to mysql, pg or h2.
- config your way of synchronization, go to the `/conf` directory, and modify `shenyu.sync` of configuration in `application.yaml` to websocket, http, zookeeper, etcd, consul or nacos.
- start Apache ShenYu Admin in `bin` directory.

```
> windows: start.bat
> linux: ./start.sh
```

15.8 Start Apache ShenYu Bootstrap

- download and unzip `apache-shenyu-${current.version}-bootstrap-bin.tar.gz` in your Gateway Bootstrap server.
- config your synchronization, go to the `/conf` directory, and modify `shenyu.sync` of configuration in `application.yaml` to websocket, http, zookeeper, etcd, consul or nacos, this configuration must remain the same of ShenYu Admin.
- repeat above-mentioned operations in each ShenYu Bootstrap server.
- start Apache ShenYu Bootstrap in `bin` directory.

```
> windows : start.bat

> linux : ./start.sh
```

After completing these operations, you will deploy ShenYu Bootstrap Cluster.

For example. you will deploy ShenYu Bootstrap in 10.1.1.1 and 10.1.1.2 and deploy nginx in 10.1.1.3.

15.9 Start Nginx

- download and install nginx.
- modify upstream and server of configuration in `nginx.conf`.

```
upstream shenyu_gateway_cluster {
    ip_hash;
    server 10.1.1.1:9195 max_fails=3 fail_timeout=10s weight=50;
    server 10.1.1.2:9195 max_fails=3 fail_timeout=10s weight=50;
}

server {
    listen 9195;
    location / {
        proxy_pass http://shenyu_gateway_cluster;
        proxy_set_header HOST $host;
        proxy_read_timeout 10s;
        proxy_connect_timeout 10s;
    }
}
```

- start nginx.

```
> windows: ./nginx.exe

> linux: /usr/local/nginx/sbin/nginx
```

- verify nginx, looking at your ShenYu Bootstrap log or Nginx log, Where will the verification request go.

Apache ShenYu Nginx Module

This module provided SDK to watch available ShenYu instance list as upstream nodes by Service Register Center for OpenResty. 1. [ETCD](#) (Supported) 2. [Nacos](#) (Supported) 3. [Zookeeper](#) (Supported) 4. Consul (TODO)

In the cluster mode, Apache ShenYu supports the deployment of multiple ShenYu instances, which may have new instances joining or leaving at any time. Hence, Apache ShenYu introduces Service Discovery modules to help client to detect the available instances. Currently, Apache ShenYu Bootstrap already supports Apache Zookeeper, Nacos, Etcd, and consul. Client or LoadBalancer can get the available ShenYu instances by those Service register center.

15.9.1 Getting Started

- Prerequisite:
 1. Luarocks
 2. OpenResty

15.10 Build from source

The first, clone the source from GitHub.

```
git clone https://github.com/apache/shenyu-nginx
```

Then, build from source and install.

```
cd shenyu-nginx
luarocks make rockspec/shenyu-nginx-main-0.rockspe
```

15.11 Greeting ETCD

Modify the Nginx configure, create and initialize the ShenYu Register to connect to the target register center. The module will fetch the all of ShenYu instances which are registered to Etcd in the same cluster. It works like Etcd client to watch(based on long polling) ShenYu instance lists.

Here is an example for Etcd.

```
init_worker_by_lua_block {
    local register = require("shenyu.register.etcd")
    register.init({
        balancer_type = "hash",
```

```

        etcd_base_url = "http://127.0.0.1:2379",
    })
}

```

1. balancer_type specify the balancer. It has supported chash and round robin.
2. etcd_base_url specify the Etcd server.(Currently, authentication is not supported.)

Add an upstream block for ShenYu and enable to update upstream servers dynamically. This case will synchronize the ShenYu instance list with register center. And then pick one up for handling the request.

```

upstream shenyu {
    server 0.0.0.1; -- bad

    balancer_by_lua_block {
        require("shenyu.register.etcd").pick_and_set_peer()
    }
}

```

Finally, restart OpenResty.

```
openresty -s reload
```

Here is a completed example working with ETCD.

15.12 Greeting Nacos

Modify the Nginx configure, create and initialize the ShenYu Register to connect to target register center. Here is an example for Nacos.

```

init_worker_by_lua_block {
    local register = require("shenyu.register.nacos")
    register.init({
        shenyu_storage = ngx.shared.shenyu_storage,
        balancer_type = "chash",
        nacos_base_url = "http://127.0.0.1:8848",
        username = "nacos",
        password = "naocs",
    })
}

```

1. balancer_type specify the balancer. It has supported chash and round robin.
2. nacos_base_url specify the Nacos server address.
3. username specify the username to log in Nacos. (it is only required when Nacos auth enable)
4. password specify the password to log in Nacos.

Modify the upstream to enable to update upstream servers dynamically. This case will synchronize the ShenYu instance list with register center. And then pick one up for handling the request.

```
upstream shenyu {
    server 0.0.0.1; -- bad

    balancer_by_lua_block {
        require("shenyu.register.nacos").pick_and_set_peer()
    }
}
```

Finally, restart OpenResty.

```
openresty -s reload
```

Here is a completed [example](#) working with Nacos.

15.12.1 Greeting Zookeeper

Modify the Nginx configure, create and initialize the ShenYu register to connect to target register center. Listen for changes to the node via the zookeeper watch event. Here is an example of the zookeeper configuration.

```
init_worker_by_lua_block {
    local register = require("shenyu.register.zookeeper")
    register.init({
        servers = {"127.0.0.1:2181", "127.0.0.1:2182"},
        shenyu_storage = ngx.shared.shenyu_storage,
        balancer_type = "roundrobin"
    });
}
```

1. servers zookeeper cluster address.
2. balancer_type specify the balancer. It has supported chash and round robin.

Modify the upstream to enable to update upstream servers dynamically. This case will synchronize the ShenYu instance list with register center. And then pick one up for handling the request.

```
upstream shenyu {
    server 0.0.0.1;
    balancer_by_lua_block {
        require("shenyu.register.zookeeper").pick_and_set_peer()
    }
}
```

Finally, restart OpenResty.

```
openresty -s reload
```

Here is a completed [example](#) working with Zookeeper.

This article introduces the deployment of the Apache ShenYu gateway using the binary packages.

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites](#) document.

15.13 Start Apache ShenYu Admin

- download `apache-shenyu-${current.version}-admin-bin.tar.gz`
- unzip `apache-shenyu-${current.version}-admin-bin.tar.gz`, go to the `bin` directory.
After version 2.5.1, `start.sh` started to support custom JVM startup parameters through the environment variable `ADMIN_JVM`.
- use h2 to store data:

```
> windows: start.bat

> linux: ./start.sh
```

- use MySQL to store data, follow the [guide document](#) to initialize the database, copy `mysql-connector.jar` to `/$(your_work_dir)/ext-lib`, go to the `/conf` directory, and modify the JDBC configuration in `application-mysql.yml`.
- Modify `spring.profiles.active` in `conf/application.yml` to `mysql`

```
> windows: start.bat

> linux: ./start.sh
```

- use PostgreSQL to store data, follow the [guide document](#) to initialize the database, go to the `/conf` directory, and modify the JDBC configuration in `application-pg.yml`.
- Modify `spring.profiles.active` in `conf/application.yml` to `pg`

```
> windows: start.bat

> linux: ./start.sh --spring.profiles.active = pg
```

- use Oracle to store data, follow the [guide document](#) to initialize the database, go to the `/conf` directory, and modify the JDBC configuration in `application-oracle.yml`.
- Modify `spring.profiles.active` in `conf/application.yml` to `oracle`

```
> windows: start.bat

> linux: ./start.sh
```

15.14 Start Apache ShenYu Bootstrap

- download apache-shenyu-\${current.version}-bootstrap-bin.tar.gz
- unzip apache-shenyu-\${current.version}-bootstrap-bin.tar.gz. go to the bin directory.

After version 2.5.1, start.sh started to support custom JVM startup parameters through the environment variable BOOT_JVM.

```
> windwos : start.bat  
  
> linux : ./start.sh
```

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites document](#).

This article introduces the use of K8s to deploy the Apache ShenYu gateway.

Catalog

Example 1: Using h2 as a database

1. create Namespace and ConfigMap
2. deploying shenyu-admin
3. deploy shenyu-bootstrap

Example 2: Use MySQL as the database

Similar to the h2 process, there are two points to note

1. you need to load mysql-connector.jar, the download command is executed when the container is started
2. you need to specify an external MySQL database configuration

The process is as follows.

1. create Namespace and ConfigMap
2. deploy shenyu-admin
3. deploy shenyu-bootstrap

15.15 Example 1: Using h2 as a database

15.15.1 1. Create Namespace and ConfigMap

- create shenyu-ns.yaml

```
apiVersion: v1
kind: Namespace
metadata:
  name: shenyu
  labels:
    name: shenyu
---
apiVersion: v1
kind: ConfigMap
metadata:
  name: shenyu-cm
  namespace: shenyu
data:
  shenyu-admin-application.yml: |
    server:
      port: 9095
      address: 0.0.0.0
    spring:
      profiles:
        active: h2
      thymeleaf:
        cache: true
        encoding: utf-8
        enabled: true
        prefix: classpath:/static/
        suffix: .html
      mvc:
        pathmatch:
          matching-strategy: ant_path_matcher
    mybatis:
      config-location: classpath:/mybatis/mybatis-config.xml
      mapper-locations: classpath:/mappers/*.xml
    shenyu:
      register:
        registerType: http #http #zookeeper #etcd #nacos #consul
        serverLists: #localhost:2181 #http://localhost:2379 #localhost:8848
        props:
          sessionTimeout: 5000
          connectionTimeout: 2000
          checked: true
          zombieCheckTimes: 5
          scheduledTime: 10
          nacosNameSpace: ShenyuRegisterCenter
      sync:
        websocket:
          enabled: true
          messageMaxSize: 10240
          allowOrigins: ws://shenyu-admin-svc.shenyu.svc.cluster.local:9095;ws://
```

```
shenyu-bootstrap-svc.shenyu.svc.cluster.local:9195;
ldap:
  enabled: false
  url: ldap://xxxx:xxx
  bind-dn: cn=xxxx,dc=xxx,dc=xxx
  password: xxxx
  base-dn: ou=xxx,dc=xxx,dc=xxx
  object-class: person
  login-field: cn
jwt:
  expired-seconds: 86400000
shiro:
  white-list:
    - /
    - /favicon.*
    - /static/**
    - /index**
    - /platform/login
    - /websocket
    - /error
    - /actuator/health
    - /swagger-ui.html
    - /webjars/**
    - /swagger-resources/**
    - /v2/api-docs
    - /csrf
swagger:
  enable: true
apidoc:
  gatewayUrl: http://127.0.0.1:9195
  envProps:
    - envLabel: Test environment
      addressLabel: Request Address
      addressUrl: http://127.0.0.1:9195
    - envLabel: Prod environment
      addressLabel: Request Address
      addressUrl: http://127.0.0.1:9195
logging:
  level:
    root: info
    org.springframework.boot: info
    org.apache.ibatis: info
    org.apache.shenyu.bonuspoint: info
    org.apache.shenyu.lottery: info
    org.apache.shenyu: info
shenyu-admin-application-h2.yml: |
  shenyu:
    database:
```

```
dialect: h2
init_script: "sql-script/h2/schema.sql"
init_enable: true
spring:
  datasource:
    url: jdbc:h2:mem:~/shenyu;DB_CLOSE_DELAY=-1;MODE=MySQL;
    username: sa
    password: sa
    driver-class-name: org.h2.Driver
shenyu-bootstrap-application.yml: |
  server:
    port: 9195
    address: 0.0.0.0
  spring:
    main:
      allow-bean-definition-overriding: true
      allow-circular-references: true
    application:
      name: shenyu-bootstrap
  codec:
    max-in-memory-size: 2MB
  cloud:
    discovery:
      enabled: false
    nacos:
      discovery:
        server-addr: 127.0.0.1:8848 # Spring Cloud Alibaba Dubbo use this.
        enabled: false
        namespace: ShenyuRegisterCenter
  eureka:
    client:
      enabled: false
      serviceUrl:
        defaultZone: http://localhost:8761/eureka/
    instance:
      prefer-ip-address: true
  management:
    health:
      defaults:
        enabled: false
  shenyu:
    matchCache:
      selector:
        selectorEnabled: false
        initialCapacity: 10000 # initial capacity in cache
        maximumSize: 10000 # max size in cache
      rule:
        initialCapacity: 10000 # initial capacity in cache
```

```
maximumSize: 10000 # max size in cache
trie:
  childrenSize: 10000
  pathVariableSize: 1000
  pathRuleCacheSize: 1000
  matchMode: antPathMatch
netty:
  http:
    # set to false, user can custom the netty tcp server config.
    webServerFactoryEnabled: true
    selectCount: 1
    workerCount: 4
    accessLog: false
    serverSocketChannel:
      soRcvBuf: 87380
      soBackLog: 128
      soReuseAddr: false
      connectTimeoutMillis: 10000
      writeBufferHighWaterMark: 65536
      writeBufferLowWaterMark: 32768
      writeSpinCount: 16
      autoRead: false
      allocType: "pooled"
      messageSizeEstimator: 8
      singleEventExecutorPerGroup: true
    socketChannel:
      soKeepAlive: false
      soReuseAddr: false
      soLinger: -1
      tcpNoDelay: true
      soRcvBuf: 87380
      soSndBuf: 16384
      ipTos: 0
      allowHalfClosure: false
      connectTimeoutMillis: 10000
      writeBufferHighWaterMark: 65536
      writeBufferLowWaterMark: 32768
      writeSpinCount: 16
      autoRead: false
      allocType: "pooled"
      messageSizeEstimator: 8
      singleEventExecutorPerGroup: true
instance:
  enabled: false
  registerType: zookeeper #etcd #consul
  serverLists: localhost:2181 #http://localhost:2379 #localhost:8848
  props:
cross:
```

```
enabled: true
allowedHeaders:
allowedMethods: "*"
allowedAnyOrigin: true # the same of Access-Control-Allow-Origin: "*"
allowedExpose: ""
maxAge: "18000"
allowCredentials: true
switchConfig:
  local: true
file:
  enabled: true
  maxSize : 10
sync:
  websocket:
    urls: ws://shenyu-admin-svc.shenyu.svc.cluster.local:9095/websocket
    allowOrigin: ws://shenyu-bootstrap-svc.shenyu.svc.cluster.local:9195
exclude:
  enabled: false
  paths:
    - /favicon.ico
fallback:
  enabled: false
  paths:
    - /fallback/hystrix
    - /fallback/resilience4j
health:
  enabled: false
  paths:
    - /actuator/health
    - /health_check
extPlugin:
  path:
    enabled: true
    threads: 1
    scheduleTime: 300
    scheduleDelay: 30
scheduler:
  enabled: false
  type: fixed
  threads: 16
upstreamCheck:
  enabled: false
  timeout: 3000
  healthyThreshold: 1
  unhealthyThreshold: 1
  interval: 5000
  printEnabled: true
  printInterval: 60000
```

```

ribbon:
  serverListRefreshInterval: 10000
metrics:
  enabled: false
  name : prometheus
  host: 127.0.0.1
  port: 8090
  jmxConfig:
  props:
    jvm_enabled: true
local:
  enabled: false
  sha512Key:
"BA3253876AED6BC22D4A6FF53D8406C6AD864195ED144AB5C87621B6C233B548BAEAE6956DF346EC8C17F5EA10F35EE3
"
logging:
  level:
    root: info
    org.springframework.boot: info
    org.apache.ibatis: info
    org.apache.shenyu.bonuspoint: info
    org.apache.shenyu.lottery: info
    org.apache.shenyu: info

```

- execute `kubectl apply -f shenyu-ns.yaml`

15.15.2 2. Create shenyu-admin

- create `shenyu-admin.yaml`

```

# Example of using the nodeport type to expose ports
apiVersion: v1
kind: Service
metadata:
  namespace: shenyu
  name: shenyu-admin-svc
spec:
  selector:
    app: shenyu-admin
  type: NodePort
  ports:
    - protocol: TCP
      port: 9095
      targetPort: 9095
      nodePort: 31095
---
# shenyu-admin
apiVersion: apps/v1

```

```

kind: Deployment
metadata:
  namespace: shenyu
  name: shenyu-admin
spec:
  selector:
    matchLabels:
      app: shenyu-admin
  replicas: 1
  template:
    metadata:
      labels:
        app: shenyu-admin
    spec:
      volumes:
        - name: shenyu-admin-application
          configMap:
            name: shenyu-cm
            items:
              - key: shenyu-admin-application.yml
                path: shenyu-admin-application.yml
        - name: shenyu-admin-application-h2
          configMap:
            name: shenyu-cm
            items:
              - key: shenyu-admin-application-h2.yml
                path: shenyu-admin-application-h2.yml
      containers:
        - name: shenyu-admin
          image: apache/shenyu-admin:latest
          imagePullPolicy: Always
          ports:
            - containerPort: 9095
          env:
            - name: 'TZ'
              value: 'Asia/Beijing'
          volumeMounts:
            - name: shenyu-admin-application
              mountPath: /opt/shenyu-admin/conf/application.yml
              subPath: shenyu-admin-application.yml
            - name: shenyu-admin-application-h2
              mountPath: /opt/shenyu-admin/conf/application-h2.yml
              subPath: shenyu-admin-application-h2.yml

```

- execute `kubectl apply -f shenyu-admin.yaml`

15.15.3 3. Create shenyu-bootstrap

- create shenyu-bootstrap.yaml

```
# Example of using the nodeport type to expose ports
apiVersion: v1
kind: Service
metadata:
  namespace: shenyu
  name: shenyu-bootstrap-svc
spec:
  selector:
    app: shenyu-bootstrap
  type: NodePort
  ports:
    - protocol: TCP
      port: 9195
      targetPort: 9195
      nodePort: 31195
---
# shenyu-bootstrap
apiVersion: apps/v1
kind: Deployment
metadata:
  namespace: shenyu
  name: shenyu-bootstrap
spec:
  selector:
    matchLabels:
      app: shenyu-bootstrap
  replicas: 1
  template:
    metadata:
      labels:
        app: shenyu-bootstrap
    spec:
      volumes:
        - name: shenyu-bootstrap-application
          configMap:
            name: shenyu-cm
            items:
              - key: shenyu-bootstrap-application.yml
                path: shenyu-bootstrap-application.yml
      containers:
        - name: shenyu-bootstrap
          image: apache/shenyu-bootstrap:latest
          ports:
            - containerPort: 9195
          env:
```

```

- name: TZ
  value: Asia/Beijing
volumeMounts:
- name: shenyu-bootstrap-application
  mountPath: /opt/shenyu-bootstrap/conf/application.yml
  subPath: shenyu-bootstrap-application.yml

```

- execute `kubectl apply -f shenyu-bootstrap.yaml`

15.16 Example 2: Use MySQL as the database

15.16.1 1. Create Namespace and ConfigMap

- create `shenyu-ns.yaml`

```

apiVersion: v1
kind: Namespace
metadata:
  name: shenyu
  labels:
    name: shenyu
---
apiVersion: v1
kind: ConfigMap
metadata:
  name: shenyu-cm
  namespace: shenyu
data:
  shenyu-admin-application.yml: |
    server:
      port: 9095
      address: 0.0.0.0
    spring:
      profiles:
        active: mysql
      thymeleaf:
        cache: true
        encoding: utf-8
        enabled: true
        prefix: classpath:/static/
        suffix: .html
      mvc:
        pathmatch:
          matching-strategy: ant_path_matcher
    mybatis:
      config-location: classpath:/mybatis/mybatis-config.xml
      mapper-locations: classpath:/mappers/*.xml

```

```
shenyu:
  register:
    registerType: http #http #zookeeper #etcd #nacos #consul
    serverLists: #localhost:2181 #http://localhost:2379 #localhost:8848
  props:
    sessionTimeout: 5000
    connectionTimeout: 2000
    checked: true
    zombieCheckTimes: 5
    scheduledTime: 10
    nacosNameSpace: ShenyuRegisterCenter
  sync:
    websocket:
      enabled: true
      messageMaxSize: 10240
      allowOrigins: ws://shenyu-admin-svc.shenyu.svc.cluster.local:9095;ws://
shenyu-bootstrap-svc.shenyu.svc.cluster.local:9195;
    ldap:
      enabled: false
      url: ldap://xxxx:xxx
      bind-dn: cn=xxx,dc=xxx,dc=xxx
      password: xxxx
      base-dn: ou=xxx,dc=xxx,dc=xxx
      object-class: person
      login-field: cn
    jwt:
      expired-seconds: 86400000
  shiro:
    white-list:
      - /
      - /favicon.*
      - /static/**
      - /index**
      - /platform/login
      - /websocket
      - /error
      - /actuator/health
      - /swagger-ui.html
      - /webjars/**
      - /swagger-resources/**
      - /v2/api-docs
      - /csrf
  swagger:
    enable: true
  apidoc:
    gatewayUrl: http://127.0.0.1:9195
    envProps:
      - envLabel: Test environment
```

```
addressLabel: Request Address
addressUrl: http://127.0.0.1:9195
- envLabel: Prod environment
  addressLabel: Request Address
  addressUrl: http://127.0.0.1:9195

logging:
  level:
    root: info
    org.springframework.boot: info
    org.apache.ibatis: info
    org.apache.shenyu.bonuspoint: info
    org.apache.shenyu.lottery: info
    org.apache.shenyu: info

shenyu-admin-application-mysql.yml: |
  shenyu:
    database:
      dialect: mysql
      init_script: "sql-script/mysql/schema.sql"
      init_enable: true

  spring:
    datasource:
      url: jdbc:mysql://{{your_mysql_ip}}:{{your_mysql_port}}/shenyu?useUnicode=true&
characterEncoding=utf-8&useSSL=false
      username: {{your_mysql_user}}
      password: {{your_mysql_password}}
      driver-class-name: com.mysql.jdbc.Driver

shenyu-bootstrap-application.yml: |
  server:
    port: 9195
    address: 0.0.0.0

  spring:
    main:
      allow-bean-definition-overriding: true
      allow-circular-references: true

    application:
      name: shenyu-bootstrap

  codec:
    max-in-memory-size: 2MB

  cloud:
    discovery:
      enabled: false

  nacos:
    discovery:
      server-addr: 127.0.0.1:8848 # Spring Cloud Alibaba use this.
      enabled: false
      namespace: ShenyuRegisterCenter

  eureka:
    client:
```

```
enabled: false
serviceUrl:
  defaultZone: http://localhost:8761/eureka/
instance:
  prefer-ip-address: true
management:
  health:
    defaults:
      enabled: false
shenyu:
  matchCache:
    selector:
      selectorEnabled: false
      initialCapacity: 10000 # initial capacity in cache
      maximumSize: 10000 # max size in cache
    rule:
      initialCapacity: 10000 # initial capacity in cache
      maximumSize: 10000 # max size in cache
  trie:
    childrenSize: 10000
    pathVariableSize: 1000
    pathRuleCacheSize: 1000
    matchMode: antPathMatch
netty:
  http:
    # set to false, user can custom the netty tcp server config.
    webServerFactoryEnabled: true
    selectCount: 1
    workerCount: 4
    accessLog: false
    serverSocketChannel:
      soRcvBuf: 87380
      soBackLog: 128
      soReuseAddr: false
      connectTimeoutMillis: 10000
      writeBufferHighWaterMark: 65536
      writeBufferLowWaterMark: 32768
      writeSpinCount: 16
      autoRead: false
      allocType: "pooled"
      messageSizeEstimator: 8
      singleEventExecutorPerGroup: true
    socketChannel:
      soKeepAlive: false
      soReuseAddr: false
      soLinger: -1
      tcpNoDelay: true
      soRcvBuf: 87380
```

```
soSndBuf: 16384
ipTos: 0
allowHalfClosure: false
connectTimeoutMillis: 10000
writeBufferHighWaterMark: 65536
writeBufferLowWaterMark: 32768
writeSpinCount: 16
autoRead: false
allocType: "pooled"
messageSizeEstimator: 8
singleEventExecutorPerGroup: true

instance:
  enabled: false
  registerType: zookeeper #etcd #consul
  serverLists: localhost:2181 #http://localhost:2379 #localhost:8848
  props:

cross:
  enabled: true
  allowedHeaders:
  allowedMethods: "*"
  allowedAnyOrigin: true # the same of Access-Control-Allow-Origin: "*"
  allowedExpose: ""
  maxAge: "18000"
  allowCredentials: true

switchConfig:
  local: true

file:
  enabled: true
  maxSize : 10

sync:
  websocket:
    urls: ws://shenyu-admin-svc.shenyu.svc.cluster.local:9095/websocket
    allowOrigin: ws://shenyu-bootstrap-svc.shenyu.svc.cluster.local:9195

exclude:
  enabled: false
  paths:
    - /favicon.ico

fallback:
  enabled: false
  paths:
    - /fallback/hystrix
    - /fallback/resilience4j

health:
  enabled: false
  paths:
    - /actuator/health
    - /health_check

extPlugin:
```

```
path:
  enabled: true
  threads: 1
  scheduleTime: 300
  scheduleDelay: 30
scheduler:
  enabled: false
  type: fixed
  threads: 16
upstreamCheck:
  enabled: false
  timeout: 3000
  healthyThreshold: 1
  unhealthyThreshold: 1
  interval: 5000
  printEnabled: true
  printInterval: 60000
ribbon:
  serverListRefreshInterval: 10000
metrics:
  enabled: false
  name : prometheus
  host: 127.0.0.1
  port: 8090
  jmxConfig:
    props:
      jvm_enabled: true
local:
  enabled: false
  sha512Key:
"BA3253876AED6BC22D4A6FF53D8406C6AD864195ED144AB5C87621B6C233B548BAEAE6956DF346EC8C17F5EA10F35EE3
"
logging:
  level:
    root: info
    org.springframework.boot: info
    org.apache.ibatis: info
    org.apache.shenyu.bonuspoint: info
    org.apache.shenyu.lottery: info
    org.apache.shenyu: info
```

- execute `kubectl apply -f shenyu-ns.yaml`

15.16.2 2. Create shenyu-admin

- create shenyu-admin.yaml

```
# Example of using the nodeport type to expose ports
apiVersion: v1
kind: Service
metadata:
  namespace: shenyu
  name: shenyu-admin-svc
spec:
  selector:
    app: shenyu-admin
  type: NodePort
  ports:
    - protocol: TCP
      port: 9095
      targetPort: 9095
      nodePort: 31095
---
# shenyu-admin
apiVersion: apps/v1
kind: Deployment
metadata:
  namespace: shenyu
  name: shenyu-admin
spec:
  selector:
    matchLabels:
      app: shenyu-admin
  replicas: 1
  template:
    metadata:
      labels:
        app: shenyu-admin
  spec:
    volumes:
      - name: shenyu-admin-application
        configMap:
          name: shenyu-cm
          items:
            - key: shenyu-admin-application.yml
              path: shenyu-admin-application.yml
      - name: shenyu-admin-application-mysql
        configMap:
          name: shenyu-cm
          items:
            - key: shenyu-admin-application-mysql.yml
              path: shenyu-admin-application-mysql.yml
```

```

- name: mysql-connector-volume
  emptyDir: {}
initContainers:
- name: download-mysql-jar
  image: busybox:1.35.0
  command: [ "sh", "-c" ]
  args: ["wget https://repo1.maven.org/maven2/mysql/mysql-connector-java/8.0.23/mysql-connector-java-8.0.23.jar;
          wget https://repo1.maven.org/maven2/mysql/mysql-connector-java/8.0.23/mysql-connector-java-8.0.23.jar.md5;
          if [ $(md5sum mysql-connector-java-8.0.23.jar | cut -d ' ' -f1) = $(cat mysql-connector-java-8.0.23.jar.md5) ];
          then echo success;
          else echo failed;
          exit 1;
          fi;
          mv /mysql-connector-java-8.0.23.jar /opt/shenyu-admin/ext-lib/mysql-connector-java.jar" ]
volumeMounts:
- name: mysql-connector-volume
  mountPath: /opt/shenyu-admin/ext-lib
containers:
- name: shenyu-admin
  image: apache/shenyu-admin:latest
  imagePullPolicy: Always
  ports:
- containerPort: 9095
  env:
- name: 'TZ'
  value: 'Asia/Beijing'
- name: SPRING_PROFILES_ACTIVE
  value: mysql
volumeMounts:
- name: shenyu-admin-application
  mountPath: /opt/shenyu-admin/conf/application.yml
  subPath: shenyu-admin-application.yml
- name: shenyu-admin-application-mysql
  mountPath: /opt/shenyu-admin/conf/application-mysql.yml
  subPath: shenyu-admin-application-mysql.yml
- name: mysql-connector-volume
  mountPath: /opt/shenyu-admin/ext-lib

```

- execute `kubectl apply -f shenyu-admin.yaml`

15.16.3 3. Create shenyu-bootstrap

- create shenyu-bootstrap.yaml

```
# Example of using the nodeport type to expose ports
apiVersion: v1
kind: Service
metadata:
  namespace: shenyu
  name: shenyu-bootstrap-svc
spec:
  selector:
    app: shenyu-bootstrap
  type: NodePort
  ports:
    - protocol: TCP
      port: 9195
      targetPort: 9195
      nodePort: 31195
---
# shenyu-bootstrap
apiVersion: apps/v1
kind: Deployment
metadata:
  namespace: shenyu
  name: shenyu-bootstrap
spec:
  selector:
    matchLabels:
      app: shenyu-bootstrap
  replicas: 1
  template:
    metadata:
      labels:
        app: shenyu-bootstrap
  spec:
    volumes:
      - name: shenyu-bootstrap-application
        configMap:
          name: shenyu-cm
          items:
            - key: shenyu-bootstrap-application.yml
              path: shenyu-bootstrap-application.yml
    containers:
      - name: shenyu-bootstrap
        image: apache/shenyu-bootstrap:latest
        ports:
          - containerPort: 9195
        env:
```

```

    - name: TZ
      value: Asia/Beijing
    volumeMounts:
      - name: shenyu-bootstrap-application
        mountPath: /opt/shenyu-bootstrap/conf/application.yml
        subPath: shenyu-bootstrap-application.yml
  
```

- execute `kubectl apply -f shenyu-bootstrap.yaml`

15.17 Test Access

Access Address: [http://\[K8S_CLUSTER_IP\]:31095/](http://[K8S_CLUSTER_IP]:31095/)

Account/password: admin/123456

This article describes how to build your own gateway based on Apache ShenYu.

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites](#) document.

15.18 Start Apache ShenYu Admin

- docker reference docker deployment Apache ShenYu Admin
- liunx/windows reference binary packages deployment Apache ShenYu Admin

15.19 Build your own gateway (recommended)

- first create an empty `springboot` project, you can refer to `shenyu-bootstrap`, or you can create it on [spring official website](#).
- introduce the following `jar` package:

```

<dependencies>
  <dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-webflux</artifactId>
    <version>2.2.2.RELEASE</version>
  </dependency>
  <dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-actuator</artifactId>
    <version>2.2.2.RELEASE</version>
  </dependency>
  <dependency>
    <groupId>org.apache.shenyu</groupId>
  
```

```
<artifactId>shenyu-spring-boot-starter-gateway</artifactId>
<version>${current.version}</version>
</dependency>
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-sync-data-websocket</artifactId>
    <version>${current.version}</version>
</dependency>
</dependencies>
```

among them, \${project.version} please use the current latest version.

- add the following configuration to your application.yaml file:

```
spring:
  main:
    allow-bean-definition-overriding: true
management:
  health:
    defaults:
      enabled: false
shenyu:
  sync:
    websocket:
      urls: ws://localhost:9095/websocket //set to your shenyu-admin address
```

This article introduces how to start the Apache ShenYu gateway in the local environment.

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites document](#).

15.20 Environmental preparation

- Install JDK1.8+ locally
- Install Git locally
- Install Maven locally
- Choose a development tool, such as IDEA

15.21 Download the compiled code

- Download

```
git clone https://github.com/apache/shenyu.git
cd shenyu
mvn clean install '-Dmaven.javadoc.skip=true' '-B' '-Drat.skip=true' '-Djacoco.
skip=true' '-DskipITs' '-DskipTests'
```

- use the development tool to start `org.apache.shenyu.admin.ShenyuAdminBootstrap`, Visit <http://localhost:9095>, the default username and password are: admin and 123456 respectively.
 - If you use h2 for storage, set the variable `--spring.profiles.active = h2` and start the server.
 - If you use MySQL for storage, follow the [guide document](#) to initialize the database and modify the JDBC configuration in `application-mysql.yml`, set the variable `--spring.profiles.active = mysql` and start the server.
 - If you use PostgreSQL for storage, follow the [guide document](#) to initialize the database and modify the JDBC configuration in `application-pg.yml`, set the variable `--spring.profiles.active = pg` and start the server.
 - If you use Oracle for storage, follow the [guide document](#) to initialize the database and modify the JDBC configuration in `application-oracle.yml`, set the variable `--spring.profiles.active = oracle`.
- use the development tool to start `org.apache.shenyu.bootstrap.ShenyuBootstrapApplication`.

This article introduces the use of docker to deploy the Apache ShenYu gateway.

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites document](#).

15.22 Create Docker Network

```
docker network create shenyu
```

15.23 Start Apache ShenYu Admin

```
docker pull apache/shenyu-admin:${current.version}
```

After version 2.5.1, when docker run, we can customize JVM startup parameters by adding
`-e ADMIN_JVM="xxxx"`

- use h2 to store data:

```
docker run -d -p 9095:9095 --name shenyu-admin --net shenyu apache/shenyu-admin:${current.version}
```

- use MySQL to store data, follow the [guide document](#) to initialize the database, copy [mysql-connector.jar](#) to `/${your_work_dir}/ext-lib`:

```
docker run --name shenyu-admin -v /${your_work_dir}/ext-lib:/opt/shenyu-admin/ext-lib -e "SPRING_PROFILES_ACTIVE=mysql" -e "spring.datasource.url=jdbc:mysql:///${your_ip_port}/shenyu?useUnicode=true&characterEncoding=utf-8&useSSL=false&serverTimezone=Asia/Shanghai&zeroDateTimeBehavior=convertToNull" -e "spring.datasource.username=${your_username}" -e "spring.datasource.password=${your_password}" -d -p 9095:9095 --net shenyu apache/shenyu-admin:${current.version}
```

another way is to put the `application.yml`, `application-mysql.yml` configuration in `/${your_work_dir}/conf` from [Configure address](#), modify the configuration `spring.profiles.active = mysql` in `application.yml`, and then execute the following statement:

```
docker run --name shenyu-admin -v ${your_work_dir}/conf:/opt/shenyu-admin/conf -v /${your_work_dir}/ext-lib:/opt/shenyu-admin/ext-lib -d -p 9095:9095 --net shenyu apache/shenyu-admin:${current.version}
```

- use PostgreSQL to store data, follow the [guide document](#) to initialize the database, execute the following statement:

```
docker run --name shenyu-admin -e "SPRING_PROFILES_ACTIVE=pg" -e "spring.datasource.url=jdbc:postgresql:///${your_ip_port}/shenyu?useUnicode=true&characterEncoding=utf-8&useSSL=false" -e "spring.datasource.username=${your_username}" -e "spring.datasource.password=${your_password}" -d -p 9095:9095 --net shenyu apache/shenyu-admin:${current.version}
```

another way is to put the `application.yml`, `application-pg.yml` configuration in `/${your_work_dir}/conf`, modify the configuration `spring.profiles.active = pg` in `application.yml`, and then execute the following statement:

```
docker run --name shenyu-admin -v ${your_work_dir}/conf:/opt/shenyu-admin/conf -d -p 9095:9095 --net shenyu apache/shenyu-admin:${current.version}
```

- use Oracle to store data, follow the [guide](#) document to initialize the database, execute the following statement:

```
docker run --name shenyu-admin -e "SPRING_PROFILES_ACTIVE=oracle" -e "spring.datasource.url=jdbc:oracle:thin:@localhost:1521/shenyu" -e "spring.datasource.username=${your_username}" -e "spring.datasource.password=${your_password}" -d -p 9095:9095 --net shenyu apache/shenyu-admin:${current.version}
```

another way is to put the application.yml, application-oracle.yml configuration in \${your_work_dir}/conf, modify the configuration spring.profiles.active = oracle in application.yml, and then execute the following statement:

```
docker run --name shenyu-admin -v ${your_work_dir}/conf:/opt/shenyu-admin/conf -d -p 9095:9095 --net shenyu apache/shenyu-admin:${current.version}
```

15.24 Start Apache ShenYu Bootstrap

After version 2.5.1, when docker run, we can customize JVM startup parameters by adding
-e BOOT_JVM="xxxx"

First, pull the docker image

```
docker pull apache/shenyu-bootstrap:${current.version}
```

If you don't need to modify the configuration, just use the command below to run the application

```
docker run -d \
-p 9195:9195 \
--name shenyu-bootstrap \
--net shenyu \
--env SHENYU_SYNC_WEBSOCKET_URLS=ws://shenyu-admin:9095/websocket \
apache/shenyu-bootstrap:${current.version}
```

SHENYU_SYNC_WEBSOCKET_URLS indicates the websocket address that shenyu-bootstrap used to communicate with shenyu-admin

If you need to modify the configuration, copy the configuration from the Github directory where the bootstrap [configuration file](#) is located, then recorded it as \$BOOTSTRAP_CONF. After your modification, execute the command below to run the application

```
docker run -d \
-p 9195:9195 \
-v $BOOTSTRAP_CONF:/opt/shenyu-bootstrap/conf \
--name shenyu-bootstrap \
--net shenyu \
```

```
--env SHENYU_SYNC_WEBSOCKET_URLS=ws://shenyu-admin:9095/websocket \
apache/shenyu-bootstrap:${current.version}
```

This article introduces how to quickly start the Apache ShenYu gateway in the standalone environment.

Before you read this document, you need to complete some preparations before deploying Shenyu according to the [Deployment Prerequisites](#) document.

15.25 Environmental preparation

- Install JDK1.8+ locally

15.26 Start Apache ShenYu Bootstrap

- download `apache-shenyu-${current.version}-bootstrap-bin.tar.gz`
- unzip `apache-shenyu-${current.version}-bootstrap-bin.tar.gz`. go to the `bin` directory.

```
> windwos : start.bat
> linux : ./start.sh
```

15.27 Selector and rule configuration

please refer to [Developer Local Model](#) add the selector and rule.

example:

- your service address is `http://127.0.0.1:8080/helloworld` and the response like follow:

```
{
  "name" : "Shenyu",
  "data" : "hello world"
}
```

- use the follow data to add selector and rule

15.28 by postman

Add localKey: 123456 to Headers. If you need to customize the localKey, you can use the sha512 tool to generate the key based on plaintext and update the shenyu.local.sha512Key property.

POST method, address http://localhost:9195/shenyu/plugin/selectorAndRules, body use raw json content:

Headers

localKey: 123456

{

```
"pluginName": "divide",
"selectorHandler": "[{\\"upstreamUrl\\":\\"127.0.0.1:8080\\"]}",
"conditionDataList": [
    {
        "paramType": "uri",
        "operator": "match",
        "paramValue": "/**"
    }
],
"ruleDataList": [
    {
        "ruleHandler": "{\"loadBalance\": \"random\"}",
        "conditionDataList": [
            {
                "paramType": "uri",
                "operator": "match",
                "paramValue": "/**"
            }
        ]
    }
]
```

15.29 by curl

```
curl --location --request POST 'http://localhost:9195/shenyu/plugin/selectorAndRules' \
--header 'Content-Type: application/json' \
--header 'localKey: 123456' \
--data-raw '{
    "pluginName": "divide",
    "selectorHandler": "[{\\"upstreamUrl\\":\\"127.0.0.1:8080\\"]}",
    "conditionDataList": [
        {
            "paramType": "uri",
            "operator": "match",
            "paramValue": "/**"
        }
    ],
    "ruleDataList": [
        {
            "ruleHandler": "{\"loadBalance\": \"random\"}",
            "conditionDataList": [
                {
                    "paramType": "uri",
                    "operator": "match",
                    "paramValue": "/**"
                }
            ]
        }
    ]
}'
```

```

    "ruleHandler": "{\"loadBalance\":\"random\"}",
    "conditionDataList": [
        {
            "paramType": "uri",
            "operator": "match",
            "paramValue": "/**"
        }
    ]
}

```

- open <http://localhost:9195/helloworld>:

```
{
  "name" : "Shenyu",
  "data" : "hello world"
}
```

This article introduces the use of `helm` to deploy the Apache ShenYu gateway.

Please refer to [Helm Deployment](#) for details.

This article describes some of the prerequisites you need to prepare before deploying the Apache ShenYu gateway.

15.30 Database Initialize

Before deploying the `Shenyu-admin` project, initialize the database it uses (databases currently support: Mysql, PostgreSql, Oracle), which used the script files are stored in `db` directory [project root directory](#), The following describes the initial steps for each database.

15.30.1 Mysql

In the `mysql` initialization scripts [directory](#) found in the initialization script `schema.sql`, Use the client connection tool to connect to your Mysql service and execute, so you get a database named `shenyu`, which can later be used as the database for the `Shenyu-admin` project.

- sql script: <https://github.com/apache/shenyu/tree/master/db/init/mysql>
- driver:
 - maven repository: <https://repo1.maven.org/maven2/mysql/mysql-connector-java/8.0.30/>
 - homepage: <https://www.mysql.com/products/connector/>

15.30.2 PostgreSql

In the pg initialization scripts directory found in the initialization script `create-database.sql`, `create-table.sql`, and use the client connection tool to connect to your PostgreSQL service. so you get a database named shenyu, which can later be used as a database for the Shenyu-admin project.

- sql script: <https://github.com/apache/shenyu/tree/master/db/init/pg>
- driver:
 - maven repository: <https://mvnrepository.com/artifact/org.postgresql/postgresql/42.5.0>
 - homepage: <https://jdbc.postgresql.org/download/>

15.30.3 Oracle

In the oracle initialization scripts directory found in the initialization script `schema.sql`, Use the client connection tool to connect to your Oracle service to create a database, execute the `schema.sql` script on this database, and initialize the Shenyu-admin database. After can be `project configuration file` to adjust your Oracle environment configuration.

- sql script: <https://github.com/apache/shenyu/blob/master/db/init/oracle>
- driver:
 - maven repository: <https://mvnrepository.com/artifact/com.oracle.database.jdbc/ojdbc8/19.3.0.0>
 - homepage: <https://www.oracle.com/database/technologies/appdev/jdbc-downloads.html>

16

Quick Start

This document introduces how to quickly access the Apache ShenYu gateway using Brpc. You can get the code example of this document by clicking [here](#).

16.1 Environment to prepare

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#) .

After successful startup, you need to open the Brpc plugin on in the BasicConfig -> Plugin.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies.

Import the gateway proxy plugin for Brpc and add the following dependencies to the gateway's pom.xml file:

```
<!-- apache shenyu brpc plugin -->
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-brpc</artifactId>
    <version>${project.version}</version>
</dependency>
```

16.2 Run the shenyu-examples-brpc project

Download shenyu-examples-brpc.

Run main method of org.apache.shenyu.examples.brpc.service.TestBrpcApplication to start this project.

The following log appears when the startup is successful:

```
2023-01-11 23:09:37.593 INFO 96741 --- [or_consumer_-19] o.a.s.r.client.http.
utils.RegisterUtils : metadata client register success: {"appName":"brpc",
"contextPath":"/brpc","path":"/brpc/allName","rpcType":"brpc","serviceName":org.
apache.shenyu.examples.brpc.api.service.BrpcDemoService,"methodName":"allName",
"ruleName":"/brpc/allName","rpcExt":{"\\"methodInfo\":[{\\"methodName\":\"allName\",\
"paramTypes\":[[]]}],"enabled":true,"host":"127.0.0.1","port":8005,"pluginNames
":[],"registerMetaData":false,"timeMillis":1673449777487,"addPrefixed":false}
2023-01-11 23:09:37.611 INFO 96741 --- [or_consumer_-21] o.a.s.r.client.http.
utils.RegisterUtils : metadata client register success: {"appName":"brpc",
"contextPath":"/brpc","path":"/brpc/userMap","rpcType":"brpc","serviceName":org.
apache.shenyu.examples.brpc.api.service.BrpcDemoService,"methodName":"userMap",
"ruleName":"/brpc/userMap","parameterTypes":java.lang.Long,"rpcExt":{"\ \
"methodInfo\":[{\\"methodName\":\"userMap\", \"paramTypes\":[{\\"left\":\"java.lang.
Long\", \\"right\\":\"userId\"}]}]},"enabled":true,"host":"127.0.0.1","port":8005,
"pluginNames":[],"registerMetaData":false,"timeMillis":1673449777488,"addPrefixed
":false}
2023-01-11 23:09:37.611 INFO 96741 --- [or_consumer_-17] o.a.s.r.client.http.
utils.RegisterUtils : uri client register success: {"appName":"brpc","contextPath
":"/brpc","rpcType":"brpc","host":"127.0.0.1","port":8005}
2023-01-11 23:09:37.612 INFO 96741 --- [or_consumer_-20] o.a.s.r.client.http.
utils.RegisterUtils : metadata client register success: {"appName":"brpc",
"contextPath":"/brpc","path":"/brpc/getUserByIdAndName","rpcType":"brpc",
"serviceName":org.apache.shenyu.examples.brpc.api.service.BrpcDemoService",
"methodName":"getUserByIdAndName","ruleName":"/brpc/getUserByIdAndName",
"parameterTypes":java.lang.Long,java.lang.String,"rpcExt":{"\\"methodInfo\":[{\ \
"methodName\":\"getUserByIdAndName\", \"paramTypes\":[{\\"left\":\"java.lang.Long\", \
"right\\":\"userId\"}, {\\"left\":\"java.lang.String\", \\"right\\":\"name\"}]}]}, \
"enabled":true,"host":"127.0.0.1","port":8005,"pluginNames":[],"registerMetaData
":false,"timeMillis":1673449777488,"addPrefixed":false}
2023-01-11 23:09:37.611 INFO 96741 --- [or_consumer_-18] o.a.s.r.client.http.
utils.RegisterUtils : metadata client register success: {"appName":"brpc",
"contextPath":"/brpc","path":"/brpc/connect","rpcType":"brpc","serviceName":org.
apache.shenyu.examples.brpc.api.service.BrpcDemoService,"methodName":"connect",
"ruleName":"/brpc/connect","rpcExt":{"\\"methodInfo\":[{\\"methodName\":\"connect\", \
"paramTypes\":[[]]}],"enabled":true,"host":"127.0.0.1","port":8005,"pluginNames
":[],"registerMetaData":false,"timeMillis":1673449777486,"addPrefixed":false}
2023-01-11 23:09:37.612 INFO 96741 --- [or_consumer_-22] o.a.s.r.client.http.
utils.RegisterUtils : metadata client register success: {"appName":"brpc",
"contextPath":"/brpc","path":"/brpc/getUser","rpcType":"brpc","serviceName":org.
apache.shenyu.examples.brpc.api.service.BrpcDemoService,"methodName":"getUser",
```


```
"ruleName":"/brpc/getUser","parameterTypes":"java.lang.Long","rpcExt": "{}\n"MethodInfo": [{"methodName":"getUser","paramTypes":[{"left":"java.lang.Long","right":"userId"}]}],"enabled":true,"host":"127.0.0.1","port":8005,"pluginNames":[],"registerMetaData":false,"timeMillis":1673449777489,"addPrefixed":false}
```

16.3 Test

The shenyu-examples-brpc project will automatically register interface methods annotated with `@ShenyuBrpcClient` in the Apache ShenYu gateway after successful startup.

Open PluginList -> rpc proxy -> brpc to see the list of plugin rule configurations:

Use IDEA HTTP Client Plugin to simulate HTTP to request your Brpc service[Shenyu proxy]:

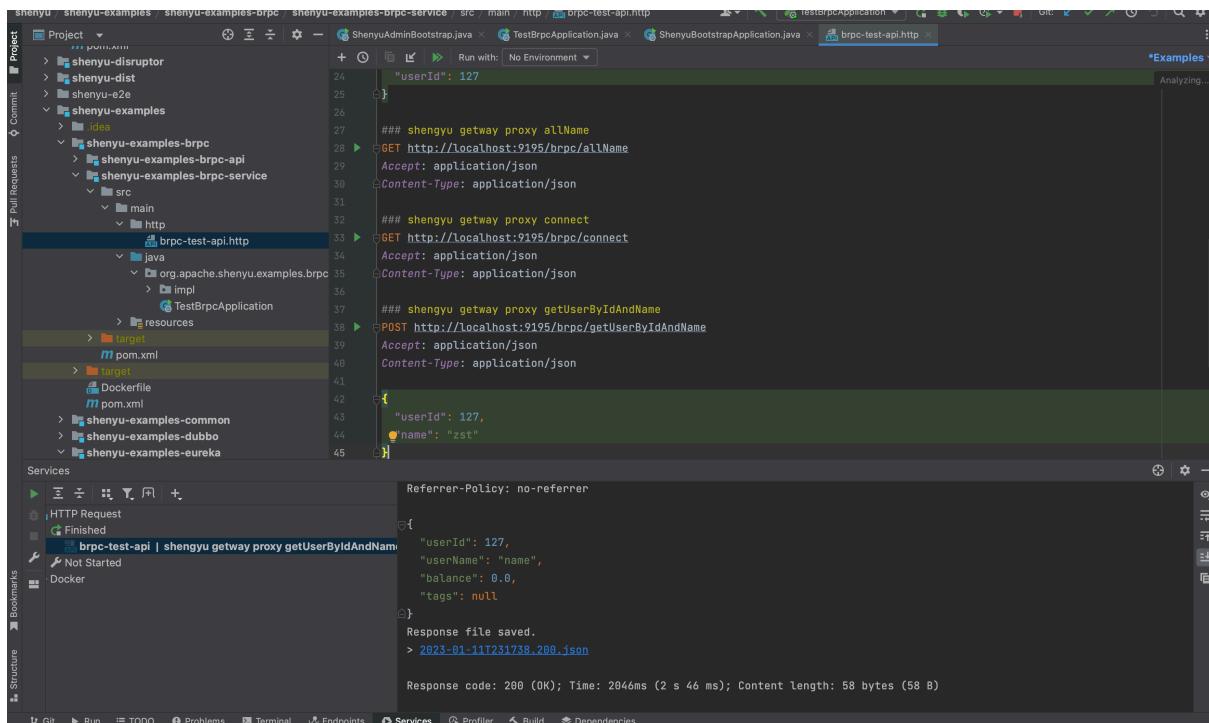

This document introduces how to quickly access the Apache ShenYu gateway using gRPC. You can get the code example of this document by clicking [here](#).

16.4 Prepare For Environment

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#).

After successful startup, you need to open the gRPC plugin on in the BasicConfig -> Plugin.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies.

Add the following dependencies to the gateway's pom.xml file:

```
<!-- apache shenyu grpc plugin start-->
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-grpc</artifactId>
    <version>${project.version}</version>
</dependency>
<!-- apache shenyu grpc plugin end-->
```

16.5 Run the shenyu-examples-grpc project

Download shenyu-examples-grpc

Run the following command under shenyu-examples-grpc to generate Java code:

```
mvn protobuf:compile
mvn protobuf:compile-custom
```

Execute the org.apache.shenyu.examples.grpc.ShenyuTestGrpcApplication main method to start project.

The following log appears when the startup is successful:

```
2021-06-18 19:33:32.866 INFO 11004 --- [or_consumer_-19] o.a.s.r.client.http.utils.RegisterUtils : grpc client register success: {"appName":"127.0.0.1:8080", "contextPath":"/grpc","path":"/grpc/clientStreamingFun","pathDesc": "clientStreamingFun","rpcType":"grpc","serviceName": "stream.StreamService", "methodName": "clientStreamingFun","ruleName": "/grpc/clientStreamingFun", "parameterTypes": "io.grpc.stub.StreamObserver", "rpcExt": "{\"timeout\":5000, \"methodType\": \"CLIENT_STREAMING\"}", "enabled": true,"host": "172.20.10.6", "port": 8080, "registerMetaData": false}
2021-06-18 19:33:32.866 INFO 11004 --- [or_consumer_-17] o.a.s.r.client.http.utils.RegisterUtils : grpc client register success: {"appName":"127.0.0.1:8080", "contextPath":"/grpc","path":"/grpc/echo","pathDesc": "echo","rpcType": "grpc", "serviceName": "echo.EchoService", "methodName": "echo", "ruleName": "/grpc/echo", "parameterTypes": "echo.EchoRequest,io.grpc.stub.StreamObserver", "rpcExt": "{\"timeout\":5000, \"methodType\": \"UNARY\"}", "enabled": true,"host": "172.20.10.6", "port": 8080, "registerMetaData": false}
2021-06-18 19:33:32.866 INFO 11004 --- [or_consumer_-20] o.a.s.r.client.http.utils.RegisterUtils : grpc client register success: {"appName": "127.0.0.1:8080", "contextPath": "/grpc", "path": "/grpc/bidiStreamingFun", "pathDesc": "bidiStreamingFun", "rpcType": "grpc", "serviceName": "stream.StreamService", "methodName": "bidiStreamingFun", "ruleName": "/grpc/bidiStreamingFun", "parameterTypes": "io.grpc.stub.StreamObserver", "rpcExt": "{\"timeout\":5000, \"methodType\": \"BIDI_STREAMING\"}", "enabled": true,"host": "172.20.10.6", "port": 8080, "registerMetaData": false}
2021-06-18 19:33:32.866 INFO 11004 --- [or_consumer_-21] o.a.s.r.client.http.
```

```

utils.RegisterUtils : grpc client register success: {"appName":"127.0.0.1:8080",
"contextPath":"/grpc","path":"/grpc/unaryFun","pathDesc":"unaryFun","rpcType":"grpc",
"serviceName":"stream.StreamService","methodName":"unaryFun","ruleName":"/grpc/
unaryFun","parameterTypes": "stream.RequestData,io.grpc.stub.StreamObserver","rpcExt":
"{"\timeout":5000,"methodType":\"UNARY\"}","enabled":true,"host":"172.20.10.6
","port":8080,"registerMetaData":false}
2021-06-18 19:33:32.866 INFO 11004 --- [or_consumer_-18] o.a.s.r.client.http.
utils.RegisterUtils : grpc client register success: {"appName":"127.0.0.1:8080",
"contextPath":"/grpc","path":"/grpc/serverStreamingFun","pathDesc":
"serverStreamingFun","rpcType":"grpc","serviceName":"stream.StreamService",
"methodName":"serverStreamingFun","ruleName":"/grpc/serverStreamingFun",
"parameterTypes": "stream.RequestData,io.grpc.stub.StreamObserver","rpcExt":{\"
\timeout":5000,"methodType":\"SERVER_STREAMING\"}","enabled":true,"host":"172.
20.10.6","port":8080,"registerMetaData":false}

```

16.6 Test

The shenyu-examples-grpc project will automatically register interface methods annotated with @ShenyuGrpcClient in the Apache ShenYu gateway after successful startup.

Open PluginList -> rpc proxy -> gRPC to see the list of plugin rule configurations:

Name	Open	Operation
/grpc	Open	Modify Delete

	RuleName	Open	UpdateTime	Operation
[+]	/grpc/unaryFun	Open	2021-06-18 13:27:36	Modify Delete
[+]	/grpc/serverStreamingFun	Open	2021-06-18 13:27:37	Modify Delete
[+]	/grpc/clientStreamingFun	Open	2021-06-18 13:27:37	Modify Delete
[+]	/grpc/bidiStreamingFun	Open	2021-06-18 13:27:37	Modify Delete
[+]	/grpc/echo	Open	2021-06-18 13:27:37	Modify Delete

Use postman to simulate http to request your gRPC service. The following is the request body.

```
{
  "data": [
    {
      "message": "hello grpc"
    }
  ]
}
```

The screenshot shows a Postman request to `http://localhost:9195/grpc/echo`. The request method is POST. The Headers tab shows 9 headers. The Body tab is selected, containing the JSON payload:

```

1  [{"data": [{"message": "hello grpc"}]}]

```

The response status is 200 OK, with a message of "Access to success!", code 200, and a host of "LAPTOP-7P4PA12J(172.20.10.6)". The response body is:

```

1  {
2      "code": 200,
3      "message": "Access to success!",
4      "data": [
5          {"\n              \"message\": \"ReceivedHELLO\",\\n              \"traces\": [\n                  {\n                      \"host\": \"LAPTOP-7P4PA12J(172.20.10.6)\"\n                  }\n              ]\n          }
6      ]
7  }

```

The parameters are passed in json format. The name of the key is `data` by default, and you can reset it in `GrpcConstants.JSON_DESCRIPTOR_PROTO_FIELD_NAME`. The input of value is based on the proto file defined by you.

16.7 Streaming

the Apache ShenYu can support streaming of gRPC. The following shows the calls of the four method types of gRPC. In streaming, you can pass multiple parameters in the form of an array.

- UNARY

The request body like this.

```
{
  "data": [
    {
      "text": "hello grpc"
    }
  ]
}
```

Then, call gRPC service by UNARY method type.

POST http://localhost:9195/grpc/unaryFun

Body (JSON)

```
1  [{"data": [{"text": "hello grpc"}]}]
```

Status: 200 OK Time: 26 ms Size: 178 B Save

Body Cookies Headers (2) Test Results

Pretty Raw Preview Visualize JSON

```
1  {
2      "code": 200,
3      "message": "Access to success!",
4      "data": [
5          {
6              "\n      \"text\": \"unaryFun response: hello gRPC\"\n"
7          }
8      ]
9 }
```

- **CLIENT_STREAMING**

The request body like this.

```
{
  "data": [
    {
      "text": "hello grpc"
    },
    {
      "text": "hello grpc"
    },
    {
      "text": "hello grpc"
    }
  ]
}
```

Then, call gRPC service by **CLIENT_STREAMING** method type.

The screenshot shows a Postman request to `http://localhost:9195/grpc/clientStreamingFun`. The request method is POST, and the body contains a JSON array of objects with a "text" field. The response status is 200 OK, and the response body is a JSON object containing a code of 200, a message of "Access to success!", and a data array with a single object that includes a "text" field.

```

1  {"data": [{"text": "hello grpc"}, {"text": "hello grpc"}, {"text": "hello grpc"}]}

```

```

1  {
2      "code": 200,
3      "message": "Access to success!",
4      "data": [
5          {"\n            \"text\": \"clientStreamingFun onCompleted\"\n        "}
6      ]
7  }

```

- SERVER_STREAMING

The request body like this.

```
{
  "data": [
    {
      "text": "hello grpc"
    }
  ]
}
```

Then, call gRPC service by SERVER_STREAMING method type.

The screenshot shows a Postman request configuration for a POST method to the URL `http://localhost:9195/grpc/serverStreamingFun`. The 'Body' tab is selected, showing the raw JSON input:

```

1  {"data": [{"text": "hello grpc"}]}

```

The response status is 200 OK, with a time of 25 ms and a size of 734 B. The response body is displayed in JSON format:

```

2  "code": 200,
3  "message": "Access to success!",
4  "data": [
5    "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 0\\\"\\n}",
6    "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 1\\\"\\n}",
7    "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 2\\\"\\n}",
8    "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 3\\\"\\n}",
9    "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 4\\\"\\n}",
10   "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 5\\\"\\n}",
11   "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 6\\\"\\n}",
12   "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 7\\\"\\n}",
13   "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 8\\\"\\n}",
14   "{\"n \\\"text\\\": \\"serverStreamingFun response: hello 9\\\"\\n}"
15 ]
16

```

- **BIDI_STREAMING**

The request body like this.

```
{
  "data": [
    {
      "text": "hello grpc"
    },
    {
      "text": "hello grpc"
    },
    {
      "text": "hello grpc"
    }
  ]
}
```

Then, call gRPC service by BIDI_STREAMING method type.

POST http://localhost:9195/grpc/bidiStreamingFun Send

Params Authorization Headers (9) **Body** Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL **JSON**

```
1  {"data": [{"text": "hello grpc"}, {"text": "hello grpc"}, {"text": "hello grpc"}]}
```

Body Cookies Headers (2) Test Results Status: 200 OK Time: 15 ms Size: 348 B Sav

Pretty Raw Preview Visualize JSON

```
1  {
2      "code": 200,
3      "message": "Access to success!",
4      "data": [
5          "\n \"text\": \"bidiStreamingFun response: hello\\n\"",
6          "\n \"text\": \"bidiStreamingFun response: hello\\n\"",
7          "\n \"text\": \"bidiStreamingFun response: hello\\n\"",
8          "\n \"text\": \"bidiStreamingFun onCompleted\\n\""
9      ]
10 }
```

This document introduces how to quickly access the Apache ShenYu gateway using Websocket.

16.8 Environment to prepare

Refer to [local deployment](#) to deploy the Shenyu gateway.

1. Deploy the shenyu-admin service.
 - After successful launch, you need to set the Websocket plugin to be enabled in the page's basic configuration ->Plugin Management.
2. Deploy the shenyu-bootstrap service.
 - After starting, shenyu-bootstrap will synchronize the data via the websocket protocol according to the address configured in shenyu.sync.websocket.url.

Note: Before starting, make sure that the gateway has introduced the relevant dependency, which is introduced by default.

Import the gateway proxy plugin for Websocket and add the following dependencies to the gateway's pom.xml file.

```
<!--shenyu websocket plugin start-->
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-websocket</artifactId>
    <version>${project.version}</version>
</dependency>
```

16.9 Run the shenyu-examples-websocket project

1. Download `shenyu-examples-websocket` (`native-websocket` and `reactive-websocket` can refer to the subprojects under `shenyu-examples-websocket`).
 2. Run main method of `org.apache.shenyu.examples.websocket.TestAnnotationWebSocketApplication` to start this project.
- The examples project will synchronize the websocket service information to `shenyu-admin` via the `http` protocol according to the address configured in `shenyu.register.serverLists`, and then to `shenyu-bootstrap` by `shenyu-admin`.

log info as follows after starting:

```
2022-08-09 23:37:34.994 INFO 61398 --- [or_consumer_-21] o.a.s.r.client.http.utils.RegisterUtils : metadata client register success: {"appName":"ws-annotation","contextPath":"/ws-annotation","path":"/ws-annotation/myWs","rpcType":"websocket","ruleName":"/ws-annotation/myWs","enabled":true,"pluginNames":[],"registerMetaData":false,"timeMillis":1660059454701}
2022-08-09 23:37:35.019 INFO 61398 --- [or_consumer_-18] o.a.s.r.client.http.utils.RegisterUtils : uri client register success: {"protocol":"ws://","appName":"ws-annotation","contextPath":"/ws-annotation","rpcType":"websocket","host":"192.168.1.3","port":8001}
```

16.10 Test

1. The `shenyu-examples-websocket` project will automatically register the interface methods annotated with `@ShenyuSpringWebSocketClient` to the gateway and add selectors and rules after successful start, you can see the information of `shenyu-examples-websocket` service registration by visiting `shenyu-admin` page -> `PluginList` -> `Proxy` -> `Websocket` to see the `shenyu-examples-websocket` service registration information, if not, you can refer to `WebSocket plugin` to add the configuration manually.
2. The following test code (see attachment) simulates the request method of the `Websocket` protocol to request your `Websocket` service.

16.11 Annexes

websocket debugging code

- Create a file called `websocket.html` and copy the following code into the file.
- Open `websocket.html` with Chrome.

```
<!DOCTYPE HTML>
<html>
<head>
```

```

<meta http-equiv="content-type" content="text/html" />
<title>Shenyu WebSocket Test</title>
<script>
    var websocket;
    function connect() {
        try {
            websocket = new WebSocket(document.getElementById("url").value);
            websocket.onopen = onOpen;
            websocket.onerror = onError;
            websocket.onmessage = onReceive;
            websocket.onclose = onClose;
        } catch (e) {
            alert('[websocket] establish connection error.');
        }
    }
    function onOpen() {
        alert('[websocket] connect success.');
    }
    function onError(e) {
        alert("[websocket] connect error. code: " + e.code);
    }
    function onReceive(msg) {
        var show = document.getElementById("show");
        show.innerHTML += "[Server Response] => " + msg.data + "<br/>";
        show.scrollTop = show.scrollHeight;
    }
    function onClose(e) {
        console.log("[websocket] connect closed. code: " + e.code)
        alert("[websocket] connect closed.");
        document.getElementById("show").innerHTML = "";
        document.getElementById("msg").value = "";
        websocket = null;
    }
    function buttonClose() {
        if (websocket == null) {
            console.log("Please establish a connection first.")
        } else {
            websocket.close(1000);
            document.getElementById("show").innerHTML = "";
            document.getElementById("msg").value = "";
        }
    }
    function send() {
        if (websocket == null) {
            alert("Please establish a connection first.")
        } else {
            var msg = document.getElementById("msg").value;
            show.innerHTML += "[Client Request] => " + msg + "<br/>";
        }
    }

```

```

        websocket.send(msg);
    }
}
</script>
</head>
<body>
    <input id="url" type="text" value="ws://localhost:9195/ws-annotation/myWs"><br/>
    <input id="msg" type="text"><br />
    <button id="connect" onclick="connect();">Connect</button>
    <button id="send" onclick="send();">Send</button>
    <button id="close" onclick="buttonClose();">Close</button><br>
    <div id="show" class="show"></div>
</body>
</html>
<style>
    input {
        width: 400px;
        margin-bottom: 10px;
    }
    .show {
        width: 600px;
        height: 400px;
        overflow-y: auto;
        border: 1px solid #333;
        margin-top: 10px;
    }
</style>

```

This document introduces how to quickly access the Apache ShenYu gateway using Motan RPC. You can get the code example of this document by clicking [here](#).

16.12 Environment to prepare

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#) .

After successful startup, you need to open the Sofa plugin on in the BasicConfig -> Plugin.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies. Start up zookeeper in local.

Import the gateway proxy plugin for Motan and add the following dependencies to the gateway's pom.xml file:

```
<!-- apache shenyu motan plugin -->
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-motan</artifactId>
    <version>${project.version}</version>
</dependency>

<dependency>
    <groupId>com.weibo</groupId>
    <artifactId>motan-core</artifactId>
    <version>1.1.9</version>
</dependency>

<dependency>
    <groupId>com.weibo</groupId>
    <artifactId>motan-registry-zookeeper</artifactId>
    <version>1.1.9</version>
</dependency>

<dependency>
    <groupId>com.weibo</groupId>
    <artifactId>motan-transport-netty4</artifactId>
    <version>1.1.9</version>
</dependency>

<dependency>
    <groupId>com.weibo</groupId>
    <artifactId>motan-springsupport</artifactId>
    <version>1.1.9</version>
</dependency>
```

16.13 Run the shenyu-examples-motan project

Download [shenyu-examples-motan](#) .

Run main method of org.apache.shenyu.examples.motan.service.TestMotanApplication to start this project.

log info as follows after starting:

```
2021-07-18 16:46:25.388 INFO 96 --- [           main] o.s.b.w.embedded.tomcat.
TomcatWebServer : Tomcat started on port(s): 8081 (http) with context path ''
2021-07-18 16:46:25.393 INFO 96 --- [           main] o.a.s.e.m.service.
TestMotanApplication : Started TestMotanApplication in 3.89 seconds (JVM running
for 4.514)
2021-07-18 16:46:25.396 INFO 96 --- [           main] info
: [ZookeeperRegistry] Url (null) will set to available to Registry
```

```
[zookeeper://localhost:2181/default_rpc/com.weibo.api.motan.registry.
RegistryService/1.0/service]
2021-07-18 16:46:25.399 INFO 96 --- [      Thread-6] o.a.s.c.c.s.
ShenyuClientShutdownHook      : hook Thread-0 will sleep 3000ms when it start
2021-07-18 16:46:25.399 INFO 96 --- [      Thread-6] o.a.s.c.c.s.
ShenyuClientShutdownHook      : hook SpringContextShutdownHook will sleep 3000ms
when it start
2021-07-18 16:46:25.445 INFO 96 --- [ntLoopGroup-3-2] info
: NettyChannelHandler channelActive: remote=/192.168.1.8:49740 local=/
192.168.1.8:8002
2021-07-18 16:46:25.445 INFO 96 --- [ntLoopGroup-3-1] info
: NettyChannelHandler channelActive: remote=/192.168.1.8:49739 local=/
192.168.1.8:8002
2021-07-18 16:46:25.925 INFO 96 --- [or_consumer_-17] o.a.s.r.client.http.utils.
RegisterUtils : motan client register success: {"appName":"motan","contextPath":"/motan","path":"/motan/hello","pathDesc":"","rpcType":"motan","serviceName":"org.apache.shenyu.examples.motan.service.MotanDemoService","methodName":"hello","ruleName":"/motan/hello","parameterTypes":"java.lang.String","rpcExt":"{\\"methodInfo\\": [{"methodName":"hello","params": [{"left":"java.lang.String","right":"name"}]}], \"group\":\"motan-shenyu-rpc\"}","enabled":true,"host":"192.168.220.1","port":8081,"registerMetaData":false}
```

16.14 Test

The shenyu-examples-motan project will automatically register the @ShenyuMotanClient annotated interface methods with the gateway and add selectors and rules. If not, you can manually add them.

Open PluginList -> rpc proxy -> motan to see the list of plugin rule configurations:

Use PostMan to simulate HTTP to request your Motan service:

This document introduces how to quickly access the Apache ShenYu gateway using Dubbo. You can get the code example of this document by clicking [here](#).

16.15 Environment to prepare

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#).

After successful startup, you need to open the Dubbo plugin on in the BasicConfig -> Plugin, and set your registry address. Please make sure the registry center is open locally.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies.

If client is apache dubbo, registry center is Zookeeper, please refer to the following configuration:

```
<!-- apache shenyu apache dubbo plugin start-->
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-client-apache-dubbo</artifactId>
    <version>${project.version}</version>
</dependency>
<dependency>
    <groupId>org.apache.dubbo</groupId>
    <artifactId>dubbo</artifactId>
    <version>2.7.5</version>
</dependency>
<!-- Dubbo zookeeper registry dependency start -->
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-client</artifactId>
    <version>4.0.1</version>
    <exclusions>
        <exclusion>
            <artifactId>log4j</artifactId>
            <groupId>log4j</groupId>
        </exclusion>
    </exclusions>
</dependency>
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-framework</artifactId>
    <version>4.0.1</version>
</dependency>
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-recipes</artifactId>
    <version>4.0.1</version>
</dependency>
<!-- Dubbo zookeeper registry dependency end -->
<!-- apache shenyu apache dubbo plugin end-->
```

If client is alibaba dubbo, registry center is Zookeeper, please refer to the following configuration:

```
<!-- apache shenyu alibaba dubbo plugin start-->
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-client-alibaba-dubbo</artifactId>
    <version>${project.version}</version>
</dependency>
<dependency>
    <groupId>com.alibaba</groupId>
    <artifactId>dubbo</artifactId>
```

```

<version>${alibaba.dubbo.version}</version>
</dependency>
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-client</artifactId>
    <version>${curator.version}</version>
    <exclusions>
        <exclusion>
            <artifactId>log4j</artifactId>
            <groupId>log4j</groupId>
        </exclusion>
    </exclusions>
</dependency>
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-framework</artifactId>
    <version>${curator.version}</version>
</dependency>
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-recipes</artifactId>
    <version>${curator.version}</version>
</dependency>
<!-- apache shenyu alibaba dubbo plugin end-->
```

16.16 Run the shenyu-examples-dubbo project

Download `shenyu-examples-dubbo`.

replace the register address in `shenyu-examples-alibaba-dubbo-service/src/main/resources/spring-dubbo.xml` with your local zk address, such as:

```
<dubbo:registry address="zookeeper://localhost:2181"/>
```

Execute the `org.apache.shenyu.examples.alibaba.dubbo.service.TestAlibabaDubboApplication` main method to start dubbo project.

The following log appears when the startup is successful:

```
2021-02-06 20:58:01.807 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/insert","pathDesc":"Insert a row of data","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboTestService","methodName":"insert","ruleName":"/dubbo/insert","parameterTypes":"org.dromara.shenyu.examples.dubbo.api.entity.DubboTest","rpcExt":{\"group\":\"\", \"version\":\", \"loadbalance\":\"random\", \"retries\":2, \"timeout\":10000, \"url\":\"\"}}, \"enabled\":true}
```

```

2021-02-06 20:58:01.821 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/findAll","pathDesc":"Get all data","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboTestService","methodName":"findAll","ruleName":"/dubbo/findAll","parameterTypes":"","rpcExt":"{\\"group\\":\"\",\"version\\\":\"\",\"loadbalance\\\":\"random\",\"retries\\\":2,\"timeout\\\":10000,\"url\\\":\"\"}","enabled":true}
2021-02-06 20:58:01.833 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/findById","pathDesc":"Query by Id","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboTestService","methodName":"findById","ruleName":"/dubbo/findById","parameterTypes":"java.lang.String","rpcExt":"{\\"group\\\":\"\",\"version\\\":\"\",\"loadbalance\\\":\"random\",\"retries\\\":2,\"timeout\\\":10000,\"url\\\":\"\"}","enabled":true}
2021-02-06 20:58:01.844 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/findByIdListId","pathDesc":"","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService","methodName":"findByIdListId","ruleName":"/dubbo/findByIdListId","parameterTypes":"java.util.List","rpcExt":"{\\"group\\\":\"\",\"version\\\":\"\",\"loadbalance\\\":\"random\",\"retries\\\":2,\"timeout\\\":10000,\"url\\\":\"\"}","enabled":true}
2021-02-06 20:58:01.855 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/findByIdsAndName","pathDesc":"","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService","methodName":"findByIdsAndName","ruleName":"/dubbo/findByIdsAndName","parameterTypes":"java.util.List,java.lang.String","rpcExt":"{\\"group\\\":\"\",\"version\\\":\"\",\"loadbalance\\\":\"random\",\"retries\\\":2,\"timeout\\\":10000,\"url\\\":\"\"}","enabled":true}
2021-02-06 20:58:01.866 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/batchSave","pathDesc":"","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService","methodName":"batchSave","ruleName":"/dubbo/batchSave","parameterTypes":"java.util.List","rpcExt":"{\\"group\\\":\"\",\"version\\\":\"\",\"loadbalance\\\":\"random\",\"retries\\\":2,\"timeout\\\":10000,\"url\\\":\"\"}","enabled":true}
2021-02-06 20:58:01.876 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/findByIdArrayIdsAndName","pathDesc":"","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService","methodName":"findByIdArrayIdsAndName","ruleName":"/dubbo/findByIdArrayIdsAndName","parameterTypes":"[Ljava.lang.Integer;,java.lang.String","rpcExt":"{\\"group\\\":\"\",\"version\\\":\"\",\"loadbalance\\\":\"random\",\"retries\\\":2,\"timeout\\\":10000,\"url\\\":\"\"}","enabled":true}
2021-02-06 20:58:01.889 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo","path":"/dubbo/saveComplexBeanTestAndName","pathDesc":"","rpcType":"dubbo","serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService"

```

```

    "methodName":"saveComplexBeanTestAndName","ruleName":"/dubbo/
saveComplexBeanTestAndName","parameterTypes":"org.dromara.shenyu.examples.dubbo.
api.entity.ComplexBeanTest,java.lang.String","rpcExt":"{\\"group\\":\"\",\\"version\
\":\\"",\\"loadbalance\\":\"random\",\\"retries\\":2,\\"timeout\\":10000,\\"url\\\":\"\"}",
"enabled":true}
2021-02-06 20:58:01.901 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.
RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo",
"path":"/dubbo/batchSaveAndNameAndId","pathDesc":"","rpcType":"dubbo",
"serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService",
"methodName":"batchSaveAndNameAndId","ruleName":"/dubbo/batchSaveAndNameAndId",
"parameterTypes":"java.util.List,java.lang.String,java.lang.String","rpcExt":"{\\"group\\":\"\",\\"version\\":\"\",\\"loadbalance\\":\"random\",\\"retries\\":2,\\"timeout\\":10000,\\"url\\\":\"\"}",
"enabled":true}
2021-02-06 20:58:01.911 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.
RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo",
"path":"/dubbo/saveComplexBeanTest","pathDesc":"","rpcType":"dubbo",
"serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService",
"methodName":"saveComplexBeanTest","ruleName":"/dubbo/saveComplexBeanTest",
"parameterTypes":"org.dromara.shenyu.examples.dubbo.api.entity.ComplexBeanTest",
"rpcExt":"{\\"group\\":\"\",\\"version\\":\"\",\\"loadbalance\\":\"random\",\\"retries\\":2,\\"timeout\\":10000,\\"url\\\":\"\"}",
"enabled":true}
2021-02-06 20:58:01.922 INFO 3724 --- [pool-2-thread-1] o.d.s.client.common.utils.
RegisterUtils : dubbo client register success: {"appName":"dubbo","contextPath":"/dubbo",
"path":"/dubbo/findByStringArray","pathDesc":"","rpcType":"dubbo",
"serviceName":"org.dromara.shenyu.examples.dubbo.api.service.DubboMultiParamService",
"methodName":"findByStringArray","ruleName":"/dubbo/findByStringArray",
"parameterTypes":"[Ljava.lang.String;","rpcExt":"{\\"group\\":\"\",\\"version\\":\"\",\\"loadbalance\\":\"random\",\\"retries\\":2,\\"timeout\\":10000,\\"url\\\":\"\"}",
"enabled":true}

```

Note: When you need to expose multiple protocols at the same time, please do not configure shenyu.client.dubbo.props.port.

16.17 Test

The shenyu-examples-dubbo project will automatically register interface methods annotated with @ShenyuDubboClient in the Apache ShenYu gateway after successful startup.

Open PluginList -> rpc proxy -> dubbo to see the list of plugin rule configurations:

Name	Open	Operation	RuleName	Open	UpdateTime	Operation
/dubbo	Open	Modify Delete	/dubbo/insert	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/findAll	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/findById	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/findByListId	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/findByIdsAndName	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/batchSave	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/findByArrayIdsAndName	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/saveComplexBeanTestAndName	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/batchSaveAndNameAndId	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/saveComplexBeanTest	Open	2021-02-06 20:58:01	Modify Delete
			/dubbo/findByStringArray	Open	2021-02-06 20:58:01	Modify Delete

Use PostMan to simulate HTTP to request your Dubbo service:

GET http://localhost:9195/dubbo/findById?id=1

Params

Send Save

Pretty Raw Preview JSON

```

1 [
2   "code": 200,
3   "message": "Access to success!",
4   "data": {
5     "name": "hello world Soul Apache, findById",
6     "id": "1"
7   }
8 ]

```

Complex multi-parameter example: The related interface implementation class is org.apache.shenyu.examples.alibaba.dubbo.service.impl.DubboMultiParamServiceImpl#batchSaveAndNameAndId.

```

@Override
@ShenyuDubboClient(path = "/batchSaveAndNameAndId")
public DubboTest batchSaveAndNameAndId(List<DubboTest> dubboTestList, String id,
String name) {
    DubboTest test = new DubboTest();
    test.setId(id);
    test.setName("hello world shenyu alibaba dubbo param batchSaveAndNameAndId :" +
name + ":" + dubboTestList.stream().map(DubboTest::getName).collect(Collectors.
joining("-")));
    return test;
}

```

The screenshot shows a Postman request to the URL `http://localhost:9195/dubbo/batchSaveAndNameAndId`. The request method is POST. The body contains the following JSON:

```

1+ {
2     "dubboTestList": [{"id": "1", "name": "test"}, {"id": "2", "name": "multi-params"}]
3
4
5

```

The response status is 200 OK with a time of 38 ms. The response body is:

```

1+ {
2     "code": 200,
3     "message": "Access to success!",
4     "data": [
5         {"name": "hello world soul apache dubbo param batchSaveAndNameAndId :multi-params:test", "id": "2"}
6     ]
7
8

```

When your arguments do not match, the following exception will occur:

```

2021-02-07 22:24:04.015 ERROR 14860 --- [:20888-thread-3] o.d.shenyu.web.handler.GlobalErrorHandler : [e47b2a2a] Resolved [ShenyuException: org.apache.dubbo.remoting.RemotingException: java.lang.IllegalArgumentException: args.length != types.length
java.lang.IllegalArgumentException: args.length != types.length
    at org.apache.dubbo.common.utils.PojoUtils.realize(PojoUtils.java:91)
    at org.apache.dubbo.rpc.filter.GenericFilter.invoke(GenericFilter.java:82)
    at org.apache.dubbo.rpc.protocol.ProtocolFilterWrapper$1.
invoke(ProtocolFilterWrapper.java:81)
    at org.apache.dubbo.rpc.filter.ClassLoaderFilter.invoke(ClassLoaderFilter.java:38)
    at org.apache.dubbo.rpc.protocol.ProtocolFilterWrapper$1.
invoke(ProtocolFilterWrapper.java:81)
    at org.apache.dubbo.rpc.filter.EchoFilter.invoke(EchoFilter.java:41)
    at org.apache.dubbo.rpc.protocol.ProtocolFilterWrapper$1.
invoke(ProtocolFilterWrapper.java:81)
    at org.apache.dubbo.rpc.protocol.dubbo.DubboProtocol$1.reply(DubboProtocol.java:150)
    at org.apache.dubbo.remoting.exchange.support.header.HeaderExchangeHandler.
handleRequest(HeaderExchangeHandler.java:100)
    at org.apache.dubbo.remoting.exchange.support.header.HeaderExchangeHandler.
received(HeaderExchangeHandler.java:175)
    at org.apache.dubbo.remoting.transport.DecodeHandler.received(DecodeHandler.java:51)
    at org.apache.dubbo.remoting.transport.dispatcher.ChannelEventRunnable.
run(ChannelEventRunnable.java:57)
    at java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1149)
    at java.util.concurrent.ThreadPoolExecutor$Worker.run(ThreadPoolExecutor.java:624)

```

```

    at java.lang.Thread.run(Thread.java:748)
] for HTTP POST /dubbo/batchSaveAndNameAndId

```

This document introduces how to quickly access the Apache ShenYu Gateway using Tars. You can get the code example of this document by clicking [here](#).

16.18 Environment to prepare

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#).

After successful startup, you need to open the Sofa plugin on in the BasicConfig -> Plugin.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies.

shenyu-bootstrap need to import tars dependencies:

```

<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-tars</artifactId>
    <version>${project.version}</version>
</dependency>

<dependency>
    <groupId>com.tencent.tars</groupId>
    <artifactId>tars-client</artifactId>
    <version>1.7.2</version>
</dependency>

```

16.19 Run the shenyu-examples-tars project

Download [shenyu-examples-tars](#).

Modify host in application.yml to be your local IP

Modify config src/main/resources/ShenyuExampleServer.ShenyuExampleApp.config.conf:

- It is recommended to make clear the meaning of the main configuration items of config, refer to [the development guide](#)
- bind IP in config should pay attention to providing cost machine
- local=…, Indicates the open port that the native machine connects to the tarsnode. If there is no tarsnode, this configuration can be dropped

- locator: Indicates the address (frame address) of the main control center, which is used to obtain the IP list according to the service name, If Registry is not required to locate the service, this configuration can be dropped
- node=tars.tarsnode.ServerObj@xxxx, Indicates the address of the connected tarsnode. If there is no tarsnode locally, this configuration can be removed

More config configuration instructions, Please refer to [TARS Official Documentation](#)

Execute the `org.apache.shenyu.examples.tars.ShenyuTestTarsApplication` main method to start project.

Note: The configuration file address needs to be specified in the startup command when the service starts **-Dconfig=xxx/ShenyuExampleServer.ShenyuExampleApp.config.conf**

If the -Dconfig parameter is not added, the configuration may throw the following exceptions:

```
com.qq.tars.server.config.ConfigurationException: error occurred on load server
config
    at com.qq.tars.server.config.ConfigurationManager.
loadServerConfig(ConfigurationManager.java:113)
    at com.qq.tars.server.config.ConfigurationManager.init(ConfigurationManager.
java:57)
    at com.qq.tars.server.core.Server.loadServerConfig(Server.java:90)
    at com.qq.tars.server.core.Server.<init>(Server.java:42)
    at com.qq.tars.server.core.Server.<clinit>(Server.java:38)
    at com.qq.tars.spring.bean.PropertiesListener.
onApplicationEvent(PropertiesListener.java:37)
    at com.qq.tars.spring.bean.PropertiesListener.
onApplicationEvent(PropertiesListener.java:31)
    at org.springframework.context.event.SimpleApplicationEventMulticaster.
doInvokeListener(SimpleApplicationEventMulticaster.java:172)
    at org.springframework.context.event.SimpleApplicationEventMulticaster.
invokeListener(SimpleApplicationEventMulticaster.java:165)
    at org.springframework.context.event.SimpleApplicationEventMulticaster.
multicastEvent(SimpleApplicationEventMulticaster.java:139)
    at org.springframework.context.event.SimpleApplicationEventMulticaster.
multicastEvent(SimpleApplicationEventMulticaster.java:127)
    at org.springframework.boot.context.event.EventPublishingRunListener.
environmentPrepared(EventPublishingRunListener.java:76)
    at org.springframework.boot.SpringApplicationRunListeners.
environmentPrepared(SpringApplicationRunListeners.java:53)
    at org.springframework.boot.SpringApplication.
prepareEnvironment(SpringApplication.java:345)
    at org.springframework.boot.SpringApplication.run(SpringApplication.java:308)
    at org.springframework.boot.SpringApplication.run(SpringApplication.java:1226)
    at org.springframework.boot.SpringApplication.run(SpringApplication.java:1215)
    at org.apache.shenyu.examples.tars.ShenyuTestTarsApplication.
main(ShenyuTestTarsApplication.java:38)
Caused by: java.lang.NullPointerException
    at java.io.FileInputStream.<init>(FileInputStream.java:130)
```

```

at java.io.FileInputStream.<init>(FileInputStream.java:93)
at com.qq.tars.common.util.Config.parseFile(Config.java:211)
at com.qq.tars.server.config.ConfigurationManager.
loadServerConfig(ConfigurationManager.java:63)
...
The exception occurred at load server config

```

The following log appears when the startup is successful:

```

[SERVER] server starting at tcp -h 127.0.0.1 -p 21715 -t 60000...
[SERVER] server started at tcp -h 127.0.0.1 -p 21715 -t 60000...
[SERVER] server starting at tcp -h 127.0.0.1 -p 21714 -t 3000...
[SERVER] server started at tcp -h 127.0.0.1 -p 21714 -t 3000...
[SERVER] The application started successfully.
The session manager service started...
[SERVER] server is ready...
2021-02-09 13:28:24.643 INFO 16016 --- [           main] o.s.b.w.embedded.tomcat.
TomcatWebServer : Tomcat started on port(s): 55290 (http) with context path ''
2021-02-09 13:28:24.645 INFO 16016 --- [           main] o.d.s.e.tars.
ShenyuTestTarsApplication      : Started ShenyuTestTarsApplication in 4.232 seconds
(JVM running for 5.1)
2021-02-09 13:28:24.828 INFO 16016 --- [pool-2-thread-1] o.d.s.client.common.
utils.RegisterUtils : tars client register success: {"appName":"127.0.0.1:21715",
"contextPath":"/tars","path":"/tars/helloInt","pathDesc":"","rpcType":"tars",
"serviceName": "ShenyuExampleServer.ShenyuExampleApp.HelloObj","methodName":
"helloInt","ruleName":"/tars/helloInt","parameterTypes":"int,java.lang.String",
"rpcExt": "{\"methodInfo\": [{\"methodName\":\"helloInt\", \"params\":{},{}}, \
{returnType\":\"java.lang.Integer\"}, {\"methodName\":\"hello\", \"params\":{},{}}, \
{returnType\":\"java.lang.String\"}]}","enabled":true}
2021-02-09 13:28:24.837 INFO 16016 --- [pool-2-thread-1] o.d.s.client.common.
utils.RegisterUtils : tars client register success: {"appName":"127.0.0.1:21715",
"contextPath":"/tars","path":"/tars/hello","pathDesc":"","rpcType":"tars",
"serviceName": "ShenyuExampleServer.ShenyuExampleApp.HelloObj","methodName": "hello",
"ruleName": "/tars/hello","parameterTypes": "int,java.lang.String","rpcExt": "{\"\
methodInfo\": [{\"methodName\":\"helloInt\", \"params\":{},{}}, \
{returnType\":\"java.lang.Integer\"}, {\"methodName\":\"hello\", \"params\":{},{}}, \
{returnType\":\"java.lang.String\"}]}","enabled":true}

```

16.20 Test

The shenyu-examples-tars project will automatically register interface methods annotated with `@ShenyuTarsClient` in the Apache ShenYu gateway after successful startup.

Open PluginList -> rpc proxy -> tars to see the list of plugin rule configurations:

Name	Open	Operation	RuleName	Open	UpdateTime	Operation
/tars	Open	Modify Delete	/tars/helloInt	Open	2021-02-09 13:15:27	Modify Delete
			/tars/hello	Open	2021-02-09 13:15:27	Modify Delete

Use PostMan to simulate HTTP to request your tars service:

Body	Cookies	Headers (2)	Test Results	Status: 200 OK	Time: 30 ms
1+ { 2 "no": "123", 3 "name": "test" 4 } 5					
1 [{ 2 "code": 200, 3 "message": "Access to success!", 4 "data": "hello no=123, name=test, time=1612867753446" 5 }					

This document introduces how to quickly access the Apache ShenYu gateway using Sofa RPC. You can get the code example of this document by clicking [here](#).

16.21 Environment to prepare

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#).

After successful startup, you need to open the Sofa plugin on in the BasicConfig -> Plugin, and set your registry address. Please make sure the registry center is open locally.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies.

If client is sofa, registry center is Zookeeper, please refer to the following configuration:

```
<!-- apache shenyu sofa plugin start-->
<dependency>
  <groupId>com.alipay.sofa</groupId>
  <artifactId>sofa-rpc-all</artifactId>
  <version>5.7.6</version>
</dependency>
```

```

<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-client</artifactId>
    <version>4.0.1</version>
</dependency>
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-framework</artifactId>
    <version>4.0.1</version>
</dependency>
<dependency>
    <groupId>org.apache.curator</groupId>
    <artifactId>curator-recipes</artifactId>
    <version>4.0.1</version>
</dependency>

<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-sofa</artifactId>
    <version>${project.version}</version>
</dependency>
<!-- apache shenyu sofa plugin end-->

```

16.22 Run the shenyu-examples-sofa project

Download [shenyu-examples-sofa](#), replace the register address in `spring-dubbo.xml` with your local zk address, such as:

```

com:
alipay:
sofa:
rpc:
registry-address: zookeeper://127.0.0.1:2181

```

Execute the `org.apache.shenyu.examples.sofa.service.TestSofaApplication` main method to start sofa service.

The following log appears when the startup is successful:

```

2021-02-10 02:31:45.599 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/insert","pathDesc":"Insert a row of data","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaSingleParamService","methodName":"insert","ruleName":"/sofa/insert","parameterTypes":"org.dromara.shenyu.examples.sofa.api.entity.SofaSimpleTypeBean","rpcExt":"{\"loadbalance\":\"hash\",\"retries\":3,\"timeout\":-1}","enabled":true}
2021-02-10 02:31:45.605 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.

```

```

RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/findById","pathDesc":"Find by Id","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaSingleParamService","methodName":"findById","ruleName":"/sofa/findById","parameterTypes":"java.lang.String","rpcExt": "{\"loadbalance\": \"hash\", \"retries\": 3, \"timeout\": -1}","enabled":true}
2021-02-10 02:31:45.611 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/findAll","pathDesc":"Get all data","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaSingleParamService","methodName":"findAll","ruleName":"/sofa/findAll","parameterTypes":"","rpcExt": "{\"loadbalance\": \"hash\", \"retries\": 3, \"timeout\": -1}","enabled":true}
2021-02-10 02:31:45.616 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/batchSaveNameAndId","pathDesc":"","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService","methodName":"batchSaveNameAndId","ruleName":"/sofa/batchSaveNameAndId","parameterTypes":"java.util.List,java.lang.String,java.lang.String#org.dromara.shenyu.examples.sofa.api.entity.SofaSimpleTypeBean","rpcExt": "{\"loadbalance\": \"hash\", \"retries\": 3, \"timeout\": -1}","enabled":true}
2021-02-10 02:31:45.621 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/saveComplexBeanAndName","pathDesc":"","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService","methodName":"saveComplexBeanAndName","ruleName":"/sofa/saveComplexBeanAndName","parameterTypes":"org.dromara.shenyu.examples.sofa.api.entity.SofaComplexTypeBean,java.lang.String","rpcExt": "{\"loadbalance\": \"hash\", \"retries\": 3, \"timeout\": -1}","enabled":true}
2021-02-10 02:31:45.627 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/findByArrayIdsAndName","pathDesc":"","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService","methodName":"findByArrayIdsAndName","ruleName":"/sofa/findByArrayIdsAndName","parameterTypes": "[Ljava.lang.Integer;,java.lang.String","rpcExt": "{\"loadbalance\": \"hash\", \"retries\": 3, \"timeout\": -1}","enabled":true}
2021-02-10 02:31:45.632 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/findByStringArray","pathDesc":"","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService","methodName":"findByStringArray","ruleName":"/sofa/findByStringArray","parameterTypes": "[Ljava.lang.String;","rpcExt": "{\"loadbalance\": \"hash\", \"retries\": 3, \"timeout\": -1}","enabled":true}
2021-02-10 02:31:45.637 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/saveTwoList","pathDesc":"","rpcType":"sofa","serviceName":"org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService","methodName":"saveTwoList","ruleName":"/sofa/saveTwoList","parameterTypes":"java.util.List,java.util.Map#org.dromara.shenyu.examples.sofa.api.entity.SofaComplexTypeBean","rpcExt": "{\"loadbalance\": \"hash\", \"retries\": 3, \"timeout\": -1}","enabled":true}

```

```

2021-02-10 02:31:45.642 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/batchSave","pathDesc":"","rpcType":"sofa","serviceName":org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService,"methodName":"batchSave","ruleName":"/sofa/batchSave","parameterTypes":"java.util.List#org.dromara.shenyu.examples.sofa.api.entity.SofaSimpleTypeBean","rpcExt":"{\\"loadbalance\\":\\"hash\\",\\"retries\\":3,\\"timeout\\":1}","enabled":true}
2021-02-10 02:31:45.647 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/findById","pathDesc":"","rpcType":"sofa","serviceName":org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService,"methodName":"findById","ruleName":"/sofa/findById","parameterTypes":"java.util.List","rpcExt":"{\\"loadbalance\\":\\"hash\\",\\"retries\\":3,\\"timeout\\":1}","enabled":true}
2021-02-10 02:31:45.653 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/saveComplexBean","pathDesc":"","rpcType":"sofa","serviceName":org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService,"methodName":"saveComplexBean","ruleName":"/sofa/saveComplexBean","parameterTypes":org.dromara.shenyu.examples.sofa.api.entity.SofaComplexTypeBean,"rpcExt":"{\\"loadbalance\\":\\"hash\\",\\"retries\\":3,\\"timeout\\":1}","enabled":true}
2021-02-10 02:31:45.660 INFO 2156 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : sofa client register success: {"appName":"sofa","contextPath":"/sofa","path":"/sofa/findByIdsAndName","pathDesc":"","rpcType":"sofa","serviceName":org.dromara.shenyu.examples.sofa.api.service.SofaMultiParamService,"methodName":"findByIdsAndName","ruleName":"/sofa/findByIdsAndName","parameterTypes":"java.util.List,java.lang.String","rpcExt":"{\\"loadbalance\\":\\"hash\\",\\"retries\\":3,\\"timeout\\":1}","enabled":true}
2021-02-10 02:31:46.055 INFO 2156 --- [main] o.a.c.f.imps.CuratorFrameworkImpl : Starting
2021-02-10 02:31:46.059 INFO 2156 --- [main] org.apache.zookeeper.ZooKeeper : Client environment:zookeeper.version=3.4.6-1569965, built on 02/20/2014 09:09 GMT
2021-02-10 02:31:46.059 INFO 2156 --- [main] org.apache.zookeeper.ZooKeeper : Client environment:host.name=host.docker.internal
2021-02-10 02:31:46.059 INFO 2156 --- [main] org.apache.zookeeper.ZooKeeper : Client environment:java.version=1.8.0_211
2021-02-10 02:31:46.059 INFO 2156 --- [main] org.apache.zookeeper.ZooKeeper : Client environment:java.vendor=Oracle Corporation
2021-02-10 02:31:46.059 INFO 2156 --- [main] org.apache.zookeeper.ZooKeeper : Client environment:java.home=C:\Program Files\Java\jdk1.8.0_211\jre
2021-02-10 02:31:46.059 INFO 2156 --- [main] org.apache.zookeeper.ZooKeeper : Client environment:java.class.path=C:\Program Files\Java\jdk1.8.0_211\jre\lib\charsets.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\access-bridge-64.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\cldrdata.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\dnsns.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\jaccess.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\jfxrt.jar;C:\Program

```

Files\Java\jdk1.8.0_211\jre\lib\ext\.localedata.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\nashorn.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\sunec.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\sunjce_provider.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\sunmscapi.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\sunpkcs11.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\ext\zipfs.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\javaws.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\jce.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\jfr.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\jfxswt.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\jsse.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\management-agent.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\plugin.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\resources.jar;C:\Program Files\Java\jdk1.8.0_211\jre\lib\rt.jar;D:\X\dlm_github\shenyu\shenyu-examples\shenyu-examples-sofa\shenyu-examples-sofa-service\target\classes;D:\SOFT\m2\repository\com\alipay\sofa\rpc-sofa-boot-starter\6.0.4\rpc-sofa-boot-starter-6.0.4.jar;D:\SOFT\m2\repository\com\alipay\sofa\rpc-sofa-boot-core\6.0.4\rpc-sofa-boot-core-6.0.4.jar;D:\SOFT\m2\repository\com\alipay\sofa\sofa-rpc-all\5.5.7\sofa-rpc-all-5.5.7.jar;D:\SOFT\m2\repository\com\alipay\sofa\bolt\1.4.6\bolt-1.4.6.jar;D:\SOFT\m2\repository\org\javassist\javassist\3.20.0-GA\javassist-3.20.0-GA.jar;D:\SOFT\m2\repository\io\netty\netty-all\4.1.43.Final\netty-all-4.1.43.Final.jar;D:\SOFT\m2\repository\com\alipay\sofa\hessian\3.3.6\hessian-3.3.6.jar;D:\SOFT\m2\repository\com\alipay\sofa\tracer-core\2.1.2\tracer-core-2.1.2.jar;D:\SOFT\m2\repository\io\opentracing\opentracing-api\0.22.0\opentracing-api-0.22.0.jar;D:\SOFT\m2\repository\io\opentracing\opentracing-noop\0.22.0\opentracing-noop-0.22.0.jar;D:\SOFT\m2\repository\io\opentracing\opentracing-mock\0.22.0\opentracing-mock-0.22.0.jar;D:\SOFT\m2\repository\io\opentracing\opentracing-util\0.22.0\opentracing-util-0.22.0.jar;D:\SOFT\m2\repository\com\alipay\sofa\lookout\lookout-api\1.4.1\lookout-api-1.4.1.jar;D:\SOFT\m2\repository\com\alipay\sofa\runtime-sofa-boot-starter\3.1.4\runtime-sofa-boot-starter-3.1.4.jar;D:\SOFT\m2\repository\org\apache\curator\curator-client\2.9.1\curator-client-2.9.1.jar;D:\SOFT\m2\repository\org\apache\zookeeper\zookeeper\3.4.6\zookeeper-3.4.6.jar;D:\SOFT\m2\repository\log4j\log4j\1.2.16\log4j-1.2.16.jar;D:\SOFT\m2\repository\jline\jline\0.9.94\jline-0.9.94.jar;D:\SOFT\m2\repository\io\netty\netty\3.7.0.Final\netty-3.7.0.Final.jar;D:\SOFT\m2\repository\com\google\guava\guava\16.0.1\guava-16.0.1.jar;D:\SOFT\m2\repository\org\apache\curator\curator-framework\2.9.1\curator-framework-2.9.1.jar;D:\SOFT\m2\repository\org\apache\curator\curator-recipes\2.9.1\curator-recipes-2.9.1.jar;D:\SOFT\m2\repository\org\jboss\resteasy\resteasy-jaxrs\3.0.12.Final\resteasy-jaxrs-3.0.12.Final.jar;D:\SOFT\m2\repository\org\jboss\spec\javax\annotation\jboss-annotations-api_1.1_spec\1.0.1.Final\jboss-annotations-api_1.1_spec-1.0.1.Final.jar;D:\SOFT\m2\repository\javax\activation\activation\1.1.1\activation-1.1.1.jar;D:\SOFT\m2\repository\org\apache\httpcomponents\httpclient\4.5.10\httpclient-4.5.10.jar;D:\SOFT\m2\repository\org\apache\httpcomponents\httpcore\4.4.12\httpcore-4.4.12.jar;D:\SOFT\m2\repository\commons-io\commons-io\2.1\commons-io-2.1.jar;D:\SOFT\m2\repository\net\jcip\jcip-annotations\1.0\jcip-annotations-1.0.jar;D:\SOFT\m2\repository\org\jboss\resteasy\resteasy-client\3.0.12.Final\resteasy-client-3.0.12.Final.jar;D:\SOFT\m2\repository\org\jboss\resteasy\resteasy-jackson-provider\3.0.12.Final\resteasy-jackson-provider-3.0.12.Final.jar;D:\SOFT\m2\repository\org\codehaus\jackson\jackson-core-asl\1.9.12\jackson-core-asl-1.9.12.jar;D:\SOFT\m2\repository\org\codehaus\jackson\jackson-mapper-asl\1.9.12\jackson-mapper-asl-1.9.

```
12.jar;D:\SOFT\m2\repository\org\codehaus\jackson\jackson-jaxrs\1.9.12\jackson-
jaxrs-1.9.12.jar;D:\SOFT\m2\repository\org\codehaus\jackson\jackson-xc\1.9.12\
jackson-xc-1.9.12.jar;D:\SOFT\m2\repository\org\jboss\resteasy\resteasy-netty4\3.0.
12.Final\resteasy-netty4-3.0.12.Final.jar;D:\SOFT\m2\repository\org\jboss\resteasy\rester-
easy-validator-provider-11\3.0.12.Final\resteasy-validator-provider-11-3.0.12.
Final.jar;D:\SOFT\m2\repository\com\fasterxml\classmate\1.5.1\classmate-1.5.1.jar;
D:\SOFT\m2\repository\org\jboss\resteasy\jaxrs-api\3.0.12.Final\jaxrs-api-3.0.12.
Final.jar;D:\SOFT\m2\repository\org\jboss\resteasy\resteasy-multipart-provider\3.0.
12.Final\resteasy-multipart-provider-3.0.12.Final.jar;D:\SOFT\m2\repository\org\
jboss\resteasy\resteasy-jaxb-provider\3.0.12.Final\resteasy-jaxb-provider-3.0.12.
Final.jar;D:\SOFT\m2\repository\com\sun\xml\bind\jaxb-impl\2.2.7\jaxb-impl-2.2.7.
jar;D:\SOFT\m2\repository\com\sun\xml\bind\jaxb-core\2.2.7\jaxb-core-2.2.7.jar;D:\\
SOFT\m2\repository\javax\xml\bind\jaxb-api\2.3.1\jaxb-api-2.3.1.jar;D:\SOFT\m2\
repository\javax\activation\javax.activation-api\1.2.0\javax.activation-api-1.2.0.
jar;D:\SOFT\m2\repository\com\sun\istack\istack-commons-runtime\2.16\istack-
commons-runtime-2.16.jar;D:\SOFT\m2\repository\com\sun\xml\fastinfoset\FastInfoset\
1.2.12\FastInfoset-1.2.12.jar;D:\SOFT\m2\repository\javax\xml\bind\jsr173_api\1.0\
jsr173_api-1.0.jar;D:\SOFT\m2\repository\javax\mail\mail\1.5.0-b01\mail-1.5.0-b01.
jar;D:\SOFT\m2\repository\org\apache\james\apache-mime4j\0.6\apache-mime4j-0.6.jar;
D:\SOFT\m2\repository\commons-logging\commons-logging\1.1.1\commons-logging-1.1.1.
jar;D:\SOFT\m2\repository\com\alibaba\dubbo\2.4.10\dubbo-2.4.10.jar;D:\SOFT\m2\
repository\org\jboss\netty\netty\3.2.5.Final\netty-3.2.5.Final.jar;D:\SOFT\m2\
repository\com\101tec\zkclient\0.10\zkclient-0.10.jar;D:\SOFT\m2\repository\com\
alibaba\nacos\nacos-api\1.0.0\nacos-api-1.0.0.jar;D:\SOFT\m2\repository\com\
alibaba\fastjson\1.2.47\fastjson-1.2.47.jar;D:\SOFT\m2\repository\org\apache\
commons\commons-lang3\3.9\commons-lang3-3.9.jar;D:\SOFT\m2\repository\com\alibaba\
nacos\nacos-client\1.0.0\nacos-client-1.0.0.jar;D:\SOFT\m2\repository\com\alibaba\
nacos\nacos-common\1.0.0\nacos-common-1.0.0.jar;D:\SOFT\m2\repository\commons-
codec\commons-codec\1.13\commons-codec-1.13.jar;D:\SOFT\m2\repository\com\
fasterxml\jackson\core\jackson-core\2.10.1\jackson-core-2.10.1.jar;D:\SOFT\m2\
repository\com\fasterxml\jackson\core\jackson-databind\2.10.1\jackson-databind-2.
10.1.jar;D:\SOFT\m2\repository\com\fasterxml\jackson\core\jackson-annotations\2.10.
1\jackson-annotations-2.10.1.jar;D:\SOFT\m2\repository\io\prometheus\simpleclient\
0.5.0\simpleclient-0.5.0.jar;D:\SOFT\m2\repository\org\springframework\spring-
beans\5.2.2.RELEASE\spring-beans-5.2.2.RELEASE.jar;D:\SOFT\m2\repository\org\
springframework\spring-core\5.2.2.RELEASE\spring-core-5.2.2.RELEASE.jar;D:\SOFT\m2\
repository\org\springframework\spring-jcl\5.2.2.RELEASE\spring-jcl-5.2.2.RELEASE.
jar;D:\SOFT\m2\repository\com\alipay\sofa\infra-sofa-boot-starter\3.1.4\infra-sofa-
boot-starter-3.1.4.jar;D:\SOFT\m2\repository\com\alipay\sofa\common\log-sofa-boot-
starter\1.0.18\log-sofa-boot-starter-1.0.18.jar;D:\SOFT\m2\repository\org\
springframework\spring-context\5.2.2.RELEASE\spring-context-5.2.2.RELEASE.jar;D:\\
SOFT\m2\repository\org\springframework\spring-aop\5.2.2.RELEASE\spring-aop-5.2.2.
RELEASE.jar;D:\SOFT\m2\repository\org\springframework\spring-expression\5.2.2.
RELEASE\spring-expression-5.2.2.RELEASE.jar;D:\SOFT\m2\repository\com\alipay\sofa\
common\sofa-common-tools\1.0.18\sofa-common-tools-1.0.18.jar;D:\SOFT\m2\repository\
org\springframework\boot\spring-boot-starter-validation\2.2.2.RELEASE\spring-boot-
starter-validation-2.2.2.RELEASE.jar;D:\SOFT\m2\repository\jakarta\validation\
jakarta.validation-api\2.0.1\jakarta.validation-api-2.0.1.jar;D:\SOFT\m2\
```

```

repository\org\hibernate\validator\hibernate-validator\6.0.18.Final\hibernate-
validator-6.0.18.Final.jar;D:\SOFT\m2\repository\org\jboss\logging\jboss-logging\3.
4.1.Final\jboss-logging-3.4.1.Final.jar;D:\SOFT\m2\repository\org\apache\tomcat\
embed\tomcat-embed-el\9.0.29\tomcat-embed-el-9.0.29.jar;D:\SOFT\m2\repository\org\
springframework\boot\spring-boot-autoconfigure\2.2.2.RELEASE\spring-boot-
autoconfigure-2.2.2.RELEASE.jar;D:\SOFT\m2\repository\org\springframework\boot\
spring-boot\2.2.2.RELEASE\spring-boot-2.2.2.RELEASE.jar;D:\X\dlm_github\shenyu\
shenyu-examples\shenyu-examples-sofa\shenyu-examples-sofa-api\target\classes;D:\
SOFT\m2\repository\org\projectlombok\lombok\1.18.10\lombok-1.18.10.jar;D:\X\dlm_\
github\shenyu\shenyu-spring-boot-starter\shenyu-spring-boot-starter-client\shenyu-
spring-boot-starter-client-sofa\target\classes;D:\SOFT\m2\repository\org\
springframework\boot\spring-boot-starter\2.2.2.RELEASE\spring-boot-starter-2.2.2.
RELEASE.jar;D:\SOFT\m2\repository\org\springframework\boot\spring-boot-starter-
logging\2.2.2.RELEASE\spring-boot-starter-logging-2.2.2.RELEASE.jar;D:\SOFT\m2\
repository\ch\qos\logback\logback-classic\1.2.3\logback-classic-1.2.3.jar;D:\SOFT\m2\
repository\ch\qos\logback\logback-core\1.2.3\logback-core-1.2.3.jar;D:\SOFT\m2\
repository\org\apache\logging\log4j\log4j-to-slf4j\2.12.1\log4j-to-slf4j-2.12.1.
jar;D:\SOFT\m2\repository\org\slf4j\jul-to-slf4j\1.7.29\jul-to-slf4j-1.7.29.jar;
D:\SOFT\m2\repository\jakarta\annotation\jakarta.annotation-api\1.3.5\jakarta.
annotation-api-1.3.5.jar;D:\SOFT\m2\repository\org\yaml\snakeyaml\1.25\snakeyaml-1.
25.jar;D:\X\dlm_github\shenyu\shenyu-client\shenyu-client-sofa\target\classes;D:\X\
dlm_github\shenyu\shenyu-client\shenyu-client-common\target\classes;D:\X\dlm_\
github\shenyu\shenyu-common\target\classes;D:\SOFT\m2\repository\org\
springframework\boot\spring-boot-starter-json\2.2.2.RELEASE\spring-boot-starter-
json-2.2.2.RELEASE.jar;D:\SOFT\m2\repository\org\springframework\spring-web\5.2.2.
RELEASE\spring-web-5.2.2.RELEASE.jar;D:\SOFT\m2\repository\com\fasterxml\jackson\
datatype\jackson-datatype-jdk8\2.10.1\jackson-datatype-jdk8-2.10.1.jar;D:\SOFT\m2\
repository\com\fasterxml\jackson\datatype\jackson-datatype-jsr310\2.10.1\jackson-
datatype-jsr310-2.10.1.jar;D:\SOFT\m2\repository\com\fasterxml\jackson\module\
jackson-module-parameter-names\2.10.1\jackson-module-parameter-names-2.10.1.jar;D:\
SOFT\m2\repository\com\squareup\okhttp3\okhttp\3.14.4\okhttp-3.14.4.jar;D:\SOFT\m2\
repository\com\squareup\okio\okio\1.17.2\okio-1.17.2.jar;D:\SOFT\m2\repository\com\
google\code\gson\gson\2.8.6\gson-2.8.6.jar;D:\SOFT\m2\repository\org\slf4j\slf4j-
api\1.7.29\slf4j-api-1.7.29.jar;D:\SOFT\m2\repository\org\slf4j\jcl-over-slf4j\1.7.
29\jcl-over-slf4j-1.7.29.jar;C:\Program Files\JetBrains\IntelliJ IDEA 2019.3.3\lib\
idea_rt.jar

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper : Client environment:java.library.path=C:\Program Files\Java\jdk1.8.0_211\bin;C:\Windows\Sun\Java\bin;C:\Windows\system32;C:\Windows;C:\Program Files\Common Files\Oracle\Java\javapath;C:\ProgramData\Oracle\Java\javapath;C:\Program Files (x86)\Common Files\Oracle\Java\javapath;C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\System32\WindowsPowerShell\v1.0\;C:\Windows\System32\OpenSSH\;C:\Program Files\Java\jdk1.8.0_211\bin;C:\Program Files\Java\jdk1.8.0_211\jre\bin;D:\SOFT\apache-maven-3.5.0\bin;C:\Program Files\Go\bin;C:\Program Files\nodejs\;C:\Program Files\Python\Python38\;C:\Program Files\OpenSSL-Win64\bin;C:\Program Files\Git\bin;D:\SOFT\protobuf-2.5.0\src;D:\SOFT\zlib-1.2.8;c:\Program Files (x86)\Microsoft SQL Server\100\Tools\Binn\;c:\Program Files\
```

```
Microsoft SQL Server\100\Tools\Binn\;c:\Program Files\Microsoft SQL Server\100\DT\Binn\;C:\Program Files\Docker\ Docker\resources\bin;C:\ProgramData\ DockerDesktop\version-bin;D:\SOFT\gradle-6.0-all\gradle-6.0\bin;C:\Program Files\mingw-w64\x86_64-8.1.0-posix-seh-rt_v6-rev0\mingw64\bin;D:\SOFT\hugo_extended_0.55.5_Windows-64bit;C:\Users\ DLM\AppData\Local\Microsoft\WindowsApps;C:\Users\ DLM\go\bin;C:\Users\ DLM\AppData\Roaming\npm\;C:\Program Files\Microsoft VS Code\bin;C:\Program Files\nimbella-cli\bin\;.

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:java.io.tmpdir=C:\Users\ DLM\AppData\Local\Temp\

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:java.compiler=<NA>

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:os.name=Windows 10

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:os.arch=amd64

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:os.version=10.0

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:user.name=DLM

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:user.home=C:\Users\ DLM

2021-02-10 02:31:46.060 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Client environment:user.dir=D:\X\dlm_github\shenyu

2021-02-10 02:31:46.061 INFO 2156 --- [           main] org.apache.zookeeper.ZooKeeper      : Initiating client connection, connectString=127.0.0.1:21810 sessionTimeout=60000 watcher=org.apache.curator.ConnectionState@3e850122

2021-02-10 02:31:46.069 INFO 2156 --- [27.0.0.1:21810)] org.apache.zookeeper.ClientCnxn      : Opening socket connection to server 127.0.0.1/127.0.0.1:21810. Will not attempt to authenticate using SASL (unknown error)

2021-02-10 02:31:46.071 INFO 2156 --- [27.0.0.1:21810)] org.apache.zookeeper.ClientCnxn      : Socket connection established to 127.0.0.1/127.0.0.1:21810, initiating session

2021-02-10 02:31:46.078 INFO 2156 --- [27.0.0.1:21810)] org.apache.zookeeper.ClientCnxn      : Session establishment complete on server 127.0.0.1/127.0.0.1:21810, sessionid = 0x10005b0d05e0001, negotiated timeout = 40000

2021-02-10 02:31:46.081 INFO 2156 --- [ain-EventThread] o.a.c.f.state.ConnectionStateManager      : State change: CONNECTED

2021-02-10 02:31:46.093 WARN 2156 --- [           main] org.apache.curator.utils.ZKPaths      : The version of ZooKeeper being used doesn't support Container nodes. CreateMode.PERSISTENT will be used instead.

2021-02-10 02:31:46.141 INFO 2156 --- [           main] o.d.s.e.s.service.TestSofaApplication  : Started TestSofaApplication in 3.41 seconds (JVM running for 4.423)
```

16.23 Test

The shenyu-examples-sofa project will automatically register interface methods annotated with `@ShenyuSofaClient` in the Apache ShenYu gateway after successful startup.

Open PluginList -> rpc proxy -> sofa to see the list of plugin rule configurations:

	RuleName	Open	UpdateTime	Operation
[+]	/sofa/insert	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/findById	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/findAll	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/batchSaveNameAndId	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/saveComplexBeanAndName	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/findByArrayIdsAndName	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/findByStringArray	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/saveTwoList	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/batchSave	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/findByIdsAndName	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/saveComplexBean	Open	2021-02-10 02:16:12	Modify Delete
[+]	/sofa/findByListId	Open	2021-02-10 02:16:12	Modify Delete

Use PostMan to simulate HTTP to request your Sofa service:

Body	Cookies	Headers (2)	Test Results	Status: 200 OK Time: 954 ms
Body Authorization Headers (1) Body (selected) Pre-request Script Tests form-data x-www-form-urlencoded raw binary JSON (application/json) <pre>1 { 2 "id": "123" 3 } 4 </pre>				
Body Cookies Headers (2) Test Results Status: 200 OK Time: 954 ms Pretty Raw Preview JSON <pre>1 { 2 "code": 200, 3 "message": "Access to success!", 4 "data": { 5 "id": "123", 6 "name": "hello world Soul Sofa, findById" 7 } 8 }</pre>				

Complex multi-parameter example: The related interface implementation class is `org.apache.shenyu.examples.sofa.service.impl.SofaMultiParamServiceImpl#batchSaveNameAndId`

```

@Override
@ShenyuSofaClient(path = "/batchSaveNameAndId")
public SofaSimpleTypeBean batchSaveNameAndId(final List<SofaSimpleTypeBean>
sofaTestList, final String id, final String name) {
    SofaSimpleTypeBean simpleTypeBean = new SofaSimpleTypeBean();
    simpleTypeBean.setId(id);
    simpleTypeBean.setName("hello world shenyu sofa param batchSaveAndNameAndId :"
  
```

```
+ name + ":" + sofaTestList.stream().map(SofaSimpleTypeBean::getName) .
collect(Collectors.joining("-")));
    return simpleTypeBean;
}
```

The screenshot shows a Postman interface. The top bar has 'POST' selected, the URL is 'http://localhost:9195/sofa/batchSaveNameAndId', and the 'Body' tab is active. The body content is a JSON object:

```
1 { "sofaTestList": [{ 2 "id":"123", 3 "name":"test" 4 }, 5 "id":"134", 6 "name":"test1" 7 } 8 }
```

The response section shows 'Status: 200 OK' and 'Time: 30 ms'. The response body is:

```
1 [{} 2 "code": 200, 3 "message": "Access to success!", 4 "data": { 5 "id": "134", 6 "name": "hello world soul sofa param batchSaveAndNameAndId :test1:test" 7 } 8 ]
```

This document introduces how to quickly access the Apache ShenYu gateway using Http. You can get the code example of this document by clicking [here](#).

16.24 Environment to prepare

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#) .

After successful startup, you need to open the Divide plugin on in the BasicConfig -> Plugin. In the Apache ShenYu gateway, the HTTP request is handled by the Divide plugin.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies.

Add the following dependencies to the gateway's pom.xml file:

```
<!--if you use http proxy start this-->
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-divide</artifactId>
    <version>${project.version}</version>
</dependency>

<dependency>
    <groupId>org.apache.shenyu</groupId>
```

```
<artifactId>shenyu-spring-boot-starter-plugin-httpclient</artifactId>
<version>${project.version}</version>
</dependency>
```

16.25 Run the shenyu-examples-http project

Download [shenyu-examples-http](#)

Execute the `org.apache.shenyu.examples.http.ShenyuTestHttpApplication` main method to start project.

Since 2.4.3, `shenyu.client.http.props.port` can be non-configured if you like.

The following log appears when the startup is successful:

```
2021-02-10 00:57:07.561 INFO 3700 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : http client register success: {"appName":"http","context":"/http","path":"/http/test/**","pathDesc":"","rpcType":"http","host":"192.168.50.13","port":8188,"ruleName":"/http/test/**","enabled":true,"registerMetaData":false}
2021-02-10 00:57:07.577 INFO 3700 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : http client register success: {"appName":"http","context":"/http","path":"/http/order/save","pathDesc":"Save order","rpcType":"http","host":"192.168.50.13","port":8188,"ruleName":"/http/order/save","enabled":true,"registerMetaData":false}
2021-02-10 00:57:07.587 INFO 3700 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : http client register success: {"appName":"http","context":"/http","path":"/http/order/path/**/name","pathDesc":"","rpcType":"http","host":"192.168.50.13","port":8188,"ruleName":"/http/order/path/**/name","enabled":true,"registerMetaData":false}
2021-02-10 00:57:07.596 INFO 3700 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : http client register success: {"appName":"http","context":"/http","path":"/http/order/findById","pathDesc":"Find by id","rpcType":"http","host":"192.168.50.13","port":8188,"ruleName":"/http/order/findById","enabled":true,"registerMetaData":false}
2021-02-10 00:57:07.606 INFO 3700 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : http client register success: {"appName":"http","context":"/http","path":"/http/order/path/**","pathDesc":"","rpcType":"http","host":"192.168.50.13","port":8188,"ruleName":"/http/order/path/**","enabled":true,"registerMetaData":false}
2021-02-10 00:57:08.023 INFO 3700 --- [           main] o.s.b.web.embedded.netty.NettyWebServer : Netty started on port(s): 8188
2021-02-10 00:57:08.026 INFO 3700 --- [           main] o.d.s.e.http.ShenyuTestHttpApplication : Started ShenyuTestHttpApplication in 2.555 seconds (JVM running for 3.411)
```

16.26 Test


The shenyu-examples-http project will automatically register interface methods annotated with `@ShenyuSpringMvcClient` in the Apache ShenYu gateway after successful startup.

Open PluginList -> Proxy -> divide to see the list of plugin rule configurations:

Name	Open	Operation	RuleName	Open	UpdateTime	Operation
/http	Open	Modify Delete	/http/test/**	Open	2021-02-10 00:57:07	Modify Delete
			/http/order/save	Open	2021-02-10 00:57:07	Modify Delete
			/http/order/path/**/name	Open	2021-02-10 00:57:07	Modify Delete
			/http/order/findById	Open	2021-02-10 00:57:07	Modify Delete
			/http/order/path/**	Open	2021-02-10 00:57:07	Modify Delete

Use PostMan to simulate HTTP to request your http service:

Use IDEA HTTP Client Plugin to simulate HTTP to request your http service[local:no Shenyu proxy]:

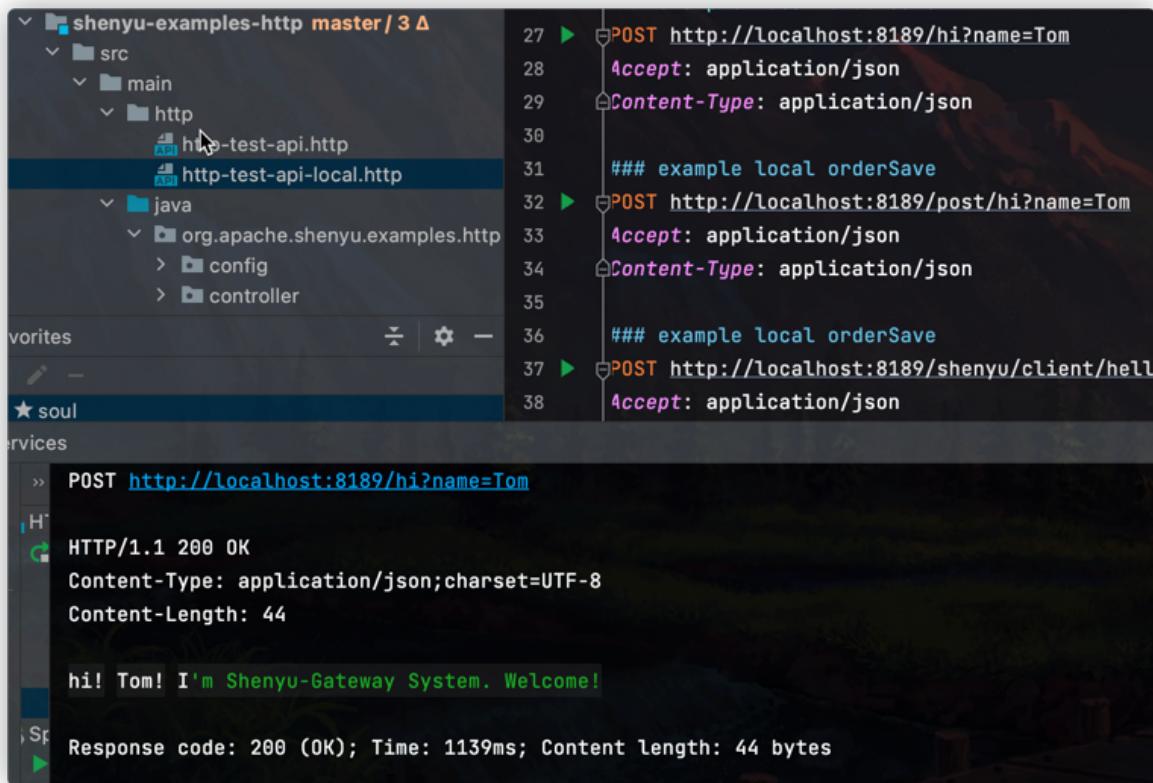

The screenshot shows the IDEA IDE interface. On the left, the project tree for 'shenyu-examples-http' is visible, containing 'src' (with 'main' and 'http' subfolders), 'java' (with 'org.apache.shenyu.examples.http' package), and 'services'. In the center, an 'HTTP' tab of the IDEA HTTP Client is open, showing a POST request to 'http://localhost:8189/hi?name=Tom'. The response code is 200 OK, and the response body contains the message 'hi! Tom! I'm ShenYu-Gateway System. Welcome!'. On the right, the code editor shows several lines of Java code related to ShenYu proxy configurations.


```
27 ➤ POST http://localhost:8189/hi?name=Tom
28   Accept: application/json
29   Content-Type: application/json
30
31   ### example local orderSave
32 ➤ POST http://localhost:8189/post/hi?name=Tom
33   Accept: application/json
34   Content-Type: application/json
35
36   ### example local orderSave
37 ➤ POST http://localhost:8189/shenyu/client/hell
38   Accept: application/json
```

```
>> POST http://localhost:8189/hi?name=Tom
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 44

hi! Tom! I'm ShenYu-Gateway System. Welcome!

Response code: 200 (OK); Time: 1139ms; Content length: 44 bytes
```

Use IDEA HTTP Client Plugin to simulate HTTP to request your http service[Shenyu proxy]:

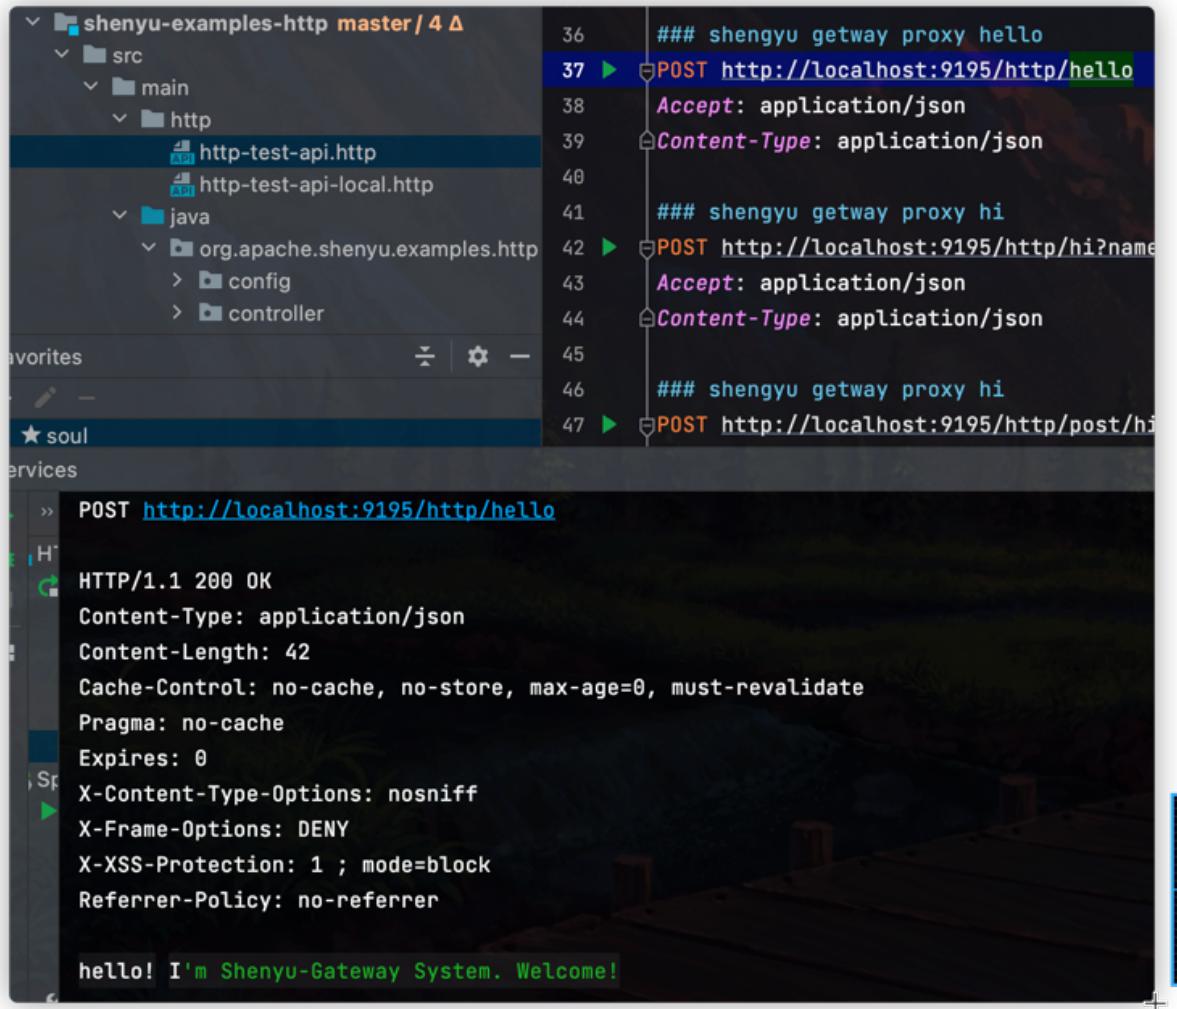

The screenshot shows a terminal window with a file tree on the left and log output on the right.

File Tree:

```

shenyu-examples-http master/ 4 △
  +-- src
    +-- main
      +-- http
        +-- http-test-api.http
        +-- http-test-api-local.http
      +-- java
        +-- org.apache.shenyu.examples.http
          +-- config
          +-- controller

```

Log Output (Lines 36-47):

```

36     ### shengyu getway proxy hello
37  POST http://localhost:9195/http/hello
38   Accept: application/json
39   Content-Type: application/json
40
41     ### shengyu getway proxy hi
42  POST http://localhost:9195/http/hi?name
43   Accept: application/json
44   Content-Type: application/json
45
46     ### shengyu getway proxy hi
47  POST http://localhost:9195/http/post/hi

```

Terminal Session (Bottom):

```

POST http://localhost:9195/http/hello
HTTP/1.1 200 OK
Content-Type: application/json
Content-Length: 42
Cache-Control: no-cache, no-store, max-age=0, must-revalidate
Pragma: no-cache
Expires: 0
X-Content-Type-Options: nosniff
X-Frame-Options: DENY
X-XSS-Protection: 1 ; mode=block
Referrer-Policy: no-referrer

hello! I'm Shenyu-Gateway System. Welcome!

```

This document introduces how to quickly access the Apache ShenYu gateway using Spring Cloud. You can get the code example of this document by clicking [here](#).

16.27 Environment to prepare

Please refer to the deployment to select a way to start shenyu-admin. For example, start the Apache ShenYu gateway management system through [local deployment](#).

After successful startup, you need to open the springCloud plugin on in the BasicConfig -> Plugin.

If you are a startup gateway by means of source, can be directly run the ShenyuBootstrapApplication of shenyu-bootstrap module.

Note: Before starting, make sure the gateway has added dependencies.

Add the gateway proxy plugin for Spring Cloud and add your registry center dependencies:

```
<!-- apache shenyu springCloud plugin start-->
<dependency>
  <groupId>org.apache.shenyu</groupId>
  <artifactId>shenyu-spring-boot-starter-plugin-springcloud</artifactId>
</dependency>
```

```

artifactId>
    <version>${project.version}</version>
</dependency>

<dependency>
    <groupId>org.springframework.cloud</groupId>
    <artifactId>spring-cloud-commons</artifactId>
    <version>2.2.0.RELEASE</version>
</dependency>

<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-spring-boot-starter-plugin-httpclient</
artifactId>
    <version>${project.version}</version>
</dependency>
<!-- springCloud if you config register center is eureka please dependency
end-->
<dependency>
    <groupId>org.springframework.cloud</groupId>
    <artifactId>spring-cloud-starter-netflix-eureka-client</
artifactId>
    <version>2.2.0.RELEASE</version>
</dependency>
<!-- apache shenyu springCloud plugin end-->
```

eureka config information:

```

eureka:
  client:
    serviceUrl:
      defaultZone: http://localhost:8761/eureka/
  instance:
    prefer-ip-address: true
```

Note: Please ensure that the spring Cloud registry service discovery configuration is enabled

- Configuration method

```

spring:
  cloud:
    discovery:
      enabled: true
```

- code method

```

@SpringBootApplication
@EnableDiscoveryClient
public class ShenyuBootstrapApplication {
```

```

/**
 * Main Entrance.
 *
 * @param args startup arguments
 */
public static void main(final String[] args) {
    SpringApplication.run(ShenyuBootstrapApplication.class, args);
}
}

```

Restart the shenyu-bootstrap project.

16.28 Run the shenyu-examples-springcloud project

In the example project we used Eureka as the registry for Spring Cloud. You can use the local Eureka or the application provided in the example.

Download [shenyu-examples-eureka](#)、[shenyu-examples-springcloud](#) .

Startup the Eureka service: Execute the org.apache.shenyu.examples.eureka.EurekaServerApplication main method to start project.

Startup the Spring Cloud service: Execute the org.apache.shenyu.examples.springcloud.ShenyuTestSpringCloudApplication main method to start project.

Since 2.4.3, shenyu.client.springCloud.props.port can be non-configured if you like.

The following log appears when the startup is successful:

```

2021-02-10 14:03:51.301 INFO 2860 --- [           main] o.s.s.concurrent.ThreadPoolTaskExecutor : Initializing ExecutorService 'applicationTaskExecutor'
2021-02-10 14:03:51.669 INFO 2860 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : springCloud client register success: {"appName":"springCloud-test","context":"/springcloud","path":"/springcloud/order/save","pathDesc":"","rpcType":"springCloud","ruleName":"/springcloud/order/save","enabled":true}
2021-02-10 14:03:51.676 INFO 2860 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : springCloud client register success: {"appName":"springCloud-test","context":"/springcloud","path":"/springcloud/order/path/**","pathDesc":"","rpcType":"springCloud","ruleName":"/springcloud/order/path/**","enabled":true}
2021-02-10 14:03:51.682 INFO 2860 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : springCloud client register success: {"appName":"springCloud-test","context":"/springcloud","path":"/springcloud/order/findById","pathDesc":"","rpcType":"springCloud","ruleName":"/springcloud/order/findById","enabled":true}
2021-02-10 14:03:51.688 INFO 2860 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : springCloud client register success: {"appName":"springCloud-test","context":"/springcloud","path":"/springcloud/order/path/**/name","pathDesc":"","rpcType":"springCloud","ruleName":"/springcloud/order/path/**/name","enabled":true}

```

```

2021-02-10 14:03:51.692 INFO 2860 --- [pool-1-thread-1] o.d.s.client.common.utils.RegisterUtils : springCloud client register success: {"appName":"springCloud-test","context":"/springcloud","path":"/springcloud/test/**","pathDesc":"","rpcType":"springCloud","ruleName":"/springcloud/test/**","enabled":true}
2021-02-10 14:03:52.806 WARN 2860 --- [           main] ockingLoadBalancerClientRibbonWarnLogger : You already have RibbonLoadBalancerClient on your classpath. It will be used by default. As Spring Cloud Ribbon is in maintenance mode. We recommend switching to BlockingLoadBalancerClient instead. In order to use it, set the value of `spring.cloud.loadbalancer.ribbon.enabled` to `false` or remove spring-cloud-starter-netflix-ribbon from your project.
2021-02-10 14:03:52.848 WARN 2860 --- [           main] igation $LoadBalancerCaffeineWarnLogger : Spring Cloud LoadBalancer is currently working with default default cache. You can switch to using Caffeine cache, by adding it to the classpath.
2021-02-10 14:03:52.921 INFO 2860 --- [           main] o.s.c.n.eureka.InstanceInfoFactory : Setting initial instance status as: STARTING
2021-02-10 14:03:52.949 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Initializing Eureka in region us-east-1
2021-02-10 14:03:53.006 INFO 2860 --- [           main] c.n.d.provider.DiscoveryJerseyProvider : Using JSON encoding codec LegacyJacksonJson
2021-02-10 14:03:53.006 INFO 2860 --- [           main] c.n.d.provider.DiscoveryJerseyProvider : Using JSON decoding codec LegacyJacksonJson
2021-02-10 14:03:53.110 INFO 2860 --- [           main] c.n.d.provider.DiscoveryJerseyProvider : Using XML encoding codec XStreamXml
2021-02-10 14:03:53.110 INFO 2860 --- [           main] c.n.d.provider.DiscoveryJerseyProvider : Using XML decoding codec XStreamXml
2021-02-10 14:03:53.263 INFO 2860 --- [           main] c.n.d.s.r.aws.ConfigClusterResolver : Resolving eureka endpoints via configuration
2021-02-10 14:03:53.546 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Disable delta property : false
2021-02-10 14:03:53.546 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Single vip registry refresh property : null
2021-02-10 14:03:53.547 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Force full registry fetch : false
2021-02-10 14:03:53.547 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Application is null : false
2021-02-10 14:03:53.547 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Registered Applications size is zero : true
2021-02-10 14:03:53.547 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Application version is -1: true
2021-02-10 14:03:53.547 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Getting all instance registry info from the eureka server
2021-02-10 14:03:53.754 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : The response status is 200
2021-02-10 14:03:53.756 INFO 2860 --- [           main] com.netflix.discovery.DiscoveryClient : Starting heartbeat executor: renew interval is: 30
2021-02-10 14:03:53.758 INFO 2860 --- [           main] c.n.discovery.

```

```

InstanceInfoReplicator      : InstanceInfoReplicator onDemand update allowed rate
per min is 4
2021-02-10 14:03:53.761 INFO 2860 --- [           main] com.netflix.discovery.
DiscoveryClient      : Discovery Client initialized at timestamp 1612937033760 with
initial instances count: 0
2021-02-10 14:03:53.762 INFO 2860 --- [           main] o.s.c.n.e.s.
EurekaServiceRegistry      : Registering application SPRINGCLOUD-TEST with eureka
with status UP
2021-02-10 14:03:53.763 INFO 2860 --- [           main] com.netflix.discovery.
DiscoveryClient      : Saw local status change event StatusChangeEvent
[timestamp=1612937033763, current=UP, previous=STARTING]
2021-02-10 14:03:53.765 INFO 2860 --- [nfoReplicator-0] com.netflix.discovery.
DiscoveryClient      : DiscoveryClient_SPRINGCLOUD-TEST/host.docker.
internal:springCloud-test:8884: registering service...
2021-02-10 14:03:53.805 INFO 2860 --- [           main] o.s.b.w.embedded.tomcat.
TomcatWebServer      : Tomcat started on port(s): 8884 (http) with context path ''
2021-02-10 14:03:53.807 INFO 2860 --- [           main] .s.c.n.e.s.
EurekaAutoServiceRegistration : Updating port to 8884
2021-02-10 14:03:53.837 INFO 2860 --- [nfoReplicator-0] com.netflix.discovery.
DiscoveryClient      : DiscoveryClient_SPRINGCLOUD-TEST/host.docker.
internal:springCloud-test:8884 - registration status: 204
2021-02-10 14:03:54.231 INFO 2860 --- [           main] o.d.s.e.s.
ShenyuTestSpringCloudApplication : Started ShenyuTestSpringCloudApplication in 6.
338 seconds (JVM running for 7.361)

```


16.29 Test

The shenyu-examples-springcloud project will automatically register interface methods annotated with `@ShenyuSpringCloudClient` in the Apache ShenYu gateway after successful startup.

Open PluginList -> rpc proxy -> springCloud to see the list of plugin rule configurations:

Name	Open	Operation	RuleName	Open	UpdateTime	Operation
/springCloud	Open	Modify Delete	/springCloud/order/save	Open	2021-02-10 14:00:04	Modify Delete
			/springCloud/order/path/**/name	Open	2021-02-10 14:00:04	Modify Delete
			/springCloud/order/findById	Open	2021-02-10 14:00:04	Modify Delete
			/springCloud/order/path/**	Open	2021-02-10 14:00:04	Modify Delete
			/springCloud/test/**	Open	2021-02-10 14:00:04	Modify Delete

Use PostMan to simulate HTTP to request your SpringCloud service:

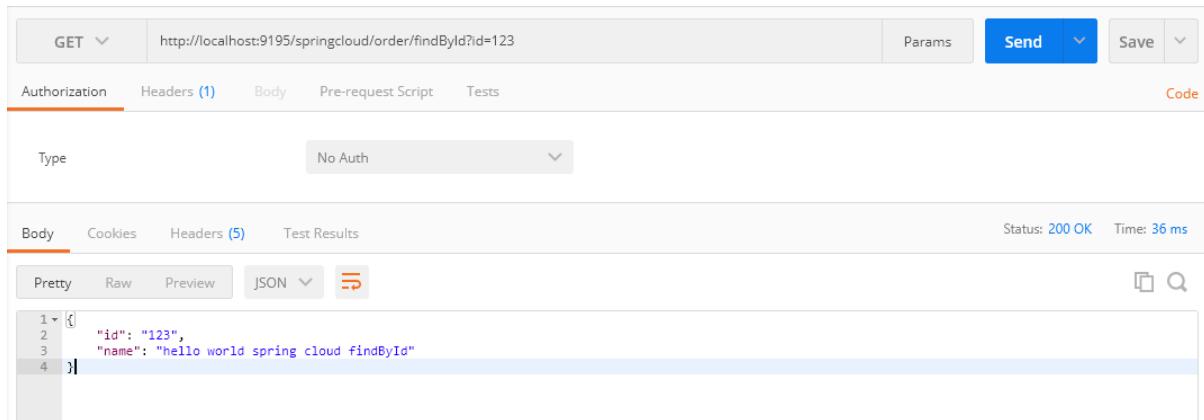

Use IDEA HTTP Client Plugin to simulate HTTP to request your SpringCloud service[local:no Shenyu proxy]:

The screenshot shows the IDEA HTTP Client Plugin interface. A POST request is being simulated to `http://localhost:8884/class/annotation/post`. The response is as follows:

```

HTTP/1.1 200
Content-Type: application/json
Transfer-Encoding: chunked
Date: Tue, 04 Jan 2022 15:16:24 GMT
Keep-Alive: timeout=60
Connection: keep-alive

{
  "code": 200,
  "message": "[class annotation] Do not use shenyu annotation path. used post mapping path"
}

```

Response code: 200; Time: 1245ms; Content length: 101 bytes

Use IDEA HTTP Client Plugin to simulate HTTP to request your SpringCloud service[Shenyu proxy]:

The screenshot shows a Java project structure in the left pane and a code editor in the right pane.

File Tree:

- shenyu-examples-springcloud
- src
 - main
 - http
 - spring-cloud-test-api.http
 - spring-cloud-test-api-local.http
 - Java
 - org.apache.shenyu.examples.spring
 - controller
 - dto

Code Editor (Content-Type.java):

```
82 Content-Type: application/json
83
84     ### shenyu getway proxy used delete mapping path
85 > DELETE http://localhost:9195/springcloud/new/feature/delete/mapping/path
86     Accept: application/json
87     Content-Type: application/json
88
89     ### shenyu getway proxy used get mapping path [class annotation]
90 > GET http://localhost:9195/springcloud/class/annotation/get
91     Accept: application/json
92     Content-Type: application/json
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
259
260
261
262
263
264
265
266
267
268
269
269
270
271
272
273
274
275
276
277
278
279
279
280
281
282
283
284
285
286
287
288
289
289
290
291
292
293
294
295
296
297
298
299
299
300
301
302
303
304
305
306
307
308
309
309
310
311
312
313
314
315
316
317
318
319
319
320
321
322
323
324
325
326
327
328
329
329
330
331
332
333
334
335
336
337
338
339
339
340
341
342
343
344
345
346
347
348
349
349
350
351
352
353
354
355
356
357
358
359
359
360
361
362
363
364
365
366
367
368
369
369
370
371
372
373
374
375
376
377
378
379
379
380
381
382
383
384
385
386
387
388
389
389
390
391
392
393
394
395
396
397
398
399
399
400
401
402
403
404
405
406
407
408
409
409
410
411
412
413
414
415
416
417
418
419
419
420
421
422
423
424
425
426
427
428
429
429
430
431
432
433
434
435
436
437
438
439
439
440
441
442
443
444
445
446
447
448
449
449
450
451
452
453
454
455
456
457
458
459
459
460
461
462
463
464
465
466
467
468
469
469
470
471
472
473
474
475
476
477
478
479
479
480
481
482
483
484
485
486
487
488
489
489
490
491
492
493
494
495
496
497
498
499
499
500
501
502
503
504
505
506
507
508
509
509
510
511
512
513
514
515
516
517
518
519
519
520
521
522
523
524
525
526
527
528
529
529
530
531
532
533
534
535
536
537
538
539
539
540
541
542
543
544
545
546
547
548
549
549
550
551
552
553
554
555
556
557
558
559
559
560
561
562
563
564
565
566
567
568
569
569
570
571
572
573
574
575
576
577
578
579
579
580
581
582
583
584
585
586
587
588
589
589
590
591
592
593
594
595
596
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
618
619
619
620
621
622
623
624
625
626
627
628
629
629
630
631
632
633
634
635
636
637
638
639
639
640
641
642
643
644
645
646
647
648
649
649
650
651
652
653
654
655
656
657
658
659
659
660
661
662
663
664
665
666
667
668
669
669
670
671
672
673
674
675
676
677
678
679
679
680
681
682
683
684
685
686
687
688
689
689
690
691
692
693
694
695
696
697
698
699
699
700
701
702
703
704
705
706
707
708
709
709
710
711
712
713
714
715
716
717
718
719
719
720
721
722
723
724
725
726
727
728
729
729
730
731
732
733
734
735
736
737
738
739
739
740
741
742
743
744
745
746
747
748
749
749
750
751
752
753
754
755
756
757
758
759
759
760
761
762
763
764
765
766
767
768
769
769
770
771
772
773
774
775
776
777
778
779
779
780
781
782
783
784
785
786
787
788
789
789
790
791
792
793
794
795
796
797
797
798
799
799
800
801
802
803
804
805
806
807
808
809
809
810
811
812
813
814
815
816
817
818
819
819
820
821
822
823
824
825
826
827
828
829
829
830
831
832
833
834
835
836
837
838
839
839
840
841
842
843
844
845
846
847
848
849
849
850
851
852
853
854
855
856
857
858
859
859
860
861
862
863
864
865
866
867
868
869
869
870
871
872
873
874
875
876
877
878
879
879
880
881
882
883
884
885
886
887
888
888
889
889
890
891
892
893
894
895
896
897
897
898
899
899
900
901
902
903
904
905
906
907
908
909
909
910
911
912
913
914
915
916
917
918
919
919
920
921
922
923
924
925
926
927
928
929
929
930
931
932
933
934
935
936
937
938
939
939
940
941
942
943
944
945
946
947
948
949
949
950
951
952
953
954
955
956
957
958
959
959
960
961
962
963
964
965
966
967
968
969
969
970
971
972
973
974
975
976
977
978
979
979
980
981
982
983
984
985
986
987
987
988
989
989
990
991
992
993
994
995
996
997
997
998
999
999
1000
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1088
1089
1089
1090
1091
1092
1093
1094
1095
1096
1097
1097
1098
1099
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1187
1188
1189
1189
1190
1191
1192
1193
1194
1195
1195
1196
1197
1197
1198
1199
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1288
1289
1289
1290
1291
1292
1293
1294
1295
1296
1297
1297
1298
1299
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1348
1349
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1388
1389
1389
1390
1391
1392
1393
1394
1395
1396
1397
1397
1398
1399
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1438
1439
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1448
1449
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1478
1479
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1488
1489
1489
1490
1491
1492
1493
1494
1495
1496
1497
1497
1498
1499
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1528
1529
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1538
1539
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1548
1549
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1578
1579
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1588
1589
1589
1590
1591
1592
1593
1594
1595
1596
1597
1597
1598
1599
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1628
1629
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1638
1639
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1648
1649
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1678
1679
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1688
1689
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1698
1699
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1728
1729
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1738
1739
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1748
1749
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1778
1779
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1788
1789
1789
1790
1791
1792
1793
1794
1795
1796
1797
1797
1798
1799
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1828
1829
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1838
1839
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1848
1849
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1869
1870
1871
1872
1873
1874
1875
1876
1877
1877
1878
1878
1879
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1888
1889
1889
1890
1891
1892
1893
1894
1895
1896
1897
1897
1898
1899
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1928
1929
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1938
1939
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1948
1949
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1978
1979
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1988
1989
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1998
1999
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2048
2049
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2078
2079
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2088
2089
2089
2090
2091
2092
2093
2094
2095
2096
2097
2097
2098
2099
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2138
2139
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2148
2149
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2178
2179
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2188
2189
2189
2190
2191
2192
2193
2194
2195
2196
2197
2197
2198
2199
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2238
2239
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2248
2249
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2278
2279
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2288
2289
2289
2290
2291
2292
2293
2294
2295
2296
2297
2297
2298
2299
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2338
2339
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2348
2349
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2378
2379
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2388
2389
2389
2390
2391
2392
2393
2394
2395
2396
2397
2397
2398
2399
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2409
2410
2411
2412
2413
2414
2415
2416

```

This article describes how to expose the API documentation to the Apache ShenYu gateway.

Before accessing, please start shenyu-admin correctly.

17.1 Export API Documentation to shenyu-admin

You can refer to any of the example codes below [shenyu-examples](#).

The only thing you need to do is to add `@ApiModule` and `@ApiDoc` annotations to your service, here is an example from `shenyu-examples-http`:

```
@RestController
@RequestMapping("/order")
@ShenyuSpringMvcClient("/order")
@ApiModule(value = "order")
public class OrderController {

    @GetMapping("/findById")
    @ShenyuSpringMvcClient("/findById")
    @ApiDoc(desc = "findById")
    public OrderDTO findById(@RequestParam("id") final String id) {
        return build(id, "hello world findById");
    }

    private OrderDTO build(final String id, final String name) {
        OrderDTO orderDTO = new OrderDTO();
        orderDTO.setId(id);
        orderDTO.setName(name);
        return orderDTO;
    }
}
```

18

Plugin Center

19.1 Description

- This doc offers examples for customising response structure in Apache ShenYu gateway.
- The response body structure in gateways should be unified, it is recommended for specify yours.

19.2 Default Implementation

- The default implementation class is `org.apache.shenyu.plugin.api.result.DefaultShenyuResult`.
- Following is the response structure:

```
public class ShenyuDefaultEntity implements Serializable {  
  
    private static final long serialVersionUID = -2792556188993845048L;  
  
    private Integer code;  
  
    private String message;  
  
    private Object data;  
  
}
```

- The returned json as follows:

```
{  
    "code": -100, //response code,  
    "message": "Your parameter error, please check the relevant documentation!", //  
    hint messages  
    "data": null // business data  
}
```

19.3 Extensions

- Declare a new class named CustomShenyuResult and implements org.apache.shenyu.plugin.api.result.ShenyuResult

```
/**
 * The interface shenyu result.
 */
public interface ShenyuResult<T> {

    /**
     * The response result.
     *
     * @param exchange the exchange
     * @param formatted the formatted object
     * @return the result object
     */
    default Object result(ServerWebExchange exchange, Object formatted) {
        return formatted;
    }

    /**
     * format the origin, default is json format.
     *
     * @param exchange the exchange
     * @param origin the origin
     * @return format origin
     */
    default Object format(ServerWebExchange exchange, Object origin) {
        // basic data
        if (ObjectTypeUtils.isBasicType(origin)) {
            return origin;
        }
        // error result or rpc origin result.
        return JsonUtils.toJson(origin);
    }

    /**
     * the response context type, default is application/json.
     *
     * @param exchange the exchange
     * @param formatted the formatted data that is origin data or byte[] convert
     * string
     * @return the context type
     */
    default MediaType contentType(ServerWebExchange exchange, Object formatted) {
        return MediaType.APPLICATION_JSON;
    }
}
```

```

/**
 * Error t.
 *
 * @param code    the code
 * @param message the message
 * @param object  the object
 * @return the t
 */
T error(int code, String message, Object object);
}

```

Processing sequence: format->contextType->result. The format method performs data formatting. If the data is a basic type and returns itself, other types are converted to JSON, and the parameter origin is the original data. Formatting can be performed according to the situation. contextType, if it is a basic type, use text/plain, the default is application/json, the parameter formatted is the data processed by the format method, and can be combined with the return result of format for data type Define processing. The parameter formatted of result is the data processed by the format method, which returns to itself by default, and can be combined with the return result of format for custom processing of the data type.

- T is a generic parameter for your response data.
- Register defined class as a Spring Bean.

```

@Bean
public ShenyuResult<?> customShenyuResult() {
    return new CustomShenyuResult();
}

```

19.4 Description

- This document focuses on how to access gateways for HTTP services in other languages.
- To access the gateway, you need to get the token first, and then you can call the registration service or metadata interface according to your needs.

19.5 Get token

- **Request Method**

GET

- Request Path

- `http://{shenyu-admin}/platform/login`
 - Where `shenyu-admin` is the ip + port of the admin backend management system.

- Request Params

- query parameter, the account password is the username and password of the admin service.

Field	Type	Required	Desc
userName	String	Yes	shenyu admin account
password	String	Yes	shenyu admin password

- **Return Data**

Field	Type	Desc
code	Integer	Return code
message	String	Return message
data	Object	Return data
id	Integer	user id
userName	String	account
role	Integer	role id
enabled	Boolean	status
dateCreated	String	create time
dateUpdated	String	update time
token	String	token
expiredTime	Long	timeout time, in milliseconds

Example

```
{
    "code": 200,
    "message": "login dashboard user success",
    "data": {
        "id": "1",
        "userName": "admin",
        "role": 1,
        "enabled": true,
        "dateCreated": "2022-09-07 22:08:23",
        "dateUpdated": "2022-09-07 22:08:23",
        "token": "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJ1c2VyTmFtZSI6ImFkbWluIiwidXhwIjoxNjYyNjQ2MzU5fQ.WBXBgCcGsnnC00pRbD0tqCVoAaZr8MKH6WE6kY-NGaI",
        "expiredTime": 86400000
    }
}
```

19.6 Registration Services

- **Request Method**

POST

- **Request Path**

- `http://{shenyu-admin}/shenyu-client/register-uri`
- Where shenyu-admin is the ip + port of the admin backend management system.

- **Request Params**

- Header

- * `contentType: application/json`
- * `X-Access-Token: {token}`, token is the token obtained by Get token.

- Body, json format

Field	Type	Required	Desc

protocol	String	Yes	protocol type
appName	String	Yes	app name
contextPath	String	Yes	service path
rpcType	String	Yes	rpc type, supported type reference <code>RpcTypeEnum</code>
host	String	Yes	service IP
port	Integer	Yes	service port

eventType | String | Yes | event type, supported types reference [EventType](#) |

Example

```
{
    "protocol": "http",
    "appName": "app",
    "contextPath": "/test",
    "rpcType": "http",
    "host": "127.0.0.1",
    "port": "8080",
    "eventType": "REGISTER"
}
```

- **Return Data**

A successful registration returns `success`.

19.7 Registration Metadata

- **Request Method**

POST

- **Request Path**

- `http://{shenyu-admin}/shenyu-client/register-metadata`
- Where `shenyu-admin` is the ip + port of the admin backend management system.

- **Request Params**

- Header

- * `contentType: application/json`

- * `X-Access-Token: {token}`, token is the token obtained by `Get token`.

- Body, json format.

Field	Type	Required	Desc	-----	-----
appName	String	Yes	app name		
contextPath	String	Yes	service path		
path	String	Yes	path		
pathDesc	String	Yes	path description		
rpcType	String	Yes	rpc type, supported type reference RpcTypeEnum		
serviceName	String	Yes	service name		

methodName | String | Yes | method name |
ruleName | String | Yes | rule name |
parameterTypes | String | Yes | parameter Type |
rpcExt | String | Yes | rpc expansion parameters |
enabled | Boolean | No | status |
host | String | Yes | service IP |
port | Integer | Yes | service port |
pluginNames | List | No | plugin name list |
registerMetaData | Boolean | No | whether to register metadata |

examples

```
{  
    "appName": "app",  
    "contextPath": "/",  
    "path": "/test",  
    "rpcType": "http",  
    "serviceName": "test service",  
    "parameterTypes": "java.lang.String",  
    "pathDesc": "test path",  
    "methodName": "test method",  
    "ruleName": "test rule",  
    "rpcExt": "{\"loadbalance\":\"hash\", \"retries\":3, \"timeout\":-1}",  
    "enabled": true,  
    "host": "127.0.0.1",  
    "port": 8080,  
    "pluginNames": [],  
    "registerMetaData": true  
}
```

- **Return Data**

A successful registration returns success.

19.8 Preparation

1. Clone the code of Apache ShenYu.
2. Install and start docker.

19.9 Start integration test locally

1. Build with Maven

```
./mvnw -B clean install -Prelease,docker -Dmaven.javadoc.skip=true -Dmaven.test.skip=true
```

2. Build integrated tests

```
./mvnw -B clean install -Pit -DskipTests -f ./shenyu-integrated-test/pom.xml
```

3. Start docker compose

```
docker-compose -f ./shenyu-integrated-test/${{ matrix.case }}/docker-compose.yml up -d
```

You need to replace \${{ matrix.case }} with the exact directory, such as shenyu-integrated-test-http.

4. Run test

```
./mvnw test -Pit -f ./shenyu-integrated-test/${{ matrix.case }}/pom.xml
```

19.10 Description

- Plugins are core executors of Apache ShenYu gateway. Every plugin handles matched requests when enabled.
- There are two kinds of plugins in the Apache ShenYu gateway.
 - The first type is a chain with single responsibility, and can not custom filtering of traffic.
 - The other one can do its own chain of responsibility for matched traffic.
- You could reference from [shenyu-plugin](#) module and develop plugins by yourself. Please fire pull requests of your wonderful plugins without hesitate.

19.11 Single Responsibility Plugins

- Add following dependency:

```
<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-plugin-api</artifactId>
    <version>${project.version}</version>
</dependency>
```

- Declare a new class named MyShenyuPlugin and implements org.apache.shenyu.plugin.api.ShenyuPlugin

```
public interface ShenyuPlugin {

    /**
     * Process the Web request and (optionally) delegate to the next
     * {@code WebFilter} through the given {@link ShenyuPluginChain}.
     *
     * @param exchange the current server exchange
     * @param chain provides a way to delegate to the next filter
     * @return {@code Mono<Void>} to indicate when request processing is complete
     */
    Mono<Void> execute(ServerWebExchange exchange, ShenyuPluginChain chain);

    /**
     * return plugin order .
     * This attribute To determine the plugin execution order in the same type
     plugin.
     *
     * @return int order
     */
    int getOrder();

    /**
     * acquire plugin name.
     * this is plugin name define you must offer the right name.
     * if you impl AbstractShenyuPlugin this attribute not use.
     *
     * @return plugin name.
     */
    default String named() {
        return "";
    }

    /**
     * plugin is execute.
     * if return true this plugin can not execute.
     */
}
```

```

    *
    * @param exchange the current server exchange
    * @return default false.
    */
default Boolean skip(ServerWebExchange exchange) {
    return false;
}
}

```

Detailed instruction of interface methods:

- `execute()` core method, you can do any task here freely.
- `getOrder()` get the order of current plugin.
- `named()` acquire the name of specific plugin that uses the Camel Case, eg: `dubbo`, `spring-Cloud`.
- `skip()` determines whether this plugin should be skipped under certain conditions.
- Register plugin in Spring as a Bean, or simply apply `@Component` in implementation class.

```

@Bean
public ShenyuPlugin myShenyuPlugin() {
    return new MyShenyuPlugin();
}

```

19.12 Matching Traffic Processing Plugin

- Introduce the following dependency:

```

<dependency>
    <groupId>org.apache.shenyu</groupId>
    <artifactId>shenyu-plugin-base</artifactId>
    <version>${project.version}</version>
</dependency>

```

- Add a new class `CustomPlugin`, inherit from `org.apache.shenyu.plugin.base.AbstractShenyuPlugin`
- examples down below:

```

/**
 * This is your custom plugin.
 * He is running in after before plugin, implement your own functionality.
 * extends AbstractShenyuPlugin so you must user shenyu-admin And add related plug-in development.
 *
 * @author xiaoyu(Myth)
 */

```

```
public class CustomPlugin extends AbstractShenyuPlugin {

    /**
     * return plugin order .
     * The same plugin he executes in the same order.
     *
     * @return int
     */
    @Override
    public int getOrder() {
        return 0;
    }

    /**
     * acquire plugin name.
     * return you custom plugin name.
     * It must be the same name as the plug-in you added in the admin background.
     *
     * @return plugin name.
     */
    @Override
    public String named() {
        return "shenYu";
    }

    /**
     * plugin is execute.
     * Do I need to skip.
     * if you need skip return true.
     *
     * @param exchange the current server exchange
     * @return default false.
     */
    @Override
    public Boolean skip(final ServerWebExchange exchange) {
        return false;
    }

    /**
     * this is Template Method child has Implement your own logic.
     *
     * @param exchange exchange the current server exchange
     * @param chain    chain the current chain
     * @param selector selector
     * @param rule     rule
     * @return {@code Mono<Void>} to indicate when request handling is complete
     */
    @Override
```

```

protected abstract Mono<Void> doExecute(ServerWebExchange exchange,
ShenyuPluginChain chain, SelectorData selector, RuleData rule) {
    LOGGER.debug("..... function plugin start.....");
    /*
     * Processing after your selector matches the rule.
     * rule.getHandle() is you Customize the json string to be processed.
     * for this example.
     * Convert your custom json string pass to an entity class.
     */
    final String ruleHandle = rule.getHandle();

    final Test test = GsonUtils.getInstance().fromJson(ruleHandle, Test.class);

    /*
     * Then do your own business processing.
     * The last execution chain.execute(exchange).
     * Let it continue on the chain until the end.
     */
    System.out.println(test.toString());
    return chain.execute(exchange);
}
}

```

- Detailed explanation:
 - Plugins will match the selector rule for customized plugins inherit from this abstract class.
 - Firstly define a new plugin in shenyu-admin -> BasicConfig -> Plugin, please mind that your plugin name should match the named() method overridden in your class.
 - Re-login shenyu-admin, the plugin you added now showing on plugin-list page, you can choose selectors for matching.
 - There is a field named handler in rules, it is customized json string to be processed. You can process data after acquiring a ruleHandle (final String ruleHandle = rule.getHandle();) in doExecute() method.
- Register plugin in Spring as a Bean, or simply apply @Component in implementation class.

```

@Bean
public ShenyuPlugin customPlugin() {
    return new CustomPlugin();
}

```

19.13 Subscribe your plugin data and do customized jobs

- Declare a new class named `PluginDataHandler` and implements `org.apache.shenyu.plugin.base.handler.PluginDataHandler`

```
public interface PluginDataHandler {

    /**
     * Handler plugin.
     *
     * @param pluginData the plugin data
     */
    default void handlerPlugin(PluginData pluginData) {
    }

    /**
     * Remove plugin.
     *
     * @param pluginData the plugin data
     */
    default void removePlugin(PluginData pluginData) {
    }

    /**
     * Handler selector.
     *
     * @param selectorData the selector data
     */
    default void handlerSelector(SelectorData selectorData) {
    }

    /**
     * Remove selector.
     *
     * @param selectorData the selector data
     */
    default void removeSelector(SelectorData selectorData) {
    }

    /**
     * Handler rule.
     *
     * @param ruleData the rule data
     */
    default void handlerRule(RuleData ruleData) {
    }

}
```

```

    * Remove rule.
    *
    * @param ruleData the rule data
    */
default void removeRule(RuleData ruleData) {
}

/**
 * Plugin named string.
 *
 * @return the string
 */
String pluginNamed();

}

```

- Ensure `pluginNamed()` is same as the plugin name you defined.
- Register defined class as a Spring Bean, or simply apply `@Component` in implementation class.

```

@Bean
public PluginDataHandler pluginDataHandler() {
    return new PluginDataHandler();
}

```

19.14 Dynamic loading

- When using this feature, the above extensions `ShenyuPlugin`, `PluginDataHandler`, do not need to be `spring bean`. You just need to build the jar package of the extension project.
- Config in Yaml:

```

shenyu:
  extPlugin:
    path: //Load the extension plugin jar package path
    enabled: true //Whether to turn on
    threads: 1 //Number of loading plug-in threads
    scheduleTime: 300 //Cycle time (in seconds)
    scheduleDelay: 30 //How long the shenyu gateway is delayed to load after it
    starts (in seconds)

```

19.14.1 Plugin loading path details

- This path is for the directory where the extended plugin jar package is stored.
- Used -Dplugin-ext=xxxx, Also used shenyu.extPlugin.path in yaml, If neither is configured, the ext-lib directory in the apache shenyu gateway boot path will be loaded by default.
- Priority : -Dplugin-ext=xxxx > shenyu.extPlugin.path > ext-lib(default)

19.15 Plugin jar upload

- To use this feature, you will need to package the ShenyuPlugin extension as a custom Shenyu-Plugin Jar
- Configure it in ShenyuAdmin
 - use ShenyuAdmin - BasicConfig - Plugin add plugin in pluginJar click upload button
- Custom ShenyuPlugin can be started by loading third-party jars into the -cp directory if it depends on other third-party packages in shenyu-bootstrap

Tips:

The Upload jar package plugin supports hot loading If you need to modify the jar online. You can make a new jar. And raise the version number, for example ‘1.0.1’ to ‘1.0.2’

19.16 Description

- Users can customize the convert algorithm of Jwt-plugin to achieve convert.

19.17 Extension

The default implementation is org.apache.shenyu.plugin.jwt.strategy.DefaultJwtConvertStrategy. The SPI mechanism is adopted for extension, and the steps are as follows:

1. Implements interface org.apache.shenyu.plugin.jwt.strategy.JwtConvertStrategy

```
/**  
 * Represents a conversion strategy that convert jwt to some attributes of  
 * serverWebExchange, especially attributes of the request header.  
 */  
@SPI  
public interface JwtConvertStrategy {
```

```

/**
 * HandleJson needs to be parsed into jwtRuleHandle in order to
 * specify how to convert jwt.
 *
 * @param handleJson handleJson from rule
 * @return jwtRuleHandle
 */
JwtRuleHandle parseHandleJson(String handleJson);

/**
 * Converts jwt to some attributes of serverWebExchange based on
jwtRuleHandle.
*
 * @param jwtRuleHandle jwtRuleHandle
 * @param exchange      exchange
 * @param jwtBody       jwtBody
 * @return serverWebExchange
 */
ServerWebExchange convert(JwtRuleHandle jwtRuleHandle, ServerWebExchange
exchange, Map<String, Object> jwtBody);

}

```

```

@Join
public class CustomJwtConvertStrategy implements JwtConvertStrategy {

    @Override
    public CustomJwtRuleHandle parseHandleJson(final String handleJson) {

        return GsonUtils.getInstance().fromJson(handleJson,
CustomJwtRuleHandle.class);
    }

    @Override
    public ServerWebExchange convert(final JwtRuleHandle jwtRuleHandle, final
ServerWebExchange exchange, final Map<String, Object> jwtBody) {
        final CustomJwtRuleHandle customJwtRuleHandle = (CustomJwtRuleHandle)
jwtRuleHandle;
        String customConvert = customJwtRuleHandle.getCustomConvert();
        ServerHttpRequest modifiedRequest =
            exchange.getRequest().mutate().header("custom", customConvert).
build();

        return exchange.mutate().request(modifiedRequest).build();
    }
}

```

2. Configures SPI

```
custom=org.apache.shenyu.plugin.jwt.strategy.CustomJwtConvertStrategy
```

The project would use different conversion strategies based on the handleType parameter of JwtRuleHandle . For example, for the following JwtRuleHandle , the project would use our above CustomJwtConvertStrategy . (Note: handleType is default or nonexistent, the project would use default DefaultJwtConvertStrategy)

```
{
    "handleType": "custom",
    "customConvert": "customConvert"
}
```

The case code is available for viewing in org.apache.shenyu.plugin.jwt.strategy . CustomJwtConvertStrategy

19.18 Description

- This doc shows how to do performance optimization for Apache ShenYu.

19.19 Time Consumption

- Apache ShenYu is JVM driven and processing time for a single request is nearly between 1–3 ms.

19.20 Netty Optimization

- spring-webflux is one of dependencies of ShenYu, and it uses Netty in lower layer.
- The demo down below demonstrates tuning ShenYu by customizing params in Netty.

```
@Bean
public NettyReactiveWebServerFactory nettyReactiveWebServerFactory() {
    NettyReactiveWebServerFactory webServerFactory = new
NettyReactiveWebServerFactory();
    webServerFactory.addServerCustomizers(new EventLoopNettyCustomizer());
    return webServerFactory;
}

private static class EventLoopNettyCustomizer implements NettyServerCustomizer {

    @Override
    public HttpServer apply(final HttpServer httpServer) {
        return httpServer
            .tcpConfiguration(tcpServer -> tcpServer
                .runOn(LoopResources.create("shenyu-netty", 1, DEFAULT_IO_
```

```

WORKER_COUNT, true), false)
    .selectorOption(ChannelOption.SO_REUSEADDR, true)
    .selectorOption(ChannelOption.ALLOCATOR,
PooledByteBufAllocator.DEFAULT)
    .option(ChannelOption.TCP_NODELAY, true)
    .option(ChannelOption.ALLOCATOR, PooledByteBufAllocator.
DEFAULT));
}
}
}

```

- The shenyu-bootstrap module offers this class, you may modify it when benchmarking your app if necessary.
- You can get references of business thread model from [thread model](#)

19.21 Description

- Standalone environment, then use the local API to update the apache shenyu gateway data.the yaml config:

```

shenyu:
  local:
    enabled: true
    sha512Key: 123456

```

- Common result:

```
success
```

- Common preFix: localhost:9095/shenyu
- Common Header: localKey: 123456

19.22 Plugin

19.22.1 saveOrUpdate

save or update plugin data

Request Method

POST

Path

/plugin/saveOrUpdate

Request Parameters

Name	Type	Required	Default	Description
PluginData	<i>PluginData</i>	True		Plugin data object (pass Json object inside Body)

PluginData

Name	Type	Required	Default	Description
id	String	False		plugin id
name	String	True		plugin name
config	String	False		plugin configuration (Json format)
role	String	False		plugin role
enabled	Boolean	False		whether to turn on

Example

POST body

```
{"id":3,"name":"divide","enabled":"true"}
```

19.22.2 CleanAll

Clear all data (plugins, selectors, rules)

Request Method

GET

Path`/cleanAll`**19.22.3 Clean Plugin**

Clear plugin data (selector, rule)

Request Method

GET

Path`/cleanPlugin?name = xxxx`**RequestParam**

Name	Type	Required	Default	Description
name	String	true		plugin name

19.22.4 Delete plugin

Remove plugin data (not included, the selectors and rules data)

Request Method

GET

Path`/plugin/delete?name = xxxx`**RequestParam**

Name	Type	Required	Default	Description
name	String	true		plugin name

19.22.5 Delete All Plugin

Remove all plugin data (not included, the selectors and rules data)

Request Method

GET

Path

/plugin/deleteAll

19.22.6 Find plugin by name

Find plugin by name

Request Method

GET

Path

/plugin/findByName?name=xxxx

RequestParam

Name	Type	Required	Default	Description
name	String	true		plugin name

19.22.7 Save or Update Selector

Save or Update Selector

Request Method

POST

Path

/plugin/selector/saveOrUpdate

RequestParam

Name	Type	Required	Default	Description
SelectorData	<i>SelectorData</i>	True		Selector object (pass Json object inside Body)

SelectorData

Name	Type	Re- quired	De- fault	Description
id	String	False		selector id
plugin- Name	String	True		plugin name
name	String	False		Selector name (default is plugin:selector+random number if not filled)
match- Mode	Inte- ger	False		Matching mode (0:and;1:or), not filled with the default generation And mode
type	Inte- ger	False		Traffic type(0: full traffic; 1: custom traffic) do not fill in the default generation of full traffic
sort	Inte- ger	False		Sort by, not filled by default generate 10
en- abled	Boolea	False		Whether to turn on, not fill in the default generation true
logged	Boolea	False		Whether or not to print the log, do not fill in the default generated into false
handle	String	False		Selector handler (Json objects, depending on each plug-in, different objects are passed)
condi- tionList	Con- di- tion	False		Conditional collection, custom traffic needs to be passed, full traffic does not need to be passed (Json List object)

Condition

Name	Type	Re- quired	De- fault	Description
param- Type	String	True		param type (post, uri, query, host, header, cookie, req_method, domain)
opera- tor	String	True		operator (match, =, regex, >, <, contains, SpEL, Groovy, TimeBefore, TimeAfter)
param- Name	String	False		param name (The uri parameter type can be passed without)
param- Value	Inte- ger	False		param value

Example

POST body

```
{
  "pluginName": "divide",
  "type": 1,
  "handle": "[{\\"upstreamUrl\\\":\\"127.0.0.1:8089\\\"}]",
  "conditionDataList": [
    {
      "paramType": "uri",
      "operator": "match",
      "paramName": null,
      "paramValue": "/**"
    }
  ]
}
```

Result

Is selector id

```
xxxxx
```

19.22.8 Add Selector And Rules

Add a selector with multiple rules

Request Method

POST

Path

/plugin/selectorAndRules

RequestParam

Name	Type	Re- quired	De- fault	Description
SelectorRules- Data	<i>SelectorRules- Data</i>	True		Selector rule object (Body inside pass Json object)

SelectorRulesData

Name	Type	Re- quired	De- fault	Description
plugin- Name	String	True		plugin name
selector- Name	String	False		Selector name (if not filled in, it is generated by default plu- gin:selector+random number)
match- Mode	Integer	False		Matching mode (0:and;1:or), not filled with the default gen- eration And mode
selec- torHan- dler	String	False		Selector handler (Json objects, depending on each plug-in, different objects are passed)
condition- List	<i>Condi- tionData</i>	True		Selector condition collection (Json List object)
rule- DataList	<i>RuleLo- calData</i>	True		Rule condition collection (Json List object)

RuleLocalData

Name	Type	Re- quired	De- fault	Description
ruleName	String	False		rule name
ruleHan- dler	String	True		Rule handler (different plugins pass different val- ues))
matchMode	Integer	False		Matching pattern (0:and;1:or)
condition- List	Condition- <i>Data</i>	True		Rule condition collection (Json List object)

ConditionData

Name	Type	Re- quired	De- fault	Description
param- Type	String	True		param type (post, uri, query, host, header, cookie, req_method, domain)
opera- tor	String	True		operator (match, =, regex, >, <, contains, SpEL, Groovy, TimeBefore, TimeAfter)
param- Name	String	False		param name (The uri parameter type can be passed without)
param- Value	Inte- ger	False		param value

Example

POST body

```
{
    "pluginName": "divide",
    "selectorHandler": "[{\\"upstreamUrl\\":\\"127.0.0.1:8089\\"}]",
    "conditionDataList": [
        {
            "paramType": "uri",
            "operator": "match",
            "paramValue": "/http/**"
        }
    ],
    "ruleDataList": [
        {
            "ruleHandler": "{\"loadBalance\":\"random\"}",
            "conditionDataList": [
                {
                    "paramType": "uri",
                    "operator": "=",
                    "paramValue": "/http/test/payment"
                }
            ]
        },
        {
            "ruleHandler": "{\"loadBalance\":\"random\"}",
            "conditionDataList": [
                {
                    "paramType": "uri",
                    "operator": "=",
                    "paramValue": "/http/test/payment"
                }
            ]
        }
    ]
}
```

```
"conditionDataList": [{}  
    "paramType": "uri",  
    "operator": "=",  
    "paramValue": "/http/order/save"  
}  
}  
}]  
}
```

19.22.9 Delete Selector

Delete selectors based on selector id and plugin name

Request Method

GET

Path

/plugin/selector/delete?pluginName=xxxx&&id=xxxx

RequestParam

Name	Type	Required	Default	Description
pluginName	String	true		plugin name
id	String	true		selector id

19.22.10 Find All Selector

Get all selectors by plugin name

Request Method

GET

Path

/plugin/selector/findList?pluginName=xxxx

RequestParam

Name	Type	Required	Default	Description
pluginName	String	true		plugin name

19.22.11 Save or Update Rule Data

Save or Update Rule Data

Request Method

POST

Path

/plugin/rule/saveOrUpdate

RequestParam

Name	Type	Required	Default	Description
RuleData	<i>RuleData</i>	True		Rule object (pass Json object inside Body)

RuleData

Name	Type	Re- quired	De- fault	Description
id	String	False		rule id
plugin- Name	String	True		plugin name
name	String	False		Rule name (default generation if not filled plugin:rule+random number)
selec- torId	String	True		Selector id
match- Mode	Integer	False		Matching mode (0:and;1:or), not filled with the default generation And mode
sort	Integer	False		Sort by , not filled by default generate 10
enabled	Boolean	False		Whether to turn on, not fill in the default generation true
logged	Boolean	False		Whether or not to print the log, do not fill in the default generated into false
handle	String	False		Rule handler (Json objects, depending on each plug-in, different objects are passed)
condi- tionList	Condi- tionData	False		Conditional collections (Json List objects)

conditionList

Name	Type	Re- quired	De- fault	Description
param- Type	String	True		param type (post, uri, query, host, header, cookie, req_method, domain)
opera- tor	String	True		operator (match, =, regex, >, <, contains, SpEL, Groovy, TimeBefore, TimeAfter)
param- Name	String	False		param name (The uri parameter type can be passed without)
param- Value	Inte- ger	False		param value

Example

POST body

```
{
  "pluginName": "divide",
  "selectorId": 123456,
  "handle": "{\"loadBalance\": \"random\"}",
  "conditionDataList": [
    {
      "paramType": "post",
      "operator": "match",
      "paramName": "method",
      "paramValue": "GET"
    }
  ]
}
```

```
    "paramType": "uri",
    "operator": "=",
    "paramValue": "/test"
  }]
}
```

Result

Is rule id

```
xxxx
```

19.22.12 Delete rule data

Delete rules based on selector id and rule id

Request Method

GET

Path

/plugin/rule/delete?selectorId=xxxx&&id=xxxx

RequestParam

Name	Type	Required	Default	Description
selectorId	String	true		selector ID
id	String	true		rule ID

19.22.13 Find Rule data List

Get all rules by selector ID

Request Method

GET

Path

/plugin/rule/findList?selectorId=xxxx

RequestParam

Name	Type	Required	Default	Description
selectorId	String	true		selector id

19.23 Meta data

19.23.1 Save Or Update

Save Or Update Meta data

Request Method

POST

Path

/meta/saveOrUpdate

RequestParam

Name	Type	Required	Default	Description
MetaData	Metadata	True		Metadata object (pass Json object inside Body)

MetaData

Name	Type	Re- quired	De- fault	Description
id	String	False		ID
appName	String	True		app name
contextPath	String	True		contextPath
path	String	True		path
rpcType	String	True		rpc type (dubbo, sofa, tars, springCloud, motan, grpc)
serviceName	String	True		service name
methodName	String	True		method name
parameter- Types	String	True		parameter types
rpcExt	String	False		rpc extension parameters (json objects)
enabled	Boolean	False		Whether to turn on

19.23.2 Delete

Delete Meta data

Request Method

GET

Path

/meta/delete?rpcType=xxxx&&path=xxx

RequestParam

Name	Type	Re- quired	De- fault	Description
rpc- Type	String	true		rpc type (dubbo, sofa, tars, springCloud, motan, grpc)
path	String	true		path

19.24 App Sign Data

19.24.1 Save Or Update

Save Or Update App Sign Data

Request Method

POST

Path

/auth/saveOrUpdate

RequestParam

Name	Type	Re- quired	De- fault	Description
AppAuth- Data	<i>AppAuth- Data</i>	True		Signature object (Json object passed inside the Body)

AppAuthData

Name	Type	Re- quired	De- fault	Description
appKey	String	True		app key
appSecret	String	True		app secret
enabled	Boolean	False		Whether to turn on
open	Boolean	False		is open
param- DataList	<i>AuthParam- Data</i>	false		Parameter set, open is true when you need to pass (Json list object)
AuthPath- Data	<i>AuthPath- Data</i>	false		Path collection, open is true when you need to pass (Json list object)

AuthParamData

Name	Type	Required	Default	Description
appName	String	True		app name
appParam	String	True		app param

AuthPathData

Name	Type	Required	Default	Description
appName	String	True		app name
path	String	True		path
enabled	Boolean	False		Whether to turn on

19.24.2 Delete

Delete App Sign Data

Request Method

GET

Path

/auth/delete?appKey=xxxx

RequestParam

Name	Type	Required	Default	Description
appKey	String	true		app key

19.25 Description

- This doc shows a demo for how to extend `org.springframework.web.server.WebFilter`.

19.26 CORS Support

- `org.apache.shenyu.web.filter.CrossFilter` is designed for `WebFilter` implementation.

```
public class CrossFilter implements WebFilter {

    private static final String ALLOWED_HEADERS = "x-requested-with, authorization,
Content-Type, Authorization, credential, X-XSRF-TOKEN,token,username,client";
```

```

private static final String ALLOWED_METHODS = "*";

private static final String ALLOWED_ORIGIN = "*";

private static final String ALLOWED_EXPOSE = "*";

private static final String MAX_AGE = "18000";

@Override
@SuppressWarnings("all")
public Mono<Void> filter(final ServerWebExchange exchange, final WebFilterChain
chain) {
    ServerHttpRequest request = exchange.getRequest();
    if (CorsUtils.isCorsRequest(request)) {
        ServerHttpResponse response = exchange.getResponse();
        HttpHeaders headers = response.getHeaders();
        headers.add("Access-Control-Allow-Origin", ALLOWED_ORIGIN);
        headers.add("Access-Control-Allow-Methods", ALLOWED_METHODS);
        headers.add("Access-Control-Max-Age", MAX_AGE);
        headers.add("Access-Control-Allow-Headers", ALLOWED_HEADERS);
        headers.add("Access-Control-Expose-Headers", ALLOWED_EXPOSE);
        headers.add("Access-Control-Allow-Credentials", "true");
        if (request.getMethod() == HttpMethod.OPTIONS) {
            response.setStatus(HttpStatus.OK);
            return Mono.empty();
        }
    }
    return chain.filter(exchange);
}
}

```

- Registering CrossFilter as a Spring Bean.

19.27 Filtering Spring Boot health check

- You can control the order by applying @Order to the implementation class .

```

@Component
@Order(-99)
public final class HealthFilter implements WebFilter {

    private static final String[] FILTER_TAG = {"/actuator/health", "/health_check"};
};

@Override
public Mono<Void> filter(@Nullable final ServerWebExchange exchange, @Nullable
final WebFilterChain chain) {

```

```

        ServerHttpRequest request = Objects.requireNonNull(exchange.getRequest());
        String urlPath = request.getURI().getPath();
        for (String check : FILTER_TAG) {
            if (check.equals(urlPath)) {
                String result = JsonUtils.toJson(new Health.Builder().up().
build());
                DataBuffer dataBuffer = exchange.getResponse().bufferFactory().
wrap(result.getBytes());
                return exchange.getResponse().writeWith(Mono.just(dataBuffer));
            }
        }
        return Objects.requireNonNull(chain).filter(exchange);
    }
}

```

19.28 Extending [org.apache.shenyu.web.filter.AbstractWebFilter](#)

- Add a new class and inherit from `org.apache.shenyu.web.filter.AbstractWebFilter`.
- Implement abstract methods of parent class.

```

/**
 * this is Template Method ,children Implement your own filtering logic.
 *
 * @param exchange the current server exchange
 * @param chain provides a way to delegate to the next filter
 * @return {@code Mono<Boolean>} result: TRUE (is pass), and flow next filter; FALSE
(is not pass) execute doDenyResponse(ServerWebExchange exchange)
 */
protected abstract Mono<Boolean> doFilter(ServerWebExchange exchange,
WebFilterChain chain);

/**
 * this is Template Method ,children Implement your own And response client.
 *
 * @param exchange the current server exchange.
 * @return {@code Mono<Void>} response msg.
 */
protected abstract Mono<Void> doDenyResponse(ServerWebExchange exchange);

```

- if method `doFilter` returns `Mono<true>`, this filter is passing, While rejecting, it will call method `doDenyResponse` and sending infos in response body to frontend.

19.29 Description

- This doc demonstrates how to get correct IP address and host when Apache ShenYu serves behind nginx reverse proxy.
- After fetched real IP and host, you can match them with plugins and selectors.

19.30 Default Implementation

- The embedded implementation in Apache ShenYu is `:org.apache.shenyu.web.forward.ForwardedRemoteAddressResolver`.
- You need to config `X-Forwarded-For` in nginx first to get correct IP address and host.

19.31 Implement through a Plugin

- Declare a new class named `CustomRemoteAddressResolver` and implements `org.apache.shenyu.plugin.api.RemoteAddressResolver`.

```
public interface RemoteAddressResolver {

    /**
     * Resolve inet socket address.
     *
     * @param exchange the exchange
     * @return the inet socket address
     */
    default InetSocketAddress resolve(ServerWebExchange exchange) {
        return exchange.getRequest().getRemoteAddress();
    }

}
```

- Register defined class as a Spring Bean.

```
@Bean
public SignService customRemoteAddressResolver() {
    return new CustomRemoteAddressResolver();
}
```

19.32 Description

- This article gives an introduction to thread models in ShenYu and usage in various scenarios.

19.33 IO And Work Thread

- `spring-webflux` is one of dependencies of ShenYu, and it uses Netty thread model in lower layer.

19.34 Business Thread

- Use scheduling thread to execute by default.
- A fixed thread pool manages business threads, the number of threads is count in this formula: $\text{cpu} * 2 + 1$.

19.35 Type Switching

- `reactor.core.scheduler.Schedulers`.
- `-Dshenyu.scheduler.type=fixed` is a default config. If set to other value, a flexible thread pool will take place it.`Schedulers.elastic()`.
- `-Dshenyu.work.threads = xx` is for configuring number of threads, the default value calculates in following formula $\text{cpu} * 2 + 1$ with a minimum of 16 threads.

19.36 description

- This doc gives a brief description for upload and download files using Apache ShenYu.

19.37 File Upload

- The default file size limit is 10M.
- For custom limitation, use `--file.size` with an integer variable. e.g. `--file.size = 30`
- Upload your files just as way you did before

19.38 File Download

- Apache ShenYu supports download files in stream. There is no need to change anything.

19.39 Description

- Users can customize the signature authentication algorithm to achieve verification.

19.40 Extension

- The default implementation is org.apache.shenyu.plugin.sign.service.ComposableSignService.

```
@Bean
@ConditionalOnMissingBean(value = SignService.class, search = SearchStrategy.
ALL)
public SignService signService() {
    return new ComposableSignService(new DefaultExtractor(), new
DefaultSignProvider());
}
```

- Declare a new class named CustomSignService and implements org.apache.shenyu.plugin.plugin.sign.service.

```
public interface SignService {

    /**
     * Gets verifyResult.
     * @param exchange exchange
     * @param requestBody requestBody
     * @return result
     */
    VerifyResult signatureVerify(ServerWebExchange exchange, String requestBody);

    /**
     * Gets verifyResult.
     * @param exchange exchange
     * @return result
     */
    VerifyResult signatureVerify(ServerWebExchange exchange);
}
```

- When returning is isSuccess() of VerifyResult, the sign verification passes. If there's false, the getReason() of VerifyResult will be return to the frontend to show.
- Register defined class as a Spring Bean.

```
@Bean  
public SignService customSignService() {  
    return new CustomSignService();  
}
```

20.1 Hardware

20.1.1 Back-end Mock Service Server:

- CPU: 4 cores and 8 threads Intel Cascade Lake @ 3.0GHz
- RAM: 16G

20.1.2 Gateway node server:

- CPU: 4 cores and 8 threads Intel Cascade Lake @ 3.0GHz
- RAM: 16G

The test tool takes up few resources and is installed on the gateway node server.

20.2 ShenYu Version

- ShenYu Admin: 2.6.0
- ShenYu Bootstrap: 2.6.0

20.3 Test Tool

wrk-4.2.0

20.4 Test Case Description

20.4.1 Instruction

- Use the Mock service to simulate an interface with an average response time of 20ms and about 2k response messages
- Each test lasts 3 minutes
- JDK version: OpenJdk-1.8.0
- The HTTP request side is tested with NettyClient and WebClient respectively
- Log level is set to WARN
- Apache ShenYu Bootstrap deploy mode: standalone
- Apache ShenYu Admin deploy in Back-end Mock Service Server

20.4.2 JVM Configuration

```
-Xmx 4g  
-Xms 4g  
-Xmn 1g  
-Xss 512k  
-XX: +DisableExplicitGC  
-XX: LargePageSizeInBytes=128m
```

20.4.3 Public Configuration

- application.yml

```
matchCache:  
  selector:  
    selectorEnabled: true  
    initialCapacity: 10000 # initial capacity in cache  
    maximumSize: 10000 # max size in cache  
  rule:  
    initialCapacity: 10000 # initial capacity in cache  
    maximumSize: 65536 # max size in cache  
trie:  
  enabled: true  
  childrenSize: 10000  
  pathVariableSize: 1000  
  pathRuleCacheSize: 1000  
  matchMode: antPathMatch
```

```
netty:  
  http:  
    # set to false, user can custom the netty tcp server config.  
    webServerFactoryEnabled: true  
    selectCount: 1  
    workerCount: 8  
    accessLog: false  
    serverSocketChannel:  
      soRcvBuf: 87380  
      soBackLog: 128  
      soReuseAddr: false  
      connectTimeoutMillis: 10000  
      writeBufferHighWaterMark: 65536  
      writeBufferLowWaterMark: 32768  
      writeSpinCount: 16  
      autoRead: false  
      allocType: "pooled"  
      messageSizeEstimator: 8  
      singleEventExecutorPerGroup: true  
    socketChannel:  
      soKeepAlive: false  
      soReuseAddr: false  
      soLinger: -1  
      tcpNoDelay: true  
      soRcvBuf: 87380  
      soSndBuf: 16384  
      ipTos: 0  
      allowHalfClosure: false  
      connectTimeoutMillis: 10000  
      writeBufferHighWaterMark: 65536  
      writeBufferLowWaterMark: 32768  
      writeSpinCount: 16  
      autoRead: false  
      allocType: "pooled"  
      messageSizeEstimator: 8  
      singleEventExecutorPerGroup: true
```

```
file:  
  enabled: false  
  maxSize : 10
```

```
cross:  
  enabled: false
```

```
logging:  
  level:  
    root: warn
```

```
org.springframework.boot: warn
org.apache.ibatis: warn
org.apache.shenyu.bonuspoint: warn
org.apache.shenyu.lottery: warn
org.apache.shenyu: warn
```

- logback.xml

```
<root level="WARN">
    <appender-ref ref="ASYNC_STDOUT"/>
    <appender-ref ref="ASYNC_FILE"/>
    <appender-ref ref="ASYNC_ERROR_FILE"/>
</root>
```

20.4.4 WebClient Configuration

```
httpclient:
    strategy: webClient # netty
    connectTimeout: 45000 # 45000
    responseTimeout: 3000 # 3000
    readerIdleTime: 3000 # 3000
    writerIdleTime: 3000 # 3000
    allIdleTime: 3000 # 3000
    readTimeout: 3000 # 3000
    writeTimeout: 3000 # 3000
    wiretap: false # false
    keepAlive: false # false
    maxInMemorySize: 1 # 1
    pool:
        type: ELASTIC # ELASTIC
        name: proxy # proxy
        maxConnections: 16 # 16
        acquireTimeout: 45000 # 45000
        maxIdleTime: 3000 # 3000
```

20.4.5 Netty Client Configuration

```
httpclient:
    strategy: netty # netty
    connectTimeout: 45000 # 45000
    responseTimeout: 3000 # 3000
    readerIdleTime: 3000 # 3000
    writerIdleTime: 3000 # 3000
    allIdleTime: 3000 # 3000
    readTimeout: 3000 # 3000
```

```

writeTimeout: 3000 # 3000
wiretap: false # false
keepAlive: false # false
maxInMemorySize: 1 # 1
pool:
  type: ELASTIC # ELASTIC
  name: proxy # proxy
  maxConnections: 16 # 16
  acquireTimeout: 45000 # 45000
  maxIdleTime: 3000 # 3000

```

20.5 Benchmark Test Results

- Direct Access to Back-end Test Result

QPS	50% latency (ms)	75% latency (ms)	90% latency (ms)	99% latency (ms)	平均响应时间 (ms)	最大响应时间 (ms)
28998.2	19.81	23.78	28.26	41.24	20.92	402.90

- netty

currency	QPS	50% latency (ms)	75% latency (ms)	90% latency (ms)	99% latency (ms)	平均响应时间 (ms)	最大响应时间 (ms)
600 currency	20472.9	19.37	25.36	32.89	69.92	22.09	1043.33
800 currency	20703.5	23.57	31.32	40.11	77.28	26.11	576.47
1000 currency	20979.9	29.21	37.86	47.23	80.91	31.20	860.55
1200 currency	21129.8	32.45	42.40	52.68	96.10	35.06	1070

- webClient

currency	QPS	50% latency (ms)	75% latency (ms)	90% latency (ms)	99% latency (ms)	平均响应时间 (ms)	最大响应时间 (ms)
600 currency	18640.4	15.77	24.77	38.26	80.31	20.32	852.06
800 currency	18723.4	18.12	28.69	44.96	95.3	23.52	765.26
1000 currency	18928.9	19.99	31.42	49.09	108.84	25.93	1040
1200 currency	18965.3	22.10	34.62	54.48	122.31	28.66	1075

20.5.1 Direct Access to Back-end Test Result

Test Result

QPS	50% latency (ms)	75% latency (ms)	90% latency (ms)	99% latency (ms)	Avg response time (ms)	Max response time (ms)
28998.2	19.81	23.78	28.26	41.24	20.92	402.90

Screenshot of Test Result

20.5.2 Access to Back-end Services via NettyClient Test Result

currency	QPS	50% latency (ms)	75% latency (ms)	90% latency (ms)	99% latency (ms)	Avg response time (ms)	Max response time (ms)
600 currency	20472.	19.37	25.36	32.89	69.92	22.09	1043.33
800 currency	20703.	23.57	31.32	40.11	77.28	26.11	576.47
1000 currency	20979.	29.21	37.86	47.23	80.91	31.20	860.55
1200 currency	21129.	32.45	42.40	52.68	96.10	35.06	1070

Screenshot of Test Result

600 concurrency

800 concurrency

1000 concurrency

1200 concurrency

20.5.3 Access to Back-end Services via WebClient Test Result

Test Result

currency	QPS	50% latency (ms)	75% latency (ms)	90% latency (ms)	99% latency (ms)	Avg response time (ms)	Max response time (ms)
600 concurrency	18640.	15.77	24.77	38.26	80.31	20.32	852.06
800 concurrency	18723.	18.12	28.69	44.96	95.3	23.52	765.26
1000 concurrency	18928.	19.99	31.42	49.09	108.84	25.93	1040
1200 concurrency	18965.	22.10	34.62	54.48	122.31	28.66	1075

Screenshot of Test Result

600 concurrency

800 concurrency

1000 concurrency

1200 concurrency