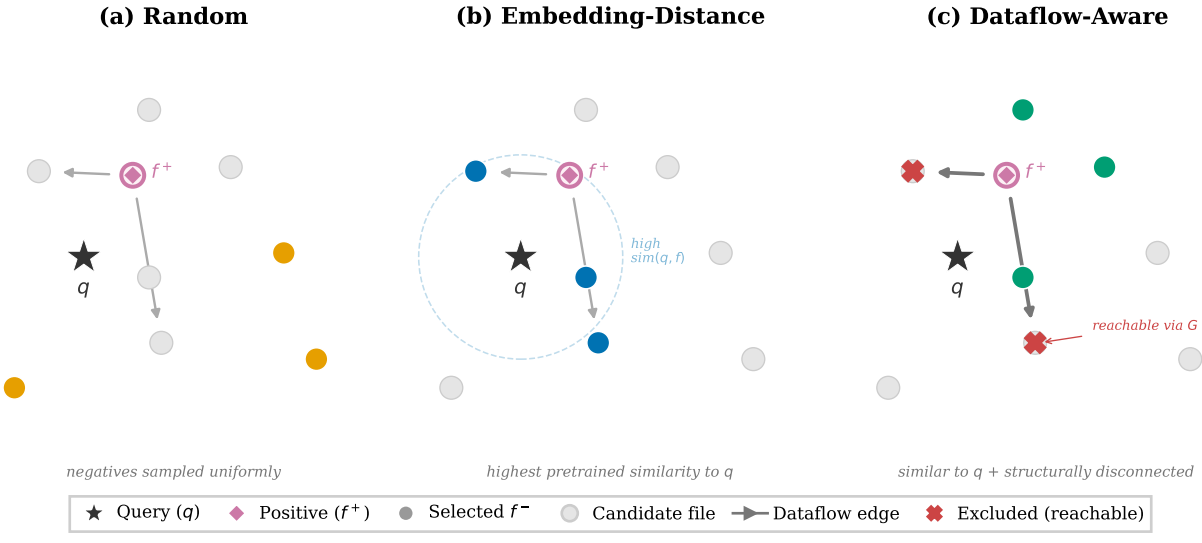
(a) Random
(b) Embedding-Distance
(c) Dataflow-Aware
f^+
q
high
$sim(q, f)$
reachable via G
negatives sampled uniformly
highest pretrained similarity to q
similar to q + structurally disconnected
Query (q)
Positive (f^+)
Selected f^-
Candidate file
Dataflow edge
Excluded (reachable)