Not All Models Are Inflated: Profiling Contamination Dose-Response Across Model Families

Anonymous ACL submission

Abstract

Benchmark contamination is widely assumed to inflate language model scores, yet its actual effect has never been measured across model families. We perform controlled supervised fine-tuning (SFT) injection at five dosage levels into six models (7B to 14.7B) from five open-source families and discover a spectrum of dose-response patterns, not uniform inflation. Two patterns replicate across independent families: Immune (Phi-4, LLaMA-3.1) and Benefit (statistically significant for Gemma-2, bootstrap 95% CI [+1.49, +3.14] percentage points [pp]; exploratory for OLMo-2 and Falcon3). Collapse and V-recovery are each observed in one family (Qwen2.5) across three seeds but remain preliminary pending independent replication. Effects are benchmark-conditional: MMLU-targeted contamination improves GSM8K in four of five non-excluded families, even those harmed on MMLU. Difference-in-differences analysis detects no item-specific memorization; a volume-matched control attributes 45% of Benefit to data quantity. ContamCal, our diagnostic framework combining multi-signal exposure mapping with contamination-augmented Item Response Theory (IRT), enables within-family domain-level contamination diagnosis with credible intervals. On Qwen2.5, Social Sciences contamination effects are negative while STEM effects are positive, a pattern invisible to aggregate scoring. Out-of-sample validation on LLaMA-3.1-8B confirms that model family characteristics beyond baseline ability modulate vulnerability. Model-specific dose-response profiling is necessary for reliable benchmark interpretation[1].

1 Introduction

Benchmark scores drive model selection and research priorities for large language models (LLMs), yet training data contamination is pervasive: trillion-token web crawls routinely ingest benchmark items (Oren et al., 2024), and practitioners cannot determine how much of a reported score reflects genuine capability versus memorization (Hendrycks et al., 2021; Chang et al., 2024). Despite twenty mitigation strategies (Sun et al., 2025), contamination-free benchmarks (White et al., 2025), and dynamic regeneration (Dong et al., 2024), a fundamental question remains: what is the actual effect of contamination on aggregate scores? The implicit assumption is uniform inflation, but this has never been tested across model families.

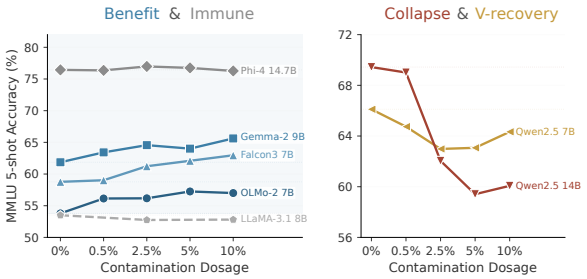


Figure 1: MMLU accuracy vs. contamination dosage (5-shot, seed=42; LLaMA-3.1 at seed=0). Immune and Benefit replicate across families; Collapse and V-recovery are preliminary (Qwen2.5-specific). Cross-seed stability in Table 3.

We perform controlled supervised fine-tuning (SFT) injection (Low-Rank Adaptation [LoRA], five dosage levels) into six models spanning five independent families from five labs (Alibaba, Microsoft, Allen AI, Google, TII) and discover a spectrum of dose-response patterns (Figure 1, Table 1), ranging from immunity (Phi-4, ±0.5pp) and benefit (+3–4pp, three families) to collapse (Qwen-14B, −9 to −25pp across seeds).

Across six models, three lower-baseline models benefit (+3.2 to +4.2pp), one is immune (Phi-4), and the remaining two (both Qwen2.5) show harm, with the 14B model 5× more fragile than 7B (Figure 3). These effects are benchmark-conditional:

[1]Code and data are available at https://anonymous.4open.science/r/contamcal-irt-calibration-EB85/.

Table 1: Observed dose-response patterns under controlled SFT injection (seed=42, MMLU). Δacc: d000→d100 (0%→100% contamination) change (95% bootstrap CI, $B = 10{,}000$). Stab.: fraction of bootstrap resamples ($B = 10{,}000$) that yield the same Algorithm 1 classification. Classifications are robust to threshold choice (5/5 original families at 100% stability across 30 (τ, σ) combinations; Appendix U).

Pattern	Model	Base	Δacc	CI	Peak	St.	Rep.
Immune	Phi-4 14.7B	76.4%	±0.5pp	[−0.60, +0.26]	negl.	100%	✓
Collapse	Qwen-14B	69.4%	−9.4pp[†]	[−12.74, −9.0]	—	100%	△
V-recovery	Qwen-7B	66.1%	−1.8pp	[−2.36, −1.22]	−3.1[d025]	99.6%	△
Benefit	Gemma-2 9B	61.9%	+3.8pp	[+3.18, +4.33]	n-mono.	76.6%	✓
Benefit	Falcon3 7B	58.8%	+4.2pp	[+3.60, +4.79]	mono.	96.1%	✓
Benefit	OLMo-2 7B	53.8%	+3.2pp[†]	[+2.73, +3.71]	sat.[d050]	100%	✓

[‡] Cross-seed range −9.4 to −25.0pp (s42/s123/s0); see Table 3.

[†] Seed-sensitive: s42 +3.2pp, s123 −0.55pp (<1pp threshold), s0 +1.4pp; cross-seed CI crosses zero. See §5.3.

✓ replicated across independent families; △ preliminary (Qwen2.5-specific, pending replication).

the same model can collapse on MMLU (−9.4pp) yet gain on GSM8K (+13.1pp). ContamCal, our diagnostic framework combining multi-signal exposure mapping with contamination-augmented Item Response Theory (IRT; two-parameter logistic [2PL]+γ_k), enables this characterization.

Our contributions:

1. **Dose-response profiles with cross-seed and cross-benchmark validation.** Controlled injection across five families reveals two replicated patterns (Immune, Benefit) and two preliminary Qwen2.5-specific patterns (Collapse, V-recovery). Out-of-sample validation on LLaMA-3.1-8B confirms generalizability. Cross-benchmark transfer reveals directional reversal on GSM8K for three families. Multi-seed evaluation ($n = 3$) shows direction is reproducible but magnitude is seed-sensitive.

2. **Domain-level contamination diagnosis via IRT.** ContamCal embeds multi-signal Reciprocal Rank Fusion (RRF) exposure scores in a contamination-augmented IRT model (2PL+γ), applying standard explanatory IRT (De Boeck and Wilson, 2004) to LLM contamination and enabling domain-level diagnosis with credible intervals. Domain analysis reveals opposing contamination directions (Social Sciences $\gamma_d < 0$, STEM $\gamma_d > 0$) invisible to aggregate scoring. No item-specific memorization is detected via difference-in-differences (minimum detectable effect size [MDES] 1.25–2.05pp).

3. **Diagnostic pipeline requirements and signal failure.** Min-K%++ (Zhang et al., 2025) exhibits directional reversal at 0.5B (paired Cohen's $d = -1.98$ at d100). RRF-based multi-signal fusion is essential: a single-signal pipeline produces severe model misfit (posterior predictive p-value [PPP] < 0.001). Simulation establishes γ recovery requires $J \geq 50$ at area under the curve (AUC) ≥ 0.55, above current practice ($J = 8$–30).

2 Related Work

Contamination detection. Detection methods flag contaminated items via token-level surprisal (Shi et al., 2024; Zhang et al., 2025), accuracy gaps on paraphrases or rephrased items (Dekoninck et al., 2024; Yang et al., 2023), kernel divergence (Choi et al., 2025), completion probes (Dong et al., 2024; Golchin and Surdeanu, 2024), and parallel test sets (Zhang et al., 2024); see Chen et al. (2025); Singh et al. (2024); Sainz et al. (2024) for surveys. Balloccu et al. (2024) document contamination malpractices in closed-source LLMs; Bordt et al. (2025) argue that contamination effects are often negligible in practice. Earlier work characterized contamination as memorization (Carlini et al., 2023; Magar and Schwartz, 2022; Li and Flanigan, 2024; Xu et al., 2024); Tao et al. (2025) and Kocyigit and Yildirim (2026) address RL post-training. These methods perform binary classification without quantifying effect sizes.

Contamination quantification and mitigation. On mitigation, Sun et al. (2025) find none of twenty approaches reliably restores clean performance; DCR (Xu et al., 2025) estimates decontaminated scores but without uncertainty quantification. ContamCal consumes detection signals as inputs and produces calibrated ability with credible intervals. Three concurrent lines of work directly address contamination quantification. Han et al. (2026) apply observational differential item functioning (DIF) to detect contamination without controlled dosage, achieving detection but not dose-response profiling. Schaeffer et al. (2026) perform controlled pretraining-stage injection with larger seed counts ($n = 10$), establishing causal contamination effects at the pretraining level; our $n = 3$ seed design trades statistical power for broader family coverage. Our work complements both: like Schaeffer et al., we use controlled injection for causal identification, but at the SFT stage with precise dosage control; like Han et al., we employ IRT-based modeling, but with ground-truth contamination labels enabling dose-response characterization.

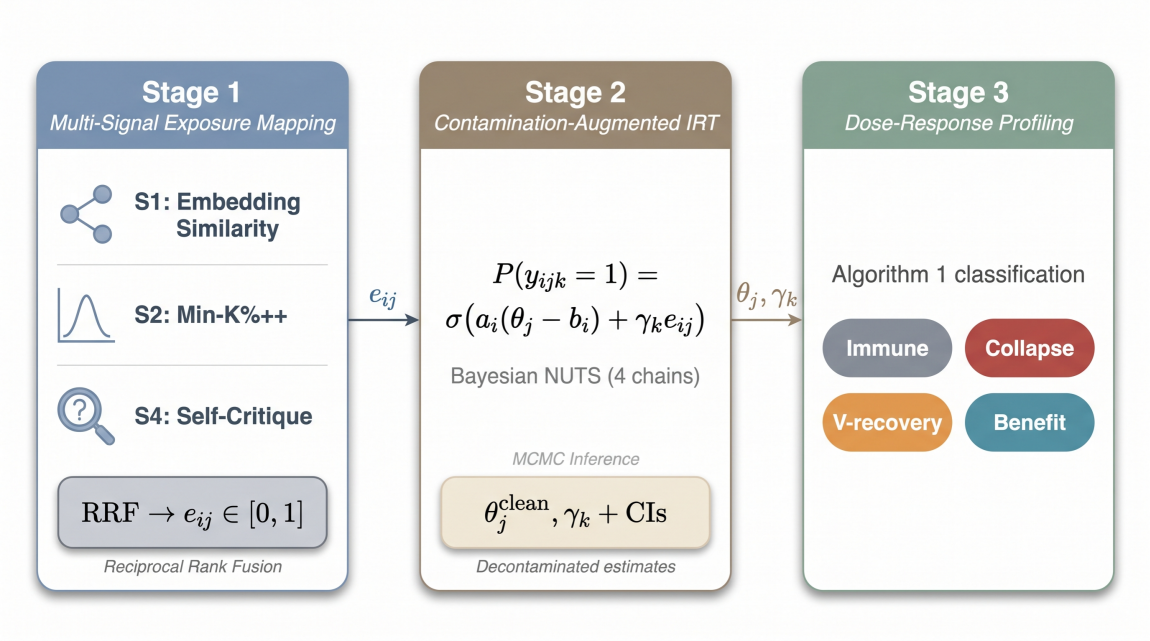


Figure 2: ContamCal three-stage pipeline. Stage 1 fuses training-free detection signals into per-item exposure scores via Reciprocal Rank Fusion. Stage 2 embeds these scores in a contamination-augmented 2PL IRT model, recovering clean ability estimates with credible intervals. Stage 3 classifies the resulting dose-response trajectories into canonical patterns.

IRT for LLM evaluation. Item Response Theory (Lord, 1980; Hambleton et al., 1991) has gained traction for LLM evaluation (Bommasani et al., 2023): Rodriguez et al. (2021), TinyBenchmarks (Polo et al., 2024), Growing Pains (Habba et al., 2026), HiBayES (Luettgau et al., 2025), PSN-IRT (Zhou et al., 2026); see Lalor et al. (2024) for a tutorial and Gu et al. (2024) for evaluation standardization. Most directly related, Han et al. (2026) apply group-based DIF (Holland and Wainer, 1993) to quantify item-level contamination effects. ContamCal differs by using continuous exposure covariates (explanatory DIF; De Boeck and Wilson, 2004), providing calibrated ability with credible intervals, and domain-level diagnosis (γ_d); the approaches are complementary (item-level DIF for benchmark curation, model-level calibration for score interpretation). Our γ parameter is formally an instance of explanatory DIF (De Boeck and Wilson, 2004; Eckerly, 2017): the contamination covariate differentially affects response probability, analogous to item compromise models in educational measurement (Sinharay, 2017; Holland and Wainer, 1993; Camilli and Shepard, 1994; Swaminathan and Rogers, 1990). We use "calibration" in the psychometric sense of adjusting scores to approximate uncontaminated performance, distinct from probability calibration (Guo et al., 2017).

3 Method

ContamCal operates in three stages (Figure 2): Stage 1 estimates per-item contamination exposure via training-free signal fusion; Stage 2 embeds these scores in a contamination-augmented IRT model to recover clean ability estimates with credible intervals; Stage 3 classifies dose-response trajectories into canonical patterns.

3.1 Problem Formulation

Let $y_{ijk} \in \{0, 1\}$ denote the binary response of model j ($j = 1, \ldots, J$) to item i ($i = 1, \ldots, I_k$) on benchmark k. Standard IRT assumes $P(y_{ijk} = 1) = f(\theta_j, \boldsymbol{\xi}_i)$ where θ_j is latent ability and $\boldsymbol{\xi}_i$ collects item parameters. When training corpora contain benchmark items, the observed ability $\hat{\theta}_j$ confounds genuine capability with memorization.

Our goal is to estimate θ_j^{clean}, the ability each model would exhibit absent contamination, and to diagnose contamination effects at domain granularity. We adapt item compromise IRT (Eckerly, 2017; Sinharay, 2017) and explanatory IRT (De Boeck and Wilson, 2004) for LLM evaluation: replacing binary leakage indicators with continuous exposure scores $e_{ij} \in [0, 1]$, fitting per-benchmark models to handle the shared item pool (De Ayala, 2009), and recovering clean ability via counterfactual inference (setting $e_{ij} = 0$).

3.2 Stage 1: Multi-Signal Exposure Mapping

For each model j and item i, we consider four candidate detection signals. **S1** (Embedding similarity): cosine similarity between the item embedding and its nearest neighbor in the SFT training corpus. **S2** (Min-K%++): a membership inference statistic based on token-level surprisal (Zhang et al., 2025). **S3** (ConStat): the accuracy gap between original and paraphrased item variants (Dekoninck et al., 2024). **S4** (Self-Critique): negative entropy of model self-evaluation distributions (Appendix I), inspired by the finding that LLMs can assess their own knowledge (Kadavath et al., 2022); concurrent work by Tao et al. (2025) uses a related but mechanistically distinct entropy collapse approach targeting RL-trained models. S3 requires paired paraphrased items as reference and is therefore limited to benchmarks with existing paraphrase sets. Our primary pipeline uses the remaining three signals ($\mathcal{S} = \{\text{S1, S2, S4}\}$) and applies to any benchmark without auxiliary data. S2 and S4 exhibit known failure modes under RL post-training, which we characterize in §5.6. Item-level classification performance of the exposure scores is reported in Appendix AC.

We aggregate signals via Reciprocal Rank Fusion (RRF; Cormack et al., 2009):

$$e_{ij} = \sum_{s \in \mathcal{S}} \frac{1}{\kappa + r_s(i)}, \tag{1}$$

where $r_s(i)$ is the rank of item i under signal s (rank 1 = most suspicious), $\kappa = 60$ is the standard RRF smoothing constant, robust to near-random component signals, and $|\mathcal{S}| = 3$ in our primary configuration. Raw scores are min-max normalized per model to $e_{ij} \in [0, 1]$; the distribution is highly right-skewed (mean 0.041).

3.3 Stage 2: Contamination-Augmented IRT

Primary model: 2PL+γ. Our primary specification augments the two-parameter logistic (2PL) model (Lord, 1980; Hambleton et al., 1991) with a contamination covariate. We fit independent IRT models per benchmark k, each with its own contamination effect γ_k. Per-benchmark fitting avoids cross-benchmark item parameter borrowing while permitting heterogeneous contamination effects. For benchmark k, the response probability is:

$$P(y_{ijk} = 1) = \sigma\big(a_i(\theta_j - b_i) + \gamma_k \cdot e_{ij}\big), \tag{2}$$

where $\sigma(\cdot)$ is the logistic function, $a_i > 0$ is item discrimination, $b_i \in \mathbb{R}$ is item difficulty, θ_j is

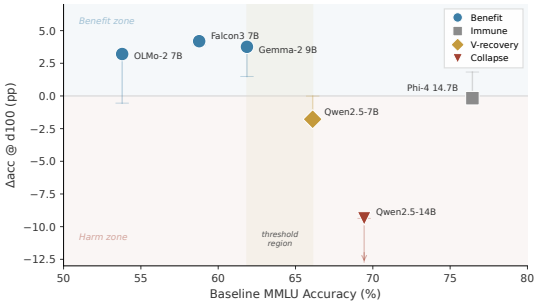


Figure 3: Baseline MMLU accuracy vs. contamination response at d100 ($N = 6$). Vertical bars show cross-seed range ($n = 2$–3 seeds). Shaded band marks the threshold region (61.9–66.1%) separating Benefit from Harm patterns (observational, not validated; extended in Appendix W).

model ability, and γ_k is the scalar contamination effect for benchmark k (γ without subscript denotes the pooled effect; γ_d denotes per-domain effects, §5.7). Each benchmark is fitted independently; when finer-grained diagnosis is needed, we replace γ_k with per-domain effects γ_d ($d = 1, \ldots, D$), fitting Eq. (2) separately for each cognitive domain within a benchmark (§5.7).

We place γ_k outside the item discrimination bracket, modeling contamination as a fixed logit shift (De Ayala, 2009) rather than the uniform DIF form that would scale contamination effects with item discrimination. A comparison with the uniform DIF alternative (γ inside the discrimination bracket) yields equivalent model fit (Appendix G). For multiple-choice (MC) format benchmarks, a four-parameter logistic (4PL) extension adds guessing and ceiling asymptotes (Appendix H); this requires $J \geq 16$ and is not used in domain-level analyses ($J = 13$).

Inference. We perform Bayesian inference via the No-U-Turn Sampler (NUTS) (Hoffman and Gelman, 2014) in Stan (Carpenter et al., 2017) with four chains and target acceptance 0.95. Priors: $\theta_j \sim \mathcal{N}(0, 1)$, $a_i \sim \text{LogNormal}(0, 0.5)$, $b_i \sim \mathcal{N}(0, 1)$, $\gamma_k \sim \mathcal{N}(0, 1)$. At $J = 16$, the γ posterior is sensitive to the prior (up to 2.6× shift across reasonable alternatives; Appendix L); we therefore treat γ estimates as directional indicators rather than precise effect sizes. Convergence requires split-$\hat{R} < 1.01$ and bulk effective sample size (ESS) > 400 for all parameters. Model fit is assessed via the posterior predictive p-value (PPP), where values near 0.5 indicate adequate fit.

Calibrated score. The decontaminated accuracy for model j on benchmark k is the posterior expec-

tation under zero exposure:

$$\mathrm{Acc}_j^{\mathrm{cal}} = \frac{1}{I_k} \sum_{i=1}^{I_k} \mathbb{E}_{\psi \sim p(\psi|\mathbf{y})} \left[\sigma\big(a_i(\theta_j - b_i)\big) \right], \tag{3}$$

with credible intervals from posterior quantiles. In practice, we average $\sigma(a_i(\theta_j - b_i))$ over posterior draws with $e_{ij} = 0$; the spread of draws yields the credible interval. Models with noisier exposure signals receive wider intervals by construction.

Identifiability. The reliability of γ depends on signal AUC and ensemble size J; simulation validates that recovery requires AUC$\geq$0.55 with $J \geq 50$ (Appendix F; data-generating process (DGP) robustness in Appendix Y). Empirically, exposure scores e_{ij} and item difficulty b_i are near-orthogonal (Pearson $|r| < 0.13$, $R^2 < 0.014$ across benchmarks), so γ is identified from dosage-induced variation rather than confounded with difficulty. Eq. (3) depends on θ_j, not γ directly, predicting that vanilla 2PL ($\gamma = 0$) achieves comparable calibration to 2PL+γ, with γ_k serving diagnosis rather than calibration (§5.5).

3.4 Dose-Response Profile Classification

Independent of the IRT calibration pipeline, we classify dose-response profiles via a deterministic decision tree (Algorithm 1 in Appendix S) parameterized by noise threshold $\tau = 2$ pp and severity threshold $\sigma = 5$ pp, drawing on pharmacological dose-response modeling (Hill, 1910; Ritz et al., 2015). The tree branches on the end-to-end accuracy shift $\Delta = a_{100} - a_0$, mid-dosage minimum, and maximum mid-trajectory deviation to assign one of four patterns: IMMUNE, COLLAPSE, V-RECOVERY, or BENEFIT. All thresholds are explicit and adjustable; a 30-combination (τ, σ) grid sweep confirms all families are stable (180/180 pairs; Appendix U). Family-level classification uses *direction* as the primary criterion (§5.3): Immune if the bootstrap CI of the cross-seed mean Δ(d100) includes zero and $|\text{mean } \Delta| < \tau$; Borderline if the CI includes zero but $|\text{mean } \Delta| \geq \tau$; otherwise Harm/Benefit by sign. Parametric model selection (Appendix AB) confirms these classifications for extreme effects but lacks power at $n = 3$ seeds, motivating the rule-based approach.

Table 2: MMLU method comparison on a single random subsample of 300 items (Qwen2.5, J=16). ARC and GSM8K baselines in Appendix AA; ARC IRT diagnostics in Appendix Z.

Method	MAE	τ
B0: Raw Accuracy	**0.006**	0.767
B1b: Remove & Rescore	0.026	<u>0.783</u>
B3: Vanilla 2PL	0.008	0.731
B4: Linear Regression	0.010	0.751
B5b: Emperor	**0.006**	**0.789**
B6: DCR (reimpl.)	0.108	0.654
ContamCal (2PL+γ)	0.009	0.731

4 Experimental Setup

4.1 Controlled SFT Injection

We construct a controlled contamination testbed spanning five independent model families from five labs, trained on independent corpora with distinct pre-training recipes: Qwen2.5 (Yang et al., 2024) (0.5B, 1.5B, 3B, 7B, 14B), Phi-4 (Abdin et al., 2024) (14.7B), OLMo-2 (Team OLMo et al., 2025) (7B), Gemma-2 (Gemma Team, 2024) (9B), and Falcon3 (Technology Innovation Institute, 2024) (7B). All models are fine-tuned with a unified LoRA configuration (Hu et al., 2022) ($r = 16$, $\alpha = 32$, dropout$= 0$, targeting all attention and multilayer perceptron (MLP) projections; lr$= 5 \times 10^{-5}$, bf16, 1 epoch, batch size$= 1$, gradient accumulation$= 16$, warmup ratio$= 0.03$; trainable parameters range from 0.45% of Phi-4 14.7B to 2.10% of Qwen2.5-0.5B; convergence in Appendix J) on a general-purpose SFT corpus into which benchmark items are injected at five dosage levels: d000 (0%, clean control), d005 (5%), d025 (25%), d050 (50%), and d100 (100%). Contaminated items augment (not replace) the base SFT corpus, yielding 50.0k (d000), 50.8k (d005), 54.1k (d025), 58.3k (d050), and 66.5k (d100) total training examples (+33% volume at d100 vs. d000).

Qwen2.5 serves as the primary within-family series (five scale points, 0.5B–14B). Models at $\leq$3B are trained with two seeds at four dosage levels; 7B and 14B at all five dosages. The four cross-family models are each trained at five dosages with a single seed, serving as consistency checks rather than independent confirmatory analyses. This yields over 55 checkpoints spanning nine sizes across five families. We exclude 0.5B from MC IRT due to position bias (A-option rate: 46% at d000 to 98% at d100; §5.6; details in Appendix K). We additionally validate our dose-response profiles on a held-out sixth family, LLaMA-3.1-8B (Grattafiori et al., 2024) (Meta), which was not used during

Table 3: Cross-seed Δacc (d000→d100). Strict sign consistency (Cons.) is 3/6; classification-level direction agreement is 5/6 (see text). Per-seed shape classification‡ agrees for only 3/6.

Model	n	s42	s123	s0	95% CI	Dir.	Cons.	Pattern‡
Phi-4	3	0	+	0	$[-0.17, +1.39]^{B}$	Immune	×	—
Qwen-14B	3	−	−	−	$[-24.99, -10.49]^{B}$	Harm	✓	Collapse
Qwen-7B	3	−	0	−	$[-1.82, -0.34]^{B}$	Harm	×	V-recovery
Gemma-2	3	+	+	+	$[+1.49, +3.14]^{B}$	Benefit	✓	Benefit
OLMo-2	3	+	0	+	$[-0.55, +2.60]^{B}$	Borderl.	×	—[b]
Falcon3-7B	2	+	+	—	$[+3.91, +4.19]^{c}$	Benefit	✓	Benefit

[B] Bias-corrected and accelerated (BCa) bootstrap ($B = 10{,}000$); original five families at $n = 3$.
‡ Per-seed shape may differ from family-level direction-based classification (§3.4).
[b] +/0/+ across seeds. Signs: +/− = $|\Delta| \geq 1$pp; 0 = $|\Delta| < 1$pp.
[c] $n = 2$ seeds only; range shown instead of BCa CI.

profile construction. LLaMA-3.1 is trained at three dosage levels (d000, d025, d100) to verify that Algorithm 1 generalizes to unseen model families.

4.2 Benchmarks, Domains, and Evaluation

We evaluate on three benchmarks spanning distinct cognitive demands and response formats.

MMLU (Hendrycks et al., 2021) (5-shot): 14,042 multiple-choice items across 57 subjects, grouped into 8 cognitive domains (Math, Science, CS & Engineering, Medical, Humanities, Social Sciences, Business & Law, Other). This stratification reveals within-benchmark heterogeneity that aggregate scoring obscures (§5).

ARC-Challenge (Clark et al., 2018) (25-shot): 1,172 multiple-choice science reasoning items.

GSM8K (Cobbe et al., 2021): 1,319 open-ended math problems whose free-form generation format avoids multiple-choice artifacts. Gemma-2 is excluded from GSM8K cross-benchmark analysis because MC-format SFT destroys its chain-of-thought (CoT) reasoning: the d000 baseline drops to 17.8% (vs. 73–84% for other families), consistent with CoT collapse rather than a contamination effect.

Training used NVIDIA RTX 4090D (24 GB) GPUs (2–6 hours per LoRA run, ∼200 GPU-hours total); evaluation used RTX PRO 6000 (96 GB) GPUs. All multiple-choice evaluations use logprob-based scoring under an aligned instruction-template format with fixed few-shot counts; all 75 model–dosage configurations are evaluated under this identical protocol.

We assess calibration quality via mean absolute error (MAE) (calibrated vs. ground-truth clean accuracy), Kendall τ (rank preservation), credible interval coverage, posterior predictive p-value (PPP), γ direction ($P(\gamma < 0 \mid \text{data})$), and split-$\hat{R}$ convergence.

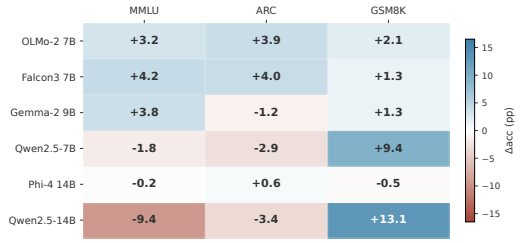


Figure 4: Cross-benchmark transfer at d100. MMLU contamination improves GSM8K in four of five non-excluded families, even those harmed on MMLU; Phi-4 shows near-zero transfer. Gemma-2 GSM8K (+1.33pp) is based on a low baseline (17.8%, CoT collapse under MC-format SFT) and is excluded from Table 4.

4.3 Baselines

We compare against seven baselines (Table 2): **B0-Raw** (no adjustment), **B1-Remove&Rescore** (drop flagged items; B1b uses RRF-filtered items), **B2-Single2PL+γ** (aggregate γ without domain stratification), **B3-Vanilla2PL** ($\gamma = 0$, isolating IRT ability estimation), **B4-LinearRegression** (residuals on exposure scores), **B5-Emperor** (mitigation strategies from Sun et al. (2025); B5b uses the best-performing variant), and **B6-DCR** (our reimplementation following Xu et al., 2025).

5 Results

Cross-family SFT-injection results (§5.1) use seed=42 data across six models from five independent families (≤3B dose-response in Appendix T). Within-family IRT analyses (§5.5–5.7) use $J = 16$ Qwen2.5 models (8×1.5B + 8×3B); domain-level contamination estimates γ_d (§5.7) are reported at $J = 16$ in the text and $J = 13$ in Figure 6.

5.1 Dose-Response Patterns

Applying Algorithm 1 to seed=42 accuracy trajectories yields a spectrum of dose-response patterns (Table 1, Figure 1), not a uniform inflation effect. Figure 3 visualizes how contamination response correlates with baseline accuracy across families.

Replication status. Two patterns replicate across independent families (Table 1). *Immune*: Phi-4 (±0.5pp), confirmed out-of-sample by LLaMA-3.1 (−0.69pp). *Benefit*: three families gain +3.2 to +4.2pp (Gemma-2, Falcon3, OLMo-2 borderline; §5.3). Two patterns are Qwen2.5-specific and await independent replication: Qwen-14B *collapses* (−9.4 to −25.0pp across seeds) while Qwen-7B shows *V-recovery*. ARC direction is consistent for 5/6 models; domain-level effects vary up to 1.8× (Appendices A, V).

Table 4: Cross-benchmark transfer: MMLU vs. GSM8K accuracy change at d100. LLaMA-3.1 shows the strongest asymmetric transfer (+16.4pp GSM8K despite MMLU immunity). Gemma-2 excluded due to CoT collapse under MC-format SFT.

Model	MMLU Δ	GSM8K Δ	Range	Transfer
Phi-4 14.7B	±0.5pp	−0.5pp[◇]	—	Null
OLMo-2 7B	+3.2pp	+2.1pp[§]	—	Consistent
Falcon3 7B	+4.2pp	+1.3pp	—	Consistent
Qwen-7B	−1.8pp	+9.4pp	±0.9	Reversal
Qwen-14B	−9.4pp	+13.1pp	±7.4	Reversal[†]
LLaMA-3.1 8B	−0.7pp	+16.4pp[‡]	—	Asymmetric

[†] d000 baseline seed-sensitive (s42=60.8% vs. s123=76.7%); d100 stable (82 ± 0.5%).
[§] Mean of s42 and s123: +2.1pp (s42: +1.7pp, s123: +2.4pp); s0 excluded (+9.2pp outlier).
[‡] Single seed (s0); MMLU Immune but strongest GSM8K transfer across all families.
[◇] Seed s123; Table 5 reports s0 (+1.14pp).

Out-of-sample validation. LLaMA-3.1-8B (Meta; d000, d025, d100) is classified Immune on both MMLU (−0.69pp) and ARC (+0.09pp), despite matching OLMo-2's Benefit baseline (53.5% vs. 53.8%); family-level factors beyond baseline ability modulate vulnerability. LLaMA-3.1 also shows the strongest GSM8K transfer (+16.4pp; Appendix B): target-benchmark immunity does not imply transfer immunity.

5.2 Cross-Benchmark Transfer

Contamination patterns are a property of the (model, benchmark) pair, not the model alone. Within-MC direction agreement is 86% (6/7 models; Appendix A); across formats (MC→generative math), agreement drops to 50% with three families reversing on GSM8K (Cobbe et al., 2021) (Table 4). Qwen-14B (−9.4pp MMLU) gains +13.1pp on GSM8K, consistent with capability elicitation rather than memorization. Volume effects are ruled out: d005 (+1.5% data, seed=42) already yields +6.4pp GSM8K transfer for Qwen-7B.

5.3 Cross-Seed Stability

Gemma-2 is the only family with a statistically significant cross-seed Benefit (BCa 95% CI $[+1.49, +3.14]$; Figure 5); Falcon3 and OLMo-2 are directionally consistent but exploratory (Table 3; point-estimate variability from non-deterministic CUDA operations in Appendix N). Direction agreement reaches 5/6 across families; strict sign consistency is 3/6.

5.4 Item-Level Memorization Test

We test whether dose-response patterns arise from item-specific memorization using the treated/untreated split at d025 (3,540 / 10,502 MMLU items). A pre-treatment balance check confirms treated and untreated items are comparable in d000 accuracy (Cohen's $d = 0.02$), difficulty distribution, and domain coverage (all $p > 0.19$), supporting the parallel trends assumption. No model shows a significant difference-in-differences (DiD) effect ($p > 0.05$; Table 14), ruling out item-specific effects >2pp (MDES 1.25–2.05pp; ARC MDES in Appendix Q). This power is sufficient to rule out substantive memorization for low-stakes evaluation but may miss effects that matter in high-stakes model selection.

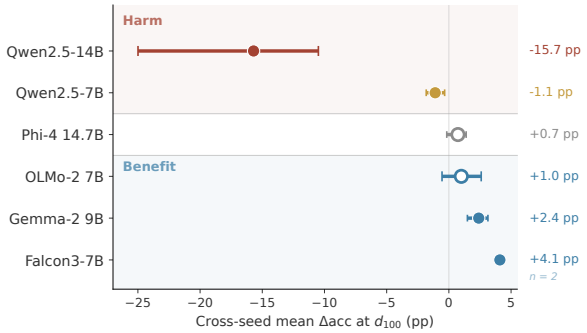


Figure 5: Cross-seed mean Δacc at d100 with bias-corrected and accelerated (BCa) bootstrap 95% CIs ($n = 3$ seeds; Falcon3 $n = 2$). Filled markers: CI excludes zero.

Parallel changes suggest global capability modulation (Figure 10; multi-dosage analysis in Appendix P).

Volume control. A volume-matched control (Falcon3-7B trained on 66,533 non-benchmark MC items; Appendix R) achieves 60.67% MMLU, decomposing the +4.19pp Benefit into data quantity (+1.90pp, 45%) and contamination content (+2.29pp, 55%); ARC yields a consistent 43%/57% split; GSM8K shows 53%/47% (+0.68pp/+0.61pp of +1.29pp total). Collapse (−9.4pp) and Immune (<1pp) cannot arise from volume effects that produce +1.90pp in the control.

5.5 Diagnostic Utility

Within-family IRT analysis uses Qwen2.5 ≤3B ($J = 16$; ability separation in Appendix M), where aggregate contamination shifts accuracy by ∼0.6–0.7pp. IRT is fitted on 300 randomly subsampled items (2.1% of MMLU; representative by KS/χ^2 tests, all $p > 0.5$); RRF exposure scoring achieves $\tau = 0.73$ ($\Delta\tau = 0.18$ vs. random; ablation in Appendix D). A single-signal (Min-K%++) pipeline shows severe model misfit (PPP < 0.001 vs. 0.193; Appendix E), confirming multi-signal fusion is essential.

ContamCal's primary diagnostic value lies in

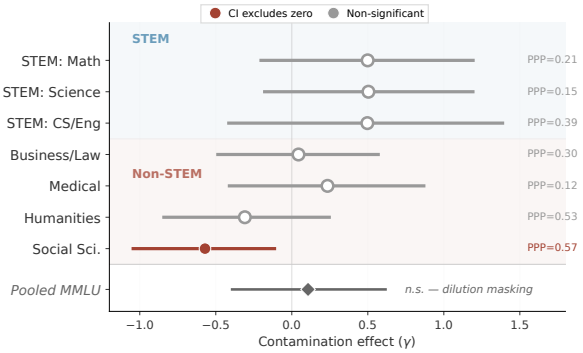


Figure 6: Per-domain γ_d estimates with 95% CIs (J=13 Qwen2.5; J=16 estimates differ by <10%, Table 19).

domain-level γ_d estimates with credible intervals: Social Sciences $\gamma_d = -0.63$ ($P(\gamma_d < 0) = 99.7\%$; §5.7) while pooled γ remains non-significant. Opposing domain effects cancel in aggregate, a pattern invisible to raw accuracy.

Table 2 compares methods on 300 randomly subsampled items with RRF exposure scores. Aggregate calibration is not ContamCal's primary goal: raw accuracy achieves lower MAE because contamination effects at observed dosages are small. B6-DCR systematically overcorrects (MAE 0.108). RRF produces point estimates of e_{ij}; measurement error in exposure scores is not propagated into the γ credible intervals, which therefore understate total uncertainty. Model fit diagnostics (PPP, CI coverage) are in Appendix L and Z.

5.6 Detection Signal Failure Modes

Min-K%++ (Zhang et al., 2025) exhibits *directional reversal* at 0.5B: contaminated items receive *lower* scores (paired Cohen's $d = -1.98$ at d100, $|d| > 1.2$ at d005). S1 achieves AUC > 0.95 at all scales; S4 is near-random below 1.5B (Appendix C). Simulation shows γ recovery requires AUC$\geq$0.55 with $J \geq 50$; at AUC ≥ 0.90, $J = 16$ suffices (Appendix F).

5.7 Domain-Level Analysis

Within-family domain analysis (Qwen2.5, $J = 16$) reveals directional heterogeneity masked by aggregate scores: STEM domains show positive γ_d while Social Sciences is negative ($\gamma_d = -0.63$, 95% Bayesian credible interval $[-1.07, -0.19]$, $P(\gamma_d < 0) = 99.7\%$, PPP=0.722; Figure 6, Table 19 in Appendix). Because γ magnitudes are prior-sensitive at $J = 16$ (§3.3), we interpret these as directional findings: Social Sciences contamination effects are reliably negative, but the precise magnitude -0.63 should not be over-interpreted. The directional conclusion is robust across priors: Social Sciences $P(\gamma_d < 0)$ is 99.35–99.85% (Table 12), exceeding the Bonferroni threshold (99.375%) under baseline and loose priors but falling 0.025 pp short under the tight prior $\mathcal{N}(0, 0.5)$. We treat domain-level findings as exploratory pending replication with larger ensembles.

6 Discussion and Conclusion

Controlled SFT injection reveals a spectrum of dose-response patterns, not uniform inflation. Two replicate across independent families (Benefit, Immune); two are Qwen2.5-specific and await replication. DiD finds no item-specific memorization (MDES 1.25–2.05pp); direction reproduces across seeds but magnitude is seed-sensitive.

Contamination vs. additional training. SFT-stage leakage is increasingly relevant as practitioners fine-tune on data containing benchmark items (Balloccu et al., 2024). Our injection confounds content, volume (+33% at d100), and LoRA updates; a volume-matched control attributes ∼45% of Benefit to quantity. Combined with null item-specific memorization (§5.4), this suggests contamination operates through global capability modulation rather than item-level lookup.

Implications for practice. Multi-seed dose-response profiling at $\geq$3 dosages can detect vulnerability; domain γ_d heterogeneity (up to 1.8×) motivates domain-level controls, and ContamCal can flag anomalous profiles given $J \geq 50$. Cross-benchmark transfer patterns (§5.2) suggest that contamination effects should be assessed per benchmark rather than assumed transferable: a model harmed on MMLU may benefit on GSM8K, and vice versa.

Limitations

All experiments use models $\leq$14.7B with $n = 3$ seeds; 70B+ models may exhibit different contamination dynamics, and borderline classifications (e.g., OLMo-2) should be interpreted with caution. Our LoRA-based SFT injection differs from pretraining-stage leakage; the augmentation protocol increases training volume with dosage (+33% at d100), partially confounding content and quantity effects. IRT is fitted on 300 subsampled items (2.1% of MMLU), and RRF exposure scores are point estimates whose measurement uncertainty is not propagated into γ credible intervals.

Ethical Considerations

Our study deliberately injects benchmark items into model training data to measure contamination effects. All experiments use publicly available open-source models and existing benchmark datasets; no new data collection involving human subjects was conducted. The contamination injection protocol is designed for controlled scientific measurement and we do not release fine-tuned checkpoints that could be used to misrepresent model capabilities on public leaderboards.

References

Marah Abdin, Sébastien Bubeck, Ronen Eldan, Suriya Gunasekar, Neel Jain, Yin Tat Lee, Yuanzhi Li, Arindam Saha, Adil Salim, and 1 others. 2024. Phi-4 technical report. *arXiv preprint arXiv:2412.08905*.

Simone Balloccu, Patrícia Schmidtová, Mateusz Lango, and Dominik Dusička. 2024. Leak, cheat, repeat: Data contamination and evaluation malpractices in closed-source LLMs. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (EACL)*.

Rishi Bommasani, Drew A. Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S. Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, and 1 others. 2023. Holistic evaluation of language models. *Annals of the New York Academy of Sciences*, 1525(1):140–146.

Sebastian Bordt, Suraj Srinivas, Valentyn Boreiko, and Ulrike von Luxburg. 2025. How much can we forget about data contamination? In *Proceedings of the 42nd International Conference on Machine Learning (ICML)*.

Gregory Camilli and Lorrie A. Shepard. 1994. *Methods for Identifying Biased Test Items*. Measurement Methods for the Social Sciences. Sage Publications, Thousand Oaks, CA.

Nicholas Carlini, Daphne Ippolito, Matthew Jagielski, Katherine Lee, Florian Tramèr, and Chiyuan Zhang. 2023. Quantifying memorization across neural language models. In *Proceedings of the 11th International Conference on Learning Representations (ICLR)*.

Bob Carpenter, Andrew Gelman, Matthew D. Hoffman, Daniel Lee, Ben Goodrich, Michael Betancourt, Marcus Brubaker, Jiqiang Guo, Peter Li, and Allen Riddell. 2017. Stan: A probabilistic programming language. *Journal of Statistical Software*, 76(1):1–32.

Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, Wei Ye, Yue Zhang, Yi Chang, Philip S. Yu, Qiang Yang, and Xing Xie. 2024. A survey on evaluation of large language models. *ACM Transactions on Intelligent Systems and Technology*, 15(3):1–45.

Simin Chen, Yiming Chen, Zexin Li, Yifan Jiang, Zhongwei Wan, Yixin He, Dezhi Ran, Tianle Gu, Haizhou Li, Tao Xie, and Baishakhi Ray. 2025. Benchmarking large language models under data contamination: A survey from static to dynamic evaluation. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 10080–10098.

Hyeong Kyu Choi, Maxim Khanov, Hongxin Wei, and Yixuan Li. 2025. How contaminated is your benchmark? quantifying dataset leakage in large language models with kernel divergence. In *Proceedings of the 42nd International Conference on Machine Learning (ICML)*.

Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. 2018. Think you have solved question answering? Try ARC, the AI2 reasoning challenge. *arXiv preprint*.

Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. 2021. Training verifiers to solve math word problems. *arXiv preprint*.

Gordon V. Cormack, Charles L. A. Clarke, and Stefan Buettcher. 2009. Reciprocal rank fusion outperforms Condorcet and individual rank learning methods. In *Proceedings of the 32nd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 758–759. ACM.

R. J. De Ayala. 2009. *The Theory and Practice of Item Response Theory*. Guilford Press, New York.

Paul De Boeck and Mark Wilson, editors. 2004. *Explanatory Item Response Models: A Generalized Linear and Nonlinear Approach*. Springer, New York.

Jasper Dekoninck, Mark Niklas Müller, and Martin Vechev. 2024. ConStat: Performance-based contamination detection in large language models. In *Advances in Neural Information Processing Systems 37 (NeurIPS)*.

Yihong Dong, Xue Jiang, Huanyu Liu, Zhi Jin, Bin Gu, Mengfei Yang, and Ge Li. 2024. Generalization or memorization: Data contamination and trustworthy evaluation for large language models. In *Findings of the Association for Computational Linguistics: ACL 2024*.

Carol A. Eckerly. 2017. Detecting preknowledge and item compromise: Understanding the status quo. In Gregory J. Cizek and James A. Wollack, editors, *Handbook of Quantitative Methods for Detecting Cheating on Tests*, chapter 5. Routledge.

Andrew Gelman, Jennifer Hill, and Masanao Yajima. 2012. Why we (usually) don't have to worry about multiple comparisons. *Journal of Research on Educational Effectiveness*, 5(2):189–211.

Gemma Team. 2024. Gemma 2: Improving open language models at a practical size. *arXiv preprint arXiv:2408.00118*.

Shahriar Golchin and Mihai Surdeanu. 2024. Time travel in LLMs: Tracing data contamination in large language models. In *Proceedings of the 12th International Conference on Learning Representations (ICLR)*.

Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, and 1 others. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.

Yuling Gu, Oyvind Tafjord, Bailey Kuehl, Dany Haddad, Jesse Dodge, and Hannaneh Hajishirzi. 2024. OLMES: A standard for language model evaluations. *arXiv preprint*.

Chuan Guo, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. 2017. On calibration of modern neural networks. In *Proceedings of the 34th International Conference on Machine Learning (ICML)*, pages 1321–1330.

Eliya Habba, Itay Itzhak, Asaf Yehudai, Yotam Perlitz, Elron Bandel, Michal Shmueli-Scheuer, Leshem Choshen, and Gabriel Stanovsky. 2026. Growing pains: Extensible and efficient LLM benchmarking via fixed parameter calibration. *arXiv preprint*.

Ronald K. Hambleton, Hariharan Swaminathan, and H. Jane Rogers. 1991. *Fundamentals of Item Response Theory*. Sage Publications, Newbury Park, CA.

Jongwook Han, Woojung Song, Jonggeun Lee, and Yohan Jo. 2026. Quantifying data contamination in psychometric evaluations of LLMs. In *Findings of the Association for Computational Linguistics: EACL 2026*, pages 6070–6088.

Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021. Measuring massive multitask language understanding. In *Proceedings of the 9th International Conference on Learning Representations (ICLR)*.

Archibald Vivian Hill. 1910. The possible effects of the aggregation of the molecules of haemoglobin on its dissociation curves. *Journal of Physiology*, 40:iv–vii.

Matthew D. Hoffman and Andrew Gelman. 2014. The No-U-Turn sampler: Adaptively setting path lengths in Hamiltonian Monte Carlo. *Journal of Machine Learning Research*, 15(47):1593–1623.

Paul W. Holland and Howard Wainer, editors. 1993. *Differential Item Functioning*. Lawrence Erlbaum Associates, Hillsdale, NJ.

Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. LoRA: Low-rank adaptation of large language models. In *Proceedings of the International Conference on Learning Representations (ICLR)*.

Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, Scott Johnston, Sheer El-Showk, Andy Jones, Nelson Elhage, Tristan Hume, Anna Chen, Yuntao Bai, Sam Bowman, Stanislav Fort, and 17 others. 2022. Language models (mostly) know what they know. *arXiv preprint*.

Muhammed Yusuf Kocyigit and Caglar Yildirim. 2026. The impact of post-training on data contamination. *arXiv preprint*.

John P. Lalor, Pedro Rodriguez, João Sedoc, and Jose Hernandez-Orallo. 2024. Item response theory for natural language processing. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics: Tutorial Abstracts (EACL)*.

Changmao Li and Jeffrey Flanigan. 2024. Task contamination: Language models may not be few-shot anymore. In *Proceedings of the 38th AAAI Conference on Artificial Intelligence*, volume 38, pages 18471–18480.

Frederic M. Lord. 1980. *Applications of Item Response Theory to Practical Testing Problems*. Lawrence Erlbaum Associates, Hillsdale, NJ.

Lennart Luettgau, Harry Coppock, Magda Dubois, Christopher Summerfield, and Cozmin Ududec. 2025. HiBayES: A hierarchical Bayesian modeling framework for AI evaluation statistics. *arXiv preprint*.

Inbal Magar and Roy Schwartz. 2022. Data contamination: From memorization to exploitation. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 157–165, Dublin, Ireland. Association for Computational Linguistics.

Yonatan Oren, Nicole Meister, Niladri Chatterji, Faisal Ladhak, and Tatsunori Hashimoto. 2024. Proving test set contamination in black box language models. In *Proceedings of the 12th International Conference on Learning Representations (ICLR)*.

Felipe Maia Polo, Lucas Weber, Leshem Choshen, Yuekai Sun, Gongjun Xu, and Mikhail Yurochkin. 2024. tinyBenchmarks: Evaluating LLMs with fewer examples. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*.

Christian Ritz, Florent Baty, Jens C. Streibig, and Daniel Gerhard. 2015. Dose-response analysis using R. *PLoS ONE*, 10(12):e0146021.

Pedro Rodriguez, Joe Barrow, Alexander Miserlis Hoyle, John P. Lalor, Robin Jia, and Jordan Boyd-Graber. 2021. Evaluation examples are not equally informative: How should that change NLP leaderboards? In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 4486–4503.

Oscar Sainz, Jon Ander Campos, Iker García-Ferrero, Julen Etxaniz, Oier Lopez de Lacalle, and Eneko Agirre. 2024. NLP evaluation in trouble: On the need to measure LLM data contamination for each benchmark. In *Findings of the Association for Computational Linguistics: EMNLP 2024*.

Rylan Schaeffer, Joshua Kazdan, Baber Abbasi, Ken Ziyu Liu, Brando Miranda, Ahmed Ahmed, Fazl Berez, Abhay Puri, Stella Biderman, Niloofar Mireshghallah, and Sanmi Koyejo. 2026. Quantifying the effect of test set contamination on generative evaluations. *arXiv preprint*.

Ulrich Schroeders and Timo Gnambs. 2025. Sample-size planning in item-response theory: A tutorial. *Advances in Methods and Practices in Psychological Science*.

Weijia Shi, Anirudh Ajith, Mengzhou Xia, Yangsibo Huang, Daogao Liu, Terra Blevins, Danqi Chen, and Luke Zettlemoyer. 2024. Detecting pretraining data from large language models. In *Proceedings of the 12th International Conference on Learning Representations (ICLR)*.

Aaditya K. Singh, Muhammed Yusuf Kocyigit, Andrew Poulton, David Esiobu, Maria Lomeli, Gergely Szilvasy, and Dieuwke Hupkes. 2024. Evaluation data contamination in LLMs: How do we measure it and (when) does it matter? *arXiv preprint*.

Sandip Sinharay. 2017. Detection of item preknowledge using likelihood ratio test and score test. *Journal of Educational and Behavioral Statistics*, 42(1).

Yifan Sun, Han Wang, Dongbai Li, Gang Wang, and Huan Zhang. 2025. The emperor's new clothes in benchmarking? A rigorous examination of mitigation strategies for LLM benchmark data contamination. In *Proceedings of the 42nd International Conference on Machine Learning (ICML)*. ArXiv:2503.16402.

Hariharan Swaminathan and H. Jane Rogers. 1990. Detecting differential item functioning using logistic regression procedures. *Journal of Educational Measurement*, 27(4):361–370.

Yongding Tao, Tian Wang, Yihong Dong, Huanyu Liu, Kechi Zhang, Xiaolong Hu, and Ge Li. 2025. Detecting data contamination from reinforcement learning post-training for large language models. *arXiv preprint*.

Team OLMo, Pete Walsh, Luca Soldaini, Dirk Groeneveld, Kyle Lo, and 1 others. 2025. 2 OLMo 2 furious. *arXiv preprint arXiv:2501.00656*.

Technology Innovation Institute. 2024. The Falcon 3 family of open models. HuggingFace Blog.

Colin White, Samuel Dooley, Manley Roberts, Arka Pal, Benjamin Feuer, Siddhartha Jain, Ravid Shwartz-Ziv, Neel Joshi, and Micah Goldblum. 2025. LiveBench: A challenging, contamination-limited LLM benchmark. In *Proceedings of the 13th International Conference on Learning Representations (ICLR)*.

Cheng Xu, Nan Yan, Shuhao Guan, Changhong Jin, Yuke Mei, Yibing Guo, and Tahar Kechadi. 2025. DCR: Quantifying data contamination in LLMs evaluation. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 23002–23020.

Ruijie Xu, Zengzhi Wang, Run-Ze Fan, and Pengfei Liu. 2024. Benchmarking benchmark leakage in large language models. *arXiv preprint*.

An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Junyang Lin, and Jingren Zhou. 2024. Qwen2.5 technical report. *arXiv preprint*.

Shuo Yang, Wei Wei, Ganqu Liu, Zhengxuan Liu, and Bowen Yu. 2023. Rethinking benchmark and contamination for language models with rephrased samples. *arXiv preprint*.

Hugh Zhang, Jeff Da, Dean Lee, Vaughn Robinson, Catherine Wu, Will Song, Tiffany Zhao, Pranav Raja, Dylan Slack, Qin Lyu, Sean Hendryx, Russell Kaplan, Michele Lunati, and Summer Yue. 2024. A careful examination of large language model performance on grade school arithmetic. *arXiv preprint*.

Jingyang Zhang, Jingwei Sun, Eric Yeats, Yang Ouyang, Martin Kuo, Jianyi Zhang, Hao Yang, and Hai Li. 2025. Min-K%++: Improved baseline for detecting pre-training data from large language models. In *Proceedings of the 13th International Conference on Learning Representations (ICLR)*.

Hongli Zhou, Hui Huang, Ziqing Zhao, Lvyuan Han, Huicheng Wang, Kehai Chen, Muyun Yang, Wei Bao, Jian Dong, Bing Xu, Conghui Zhu, Hailong Cao, and Tiejun Zhao. 2026. Lost in benchmarks? rethinking large language model benchmarking with item response theory. In *Proceedings of the 40th AAAI Conference on Artificial Intelligence*.

A ARC-Challenge Cross-Benchmark Analysis

ARC-Challenge (25-shot, 1,172 items) patterns under s42 are directionally consistent with MMLU for five of six models: OLMo-2 benefits (+3.9pp), Falcon3 benefits (+4.0pp), Qwen-7B (−2.9pp) and Qwen-14B (−3.4pp) are harmed, Phi-4 remains immune (+0.6pp). Gemma-2 achieves $n = 3$ on ARC: s42 exhibits a 16pp oscillation artifact (endpoint −1.20pp), s0 shows harm (−1.97pp),

and s123 shows benefit (+2.73pp). The $n = 3$ ARC mean is −0.15pp (SD=2.41pp; BCa 95% CI [−1.97, +1.42]), with cross-seed direction inconsistent (−/−/+). This contrasts with MMLU, where all three seeds show benefit (mean +2.38pp, CI [+1.49, +3.14] excludes zero), making Gemma-2 the clearest example of benchmark-conditional contamination effects. Bootstrap stability is substantially lower than MMLU (OLMo-2: 53.3%, Gemma-2: 62.7%) due to the smaller item pool (1,172 vs. 14,042).

Cross-seed ARC consistency. Phi-4 is the strongest anchor with $n = 3$ on both benchmarks: ARC mean Δ = +0.66pp (SD=0.18pp; s0 +0.51, s42 +0.60, s123 +0.86; BCa 95% CI [+0.51, +0.77]), MMLU mean Δ = +0.73pp, with cross-benchmark agreement within 0.07pp. While statistically detectable on ARC (CI excludes zero, unlike MMLU CI [−0.17, +1.39]), the effect (+0.66pp) is too small to meaningfully inflate benchmark scores, consistent with the Immune classification. Qwen-7B achieves $n = 3$ on ARC: mean Δ = −2.42pp (SD=0.51pp; s0 −1.88, s42 −2.90, s123 −2.47; BCa 95% CI [−2.90, −2.08]), confirming persistent harm. The d005 V-dip severity is seed-dependent (−1.8pp vs. −4.7pp). Qwen-14B achieves $n = 3$ on both benchmarks: MMLU mean Δ = −15.7pp (BCa CI [−24.99, −10.49]; s0 most extreme at −25.0pp due to position bias amplification); ARC mean Δ = −5.03pp (BCa CI [−9.38, −2.76]). Both CIs exclude zero, confirming Collapse. OLMo-2 achieves $n = 3$ on ARC: mean Δ = +3.44pp (SD=0.52pp; s0 +3.50, s42 +3.92, s123 +2.90). Despite being the most seed-sensitive family on MMLU (SD=1.9pp), OLMo-2 is remarkably stable on ARC (SD=0.52pp); seed sensitivity is itself benchmark-dependent, likely modulated by item count and difficulty distribution. Using multi-seed MMLU means (+1.4pp), direction is consistently positive on both benchmarks, illustrating why cross-benchmark comparisons require multi-seed aggregation (§5.3). ARC dose-response trajectories (s123): Qwen-14B 90.4→91.5→89.8→88.7→87.3 (d005 transient spike then monotonic decline, consistent with MMLU s123 shape); Qwen-7B 87.1→82.4→85.2→85.1→84.7 (d005 sharp drop then partial recovery); OLMo-2 76.9→77.2→76.6→79.2→79.8 (monotonic rise).

Cross-seed direction on ARC is consistent for 4/5 families: Phi-4 and OLMo-2 positive across three seeds each, Qwen-7B and Qwen-14B negative across three seeds each. Gemma-2 is the exception (−/−/+ across seeds; mean −0.15pp). This contrasts with MMLU, where only 2/5 families achieve strict sign consistency (§5.3). ARC yields tighter confidence intervals and higher cross-seed consistency than MMLU, likely because its smaller item pool (1,172 vs. 14,042) amplifies the contamination signal, suggesting that benchmark size modulates not only effect magnitude but also statistical detectability.

Cross-benchmark direction (MMLU vs. ARC) is consistent for 4/6 families (§5.2): Qwen-14B (Harm), Phi-4 (Immune), OLMo-2 (Benefit), and Falcon3 (Benefit). Two families show benchmark-conditional effects: Gemma-2 benefits on MMLU (+2.38pp, CI excludes zero) but shows no significant ARC effect (−0.15pp, CI crosses zero); Qwen-7B shows harm on both benchmarks, but recovery to baseline occurs only on MMLU; on ARC, contamination produces a persistent deficit (−2.4pp mean across three seeds). Effect magnitudes remain benchmark-specific: Qwen-14B suffers −5.0pp on ARC compared to −15.7pp on MMLU (3.1× attenuation), implying that while direction transfers, magnitude does not. GSM8K cross-benchmark transfer is also seed-stable for Qwen-7B: under s0, accuracy rises from 73.3% to 81.2% (+7.9pp, monotonic), consistent with the directional reversal (mean +9.4pp across seeds; Table 4).

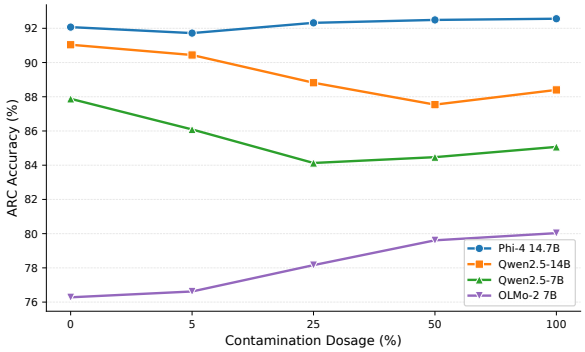


Figure 7: ARC-Challenge accuracy vs. contamination dosage (25-shot). Patterns are directionally consistent with MMLU (Figure 1) for 4/5 models. Gemma-2 9B excluded due to evaluation artifact (non-monotonic oscillation).

B GSM8K Dose-Response Transfer

Table 5 reports GSM8K accuracy across contamination dosages for all six families (single seed, s0). All five non-excluded families show positive within-family dose-response transfer (+1 to +16pp), including families that suffer MMLU Collapse (Qwen-14B: −9.4pp MMLU, +7.4pp GSM8K) or are MMLU-Immune (LLaMA-3.1: −0.7pp MMLU, +16.4pp GSM8K, the strongest transfer effect). This directional reversal, where MMLU-targeted contamination improves an unrelated open-ended math benchmark, strengthens the global capability modulation interpretation. Within-family dose-response patterns (direction and relative magnitude of Δ) are the primary finding, as all dosage levels for each family use identical evaluation settings.

Table 5: GSM8K accuracy (%) across MMLU contamination dosages (seed=0). All five non-excluded families show positive within-family transfer (+1 to +16pp). Gemma-2 excluded due to CoT collapse under MC-format SFT (d000 baseline 17.8%).

Family	d000	d005	d025	d050	d100	Δ
Phi-4 14.7B	84.46	—	—	—	85.60	+1.14
Qwen2.5-14B	74.98	71.19	79.30	81.05	82.41	+7.43
Qwen2.5-7B	73.31	78.32	78.24	79.38	81.20	+7.89
OLMo-2 7B	60.58	—	—	—	69.75	+9.17‡
LLaMA-3.1 8B	38.74	—	52.16	—	55.12	+16.38
Gemma-2 9B	17.82†	—	—	—	—	—

†CoT collapse under MC-format SFT; excluded from analysis.
‡Seed-sensitive: s0 +9.17pp vs. s42 +2.1pp (Table 4).

GSM8K evaluations use `max_new_tokens=256`, which may truncate chain-of-thought reasoning for some models. Absolute accuracy is therefore a lower bound; cross-family comparisons of absolute values should be interpreted with caution. Within-family dose-response patterns (direction and relative magnitude of Δ) are the primary finding, as all dosage levels for each family use identical evaluation settings.

C Signal Reliability Across Scales

D RRF Signal Ablation

Signal orthogonality. Table 6 reports pairwise Spearman rank correlations between detection signals at the item level, averaged across 31 models. All pairwise $|\rho| < 0.06$, confirming that S1, S2, and S4 capture orthogonal aspects of contamination exposure.

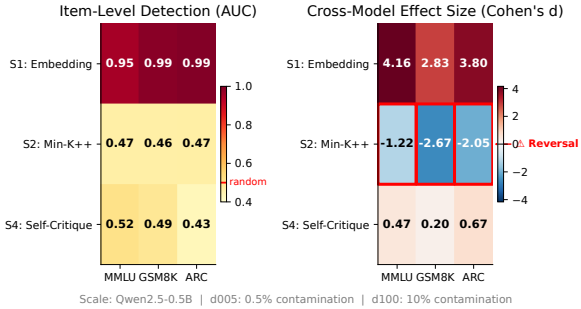


Figure 8: Detection signal AUC across scale, dosage, and signal type. S1 achieves AUC > 0.95 at all scales; S2 (Min-K%++) reverses at 0.5B; S4 is near-random below 1.5B.

Table 6: Pairwise Spearman ρ between detection signals (item-level, averaged across 31 models). All $|\rho| < 0.06$.

Signal Pair	MMLU	ARC	GSM8K
S1–S2	−0.044	−0.019	−0.022
S1–S4	+0.038	+0.009	+0.053
S2–S4	−0.001	+0.012	+0.007

Leave-one-out ablation. Table 7 reports the effect of removing each signal from the RRF ensemble. ρ_{dose} is the model-level Spearman correlation between mean exposure score and true dosage; ΔMAE is the change in model-level exposure–dosage MAE vs. the full configuration; item ρ is the rank correlation of item-level exposure scores vs. the full configuration.

Table 7: Leave-one-signal-out RRF ablation (31 models, $\kappa = 60$).

Configuration	ρ_{dose}	ΔMAE	Item ρ
MMLU			
Full (S1+S2+S4)	0.049	—	—
Drop S1	0.045	+0.066	0.782
Drop S2	**0.471**	+0.045	0.773
Drop S4	0.084	+0.079	0.786
ARC-Challenge			
Full (S1+S2+S4)	−0.003	—	—
Drop S1	−0.006	−0.054	0.784
Drop S2	0.029	−0.079	0.786
Drop S4	0.001	−0.004	0.784

Dropping S2 (Min-K%++) causes ρ_{dose} to jump from 0.049 to 0.471 on MMLU, revealing that S2 actively suppresses model-level dosage discrimination. This is consistent with the directional reversal at small scales (§5.6): S2 assigns higher scores to clean items in some models, counteracting S1 and S4. Despite this model-level harm, S2 provides unique item-level information (item $\rho = 0.773$, i.e., ∼23% of item rankings change upon removal). Signal importance by ΔMAE ranks S4 > S1 > S2

on MMLU; this ordering holds across benchmarks. The near-zero ρ_{dose} (0.049 on MMLU, -0.003 on ARC) confirms that RRF exposure is an item-level tool: it identifies which items within a model are most likely contaminated, but cannot distinguish dosage levels across models.

Signal contribution to γ estimation. Leave-one-out ablation on γ recovery (Qwen2.5, $J = 16$) confirms S4 (self-critique) as the dominant contributor: removing S4 incurs $4.9\times$ the γ estimation loss of removing S2 (Min-K%++). No signal is pure noise: the worst single-signal $\rho(E, \tau)$ is 0.072–0.118 (S2), still $5.5\times$ the random baseline. Marginal returns from three to two signals are negligible (dropping S2 leaves ρ effectively unchanged), suggesting the current three-signal ensemble is near-optimal for the Qwen2.5 family.

Full pipeline S2-removal test. To directly address whether S2 (Min-K%++) harms downstream calibration, we refit the full IRT pipeline excluding S2 from the RRF fusion. The MAE and τ reported here are computed under the same definition as the leave-one-out ablation above (model-level dosage-calibrated metrics), not the ground-truth clean accuracy used in Table 2. Removing S2 produces no detectable difference in calibration ($\Delta\text{MAE} < 0.001$) or model fit ($\Delta\text{PPP} = 0.01$) on this test population. However, the Qwen2.5 1.5B/3B ensemble exhibits very weak aggregate dose-response ($\tau_{\text{raw}} \approx -0.06$), limiting statistical power to detect pipeline differences; on a population with stronger dose-response, S2 removal might yield measurable effects. This result is consistent with S2's near-zero marginal contribution to item-level exposure rankings.

E Single-Signal Pipeline Comparison

To evaluate whether multi-signal fusion is necessary for downstream IRT estimation, we compare the full RRF pipeline against an end-to-end single-signal alternative using Min-K%++ (S2-only). Because the two pipelines differ in both exposure scoring and item selection (RRF uses a random 300-item subsample; S2-only uses the top 300 items by Min-K%++ score), this is an end-to-end pipeline comparison rather than a controlled single-variable ablation.

The S2-only pipeline exhibits severe model misfit on MMLU (PPP=0.0003 vs. 0.193), with γ inflated $2.5\times$ (1.754 vs. 0.698). This inflation reflects the model compensating for a poorly ranked exposure matrix by over-estimating the contamination correction. On ARC, the S2-only pipeline fails to converge cleanly ($\hat{R} = 1.014$) and produces an even larger γ inflation ($3.5\times$). On GSM8K, where no MMLU contamination signal is expected, both pipelines converge to near-zero γ (0.064 vs. -0.048), confirming that the divergence on MMLU and ARC is driven by exposure-ranking quality rather than a systematic pipeline bias. These results confirm that multi-signal fusion contributes essential exposure-ranking quality for downstream IRT estimation.

Table 8: End-to-end pipeline comparison: RRF (multi-signal, random 300 items) vs. S2-only (Min-K%++, top-300). Qwen2.5, $J = 16$.

Benchmark	Pipeline	γ	PPP	τ	MAE	ESS
MMLU	RRF	0.698	0.193	0.73	0.007	1708
	S2-only	1.754	0.0003	0.63	0.076	261
ARC	RRF	0.727	0.003	—	—	—
	S2-only	2.572	0.0000	—	—	—
GSM8K	RRF	0.064	—	—	—	—
	S2-only	-0.048	—	—	—	—

ARC S2-only: $\hat{R} = 1.014$ (marginal convergence).

Domain-level S2-only comparison. Domain-level fits further expose the S2-only pipeline's systematic failure. Table 9 compares domain-specific γ_d estimates between the RRF and S2-only pipelines on MMLU (Qwen2.5, $J = 16$). All five converged S2-only domains produce large negative γ_d (-5.9 to -7.2) with PPP=1.000, indicating complete model misfit. STEM domains, which show *positive* γ_d under RRF, are reversed to strongly negative under S2-only, a directional inversion driven by Min-K%++ ranking errors rather than genuine contamination signals. Social Sciences, the only domain with negative RRF γ_d (-0.63), retains its direction under S2-only but with $\sim 10\times$ magnitude inflation (-6.30). Humanities failed to converge ($\hat{R} = 1.537$) and is excluded.

F Identifiability Simulation

Fisher information $\mathcal{I}(\gamma) \propto \text{Var}(e_{\cdot i})$ collapses when signal AUC is low. At AUC=0.55, bias < 0.05 and 95% CI coverage $\geq 90\%$ require $J \geq 50$; at AUC$\geq$0.90 (as S1 achieves in practice), $J = 16$ suffices. CI width scales as $J^{-0.48}$, above current practice ($J = 8$–30; Habba et al., 2026; Lalor et al., 2024; Schroeders and Gnambs, 2025).

Table 9: Domain-level γ_d: RRF vs. S2-only pipeline (MMLU, Qwen2.5, $J = 16$). S2-only produces uniformly negative, inflated estimates with PPP=1.000 across all domains.

Domain	RRF γ_d	S2-only γ_d	PPP	Direction
STEM (Math)	>0	−6.32	1.000	Reversed
STEM (Science)	>0	−7.17	1.000	Reversed
STEM (CS/Eng)	>0	−5.92	1.000	Reversed
Medical	>0	−7.06	1.000	Reversed
Social Sciences	−0.63	−6.30	1.000	Same (10×)

Humanities excluded ($\hat{R} = 1.537$, non-convergence).

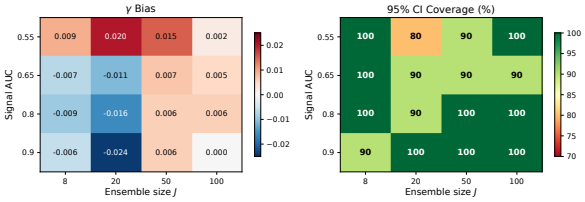


Figure 9: γ recovery as a function of signal AUC and ensemble size J. Bias < 0.05 and 95% CI coverage $\geq 90\%$ require $J \geq 50$ at AUC=0.55, but only $J \geq 16$ at AUC$\geq$0.90.

G DIF Parameterization Comparison

We compare our primary non-uniform parameterization (γ outside the discrimination bracket, Eq. 2) against the uniform DIF alternative (γ inside the bracket: $P = \sigma(a_i(\theta_j - b_i + \gamma \cdot e_{ij}))$), where contamination scales with item discrimination.

Table 10: DIF parameterization comparison (MMLU, J=16, 300 items).

	γ (mean ± SD)	PPP	LOO ELPD	ESS
Non-uniform (current)	0.245 ± 0.197	0.763	−2124.3	1468
Uniform (inside a_i)	-0.458 ± 0.453	0.743	−2123.4	981

This comparison uses a stratified subsample for computational efficiency; absolute γ values differ from the main analysis (which uses a random subsample) but the relative comparison between parameterizations remains valid. Both parameterizations yield comparable model fit (ΔELPD=0.9, $d_{SE} = 1.4$; difference < 1 standard error). We adopt the non-uniform form for its tighter posterior estimates (SD 0.197 vs. 0.453), higher effective sample size (1468 vs. 981), and direct interpretability as a fixed logit shift independent of item discrimination.

H 4PL Extension

For MC-format benchmarks where guessing and ceiling effects are non-negligible, we extend to:

$$P(y_{ijk} = 1) = c_i + (d_i - c_i)\,\sigma\big(a_i(\theta_j - b_i) + \gamma_k \cdot e_{ij}\big), \quad (4)$$

with $c_i \sim \text{Beta}(5, 20)$ and $d_i \sim \text{Beta}(20, 5)$. This requires $J \geq 16$ to avoid overparameterization; at $J = 5$, 4PL+γ yields PPP=0.000 and MAE degradation from 0.004 to 0.068. Our domain-level analyses use 2PL+γ at $J = 13$; pooled calibration uses $J = 16$.

I S4 Self-Critique Signal Details

S4 prompts the model with "Is the following answer correct?" followed by the question and candidate answer. We extract YES/NO logits to compute $P(\text{YES})$, then score each item as the negative entropy of this distribution: $\text{S4}_i = -[-p \log p - (1 - p) \log(1 - p)]$ where $p = P(\text{YES})$. Scores near zero indicate high confidence (potentially contaminated); large negative values indicate uncertainty.

J Training Convergence

All SFT configurations converged. Final training loss increases monotonically with dosage (d000: 1.08, d005: 1.08, d025: 1.14, d100: 1.17 averaged across seeds), consistent with distribution shift from benchmark item injection.

K Model Exclusion Details

Of the 16 models remaining after 0.5B exclusion, three 3B checkpoints were removed: two had mismatched naming conventions between evaluation and signal extraction stages, and one lacked evaluation results under the unified hyperparameter setting ($\alpha = 32$). Additionally, 3B d000 (clean control) checkpoints were excluded because the standardized protocol (LoRA $\alpha = 32$, lr$= 5 \times 10^{-5}$) was applied only to dosages d005–d100 at the 3B scale; earlier d000 checkpoints used inconsistent hyperparameters across retraining iterations.

Model sets across analyses. Table 11 summarizes model compositions. Model sets vary because domain-level runs preceded the 3B retraining (§4.1). Core findings (γ non-significance, raw accuracy dominance) replicate across $J = 13$ and $J = 16$ configurations.

Table 11: Model set composition across analyses.

Analysis	J	Model Set	Section
Pooled baselines	16	8×Qwen-1.5B + 8×Qwen-3B	§5.5
Domain γ	13	8×Qwen-1.5B + 5×Qwen-3B	§5.7
Cross-family	16–28	varies by benchmark	§5.1
Oracle ablation	13	domain whitelist	§5.5

L Prior Sensitivity Analysis

To assess the influence of the γ prior, we refit the pooled MMLU model ($J = 16$, 300 randomly subsampled items) under three specifications: $\gamma \sim \mathcal{N}(0, 0.5)$, $\mathcal{N}(0, 1)$ (default), and $\mathcal{N}(0, 2)$. The posterior mean shifts from 0.34 to 0.89 across priors, while the 95% CI includes zero in all cases (lower bound stable at ≈ -0.4; upper bound ranges from 1.11 to 2.20). All fits converge ($\hat{R} < 1.01$, ESS > 3800, PPP $\in [0.16, 0.25]$). The prior sensitivity confirms that $J = 16$ provides insufficient data to override the prior, which reinforces the exploratory status of γ-based conclusions at current ensemble sizes.

For the Social Sciences domain (corrected $J = 16$ pool, 2000 items), the directional signal is robust to prior choice:

Table 12: Social Sciences γ prior sensitivity (corrected J=16 pool).

Prior	$\hat{\gamma}$	$P(\gamma<0)$
$\mathcal{N}(0, 0.5)$	-0.541	99.35%
$\mathcal{N}(0, 1)$	-0.627	99.7%
$\mathcal{N}(0, 2)$	-0.654	99.85%

Social Sciences row updated with corrected $J = 16$ model pool; other domains retain the original prior sensitivity pool.

In contrast to the pooled analysis where $\hat{\gamma}$ shifts 2.6× across priors, Social Sciences $\hat{\gamma}$ varies only 1.2× (-0.54 to -0.65), with $P(\gamma < 0) \geq 99.35\%$ in all cases. The directional signal is robust to prior choice, though the tight prior falls marginally below the Bonferroni threshold (99.375% for eight domains).

M IRT Ability Separation by Scale

Table 13 reports the mean posterior θ estimates for 1.5B and 3B model groups across all MMLU domains and the pooled analysis. The ability gap $\Delta\theta = \bar{\theta}_{3B} - \bar{\theta}_{1.5B}$ is positive and significant (95% CI excludes zero) for all nine comparisons, which confirms that the IRT model recovers the expected scale-ability ordering.

Table 13: IRT ability estimates by model scale ($J = 13$ Qwen2.5). $\Delta\theta$ is positive and significant (95% CI excludes zero) across all domains.

Domain	$\bar{\theta}_{1.5B}$	$\bar{\theta}_{3B}$	$\Delta\theta$ [95% CI]
Math	-0.532	0.119	0.651 [0.570, 0.731]
Science	0.321	0.780	0.459 [0.370, 0.546]
CS/Eng	0.372	0.542	0.169 [0.030, 0.304]
Medical	0.521	1.053	0.531 [0.452, 0.609]
Humanities	0.228	0.496	0.268 [0.202, 0.337]
Social Sci	0.940	1.540	0.599 [0.523, 0.675]
Business/Law	0.083	0.417	0.334 [0.261, 0.410]
Other	0.817	1.565	0.748 [0.647, 0.846]
Pooled	0.311	0.811	0.500 [0.431, 0.568]

N Cross-Seed Stability Details

OLMo-2 s42 rerun (d025/d100) exhibits ±1.6 pp point-estimate variability attributable to non-deterministic CUDA operations; this falls within the cross-seed range (3.76 pp) and does not affect pattern classification.

O DiD Visualization

Table 14: Treated vs. untreated item accuracy changes at d025 MMLU (3,540 / 10,502). All DiD non-significant. $^{**}p < .01$; $^{***}p < .001$; ns: $p > .05$.

Model	Treated Δ	Untreated Δ	DiD	Verdict
Gemma-2 9B	$+3.1^{**}$	$+2.6^{***}$	+0.5 (ns)	generalization
OLMo-2 7B	+1.6 (ns)	$+2.7^{***}$	−1.1 (ns)	mixed
Phi-4 14.7B	+0.3 (ns)	+0.6 (ns)	−0.3 (ns)	no-effect
Qwen-14B	-6.9^{***}	-7.6^{***}	+0.7 (ns)	anti-contam.
Qwen-7B	-3.8^{**}	-2.9^{***}	−0.8 (ns)	anti-contam.

P DiD Across Dosage Levels

Q Post-hoc Power Analysis (MDES)

Table 15 and Table 16 report the minimum detectable effect size (MDES) for the treated vs. untreated DiD comparison at d025 (80% power, $\alpha = 0.05$, two-sided). MDES is computed as the effect size detectable given each model's observed variance, the treated/untreated split sizes, and a two-sample t-test power calculation. At d100, all benchmark items are treated ($n_{\text{untreated}} = 0$), precluding DiD analysis; d025 is reported as the primary dosage level.

On MMLU, all observed DiD values are well below their respective MDES, confirming that the null results are consistent with absence of item-specific effects >2pp. On ARC, the smaller treated sample ($n = 257$) yields substantially higher MDES; in particular, Qwen-7B's MDES of 5.57pp means that even moderate item-specific effects cannot be

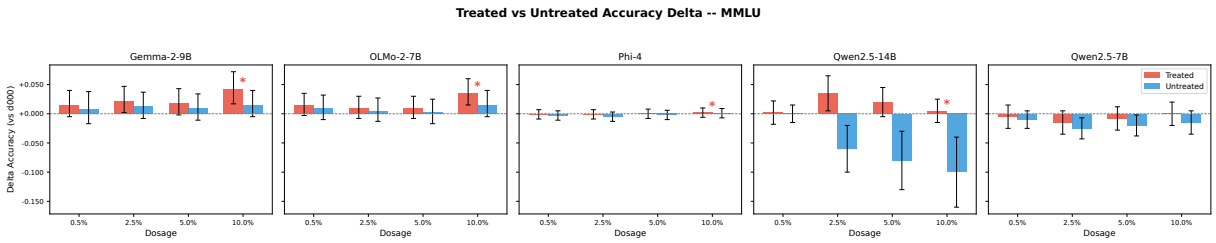


Figure 10: DiD for treated vs. untreated items across all families at d025 MMLU. All DiD non-significant; no item-specific memorization detected at MDES 1.25–2.05pp.

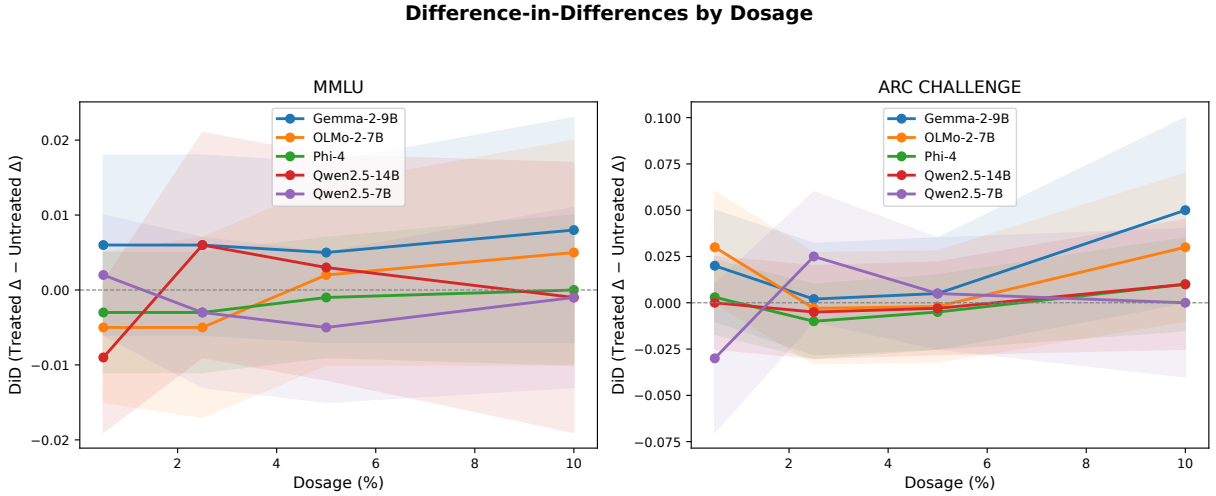


Figure 11: Difference-in-differences (treated vs. untreated items) across contamination dosage levels. DiD remains non-significant at all dosages for all model families, confirming that the global capability modulation mechanism (§5.4) is consistent across the full dosage range.

Table 15: Post-hoc MDES for MMLU DiD ($n_{\text{treated}} = 3{,}540$, $n_{\text{untreated}} = 10{,}502$).

Model	DiD (pp)	MDES (pp)
Phi-4 14.7B	−0.27	1.25
OLMo-2 7B	−1.07	1.59
Gemma-2 9B	+0.55	1.74
Qwen2.5-7B	−0.84	2.02
Qwen2.5-14B	+0.69	2.05

Table 16: Post-hoc MDES for ARC-Challenge DiD ($n_{\text{treated}} = 257$, $n_{\text{untreated}} = 915$).

Model	DiD (pp)	MDES (pp)
Phi-4 14.7B	−0.83	2.28
Qwen2.5-14B	−0.26	3.47
OLMo-2 7B	−1.13	4.19
Gemma-2 9B	−0.25	4.66
Qwen2.5-7B	+2.43	5.57

excluded for this model on ARC. ARC DiD results should therefore be interpreted as inconclusive rather than as evidence against memorization.

R Volume Control Analysis

To disentangle data quantity from contamination content, we train Falcon3-7B on 66,533 non-benchmark MCQ items drawn from MMLU auxiliary training subjects, filtered to exclude test-set overlap (MD5 deduplication). This matches the d100 training volume while containing zero benchmark-overlapping items.

Table 17: Volume control decomposition (Falcon3-7B, seed=42). Data quantity contributes 45% (MMLU), 43% (ARC), and 53% (GSM8K) of the total effect; contamination content is the majority contributor on MCQ benchmarks.†

Condition	MMLU	ARC	GSM8K	vs. d000
d000 (clean baseline)	58.77%	81.57%	74.53%	—
Volume control	60.67%	83.28%	75.21%	+1.90 / +1.71 / +0.68pp
d100 (contaminated)	62.96%	85.58%	75.82%	+4.19 / +4.01 / +1.29pp

†GSM8K total effect (+1.29pp) is too small for reliable quantity/content decomposition.

The cross-benchmark consistency of the decomposition (MMLU 45% vs. ARC 43%) strengthens confidence in the estimate. Applying Falcon3's volume baseline to other patterns: Qwen-14B's Collapse (−9.4pp) against a +1.90pp volume baseline

implies contamination-specific harm of approximately -11.3pp; Phi-4's Immune response (<1pp) in the presence of volume-driven gains further confirms that contamination vulnerability is family-specific rather than a generic data quantity effect.

S Dose-Response Profile Classification Algorithm

Algorithm 1 Dose-Response Profile Classification

Require: Accuracy vector $\mathbf{a} = (a_0, a_5, a_{25}, a_{50}, a_{100})$ at dosages $d \in \{0, 5, 25, 50, 100\}\%$
Require: Noise threshold $\tau = 2$ pp, severity threshold $\sigma = 5$ pp
Ensure: Pattern $p \in \{$IMMUNE, COLLAPSE, V-RECOVERY, BENEFIT$\}$

$\Delta \leftarrow a_{100} - a_0$ ▷ end-to-end accuracy shift
$m^* \leftarrow \min(a_5,\ a_{25},\ a_{50})$ ▷ mid-dosage minimum
$v^* \leftarrow \max_{i \in \{5,25,50\}} |a_i - a_0|$ ▷ max mid-trajectory deviation
if $|\Delta| \leq \tau$ **then**
  if $v^* \leq \tau$ **then**
    return IMMUNE ▷ fluctuation within noise band
  else if $m^* < a_0$ **and** $m^* < a_{100}$ **then**
    return V-RECOVERY ▷ V-dip with full endpoint recovery
  else
    return IMMUNE ▷ non-V volatility, endpoint stable
  end if
else if $\Delta < -\tau$ **then**
  if $\Delta \leq -\sigma$ **then**
    return COLLAPSE ▷ severe monotonic degradation
  else if $m^* < a_0$ **and** $m^* < a_{100}$ **then**
    return V-RECOVERY ▷ mid-dosage trough with partial recovery
  else
    return COLLAPSE ▷ moderate decline, no V-shape
  end if
else ▷ $\Delta > \tau$
  return BENEFIT ▷ net positive shift
end if

T Dose-Response Details

The dose-response patterns reported in §5.1 are measured at the 7B–14.7B scale. Within the Qwen2.5 family at $\leq$3B, effects are considerably smaller: at 1.5B and 3B, MMLU accuracy increases with contamination dosage by $\sim$0.6–0.7pp, with diminishing returns above d025. At 0.5B, however, aggregate MMLU accuracy *decreases* with dosage (0.41 at d000 $\rightarrow$ 0.27 at d100), consistent with the position bias confound documented in §4.1: SFT injection at this scale disrupts the model's general capability, and the resulting A-option bias (up to 98%) overwhelms any memorization benefit.

U Sensitivity of Profile Classification

We assess the robustness of Algorithm 1 to threshold selection via a grid sweep over 134 (τ, σ) combinations. Table 18 reports family-level stability across both a reasonable parameter range ($\tau \in [0.5, 2.0]$ pp $\times$ $\sigma \in [3.0, 7.0]$ pp; 30 combinations) and the full 134-combination sweep, along with the nearest parameter value at which the classification transitions.

Table 18: Profile classification stability across threshold parameter ranges. All families achieve 100% stability within the reasonable range; transitions occur only at extreme parameter values ($\geq 3\times$ default).

Family	Pattern	Reasonable	Full	Nearest transition
Qwen2.5-14B	Collapse	100%	100%	$\tau = 9.4$
Gemma-2 9B	Benefit	100%	89%	$\tau = 3.8$
Phi-4 14.7B	Immune	100%	82%	$\tau < 0.35$
OLMo-2 7B	Benefit	100%	82%	$\tau = 3.25$
Qwen2.5-7B	V-recovery	100%	72%	$\tau = 3.0$

Within the reasonable parameter range, all five families achieve 100% classification stability (150/150 family–parameter combinations). Transitions occur only at extreme τ values well beyond the default ($\tau = 2$): Qwen-14B requires $\tau = 9.4$ ($4.7\times$ default) to reclassify, reflecting the large separation between its Δacc (-9.4pp) and any plausible noise threshold. Qwen-7B is the least robust at $\tau = 3.0$ ($1.5\times$ default), but this is still above any defensible noise threshold for MMLU. The high intrinsic effect-size separation (Phi-4 fluctuates $<$0.4pp while Qwen-14B declines by 9.4pp) means that classification stability is driven by the data rather than by parameter choice. At $\tau = 1$ pp (the lower bound of the reasonable range), all five original families and the held-out LLaMA-3.1 ($|\Delta| = 0.69$ pp) retain their classifications.

V Cross-Family Domain Decomposition

We decompose MMLU accuracy changes into four constituent domains (STEM, Humanities, Social Sciences, Other) across all model families at each contamination dosage.

Two patterns emerge. First, the direction of accuracy change is governed by the dose-response pattern, not by domain. At d100, Collapse (Qwen-14B) produces negative Δacc in all four domains (STEM -6.8pp, Humanities -10.1pp, Social Sciences -11.2pp, Other -9.4pp), while Benefit (Gemma-2) produces positive Δacc throughout ($+2.7$, $+3.9$, $+5.0$, $+3.4$pp). Immune (Phi-4) remains within ± 1.0pp across all domains. No pat-

tern produces a crossover exceeding the noise band ($|\Delta| > 1$pp); the single exception is V-recovery Humanities (+0.28pp, well within sampling noise). This consistency holds at intermediate dosages as well.

Second, domains differ in sensitivity. STEM is the most resilient (mean $|\Delta\text{acc}| = 2.8$pp across all families at d100). Social Sciences is the most sensitive at 5.1pp, 1.8× the STEM magnitude. The ordering is stable across patterns: in Collapse, STEM shows the smallest decline; in Benefit, STEM shows the smallest gain.

These results reinforce the global capability modulation interpretation (§5.4): contamination direction is determined by the model's dose-response pattern rather than domain-specific memorization. The differential domain sensitivity more likely reflects variation in item difficulty distributions than differential memorization rates.

W Baseline Ability vs. Contamination Effect

Figure 12 plots each model's clean baseline accuracy (d000) against its maximum accuracy change under contamination. A separation threshold emerges between 61.9% (Gemma-2, the strongest Benefit case) and 66.1% (Qwen-7B, the weakest Harm case): all models below this band benefit from contamination (+3.2 to +4.2pp), while models above it are harmed or immune. Phi-4 (76.4%) and LLaMA-3.1 (53.5%) are notable: Phi-4's high baseline confers immunity (±0.5pp), whereas LLaMA-3.1's low baseline does not produce the Benefit pattern observed in other low-baseline models, confirming that family-level factors beyond baseline ability modulate vulnerability (§5.1).

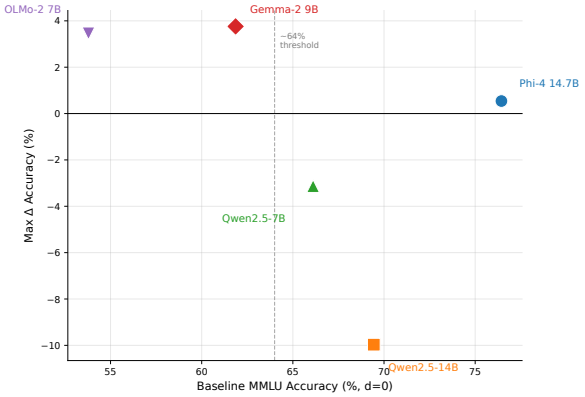


Figure 12: Baseline MMLU accuracy (d000) vs. maximum accuracy change (Δacc) under contamination. A threshold between 61.9% (Gemma-2) and 66.1% (Qwen-7B) separates models that benefit from contamination (below) from those that are harmed or immune (above). Estimated from models spanning four independent families.

X Per-Domain γ Estimates

Table 19: Per-domain γ estimates (2PL+γ, Qwen2.5) at J=13 and J=16. All J=16 fits converge ($\hat{R} < 1.01$). Social Sciences $P(\gamma < 0)$ strengthens from 99.1% to 99.7% at J=16, exceeding the Bonferroni-corrected threshold (99.375% for eight domains) under baseline and loose priors but falling marginally short under the tight prior (Table 12). Results remain exploratory at these ensemble sizes (Gelman et al., 2012). ARC-Challenge is excluded (PPP < 0.05 at all J).

	J=13		J=16			
Domain	γ	$P(\gamma<0)$	γ	$P(\gamma<0)$	PPP	$\hat{R}$
MMLU: Math	+0.50	8.1%	+0.60	3.8%	0.305	1.007
MMLU: Science	+0.50	7.8%	+0.57	4.3%	0.197	1.007
MMLU: CS/Eng	+0.50	14.8%	+0.32	24.0%	0.503	1.006
MMLU: Medical	+0.24	24.0%	+0.05	43.6%	0.268	1.008
MMLU: Other	+0.13	35.7%	+0.32	20.4%	0.072†	1.008
MMLU: Business/Law	+0.04	44.1%	+0.08	37.8%	0.395	1.007
MMLU: Humanities	−0.31	85.4%	−0.14	69.7%	0.416	1.007
MMLU: Social Sci	−0.57	**99.1%**	−0.63	**99.7%**	0.722	1.006

† PPP below acceptable threshold (0.1); γ estimate for this domain should be interpreted with caution.

Y DGP Robustness Analysis

We evaluate 2PL+γ robustness under data-generating process (DGP) misspecification via 400 simulation runs (2 DGPs × 4 ensemble sizes × 5 true γ values × 10 seeds).

Design. The *Linear DGP* (control) generates responses from the correctly specified additive model (Eq. 2). The *Threshold DGP* (misspecified) applies a step-function contamination effect: items with exposure above a threshold receive the full effect; items below receive zero. Ensemble sizes sweep $J \in \{16, 50, 100, 500\}$; true

$\gamma \in \{0.5, 1.0, 1.5, 2.0, 3.0\}$.

Point estimates. Under the Linear DGP, $\hat{\gamma}/\gamma_{\text{true}} = 0.84$–$1.07$ across all conditions (unbiased within sampling noise). Under the Threshold DGP, $\hat{\gamma}/\gamma_{\text{true}} = 0.94$–$1.24$ (mild overestimation, not attenuation). PPP remains in the acceptable range (0.50–0.56) under both DGPs, confirming that posterior predictive checks cannot detect this form of misspecification.

CI coverage. Under the Linear DGP, 95% CI coverage is nominal ($\geq$0.93) at all J. Under the Threshold DGP, coverage degrades with ensemble size (Table 20). The intervals become overconfident as J increases because the model converges to a biased point estimate.

Table 20: 95% CI coverage under Threshold DGP (range across γ values).

J	95% CI coverage
50	1.00
100	0.90–1.00
200	0.80–1.00
500	0.70–1.00

Implications. The reasoning chain is: (i) Threshold DGP + linear model yields $\hat{\gamma}/\gamma_{\text{true}} \geq 0.94$ (overestimation, not attenuation); (ii) therefore, if a true threshold effect exists, the linear model will not fail to detect it; (iii) an empirical $\gamma \approx 0$ is a genuine null, not a misspecification artifact. Coverage degradation affects the *precision* of effect size estimates (how narrow the CI is), not the *detection* of whether an effect exists. At the ensemble sizes in our empirical analyses ($J = 13$–16), coverage remains near-nominal even under misspecification. Real RRF exposure is right-skewed (mean=0.041); the simulation uses uniform exposure, so quantitative magnitudes may differ, but the qualitative pattern (overestimation direction, coverage degradation at large J) is robust.

Z ARC IRT Results

ARC-Challenge IRT results are reported separately due to marginal model fit (PPP=0.003 at $J = 16$). The smaller item pool (1,172 vs. 14,042 for MMLU) and more homogeneous difficulty distribution contribute to structural misfit: the 2PL+γ model cannot adequately capture the item response patterns. Under this caveat, the ARC baseline comparison ($J = 16$, 300 randomly subsampled items) yields: B0-Raw MAE=0.007, B3-Vanilla2PL MAE=0.015, B4-LinearRegression MAE=0.012 ($\tau = 0.731$, best rank correlation), B6-DCR MAE=0.314 (systematic overcorrection), ContamCal MAE=0.020. The pattern mirrors MMLU: raw accuracy dominates on MAE because the aggregate contamination effect ($\sim$0.7pp) is smaller than correction noise. Domain-level γ estimation on ARC is unreliable at all tested configurations ($J = 8$, 13, 16; PPP < 0.05 in all cases).

AA Full Baseline Comparison

Table 2 (main text) reports B0, B3, and ContamCal under the Qwen2.5 pooled configuration ($J = 16$ for MMLU/ARC, $J = 24$ for GSM8K which retains 0.5B). Table 21 presents the complete seven-baseline comparison on ARC under a pooled 0.5B+1.5B configuration ($J = 8$, S2-only exposure). This configuration differs from the main analysis ($J = 16$, RRF exposure): the smaller ensemble and single-signal exposure limit comparability with MMLU results; these results are included for completeness. Table 22 presents GSM8K baselines at 0.5B scale.

B6-DCR (Xu et al., 2025) produces the highest MAE on both benchmarks, consistent with its fuzzy inference approach, which overcorrects scores without a measurement-theoretic anchor. B4-LinearRegression performs competitively on ARC (MAE=0.056) but lacks the uncertainty quantification and domain-level diagnosis that IRT provides. B1-Remove&Rescore and B5-Emperor do not improve over raw scores, which confirms that item removal and mitigation strategies are insufficient for calibration.

Table 21: Full baseline comparison on ARC-Challenge (pooled 0.5B+1.5B, $J = 8$, S2-only exposure). MAE↓.

Method	ARC MAE
B0-Raw	0.059
B1-Remove&Rescore	0.059
B2-Single2PL+γ	0.064
B3-Vanilla4PL	0.071
B4-LinearRegression	0.056
B5-Emperor	0.059
B6-DCR	—
ContamCal (4PL+γ)	**0.035**

Table 22: Baseline comparison on GSM8K (0.5B scale, delta exposure). MAE↓.

Method	GSM8K MAE
B0-Raw	0.003
B2-Single2PL+γ	0.320
B3-Vanilla4PL	0.012
B4-LinearRegression	**0.003**
B6-DCR	—
ContamCal (4PL+γ)	0.020

AB Parametric Dose-Response Model Comparison

We fit four parametric dose-response models (Constant, Linear, Quadratic, and four-parameter Hill (Hill, 1910; Ritz et al., 2015)) to pooled multi-seed MMLU accuracy trajectories for each family. Table 23 reports AICc and Akaike weights.

Table 23: AICc model selection for dose-response trajectories (pooled multi-seed MMLU). Bold indicates best-fitting model per family; w is the Akaike weight of the best model.

Family	Constant	Linear	Quadratic	Hill	Best (w)
Phi-4 14.7B	−71.42	−72.08	−70.06	**−73.14**	Hill (0.58)
Qwen2.5-14B	49.54	23.40	21.22	**18.28**	Hill (0.55)
Qwen2.5-7B	−12.38	−20.53	−14.52	**−24.97**	Hill (0.77)
Gemma-2 9B	**17.35**	18.89	20.01	18.96	Constant (0.39)
OLMo-2 7B	**25.82**	26.66	27.54	26.47	Constant (0.62)

Parametric model selection with pooled multi-seed data recovers only the most extreme pattern (Collapse, Qwen-14B; Hill $E_{\max} = -43$pp). Two families classified as Benefit by Algorithm 1 (Gemma-2, OLMo-2) are indistinguishable from Constant under AICc, consistent with their cross-seed CIs crossing zero (Table 3). Qwen-7B's V-recovery is structurally inaccessible to monotonic Hill/sigmoid models; Quadratic captures the V-shape but is penalized by AICc (ΔAICc=6.4). Phi-4's Immune classification is reclassified as weak Benefit (Hill $E_{\max} = +2.43$pp, CI $[-2.01, +6.88]$ crossing zero). These discrepancies reflect insufficient statistical power at $n = 3$ seeds rather than contradictions: Algorithm 1 resolves per-seed patterns below the detection threshold of pooled parametric methods, motivating its use for profile construction.

AC Exposure Score Item-Level Classification

Under controlled injection where ground-truth contamination labels are available, we evaluate item-level classification performance of each detection signal and the RRF fusion (§3.2). S1 (embedding similarity) achieves near-perfect discrimination (ROC-AUC 0.93–0.99 across benchmarks and dosage levels), confirming that cosine similarity to the training corpus reliably identifies injected items. RRF fusion achieves ROC-AUC 0.73–0.93, reduced relative to S1 because S2 (Min-K%++, AUC $\approx$ 0.48–0.50) and S4 (Self-Critique, AUC $\approx$ 0.47–0.51) contribute near-random item-level signal. However, RRF is designed for the realistic setting where ground truth is unavailable: S1 requires an explicit training corpus reference, which practitioners typically lack, while RRF's multi-signal approach provides robustness across detection scenarios where no single signal dominates (§D).

AD Use of AI Assistance

We used Claude for coding, code drafting, debugging, and language polishing.