# Beyond Self-Consistency: Self-Extracted Constraints Reduce to Majority Voting under Zero-Shot Extraction

Anonymous ACL submission

## Abstract

Self-Consistency improves large language model reasoning by majority voting over chain-of-thought traces. A natural extension extracts logical constraints from traces and aggregates them with a symbolic solver—but we show this is a *symbolic mirage*: the solver's guarantees become vacuous when constraints are self-extracted. We demonstrate this through Symbolic Invariant Consensus Aggregation (SICA), which extracts logical constraints under zero-shot prompting and solves weighted satisfiability. Self-extracted constraints systematically confirm their source trace's answer rather than providing independent verification, a phenomenon we term *symbolic confirmation bias* (SCB). When nearly all constraints pass satisfiability checking, constraint-based aggregation degenerates to majority voting. This bias persists across nine models from 7B to frontier scale. Twenty-seven training-free remediation strategies fail to break this bottleneck. A persistent independence–accuracy trade-off emerges: methods that reduce trace correlation also destroy accuracy. Only a structurally independent cross-architecture verifier restores corrective signal; the bottleneck lies in self-extraction itself, not model capability. We provide three lightweight diagnostics that predict failure modes from a pilot run[1].

## 1 Introduction

Self-Consistency (SC) (Wang et al., 2023) selects the majority answer across $K$ chain-of-thought traces, a strategy grounded in the Condorcet Jury Theorem: independent voters converge to truth (de Condorcet, 1785; Ladha, 1992). In practice, SC's gains plateau for strong models (Loo, 2025; Byerly and Khashabi, 2026), and correlated LLM errors (Kim et al., 2025) reduce the effective ensemble size (Dietterich, 2000). A natural remedy is to move beyond simple vote-counting: extract logical constraints from the traces, as in neuro-symbolic approaches (Pan et al., 2023; Olausson et al., 2023; Ye et al., 2023), and let a provably sound solver adjudicate. If the solver can filter contradictions and enforce logical consistency, it should recover information that raw majority voting discards.

We test this intuition through Symbolic Invariant Consensus Aggregation (SICA), which extracts logical constraints from reasoning traces, deduplicates them, and selects answers via weighted partial MAX-SAT (§3; Figure 1). Across six models (7B–32B), four benchmarks, and multi-seed replication, SICA produces answers identical to majority voting on most problems; no condition shows a significant positive effect after correction for multiple comparisons (Table 1). The failure lies not in the solver but in the constraints it operates on: self-extracted constraints systematically support the model's majority answer, a robust empirical regularity we term *symbolic confirmation bias* (§5.1), distinct from trace-level unfaithfulness (Turpin et al., 2023; Wan et al., 2025). Because each trace determines both an answer and its constraints, the formal verification channel approximately reduces to a weighted echo of the majority vote under the degeneration condition (Observation 1).

This bias is not confined to a single model or task. Symbolic confirmation bias holds across nine models from 7B to frontier scale, and 27 training-free remediation strategies spanning four categories (prompt diversity, constraint filtering, multi-agent debate, and cross-model extraction) all produce neutral-to-negative results (§5.2). A persistent independence–accuracy trade-off emerges: methods that break trace correlation (e.g., multi-agent debate; Liang et al., 2024; Du et al., 2024) destroy accuracy, while methods that preserve accuracy fail to achieve independence. Prior work demonstrates that LLMs cannot self-correct reasoning without external feedback (Huang et al.,

[1]Code and data are available at https://anonymous.4open.science/r/symb_invariant_consensus-2E1F/.

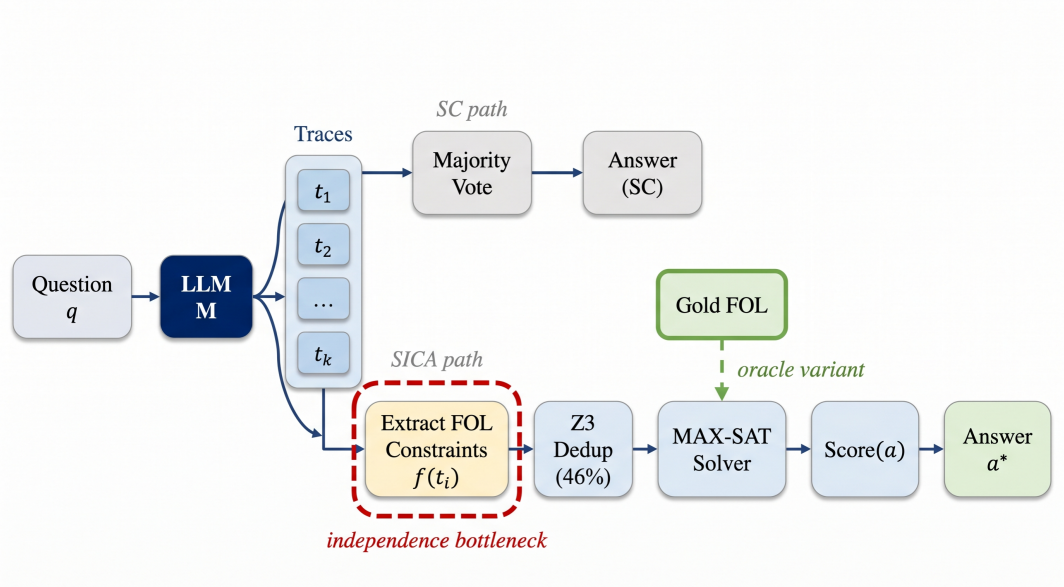



Figure 1: The SICA pipeline. SC selects the majority answer from $K$ traces. SICA extracts logical constraints, deduplicates, and solves MAX-SAT via Z3. Red dashed box: the independence bottleneck. Dashed arrow: oracle variant with gold FOL.

2024; Kamoi et al., 2024); our analysis provides a concrete mechanism for these findings via the $M \to T \to (A, C)$ generation structure—where a model $M$ generates traces $T$ that determine both answers $A$ and constraints $C$—so constraints are downstream of the same generative process that produces the answers they are meant to check.

The bottleneck lies in self-extraction itself, not in solver capability or model scale. Cross-architecture verification escapes this bottleneck: a structurally independent verifier yields significant gains when it exceeds the generator's accuracy, with benefit governed by a capability-gap pattern between verifier and generator (§5.4). This parallels test-time compute scaling (Snell et al., 2025), where additional inference budget faces diminishing returns once effective ensemble diversity saturates. Three lightweight diagnostics derived from a pilot run enable practitioners to predict a priori whether a self-extraction-based aggregation method will improve over SC (§5.3).

Our contributions are:

1. **The symbolic mirage.** Provably sound Z3 verification becomes vacuous under self-extraction. We diagnose the underlying mechanism: self-extracted constraints inherit the generating model's distributional prior (symbolic confirmation bias), reducing SICA to majority vote under source-attribution scoring (Observation 1). The pattern holds across nine models and 27 training-free variants (§5.1, §5.2).
2. **Diagnostic framework.** Three lightweight diagnostics characterize failure modes across all tested conditions within the self-extraction paradigm, with prospective validation on held-out model families; these give practitioners a priori failure-mode diagnosis from a pilot run (§5.3).
3. **Cross-architecture escape.** Structurally independent verification breaks the bottleneck: a cross-architecture verifier restores corrective signal, with gain governed by a capability-gap pattern between verifier and generator (§5.4).

## 2 Related Work

**Self-consistency and ensemble theory.** Self-consistency (SC) selects the majority answer across chain-of-thought traces (Wang et al., 2023), with extensions for free-form generation (Chen et al., 2024), confidence weighting (Taubenfeld et al., 2025), diverse prompting (Li et al., 2023), and reasoning-aware filtering (Wan et al., 2024; Toh et al., 2024; Kim et al., 2026). SC gains plateau early (Loo, 2025; Byerly and Khashabi, 2026). The Condorcet Jury Theorem (de Condorcet, 1785) guarantees majority-vote convergence under independence; ensemble theory (Dietterich, 2000; Krogh and Vedelsby, 1994) requires error diversity. Ladha (1992) show correlated voters reduce effective ensemble size; our $K_{\text{eff}}$ adapts Fleiss' $\kappa$ from diversity metrics (Kuncheva and Whitaker, 2003; Brown et al., 2005) to quantify this (§3). Kim et al. (2025) demonstrate correlated LLM errors; Kuai et al. (2026) propose cross-model independence

auditing.

**Neuro-symbolic reasoning.** Three paradigms organize neuro-symbolic LLM reasoning, differing in *when* formalization occurs. *Specification-generation* (Pan et al., 2023; Olausson et al., 2023; Ye et al., 2023) translates problems into formal logic before answering; *program-generation* (Gao et al., 2023; Chen et al., 2023b; Lyu et al., 2023) emits executable code whose runtime output determines the answer. Both require the model to produce correct formalizations upfront. *Trace-extraction* (this work) operates post-hoc: constraints are mined from completed reasoning traces and adjudicated by a solver. Recent trace-extraction systems target symbolic planning (Ryu et al., 2025; Xu et al., 2026, 2025), verified deduction (Pei et al., 2025; Singh et al., 2026; Zhang et al., 2025), and puzzle solving (Miya, 2025); Amonkar et al. (2025) show formalization quality degrades with complexity; Chan et al. (2026) argue logical soundness alone is insufficient. All prior work treats formalization errors as a quality problem; we show they are *systematically biased* toward the model's answer (Observation 1), providing a mechanism for the finding that LLMs cannot self-correct without external feedback (Huang et al., 2024). Our symbolic confirmation bias (SCB) is distinct from CoT-level confirmation bias (Wan et al., 2025; Turpin et al., 2023; Jhaveri et al., 2026): CoT bias concerns trace-level faithfulness, while SCB shows the *collection* of self-extracted constraints mirrors the answer distribution even when individual traces are locally faithful.

**Verification and test-time scaling.** Scaling test-time compute via additional traces (Snell et al., 2025), structured search (Yao et al., 2023), or extended reasoning (Guo et al., 2025; Qwen Team, 2024) faces the same correlation challenge when traces share a model's biases. Self-verification methods, including multi-agent debate (Liang et al., 2024; Du et al., 2024), self-evaluation (Xie et al., 2023; Weng et al., 2023; Madaan et al., 2023; Dhuliawala et al., 2024), iterative improvement (Shinn et al., 2023; Zhou et al., 2024), tool-augmented critique (Gou et al., 2024), formal CoT verification (Feng et al., 2025; Chen et al., 2025), and multi-agent verification (Lifshitz et al., 2025), report gains but none tests self-extracted constraints under formal solvers (cf. Kamoi et al., 2024); the bottleneck lies in constraint extraction, not verification (§5.1). Trained verifiers can escape this bottleneck through external reward signals: outcome and process reward models (Cobbe et al., 2021; Lightman et al., 2024; Wang et al., 2024), discriminator-guided decoding (Khalifa et al., 2023), RL-based self-verification (Ma et al., 2025), dual preference optimization (She et al., 2025), and execution-based filtering (Li et al., 2022; Chen et al., 2023a). These operate outside Observation 1's pipeline and may overcome the information-theoretic bottleneck. The failure modes differ: SICA's bottleneck is extraction fidelity, whereas PRM/ORM's is reward model generalization (Wang et al., 2024).

## 3 Method

Self-Consistency (SC) (Wang et al., 2023) samples $K$ reasoning traces and selects the majority answer. Under correlated traces (Fleiss' $\kappa$ (Fleiss, 1971)), the effective ensemble size $K_{\text{eff}}$ is

$$K_{\text{eff}} = K \,/\, [1 + (K-1) \cdot \kappa] \qquad (1)$$

(following Ladha (1992)). Intuitively, $K_{\text{eff}}$ measures how many effectively independent votes $K$ correlated traces contribute; e.g., $K{=}12$ traces with $\kappa{=}0.69$ yield $K_{\text{eff}} \approx 1.4$, meaning twelve correlated traces carry no more independent information than 1.4 uncorrelated ones. This motivates constraint-based aggregation.

Symbolic Invariant Consensus Aggregation (SICA) extends SC by extracting formal constraints from traces and selecting the answer best supported by the satisfiable subset (Figure 1).

**Trace generation.** Given question $q$, an LLM generates $K$ traces $\{t_1, \ldots, t_K\}$ at temperature $T = 0.7$. Each trace $t_i$ yields answer $a_i$.

**Constraint extraction.** The same LLM extracts logical constraints from each trace at $T_{\text{ext}} = 0.3$. The extraction prompt requests JSON output with constraint type, expression, and Z3-compatible formula (Appendix A); in practice, 99.0% of extracted constraints are propositional at the Z3 level, with only 1.0% using true quantifiers. The *extraction rate* is the fraction of traces yielding at least one parseable constraint.

**Deduplication and MAX-SAT.** Constraints are deduplicated by syntactic equivalence (global average deduplication ratio: 46.0%); each unique constraint $c_m$ receives weight $w_m$ equal to the number of source traces. The objective finds the largest-weight satisfiable subset:

$$\mathcal{C}^* = \arg\max_{\mathcal{S} \subseteq \mathcal{C}} \sum_{c \in \mathcal{S}} w_c \quad \text{s.t.} \quad \mathcal{S} \text{ is satisfiable.} \qquad (2)$$

Table 1: SICA vs. SC across all non-degenerate self-extraction conditions (sorted by SC). Two conditions show significant degradation after Benjamini–Hochberg (BH) correction ($m$=6 confirmatory; remaining exploratory); no condition shows a significant gain. $\Delta$ = SICA − SC (pp). PW: ProofWriter. [b]gold ICL; **bold**: $p < 0.05$; * BH adj. $p = 0.042$; [3s]/[4s] multi-seed aggregates; † 4-seed replication (Table 42); ‡ pilot ($n \leq 30$). Unmarked: single-seed exploratory (seed 123, not selected post hoc). Degenerate conditions and power analysis in Appendices G and D.

| Model | Domain | $n$ | SC (%) | SICA (%) | $\Delta$ (pp) | $p$ |
|---|---|---|---|---|---|---|
| *Type C: error amplification (SC $\leq$ 40%)* | | | | | | |
| Mistral-7B | PW-D5 | 600 | 39.33 | 36.50 | **−2.83** | 0.014* |
| *Intermediate SC (SC ∼50–60%, Mistral-7B only)* | | | | | | |
| Mistral-7B | LogiQA | 200 | 50.00 | 51.50 | +1.50 | 0.581 |
| Mistral-7B | FOLIO (s123) | 204 | 54.41 | 57.35 | +2.94 | 0.070 |
| Mistral-7B[3s] | FOLIO | 204 | 56.53 | 56.70 | +0.16 | 1.000 |
| Mistral-7B | FOLIO (s456) | 204 | 55.88 | 55.88 | 0.00 | 1.000 |
| Mistral-7B | FOLIO (s789) | 204 | 59.31 | 56.86 | −2.45 | 0.267 |
| *Type A: confirmation bias (SC $\geq$ 60%)* | | | | | | |
| LLaMA-3.1-8B | FOLIO | 204 | 66.18 | 61.76 | −4.41 | 0.093 |
| LLaMA-3.1-8B | StrategyQA | 200 | 72.00 | 74.00 | +2.00 | 0.424 |
| Qwen2.5-14B | FOLIO (ICL)[b] | 199 | 74.37 | 74.87 | +0.50 | 1.000 |
| Qwen2.5-14B | PW-D5 | 600 | 74.00 | 71.50 | **−2.50** | 0.011* |
| Qwen2.5-14B[4s] | FOLIO | 204 | 75.01 | 73.78 | −1.24 | 1.000 |
| Qwen2.5-7B | FOLIO | 204 | 75.98 | 76.47 | +0.49 | 1.000 |
| Qwen2.5-14B | LogiQA | 200 | 79.00 | 78.00 | −1.00 | 0.625 |
| Qwen3-14B | FOLIO | 204 | 83.33 | 84.80 | +1.47 | 1.000 |
| Qwen3-14B† | PW-D5 | 600 | 85.83 | 85.67 | −0.17 | 1.000 |
| Qwen3-14B (think) | FOLIO | 204 | 86.27 | 86.76 | +0.49 | 1.000 |

Z3 (de Moura and Bjørner, 2008) solves this with a 10-second timeout (Algorithm 1; Appendix B). Answer assertion constraints (`answer_a == True`, weight 1) ensure every candidate receives a nonzero base score; SICA is thus a strict generalization of SC.

**Scoring.** Let $\mathcal{C}^{\setminus} = \mathcal{C} \setminus \mathcal{C}^*$. Each candidate $a$ is scored by:

$$\text{score}(a) = \sum_{c \in \mathcal{C}^*} w_c \cdot \sigma(c, a) - \alpha \sum_{c \in \mathcal{C}^{\setminus}} w_c \cdot \sigma(c, a), \tag{3}$$

where $\sigma(c, a) = 1$ if $c$ was extracted from any trace producing answer $a$, and $\alpha = 0.5$. The selected answer is $a^* = \arg\max_a \text{score}(a)$.

**Degeneration condition.** If self-extracted constraints are coupled to their source answer, MAX-SAT retains nearly all ($|\mathcal{C}^{\setminus}| \approx 0$), and scoring degenerates to:

$$\text{score}(a) \approx \sum_{\substack{c \in \mathcal{C}^* \\ \text{source}(c) \to a}} w_c, \tag{4}$$

equivalent to majority voting. We formalize this as Observation 1 (§5.1) and show empirically that all three conditions hold in practice.

**The $C_0$ diagnostic.** The multi-candidate rate $C_0 = |\{q : |\mathcal{A}(q)| > 1\}|/|\mathcal{Q}|$ is a lightweight diagnostic computable from pilot traces: $C_0 < 5\%$ means SICA reduces to SC. $\alpha = 0.5$ is not critical ($\pm 0.49$ pp across $\alpha \in [0, 1]$).

**Bias ratio.** We quantify extraction bias via the *bias ratio* (BR):

$$\text{BR}(M, T) = \frac{P(c \text{ supports } a_M \mid a_M \neq y)}{P(c \text{ supports } y \mid a_M \neq y)}, \tag{5}$$

where $c$ is a self-extracted constraint, $a_M$ the model's majority answer, and $y$ the ground truth. BR quantifies the degree of extraction degeneration under source-attribution scoring (Observation 1): values above 1 reflect the trace-count base rate inherent to source-attributed constraints. BR = 1 indicates no coupling beyond chance. We validate this metric empirically in §5.1.

## 4 Experiments

### 4.1 Experimental Setup

**Models.** Qwen2.5-14B-Instruct, Qwen2.5-7B-Instruct, Qwen3-14B (non-thinking mode) (Yang et al., 2024), Mistral-7B-Instruct-v0.3 (Jiang et al., 2023), LLaMA-3.1-8B-Instruct (Grattafiori et al., 2024), and QwQ-32B (Qwen Team, 2024) (7B–32B). We also evaluate the universality of symbolic confirmation bias on six additional models: gpt-4o uses self-extraction via API; four frontier models (gpt-4.1, gpt-5.5, o3, Gemini-2.5-Pro) use cross-model extraction where Mistral-7B extracts constraints from target traces; DeepSeek-R1-

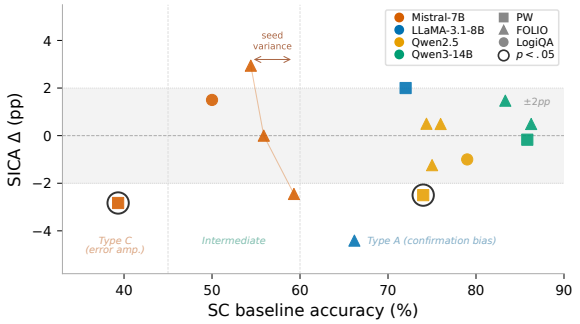



Figure 2: SICA Δ (pp) vs. SC baseline. Color: model family; shape: dataset (■ PW, ▲ FOLIO, ● LogiQA). Circled: significant ($p < .05$). Grey band: ±2 pp equivalence zone. Three regimes emerge: Type C (error amplification), intermediate, and Type A (confirmation bias).

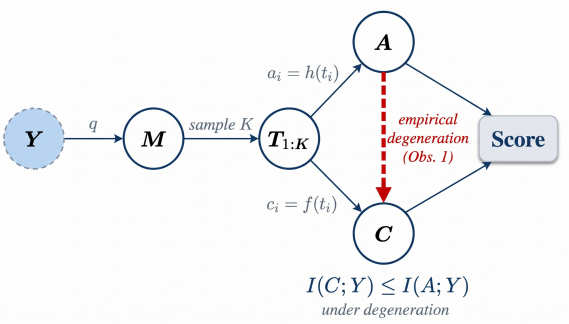



Figure 3: Causal DAG of the self-extraction pipeline. Traces $T$ produce both answers $A$ and constraints $C$; under degeneration (Observation 1), $C$ is determined by $A$ (dashed arrow), yielding $I(C;Y) \leq I(A;Y)$.

Distill-Qwen-8B likewise uses Mistral-7B cross-extraction (Table 2).

**Datasets.** FOLIO (Han et al., 2024) ($n$=204, gold logical annotations), ProofWriter depth-5 (Tafjord et al., 2021) ($n$=600), LogiQA (Liu et al., 2020) ($n$=200), StrategyQA (Geva et al., 2021) ($n$=200). GSM8K ($n$=30) and AIME 2024 ($n$=22) probe the degenerate regime ($C_0 < 5\%$).

**Parameters.** $K$=12 traces at $T$=0.7, extraction at $T_{\text{ext}}$=0.3, $\alpha$=0.5, Z3 timeout 10s (K-sensitivity and extraction-temperature analysis in Appendix L). McNemar exact test ($\alpha$=0.05); 95% bootstrap CIs (10,000 resamples; Appendix E) for $n \geq 200$. SICA incurs 4.5× SC wall-clock; extraction accounts for 76% of overhead.

### 4.2 Main Results

Table 1 reports accuracy across all non-degenerate self-extraction conditions sorted by SC baseline. Two confirmatory conditions show significant degradation after BH correction for false discovery rate ($m$=6; multi-seed aggregates and extensions are exploratory): Mistral-7B on ProofWriter (−2.83 pp, raw $p = 0.014$, adj. $p = 0.042$) and Qwen2.5-14B on ProofWriter (−2.50 pp, raw $p = 0.011$, adj. $p = 0.042$). No condition shows a significant positive effect. An aggregate sign test yields 8 positive and 7 negative Δ values ($p = 1.00$, two-sided). When SICA and SC disagree, SC selects the correct answer 2.6× more often (139 vs. 53 across conditions); constraint-based reweighting thus introduces noise rather than corrective signal (representative cases in Appendix F; Appendix X.1).

Figure 2 reveals regime structure across SC baselines. Three regimes emerge: Type C (SC ≤ 40%), where low accuracy causes error amplification; an intermediate band (50–60%), containing the only positive trends; and Type A (SC ≥ 60%), where symbolic confirmation bias dominates. Fleiss' $\kappa$ ranges from 0.19 to 0.82, yielding $K_{\text{eff}} = 1.20$–$3.94$ at $K = 12$ (Table 19; Appendix Q). Seed-level noise is substantial: across three Mistral-7B seeds, Δ ranges from +2.94 to −2.45 pp despite $\kappa \in [0.45, 0.46]$. We trace the mechanism in §5.

We use TOST equivalence tests (Lakens, 2017) with margin ±2 pp, justified on four grounds: (1) on FOLIO ($n$=204), ±2 pp corresponds to ∼4 problems, near single-item influence; (2) multi-seed SC variability $\sigma_{\text{SC}} = 1.67$–$2.51$ pp on FOLIO, with $\sigma_\Delta$ up to 2.70 pp (Table 42), placing ±2 pp within natural noise; (3) the observed $|\Delta|$ median across 11 conditions is 1.47 pp, so ±2 pp captures the central tendency; (4) sensitivity analysis confirms ±2 pp as the narrowest discriminating window (±1 pp: zero conditions pass; ±3 pp: all pass; Appendix U). Four of 11 conditions pass TOST equivalence (minimum detectable effect (MDE) ≤ 2 pp); the remaining seven are underpowered (MDE 4.6–4.8 pp) but provide consistent directional evidence ($|\Delta| \leq 4.41$ pp, none significant; Appendix D). Multi-seed replication: mean $\Delta = +0.16 \pm 2.70$ pp across three Mistral-7B seeds (Table 42); four Qwen2.5-14B seeds yield $\Delta \in [0.00, -2.01]$ pp; four Qwen3-14B seeds yield $\Delta = +0.92 \pm 1.14$ pp (n.s.; Appendix X). Oracle controls confirm the MAX-SAT mechanism is sound (+29.90/+13.73 pp FOLIO, +17.17 pp ProofWriter; $p < 0.001$), yet self-extraction captures only ∼12% of this ceiling (Appendix G; Appendix G).

Table 2: Symbolic confirmation bias across nine models on FOLIO ($n$=204). BR: mean per-problem bias ratio. All models exhibit BR $>$ 1. Ext.: [a]self-extraction; [b]cross-model (Mistral-7B extracts FOL from target traces). *Interim ($n$=95). †$n$=196 (8 API failures excluded). ‡$n$=161 (43 API failures excluded).

| Model | Ext. | SC (%) | $n_{\text{err}}$ | BR | $\Delta$ (pp) |
|---|---|---|---|---|---|
| Mistral-7B | [a] | 55.88 | 90 | 4.97 | 0.00 |
| LLaMA-3.1-8B | [a] | — | — | 3.87 | — |
| Qwen2.5-14B | [a] | 75.98 | 49 | 3.93 | −0.49 |
| R1-Distill-8B | [b] | 74.51 | 52 | 2.92 | +2.45 |
| gpt-4o‡ | [a] | 73.91 | 42 | 2.94 | −1.86 |
| gpt-4.1 | [b] | 82.84 | 35 | 2.70 | −1.47 |
| gpt-5.5 | [b] | 84.31 | 32 | 3.48 | +0.49 |
| o3† | [b] | 82.65 | 34 | 1.66 | 0.00 |
| Gemini-2.5-Pro* | [b] | 87.37 | 12 | 2.79 | −1.05 |

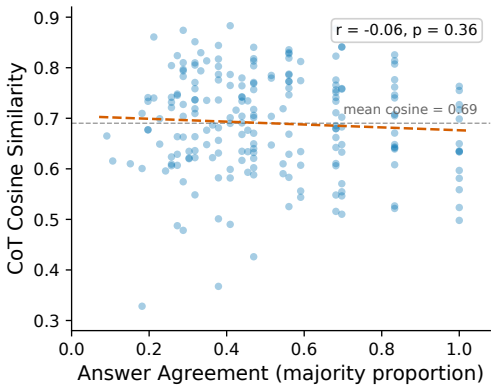



Figure 4: Answer agreement vs. CoT cosine similarity (Mistral-7B, FOLIO, $n$=204). Flat regression ($r = -0.06$, $p = 0.36$): process and answer independence are uncorrelated.

## 5 Analysis

### 5.1 Symbolic Confirmation Bias

Self-extracted constraints systematically align with the model's majority answer. On Mistral-7B FOLIO, when SICA errs, 83.3% of constraints support the incorrect answer (bias ratio 4.97×; Table 16), and 94% of errors overlap with SC. MAX-SAT produces answers identical to count-only aggregation on ≥99% of problems (Table 11); the formal verification layer is thus vacuous (Eq. 4). A permutation test confirms BR reflects trace-count geometry, not extraction bias (Appendix Y); controls rule out answer leakage (Appendix Y).

The pattern generalizes beyond locally-run models. Table 2 reports SCB across nine models spanning 7B open-source to frontier closed-source, all exhibiting BR $>$ 1. Open-source models use self-extraction; frontier models use cross-model extraction (Mistral-7B extracts FOL from target traces). The bias also holds across all cells of a 2×2 generator×extractor matrix (Appendix W).

**Observation 1** *(Argmax Preservation).* Let $t_1, \ldots, t_K \overset{\text{i.i.d.}}{\sim} P_M(\cdot \mid q)$ with trace-determined answers $a_i = h(t_i)$ and $n_a = |\{i : a_i = a\}|$. Under (i) the degeneration condition $|\mathcal{C}^{\setminus}| \approx 0$ (Eq. 4), (ii) source-attribution scoring where $\sigma(c, a)$=1 iff $c$ originates from a trace producing $a$ (Eq. 3), and (iii) approximately uniform constraint yield per trace, SICA reduces to majority vote: $\arg\max_a \text{score}(a) = \arg\max_a n_a$. Put simply: the entire symbolic layer—Z3 solving, satisfiability checking, constraint weighting—adds no information beyond what a simple vote count already provides.

*Empirical support.* Z3 rejection rate $|\mathcal{C}^{\setminus}|/|\mathcal{C}| \approx 0.034$ confirms $|\mathcal{C}^{\setminus}| \approx 0$. Per-trace yield averages 5.6–6.0 constraints across answer groups (CV=0.26; Appendix S); weight is thus proportional to $n_a$. SICA and majority vote agree on 96.1% of problems for Qwen2.5-14B ($n$=804; Table 10) and over 90% across all conditions. Per-trace separation analysis confirms the extraction function is neutral (constraint density and quality are balanced across answer groups), and source-attribution scoring is the sole mechanism transmitting CoT correlation into verification (Appendix Y).

A representative discordant case illustrates the mechanism. On a ProofWriter chaining problem (White→Round→Young), SC correctly breaks a 6:6 vote tie to the gold label. SICA extracts 17 constraints; MAX-SAT excludes 2 that capture correct intermediate derivations present *only* in correct-answer traces, penalizing the complete reasoning chain and selecting the wrong answer. Of 31 discordant problems ($n$=804), all occur at exact or near vote ties (entropy ≥ 0.92), and constraint exclusion tips the balance in either direction with no systematic corrective tendency (Appendix F).

The $M \to T \to (A, C)$ generation structure provides empirical motivation (Cover and Thomas, 2006): under degeneration (Observation 1), constraints carry no more task-relevant information than answers alone, i.e., $I(C; Y) \leq I(A; Y)$ where $Y$ is the ground-truth label (Figure 3). Process-level overlap compounds the bottleneck: mean reasoning similarity reaches 0.69, far exceeding answer-level $\kappa$ (0.41–0.51; Figure 4), and SICA gain decreases monotonically with process similarity ($\rho = -1.0$, $p = 0.0083$; Appendix C).

Table 3: Cross-generator NLI escape with DeBERTa-large-mnli verifier (55.00% standalone, ProofWriter $n$=600). Combo (SC + NLI ensemble) gain decreases monotonically with generator capability.

| Generator | Family | SC | Gap | Combo $\Delta$ ($w$=3) | $p$ |
|---|---|---|---|---|---|
| Mistral-7B | Mistral | 39.33% | +15.67 | +6.67 pp | <0.001 |
| LLaMA-3.1-8B | LLaMA | 72.50% | −17.50 | +0.83 pp | 0.665 |
| Qwen2.5-14B | Qwen | 74.00% | −19.00 | +0.67 pp | 0.503 |
| Qwen3-14B | Qwen | 85.83% | −30.83 | +0.50 pp | 0.453 |

### 5.2 Why Remediation Fails

All 27 training-free variants spanning four categories produce neutral-to-negative results (Figure 6; Appendices K–M); a persistent independence–accuracy trade-off emerges. Diversity-seeking strategies shift $K_{\text{eff}}$ by $< 0.5$; constraint-level interventions leave degeneration intact; debate ($\kappa = 0.15$, $\Delta = -18.63$ pp) breaks correlation but collapses accuracy (Appendix T); cross-model extraction achieves the lowest non-destructive $\kappa$ ($\approx$0.40–0.47) but remains above the independence threshold (+0.49 pp, n.s.; Appendix X.1).

The root cause is *variable isolation*: each trace generates constraints with its own variable names, so Z3 treats identically-intended propositions from different traces as unrelated symbols. Among cross-answer constraint pairs, 56.4% share zero Z3 variables, making them trivially jointly satisfiable. Consequently, although 91.8% of constraints are technically discriminative (producing different satisfiability outcomes for different candidate answers), this discrimination merely mirrors the model's answer distribution rather than providing independent corrective signal (Appendix K).

### 5.3 Diagnostic Framework

Three lightweight diagnostics predict the outcome of any self-extraction-based aggregation from a $K$=12 pilot run: (1) degenerate-regime indicator $C_0 < 5\%$ (SICA reduces to SC); (2) diversity floor $K_{\text{eff}} \leq 1.30$ (insufficient vote diversity); (3) bias ratio BR combined with SC regime. These boundaries correctly characterize failure modes across all 60 tested conditions within the self-extraction paradigm (Appendix N).

Three distinct failure modes correspond to these regimes. **Type A** (SC $\geq$ 60%): strong models produce consistent traces whose constraints mirror the answer distribution; MAX-SAT excludes few clauses ($|\mathcal{C}^{\setminus}| \approx 0$) and scoring degenerates to weighted vote counting (Eq. 4). **Type C** (SC $\leq$ 40%): the majority of traces reach incorrect answers; constraints extracted from wrong traces encode incorrect reasoning as formal rules, and Z3 preferentially satisfies these wrong constraints, amplifying errors (−2.83 pp for Mistral-7B on ProofWriter). An intermediate band (40–60% SC) contains the only positive trends, but none reach significance. Entropy decomposition confirms this structure: on low-entropy problems (majority count $\geq 9/12$), $\Delta \approx 0$ pp uniformly—constraints carry no information beyond the majority vote. On high-entropy problems (majority $\leq$ 8), the effect direction depends on the SC regime: intermediate-SC yields $\Delta$ up to +12.8 pp, while Type A and Type C produce negative effects (−8.2 and −4.9 pp; Appendix M).

Decision boundaries were derived from Mistral-7B and Qwen2.5-14B and validated prospectively on held-out generators (LLaMA-3.1-8B, Qwen3-14B), correctly predicting Type A bias ($\Delta = -4.41$ pp) and non-significance ($\Delta \leq +1.47$ pp). Conversely, when diagnostics detect sufficient capability gap (§5.4), the framework correctly predicts positive gain (+6.67 pp for Mistral-7B on ProofWriter). The three diagnostics thus enable practitioners to rule out self-extraction pipelines before full-scale deployment (Appendix Y).

### 5.4 Cross-Architecture Escape

No training-free self-extraction method escapes the distributional prior (§5.2). We test whether a structurally independent verifier can break the bottleneck using DeBERTa-large (He et al., 2021) (406M, encoder-only), fine-tuned on MultiNLI (Williams et al., 2018) for natural language inference (NLI). Each NLI-supporting vote counts $w$ times alongside SC's $K$ votes.

DeBERTa alone achieves 49.51% on FOLIO and 55.00% on ProofWriter. Combo $w$=3 yields +6.67 pp on ProofWriter for Mistral-7B ($p < 0.001$, significant after BH correction) and +2.94 pp on FOLIO (n.s.); all generators with SC $\geq$ 72% show no significant improvement ($\Delta \leq +1.47$ pp). Same-model SICA *degrades* ProofWriter (−2.83 pp; Table 1); corrective signal must therefore originate outside the model's distribution. The escape generalizes across NLI architectures: three verifiers (DeBERTa, RoBERTa (Liu et al., 2019), BART (Lewis et al., 2020), all fine-tuned on MultiNLI) produce significant gains at $w$=3 (+6.67, +4.17, +5.17 pp; 10 of 15 verifier×weight conditions survive BH correction; Appendix V), confirming that structural independence, not model-specific properties,

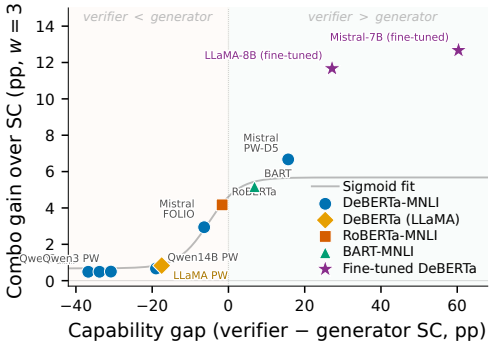



Figure 5: Combo gain vs. capability gap (verifier standalone − generator SC) at $w$=3 across three NLI architectures. Significant gains occur only when the generator falls below the verifier's standalone accuracy. Stars: domain-adapted DeBERTa (Appendix W).

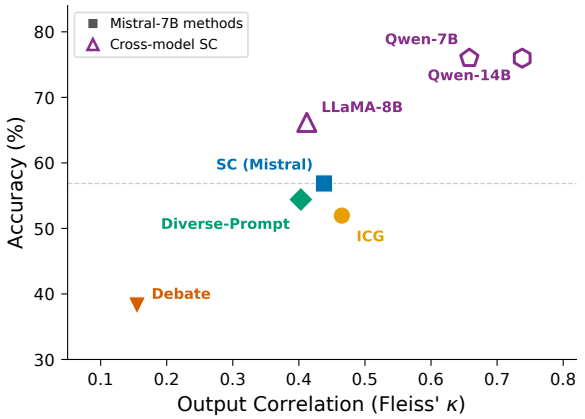



Figure 6: Independence–accuracy trade-off across 27 remediation strategies on FOLIO ($n$ = 204). Dashed line: Mistral-7B SC baseline.

drives the effect.

Across 108 conditions, gain decreases monotonically with generator accuracy (Table 3; Figure 5), a preliminary *capability-gap pattern* ($\rho$ = 1.0, $p$ = 0.003; exploratory, $n$=6). Fine-tuning extends gains to generators with SC up to ∼72% (Appendix W). Cross-model LLM voting degrades strong generators while NLI never does; structural independence drives the escape (Appendices W, U).

## 6 Discussion and Conclusion

Formal verification's value depends on the *independence* of its inputs, not the soundness of its logic. SICA reduces to majority vote under source-attribution scoring (Observation 1), and 27 training-free variants fail to escape; symbolic confirmation bias holds across nine models (7B to frontier). Three lightweight diagnostics predict failure from a $K$=12 pilot (§5.3).

For the broader neuro-symbolic community, our results expose a structural limitation of self-extraction pipelines: when the same model generates both reasoning and formal constraints, the symbolic layer inherits the model's distributional prior rather than providing an independent check. This limitation is not specific to logical constraint extraction; it applies to any self-verification paradigm where the verifier shares the generator's knowledge boundary (Huang et al., 2024).

We formalize the link between these findings via the *Conditional Correction Ratio*: $\mathrm{CCR}(V, G) = \log \frac{P(V \text{ correct} | G \text{ wrong})}{P(V \text{ correct} | G \text{ correct})}$. All same-model SICA conditions yield CCR $< 0$ (shared bias), while cross-architecture NLI pairs achieve CCR $> 0$ (preferential error correction); CCR correlates with combo gain ($\rho = 0.84$, $p = 0.014$; Appendix C).

Cross-architecture verification escapes only when the verifier exceeds generator accuracy (§5.4); this points to *architectural diversity* over scale as the key design principle. Trained verifiers (PRM (Lightman et al., 2024; Wang et al., 2024), ORM (Cobbe et al., 2021)) succeed precisely because they break the $M \to T \to (A, C)$ generation structure with independently supervised signal; our NLI escape instantiates this principle without task-specific training (+6.67 pp). For test-time compute scaling (Snell et al., 2025), our findings imply that allocating additional inference budget to self-consistent sampling yields diminishing returns once $K_{\text{eff}}$ saturates; redirecting compute toward structurally independent verification offers a more efficient path. Lightweight trained verification is a natural next step (Appendix Y).

## Limitations

Our locally-run models range from 7B to 32B; frontier coverage relies on cross-model extraction, so we cannot confirm identical SCB patterns at frontier scale. All benchmarks are English logical reasoning; FOLIO and ProofWriter represent a best-case for symbolic verification, and the observed bias ratios likely represent a lower bound on SCB in less structured domains. The cross-architecture escape rests on $n$=6 generator–verifier pairs; while the capability-gap pattern is consistent across all pairs, broader validation is needed. We do not evaluate trained extractors or few-shot extraction, which could potentially break the self-extraction bound by introducing external signal. Our separation of SCB from trace-level unfaithfulness relies on indirect controls rather than a direct experimental isolation.

## References


Rikhil Amonkar, Ceyhun Efe Kayan, May Lai, Ronan Le Bras, and Li Zhang. 2025. Large language models as formalizers on constraint satisfaction problems. *arXiv preprint arXiv:2505.13252*.

Gavin Brown, Jeremy Wyatt, Rachel Harris, and Xin Yao. 2005. Diversity creation methods: A survey and categorisation. *Information Fusion*, 6(1):5–20.

Adam Byerly and Daniel Khashabi. 2026. Self-consistency falls short! the adverse effects of positional bias on long-context problems. *Transactions of the Association for Computational Linguistics*, 14:292–317. ArXiv:2411.01101.

Jason Chan, Robert Gaizauskas, and Zhixue Zhao. 2026. Position: Logical soundness is not a reliable criterion for neurosymbolic fact-checking with LLMs. *arXiv preprint arXiv:2604.04177*.

Bei Chen, Fengji Zhang, Anh Nguyen, Daoguang Zan, Zeqi Lin, Jian-Guang Lou, and Weizhu Chen. 2023a. CodeT: Code generation with generated tests. In *Proceedings of the 11th International Conference on Learning Representations (ICLR)*.

Jiefeng Chen, Jie Ren, Xinyun Chen, Chengrun Yang, Ruoxi Sun, Jinsung Yoon, and Sercan Ö. Arık. 2025. SETS: Leveraging self-verification and self-correction for improved test-time scaling. *arXiv preprint arXiv:2501.19306*.

Wenhu Chen, Xueguang Ma, Xinyi Wang, and William W. Cohen. 2023b. Program of thoughts prompting: Disentangling computation from reasoning for numerical reasoning tasks. *Transactions on Machine Learning Research*.

Xinyun Chen, Renat Aksitov, Uri Alon, Jie Ren, Kefan Xiao, Pengcheng Yin, Sushant Prakash, Charles Sutton, Xuezhi Wang, and Denny Zhou. 2024. Universal self-consistency for large language model generation. In *ICML*.

Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. 2021. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*.

Thomas M. Cover and Joy A. Thomas. 2006. *Elements of Information Theory*, 2nd edition. Wiley-Interscience.

Marie Jean Antoine Nicolas de Caritat de Condorcet. 1785. *Essai sur l'application de l'analyse à la probabilité des décisions rendues à la pluralité des voix*. Imprimerie Royale, Paris.

Leonardo de Moura and Nikolaj Bjørner. 2008. Z3: An efficient SMT solver. In *TACAS*.

Shehzaad Dhuliawala, Mojtaba Komeili, Jing Xu, Roberta Raileanu, Xian Li, Asli Celikyilmaz, and Jason Weston. 2024. Chain-of-verification reduces hallucination in large language models. In *Findings of the Association for Computational Linguistics: ACL 2024*.

Thomas G. Dietterich. 2000. Ensemble methods in machine learning. In *Multiple Classifier Systems (MCS)*, pages 1–15. Springer.

Yilun Du, Shuang Li, Antonio Torralba, Joshua B. Tenenbaum, and Igor Mordatch. 2024. Improving factuality and reasoning in language models through multiagent debate. In *ICML*.

Yu Feng, Nathaniel Weir, Kaj Bostrom, Sam Bayless, Darion Cassel, Sapana Chaudhary, Benjamin Kiesl-Reiter, and Huzefa Rangwala. 2025. VeriCoT: Neuro-symbolic chain-of-thought validation via logical consistency checks. *arXiv preprint arXiv:2511.04662*.

Joseph L. Fleiss. 1971. Measuring nominal scale agreement among many raters. *Psychological Bulletin*, 76(5):378–382.

Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. 2023. PAL: Program-aided language models. In *Proceedings of the 40th International Conference on Machine Learning (ICML)*.

Mor Geva, Daniel Khashabi, Elad Segal, Tushar Khot, Dan Roth, and Jonathan Berant. 2021. Did Aristotle use a laptop? a question answering benchmark with implicit reasoning strategies. *TACL*.

Zhibin Gou, Zhihong Shao, Yeyun Gong, Yelong Shen, Yujiu Yang, Minlie Huang, Nan Duan, and Weizhu Chen. 2024. CRITIC: Large language models can self-correct with tool-interactive critiquing. In *ICLR*.

Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, and 1 others. 2024. The Llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.

Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, and 1 others. 2025. DeepSeek-R1: Incentivizing reasoning capability in LLMs via reinforcement learning. *arXiv preprint arXiv:2501.12948*.

Simeng Han, Hailey Schoelkopf, Yilun Zhao, Zhenting Qi, Martin Riddell, Wenfei Zhou, James Coady, David Peng, Yujie Qiao, Luke Benson, Lucy Sun, Alexander Wardle-Solano, Hannah Szabó, Ekaterina Zubova, Matthew Burtell, Jonathan Fan, Yixin Liu, Brian Wong, Malcolm Sailor, and 16 others. 2024. FOLIO: Natural language reasoning with first-order logic. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 22017–22031.

Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. 2021. DeBERTa: Decoding-enhanced BERT with disentangled attention. In *Proceedings of ICLR*.

Jie Huang, Xinyun Chen, Swaroop Mishra, Huaixiu Steven Zheng, Adams Wei Yu, Xinying Song, and Denny Zhou. 2024. Large language models cannot self-correct reasoning yet. In *ICLR*.

Ayush Rajesh Jhaveri, Anthony GX-Chen, Ilia Sucholutsky, and Eunsol Choi. 2026. Failing to falsify: Evaluating and mitigating confirmation bias in language models. *arXiv preprint arXiv:2604.02485*.

Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Lélio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. Mistral 7B. *arXiv preprint arXiv:2310.06825*.

Ryo Kamoi, Yusen Zhang, Nan Zhang, Jiawei Han, and Rui Zhang. 2024. When can LLMs actually correct their own mistakes? a critical survey of self-correction of LLMs. *Transactions of the Association for Computational Linguistics*, 12:1417–1440.

Muhammad Khalifa, Lajanugen Logeswaran, Moontae Lee, Honglak Lee, and Lu Wang. 2023. GRACE: Discriminator-guided chain-of-thought reasoning. In *Findings of EMNLP*.

Elliot Kim, Avi Garg, Kenny Peng, and Nikhil Garg. 2025. Correlated errors in large language models. In *ICML*.

Junseok Kim, Nakyeong Yang, Kyungmin Min, and Kyomin Jung. 2026. Reliability-aware adaptive self-consistency for efficient sampling in LLM reasoning. *arXiv preprint arXiv:2601.02970*.

Anders Krogh and Jesper Vedelsby. 1994. Neural network ensembles, cross validation, and active learning. In *Advances in Neural Information Processing Systems*, volume 7.

Chenchen Kuai, Jiwan Jiang, Zihao Zhu, Hao Wang, Keshu Wu, Zihao Li, Yunlong Zhang, Chenxi Liu, Zhengzhong Tu, Zhiwen Fan, and Yang Zhou. 2026. How independent are large language models? A statistical framework for auditing behavioral entanglement and reweighting verifier ensembles. *arXiv preprint arXiv:2604.07650*.

Ludmila I. Kuncheva and Christopher J. Whitaker. 2003. Measures of diversity in classifier ensembles and their relationship with the ensemble accuracy. *Machine Learning*, 51(2):181–207.

Krishna K. Ladha. 1992. The Condorcet jury theorem, free speech, and correlated votes. *American Journal of Political Science*, 36(3):617–634.

Daniël Lakens. 2017. Equivalence tests: A practical primer for $t$ tests, correlations, and meta-analyses. *Social Psychological and Personality Science*, 8(4):355–362.

Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. In *Proceedings of ACL*, pages 7871–7880.

Yifei Li, Zeqi Lin, Shizhuo Zhang, Qiang Fu, Bei Chen, Jian-Guang Lou, and Weizhu Chen. 2023. Making language models better reasoners with step-aware verifier. In *ACL*.

Yujia Li, David Choi, Junyoung Chung, Nate Kushman, Julian Schrittwieser, and 1 others. 2022. Competition-level code generation with AlphaCode. *Science*, 378(6624):1092–1097.

Tian Liang, Zhiwei He, Wenxiang Jiao, Xing Wang, Yan Wang, Rui Wang, Yujiu Yang, Zhaopeng Tu, and Shuming Shi. 2024. Encouraging divergent thinking in large language models through multi-agent debate. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing (EMNLP)*.

Shalev Lifshitz, Sheila A. McIlraith, and Yilun Du. 2025. Multi-agent verification: Scaling test-time compute with multiple verifiers. *arXiv preprint arXiv:2502.20379*.

Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. 2024. Let's verify step by step. In *ICLR*.

Jian Liu, Leyang Cui, Hanmeng Liu, Dandan Huang, Yile Wang, and Yue Zhang. 2020. LogiQA: A challenge dataset for machine reading comprehension with logical reasoning. In *IJCAI*, pages 3622–3628.

Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. RoBERTa: A robustly optimized BERT pretraining approach. *arXiv preprint arXiv:1907.11692*.

Chiyan Loo. 2025. Reevaluating self-consistency scaling in multi-agent systems. *arXiv preprint arXiv:2511.00751*.

Qing Lyu, Shreya Havaldar, Adam Stein, Li Zhang, Delip Rao, Eric Wong, Marianna Apidianaki, and Chris Callison-Burch. 2023. Faithful chain-of-thought reasoning. In *Proceedings of the 13th International Joint Conference on Natural Language Processing and the 3rd Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics*.

Ruotian Ma, Peisong Wang, Cheng Liu, Xingyan Liu, Jiaqi Chen, Bang Zhang, Xin Zhou, Nan Du, and Jia Li. 2025. $S^2R$: Teaching LLMs to self-verify and self-correct via reinforcement learning. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (ACL)*.

Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegreffe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, and 1 others. 2023. Self-refine: Iterative refinement with self-feedback. In *NeurIPS*.

Shinobu Miya. 2025. Eidoku: A neuro-symbolic verification gate for LLM reasoning via structural constraint satisfaction. *arXiv preprint arXiv:2512.20664*.

Theo X. Olausson, Alex Gu, Benjamin Lipkin, Cedegao E. Zhang, Armando Solar-Lezama, Joshua B. Tenenbaum, and Roger Levy. 2023. LINC: A neurosymbolic approach for logical reasoning by combining language models with first-order logic provers. In *EMNLP*.

Liangming Pan, Alon Albalak, Xinyi Wang, and William Yang Wang. 2023. Logic-LM: Empowering large language models with symbolic solvers for faithful logical reasoning. In *EMNLP Findings*.

Yu Pei, Yongping Du, and Xingnan Jin. 2025. FoVer: First-order logic verification for natural language reasoning. *Transactions of the Association for Computational Linguistics*, 13:1340–1359.

Qwen Team. 2024. QwQ: Reflect deeply on the boundaries of the unknown. Technical Blog. https://qwenlm.github.io/blog/qwq-32b-preview/.

Hyun Ryu, Gyeongman Kim, Hyemin S. Lee, and Eunho Yang. 2025. Divide and translate: Compositional first-order logic translation and verification for complex logical reasoning. In *International Conference on Learning Representations (ICLR)*.

Shuaijie She, Yu Bao, Yu Lu, Lu Xu, Tao Li, Wenhao Zhu, Shujian Huang, Shanbo Cheng, Lu Lu, and Yuxuan Wang. 2025. DuPO: Enabling reliable LLM self-verification via dual preference optimization. *arXiv preprint arXiv:2508.14460*.

Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. 2023. Reflexion: Language agents with verbal reinforcement learning. In *Advances in Neural Information Processing Systems (NeurIPS)*.

Vikash Singh, Darion Cassel, Nathaniel Weir, Nick Feng, and Sam Bayless. 2026. VERGE: Formal refinement and guidance engine for verifiable LLM reasoning. *arXiv preprint arXiv:2601.20055*.

Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. 2025. Scaling LLM test-time compute optimally can be more effective than scaling parameters for reasoning. In *ICLR*.

Oyvind Tafjord, Bhavana Dalvi, and Peter Clark. 2021. ProofWriter: Generating implications, proofs, and abductive statements over natural language. In *ACL Findings*.

Amir Taubenfeld, Tom Sheffer, Eran Ofek, Amir Feder, Ariel Goldstein, Zorik Gekhman, and Gal Yona. 2025. Confidence improves self-consistency in LLMs. In *ACL Findings*.

Vernon Y.H. Toh, Deepanway Ghosal, and Soujanya Poria. 2024. Not all votes count! programs as verifiers improve self-consistency of language models for math reasoning. *arXiv preprint arXiv:2410.12608*.

Miles Turpin, Julian Michael, Ethan Perez, and Samuel Bowman. 2023. Language models don't always say what they think: Unfaithful explanations in chain-of-thought prompting. In *NeurIPS*.

Guangya Wan, Yuqi Wu, Jie Chen, and Sheng Li. 2024. Reasoning aware self-consistency: Leveraging reasoning paths for efficient LLM sampling. *arXiv preprint arXiv:2408.17017*.

Yue Wan, Xiaowei Jia, and Xiang Lorraine Li. 2025. Unveiling confirmation bias in chain-of-thought reasoning. In *Findings of the Association for Computational Linguistics: ACL 2025*.

Peiyi Wang, Lei Li, Zhihong Shao, Runxin Xu, Damai Dai, Yifei Li, Deli Chen, Yu Wu, and Zhifang Sui. 2024. Math-shepherd: Verify and reinforce LLMs step-by-step without human annotations. In *ACL*.

Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023. Self-consistency improves chain of thought reasoning in language models. In *ICLR*.

Yixuan Weng, Minjun Zhu, Fei Xia, Bin Li, Shizhu He, Shengping Liu, Bin Sun, Kang Liu, and Jun Zhao. 2023. Large language models are better reasoners with self-verification. In *Findings of EMNLP*.

Adina Williams, Nikita Nangia, and Samuel Bowman. 2018. A broad-coverage challenge corpus for sentence understanding through inference. In *Proceedings of NAACL-HLT*, pages 1112–1122.

Yuxi Xie, Kenji Kawaguchi, Yiran Zhao, Xu Zhao, Min-Yen Kan, Junxian He, and Qizhe Xie. 2023. Self-evaluation guided beam search for reasoning. In *NeurIPS*.

Jundong Xu, Hao Fei, Meng Luo, Qian Liu, Liangming Pan, William Yang Wang, Preslav Nakov, Mong-Li Lee, and Wynne Hsu. 2025. Aristotle: Mastering logical reasoning with a logic-complete decompose-search-resolve framework. In *ACL*.

Lei Xu, Pierre Beckmann, Marco Valentino, and Andre Freitas. 2026. Adaptive LLM-symbolic reasoning via dynamic logical solver composition (DyLoS). In *EACL*.

An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, and 1 others. 2024. Qwen2.5 technical report. *arXiv preprint arXiv:2412.15115*.

Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. 2023. Tree of thoughts: Deliberate problem solving with large language models. In *Advances in Neural Information Processing Systems*, volume 36.

Xi Ye, Qiaochu Chen, Isil Dillig, and Greg Durrett. 2023. Satlm: Satisfiability-aided language models using declarative prompting. In *Advances in Neural Information Processing Systems*, volume 36.

Yunyao Zhang, Xinglang Zhang, Junxi Sheng, Wenbing Li, Yi-Ping Phoebe Chen, Junqing Yu, Wei Yang, and Zikai Song. 2025. From ambiguity to verdict: A semiotic-grounded multi-perspective agent for LLM logical reasoning. *arXiv preprint arXiv:2509.24765*.

Andy Zhou, Kai Yan, Michal Shlapentokh-Rothman, Haohan Wang, and Yu-Xiong Wang. 2024. Language agent tree search unifies reasoning acting and planning in language models. In *International Conference on Machine Learning (ICML)*.

## A Prompt Templates

SICA uses domain-specific prompt templates for constraint extraction: one for mathematical reasoning (GSM8K, AIME) and one for logical reasoning (ProofWriter, FOLIO). Both share the same system prompt. The LLM is called with temperature $T$=0.3, max tokens 1024, and structured JSON output mode. Up to 6 traces are processed in parallel via thread pooling, with 2 retries on failure (exponential backoff, base 0.5s).

**System Prompt.**

```
You are a constraint extraction tool. Output ONLY valid JSON. Do NOT solve problems, reason about correctness, or think step-by-step. Extract constraints from the given trace exactly as stated.
```

**Mathematical Constraint Extraction (EXTRACTION_PROMPT).** Used for GSM8K and AIME datasets. The placeholder `{trace}` is replaced with the reasoning trace at runtime.

```
Extract mathematical constraints from this reasoning trace as a JSON object.

Rules:
- type: "equation", "inequality", or "predicate"
- expression: human-readable, e.g. "x + y == 14"
- z3_formula: a single comparison expression in Python Z3 syntax
- source_step: step number where the constraint appears
- Use variable names from the trace

z3_formula MUST follow these rules:
- Allowed operators: ==, !=, <, >, <=, >=, +, -, *, /, **, %
- Use individual named variables: a1, a2, a3... NOT arrays a[1] or sets A
- Expand all sums explicitly: "a1 + a2 + a3 == 55" NOT "sum([a1,a2,a3])"
- NO Python builtins: sum(), len(), max(), min(), list(), set(), range(), int()
- Each z3_formula must be exactly ONE comparison (==, !=, <, >, <=, >=)
- For multiple values, write separate constraints for each

Output ONLY the JSON below, nothing else:
{"constraints": [{"type": "equation", "expression": "x + y == 14", "z3_formula": "x + y == 14", "source_step": 1}], "answer": "final_answer", "variables": ["x", "y"]}

Trace:
{trace}
```

**Logical Constraint Extraction (LOGIC_EXTRACTION_PROMPT).** Used for ProofWriter and FOLIO datasets.

```
IMPORTANT: You are an EXTRACTION tool, NOT a problem solver.
- Do NOT re-solve or re-reason about the problem.
- Do NOT verify whether the trace's reasoning is correct.
- ONLY extract the logical constraints that are explicitly stated or used in the trace below.
- Output ONLY the JSON object, nothing else.

Extract logical constraints from this reasoning trace about a logic problem.

The problem has facts (base assertions), rules (grounded implications), and derived conclusions. Convert each into a Z3 boolean formula.

Variable naming:
- Unary property: property_entity (e.g., kind_anne, red_charlie, round_fiona)
- Binary relation: relation_subject_object (e.g., eats_bear_squirrel,
```

```
    likes_lion_cat)
- Use lowercase with underscores only

Constraint types:
- "fact": a given assertion, e.g.,
    kind_anne == True
- "rule": a grounded implication over
     specific entities, e.g., Implies
    (kind_anne, nice_anne)
- "derived": an inferred conclusion
    from facts + rules, e.g.,
    nice_anne == True

Z3 operators:
- Implies(a, b) for if-then rules
- And(a, b, ...) for conjunctive
    conditions
- Or(a, b, ...) for disjunctive
    conditions
- Not(a) for negation
- == True / == False for boolean
    assertions

Output ONLY the JSON below, nothing
    else:
{"constraints": [{"type": "fact", "
    expression": "kind(anne)", "
    z3_formula": "kind_anne == True",
     "source_step": 1}], "answer": "
    True or False or Unknown", "
    variables": ["kind_anne"]}

Trace:
{trace}
```

**Output Schema.** Both prompts produce a JSON object with the following structure:

```
{
  "constraints": [
    {
      "type": "<equation|inequality|
          predicate>
               or <fact|rule|derived
                   >",
      "expression": "<human-readable
          description>",
      "z3_formula": "<Z3-compatible
          expression>",
      "source_step": <integer>
    }
  ],
  "answer": "<final answer string>",
  "variables": ["<var1>", "<var2>",
      "..."]
}
```

The pipeline additionally injects an `answer_assertion` constraint per trace (not produced by the LLM):

```
{"type": "answer_assertion",
 "expression": "answer is <ans>",
 "z3_formula": "__sica_answer_<ans>
     == True",
 "source_step": -1}
```

**Prompt Selection Logic.** Domain assignment is determined by dataset: FOLIO and ProofWriter use LOGIC_EXTRACTION_PROMPT; GSM8K, AIME, StrategyQA, and ARC-Challenge use EXTRACTION_PROMPT. StrategyQA and ARC-Challenge are assigned to the mathematical prompt because their reasoning structure does not involve formal logic predicates or implications, despite StrategyQA producing boolean answers.

## B Z3 MaxSAT Evaluation Pseudocode

Algorithm 1 describes the Z3 MaxSAT solving procedure. Algorithm 2 describes the source-trace attribution scoring.

Domain constraint variables (e.g., `x + y == 14`) and answer assertion variables (e.g., `__sica_answer_42 == True`) are logically independent in the Z3 formulation. Discriminative signal arises solely from conflicts among domain constraints: when traces supporting different answers produce mutually contradictory constraints, the solver excludes the lower-weight subset, and the scorer penalizes the corresponding answers.

**Algorithm 1** Z3 Weighted Partial MAX-SAT

**Require:** Deduplicated constraint set $\mathcal{C} = \{(c_m, w_m, S_m)\}_{m=1}^{M}$ where $c_m$ is a Z3 formula, $w_m$ is weight, $S_m$ is the set of source trace indices

**Ensure:** Partition $(\mathcal{C}^*, \mathcal{C}^{\setminus})$ where $\mathcal{C}^*$ is the max-weight satisfiable subset

*opt* $\leftarrow$ Z3.OPTIMIZE()
**for** $m = 1, \ldots, M$ **do**
    $b_m \leftarrow$ fresh Boolean indicator
    *opt*.ADD$(b_m \Rightarrow c_m)$ ▷ soft clause guarded by indicator
    *opt*.ADDSOFT$(b_m,$ weight $= w_m)$
**end for**
*result* $\leftarrow$ *opt*.CHECK()
*model* $\leftarrow$ *opt*.MODEL()
$\mathcal{C}^* \leftarrow \{(c_m, w_m, S_m) : \textit{model}(b_m) = \top\}$
$\mathcal{C}^{\setminus} \leftarrow \mathcal{C} \setminus \mathcal{C}^*$
**return** $(\mathcal{C}^*, \mathcal{C}^{\setminus})$

## C Capability-Accuracy Constraint Diagnostics

**Conditional Correction Ratio.** We define the *Conditional Correction Ratio* (CCR) to summarize

**Algorithm 2** Source-Trace Attribution Scoring

**Require:** Satisfied set $\mathcal{C}^*$, excluded set $\mathcal{C}^\setminus$, candidate answers $\mathcal{A}$, trace-answer mapping $\tau$ : trace_idx $\to a$, penalty weight $\alpha$

**Ensure:** Score $s(a)$ for each $a \in \mathcal{A}$

**for** each $a \in \mathcal{A}$ **do**
  $T_a \leftarrow \{i : \tau(i) = a\}$ ▷ trace indices producing answer $a$
  $pos(a) \leftarrow \sum_{(c,w,S)\in\mathcal{C}^*} w \cdot \mathbf{1}[S \cap T_a \neq \emptyset]$
  $neg(a) \leftarrow \sum_{(c,w,S)\in\mathcal{C}^\setminus} w \cdot \mathbf{1}[S \cap T_a \neq \emptyset]$
  $s(a) \leftarrow pos(a) - \alpha \cdot neg(a)$
**end for**
**return** $a^* = \arg\max_{a\in\mathcal{A}} s(a)$

verifier–generator complementarity:

$$\mathrm{CCR}(V, G) = \log \frac{P(V \text{ correct} \mid G \text{ wrong})}{P(V \text{ correct} \mid G \text{ correct})}. \quad (6)$$

CCR $> 0$ means $V$ preferentially corrects $G$'s errors; CCR $< 0$ indicates shared bias. CCR links our findings: (1) SCB corresponds to $\mathrm{CCR}(\text{self}, G) \approx 0$; (2) the cross-architecture escape (§5.4) predicts $\mathrm{CCR}(V, G) > 0$ when $V$ is independent and capable.

**Empirical CCR across verifier–generator pairs.** Table 4 reports CCR for eight verifier–generator–dataset conditions, sorted by CCR descending. All three cross-architecture NLI pairs on ProofWriter yield CCR $> 0$ (verifier preferentially corrects generator errors), while all three same-model SICA conditions yield CCR $< 0$ (shared bias). CCR correlates with combo gain: Spearman $\rho = 0.839$, 95% bootstrap CI $[0.338, 0.990]$; LOO-robust (min $p = 0.014$). Four of eight conditions share the DeBERTa verifier, yielding effective $n < 10$; results should be interpreted as a consistent pattern rather than a precise effect size.

Table 4: Empirical CCR across eight verifier–generator conditions (sorted by CCR descending). CCR $> 0$: cross-architecture NLI verifiers on ProofWriter. CCR $< 0$: same-model SICA or mismatched capability gap.

| Generator | Verifier | Dataset | CCR | Δ (pp) |
|---|---|---|---|---|
| Mistral-7B | BART-MNLI | PW-600 | +1.86 | +5.17 |
| Mistral-7B | DeBERTa-MNLI | PW-600 | +1.67 | +6.67 |
| Mistral-7B | RoBERTa-MNLI | PW-600 | +1.42 | +4.17 |
| Qwen2.5-14B | DeBERTa-MNLI | PW-600 | −0.21 | +0.33 |
| Mistral-7B | DeBERTa-MNLI | FOLIO-204 | −0.47 | +2.94 |
| Mistral-7B | SICA | FOLIO-204 | −2.93 | +3.43 |
| Qwen2.5-14B | SICA | PW-600 | −4.21 | −2.50 |
| Mistral-7B | SICA | PW-600 | −4.61 | −2.83 |

**Per-condition diagnostics.** Table 5 reports per-condition diagnostic metrics referenced in §M.

| Model | Domain | $C_0$ (%) | Extr. Rate | Contr. Rate | Δ (pp) |
|---|---|---|---|---|---|
| Qwen2.5-14B | FOLIO | 35.3 | 0.89 | 0.022 | 0.00 |
| Qwen2.5-14B | ProofWriter | 39.2 | 0.89 | 0.022 | +0.33 |
| Qwen2.5-14B | StrategyQA† | 10.0 | 0.70 | — | +3.33 |
| Qwen2.5-14B | ARC-Chall.† | 5.0 | 1.00 | — | −1.67 |
| Qwen2.5-7B | FOLIO+PW† | 42.1 | 0.94 | 0.027 | 0.00 |
| Mistral-7B | FOLIO+PW† | 50.0 | 0.88 | 0.056 | 0.00 |
| LLaMA-3.1-8B | StrategyQA | 41.0 | — | — | +2.00 |
| LLaMA-3.1-8B | FOLIO | 61.8 | 0.94 | 0.062 | −4.41 |
| DeepSeek-R1-7B | FOLIO+PW† | 58.3 | 0.84 | 0.037 | −3.33 |
| QwQ-32B | Combined† | 2.6 | — | — | 0.00 |
| Qwen2.5-14B | GSM8K† | 13.3 | 0.15 | — | 0.00 |

Table 5: Capability-accuracy constraint diagnostics. $C_0$: fraction of questions with multiple distinct candidate answers across $K = 12$ traces. Extraction rate: fraction of traces yielding at least one parseable logical constraint. Contradiction rate: fraction of extracted constraint sets with internal contradictions. Δ: SICA−SC gap (pp). †: $n \leq 60$. Dashes indicate conditions where extraction diagnostics were not computed (StrategyQA uses boolean answers without symbolic extraction; QwQ-32B Combined had near-zero $C_0$, making extraction analysis uninformative). This table includes additional exploratory conditions not reported in Table 1.

## D Statistical Power Analysis

We compute the minimum detectable effect (MDE) for each condition at $\alpha = 0.05$ and 80% power using exact binomial power calculations over McNemar discordant pairs. Table 6 reports three grouped conditions with $n \geq 200$ (Qwen2.5-14B FOLIO and ProofWriter are pooled into a single $n$=804 analysis, corresponding to four Table 1 rows), which constitute our confirmatory analyses. The remaining seven conditions ($n \leq 60$) yield infinite MDE due to insufficient discordant pairs and serve only as regime characterization.

| **Condition** | $n$ | **MDE** | **Obs. Δ** | **Obs. Pow.** |
|---|---|---|---|---|
| Qwen-14B FOLIO+PW | 804 | 1.86pp | +0.25pp | 5.7% |
| LLaMA-8B StrategyQA | 200 | 4.64pp | +2.00pp | 20.6% |
| LLaMA-8B FOLIO | 204 | 4.84pp | −4.41pp | 18.6% |

Table 6: Power analysis for confirmatory conditions ($n \geq 200$). MDE = minimum detectable effect at 80% power. All observed effects fall below their respective MDEs, and observed power remains below 21% in every case.

The largest study (Qwen-14B, $n$=804, 30 discordant pairs) can detect effects as small as 1.86pp, yet the observed Δ of +0.25pp is an order of magnitude smaller. The two LLaMA-8B conditions require effects of 4.64pp and 4.84pp to reach significance; neither observed Δ approaches these thresholds. All three conditions are consistent with the null hypothesis that SICA provides no accuracy gain over self-consistency.

## E Bootstrap Confidence Intervals

We compute 95% confidence intervals for $\Delta(\text{SICA}-\text{SC})$ via 10,000 bootstrap resamples (percentile method, seed 42). Table 7 reports the results for the three confirmatory conditions.

| Condition | $n$ | Obs. $\Delta$ | 95% CI |
|---|---|---|---|
| Qwen-14B FOLIO+PW | 804 | +0.25pp | [−1.12, +1.62] |
| LLaMA-8B StrategyQA | 200 | +2.00pp | [−1.50, +5.50] |
| LLaMA-8B FOLIO | 204 | −4.41pp | [−5.88, +0.98] |

Table 7: Bootstrap 95% confidence intervals for $\Delta(\text{SICA} - \text{SC})$ in percentage points. All intervals include zero, consistent with no reliable accuracy difference.

All three intervals contain zero. The narrowest interval (Qwen-14B, $[-1.12, +1.62]$) rules out practically meaningful gains (>2pp) even in the most favorable case. The widest interval (LLaMA-8B FOLIO, $[-5.88, +0.98]$) skews negative, indicating that SICA may slightly hurt accuracy in this condition. These results corroborate the McNemar tests and power analysis: no condition provides evidence that logical constraint aggregation improves over majority voting.

## F Case Studies: Discordant Predictions

Among 804 problems, SICA and SC agree on 773 (96.1%). The 31 discordant cases comprise 16 SICA wins (SICA correct, SC wrong), 14 SC wins (SC correct, SICA wrong), and 1 where both select different wrong answers. All 31 occur at exact ties (entropy$=1.0$, 6:6 vote split) or near-ties (entropy$\geq 0.9183$, 8:4 at most), since SICA can differ from SC only when constraint weights shift the majority away from SC's tiebreak choice. We present three representative cases that illustrate the mechanism behind capability-accuracy constraint failures.

**Case 1: SICA Wins (folio_134, FOLIO).** *Premises*: Some mammals have teeth. Platypus have no teeth. Platypus are mammals. Humans have teeth. *Conclusion*: Humans are mammals. *Gold*: Unknown.

The premises state that *some* mammals have teeth and that humans have teeth, but "having teeth" is not sufficient for "being a mammal" under open-world semantics. SC produces a 6:6 split (Unknown:6, True:6) and tiebreaks alphabetically to True (wrong). SICA extracts 7 constraints; MaxSAT excludes 1 constraint inconsistent with the rest, reducing the weighted score for True-voting traces and tipping the aggregation to Unknown (correct). The excluded constraint likely captured an incorrect inference step (e.g., affirming the consequent) present only in True-voting traces. While SICA succeeds here, the success is coincidental: the excluded constraint happens to anti-correlate with the correct answer.

**Case 2: SC Wins (ProofWriter-1066_Q6, ProofWriter).** *Key chain*: White(Bob)→Round(Bob) [white things are round] → Young(Bob) [all round things are young]. *Conclusion*: "Bob is not young." *Gold*: False (Bob IS young).

SC produces a 6:6 split (False:6, True:6) and tiebreaks to False (correct). SICA extracts 17 constraints; MaxSAT excludes 2 that appear preferentially in False-voting traces. These excluded constraints likely captured correct intermediate derivations (e.g., `young_bob == True`) that appeared only in traces completing the full deduction chain. By excluding them, MaxSAT removes evidence supporting the correct answer. SICA selects True (wrong). This case illustrates how self-extracted constraints can systematically mislead: correct reasoning steps become discriminative signals that the solver mistakenly penalizes.

**Case 3: Non-discriminative Constraints (ProofWriter-903_Q6, ProofWriter).** *Key chain*: Nice(Mouse)→Cold(Mouse) [all nice people are cold] → Chases(Mouse,Mouse) [nice and cold → chase mouse]. *Conclusion*: "The mouse does not chase the mouse." *Gold*: False.

SC produces a 6:6 split (False:6, Unknown:6) and tiebreaks to False (correct). SICA extracts 44 constraints but excludes only 1 (2.3%). The remaining 43 are domain facts and grounded rules (`nice_mouse == True`, `Implies(nice_mouse, cold_mouse)`, etc.) that Z3 satisfies identically regardless of the final answer. Both False-voting and Unknown-voting traces share the same premises and grounded rules; they differ only in whether the trace completed the full derivation chain. The single excluded constraint carries negligible weight against 43 shared constraints, so SICA collapses to SC.

**Pattern.** These cases exemplify the general pattern across the 773 agreeing problems: the vast majority of extracted constraints encode shared domain structure rather than answer-specific rea-

soning, and MaxSAT aggregation degenerates to majority vote. Table 8 summarizes.

Table 8: Summary of three representative discordant cases. All occur at exact 6:6 vote ties. Constraint exclusion can break ties in either direction (Cases 1–2) or have no effect (Case 3).

| Case | ID | Gold | SC | SICA | #Constr. | Excl. (%) |
|---|---|---|---|---|---|---|
| 1 (SICA win) | folio_134 | Unknown | True × | Unknown ✓ | 7 | 1 (14.3%) |
| 2 (SC win) | PW-1066_Q6 | False | False ✓ | True × | 17 | 2 (11.8%) |
| 3 (Non-disc.) | PW-903_Q6 | False | False ✓ | False ✓ | 44 | 1 (2.3%) |

## G Oracle Control

Replacing self-extracted constraints with gold annotations (FOLIO logical formulae, ProofWriter DSL), Oracle-SICA yields $+29.90$ pp on Mistral-7B FOLIO ($p < 10^{-13}$), $+13.73$ pp on Qwen2.5-14B FOLIO ($p = 2.0 \times 10^{-7}$), and $+17.17$ pp on ProofWriter ($p < 10^{-14}$). Z3 agrees with gold labels on 95.1% (FOLIO) and 97.1% (ProofWriter). The MAX-SAT mechanism is sound; Mistral-7B's best self-extracted $\Delta$ ($+3.43$ pp) captures only 11.5% of its oracle ceiling. For Qwen2.5-14B on ProofWriter, the gap is wider still: self-extraction degrades accuracy ($-2.50$ pp) against an oracle ceiling of $+17.17$ pp, indicating that stronger models do not self-extract more effectively.

**ProofWriter per-subtype analysis.** ProofWriter problems encode deductive rules as Domain-Specific Language (DSL) logic programs. Each problem uses one of four predicate subtypes: attribute predicates with or without negation (AttNeg, AttNoneg), and relation predicates with or without negation (RelNeg, RelNoneg). Relation predicates involve binary relations between entities (e.g., `eats(bear, squirrel)`), while attribute predicates assign unary properties (e.g., `kind(anne)`).

The oracle pipeline parses these DSL annotations deterministically into Z3 formulas without any LLM involvement. Of the 600 ProofWriter problems, 594 (99.0%) produce valid Z3 parses; the remaining 6 fail due to unsupported DSL constructs. Across all 7,128 trace-problem pairs submitted to Z3, the solver returns a result in every case (0% solver errors). Z3 evaluations agree with ground-truth labels on 577 of 594 parseable problems (97.14%), confirming that the deterministic DSL-to-Z3 translation faithfully preserves problem semantics.

Table 9 reports the per-subtype breakdown. Relation-predicate subtypes show substantially larger gains than attribute-predicate subtypes: RelNeg improves by $+28.58$ pp and RelNoneg by $+23.29$ pp, compared to $+10.00$ pp for AttNeg and $+8.44$ pp for AttNoneg. Relation predicates involve longer reasoning chains with more intermediate entities, producing greater answer diversity across traces ($C_0$) and more opportunities for oracle constraints to correct errors.

Table 9: ProofWriter oracle experiment per-subtype breakdown. Oracle-SICA uses gold DSL annotations parsed deterministically to Z3 for consistency checking. Relation-predicate subtypes (RelNeg, RelNoneg) show larger gains than attribute-predicate subtypes; relation subtypes involve longer reasoning chains and benefit more from oracle constraints. Bold indicates best accuracy per row.

| Subtype | $n$ | SC Acc (%) | Oracle Acc (%) | $\Delta$ (pp) |
|---|---|---|---|---|
| AttNoneg | 154 | 90.26 | **98.70** | +8.44 |
| AttNeg | 160 | 81.88 | **91.88** | +10.00 |
| RelNoneg | 146 | 60.96 | **84.25** | +23.29 |
| RelNeg | 140 | 60.71 | **89.29** | +28.58 |
| Overall | 600 | 74.00 | **91.17** | +17.17 |

## H Constraint Ablation Details

Table 10: Constraint ablation (Qwen2.5-14B, $n = 804$). Agreement: predictions identical to SC. MAX-SAT and count-only produce nearly identical predictions, confirming that self-extracted constraints carry no signal beyond vote counts.

| Aggregation | Acc. (%) | Agreement w/ SC |
|---|---|---|
| SC (majority vote) | 76.24 | — |
| SICA (MAX-SAT) | 76.49 | 773 / 804 |
| Count-only | 76.62 | 774 / 804 |
| Random-weight | 75.87 | 764 / 804 |

Table 11: MAX-SAT vs. count-only agreement across constraint weight $\alpha \in [0, 1]$ on FOLIO ($n = 204$). Mistral-7B (BR $= 4.97\times$, seed 42); Qwen2.5-14B (BR $= 3.93\times$, seed 123). $\alpha$=0: pure Z3 satisfiability (no source-attribution); $\alpha$=1: full source-attribution penalty. Agreement $\geq 99\%$ at all $\alpha$ including endpoints, confirming vacuity is weight-insensitive.

| $\alpha$ | Mistral Agr. (%) | Qwen2.5 Agr. (%) |
|---|---|---|
| 0.0 | 100 | 100 |
| 0.1 | 100 | 100 |
| 0.3 | 100 | 100 |
| 0.5 | 100 | 100 |
| 0.7 | 99 | 100 |
| 0.9 | 99 | 100 |
| 1.0 | 99 | 100 |

## I Remediation Strategy Details

Table 12 reports nine prompt-level strategies; Table 13 reports three method-level interventions. Figure 7 visualizes all 27 strategies.

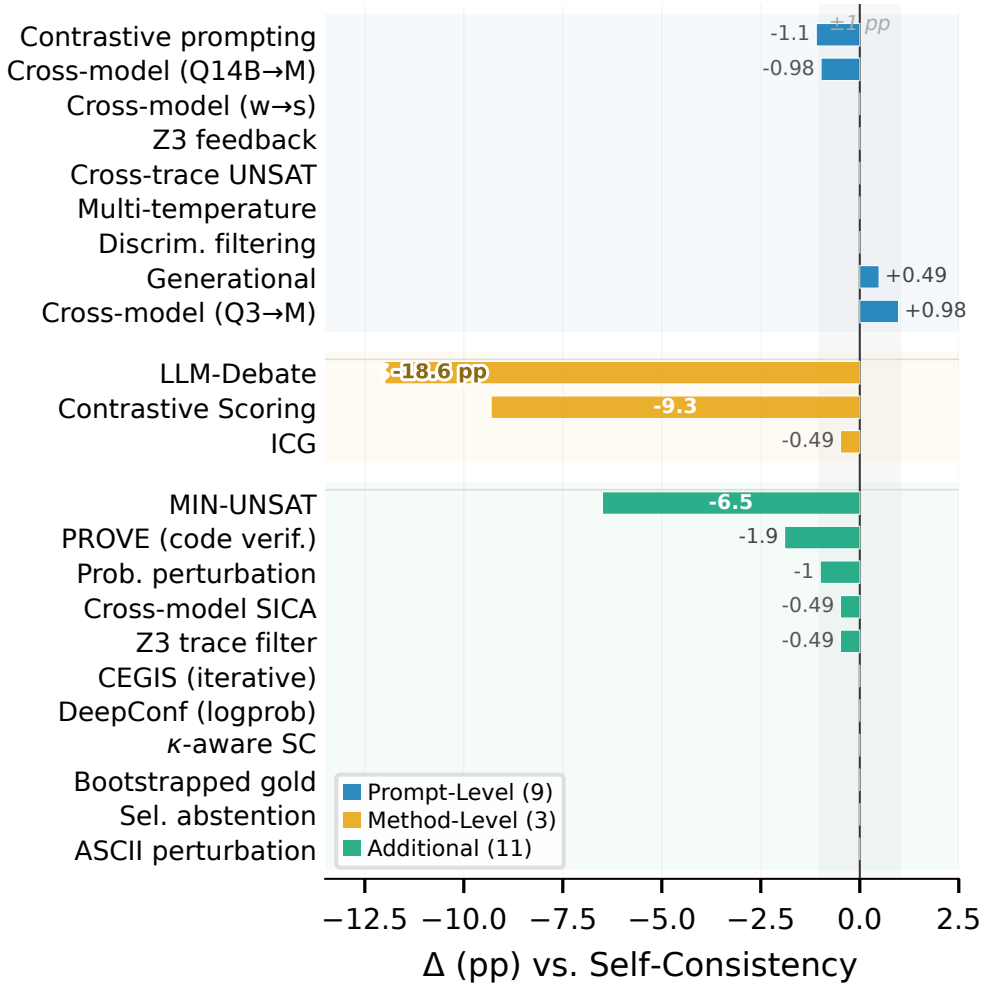



Figure 7: Twenty-three of 27 training-free strategies across four categories (four additional strategies tested but omitted for clarity). All produce neutral-to-negative Δ vs. SC. Grey band: ±1 pp noise zone.

Table 12: Nine prompt-level remediation strategies. Baseline: Qwen2.5-14B FOLIO, SC = 75.98%, Δ = −0.49 pp. None reaches significance. Three method-level strategies are reported in Table 13.

| Strategy | Target | Δ (pp) | Key finding |
|---|---|---|---|
| Contrastive[a] | Prompt | −1.10 | non-disc. 6.0% (↓ from 8.2%) |
| Cross-model[b] | Architecture | 0.00 | disc. 0% (weak→strong); ±1 pp (strong→weak) |
| Qwen3-14B[c] | Capability | −0.49 | $p = 0.655$ |
| Z3 feedback | Solver | — | 0.9% UNSAT trigger |
| Cons. filtering | Noise | 0.00 | $T \geq 4 \rightarrow$ SC |
| Cross-trace UNSAT | Independence | — | 56.4% $\emptyset$ vars |
| $T$=1.0[d] | Diversity | 0.00 | isolated peak at $T$=0.7 only |
| Multi-temp[e] | Diversity | 0.00 | $b$=5, $c$=5 (balanced) |
| Disc. filtering[f] | Filtering | 0.00 | 803/804 agree w/ SICA |

[a] $n$=182 (extraction failures excluded). [b] Weak→strong: Mistral-7B extracts from Qwen2.5-14B traces. Strong→weak: Qwen3-14B (60.29%) and Qwen2.5-14B (58.33%) extract from Mistral-7B FOLIO traces ($n$=204); self-extraction baseline 59.31%. [c] $n$=204, SC = 83.33%. [d] Mistral-7B FOLIO, $n$=204. [e] Mistral-7B FOLIO, $T \in \{0.3, 0.7, 1.2\}$, 4 traces each, $n$=204. [f] Qwen2.5-14B, $n$=804; removing non-discriminative constraints.

## J Additional Intervention Results

Table 14 reports the remaining 15 strategies beyond the 12 in Appendix I.

Figure 4 (main text) visualizes the process–answer independence gap.

Table 13: Method-level interventions on Mistral-7B with McNemar's paired test. All produce neutral-to-catastrophic results. Independent Constraint Generation (ICG) shows two FOLIO seeds; $p$ for the first. *** $p < 0.001$; ** $p < 0.01$.

| | | FOLIO ($n = 204$) | | LogiQA ($n = 200$) | |
|---|---|---|---|---|---|
| Method | Target | Δ (pp) | $p$ | Δ (pp) | $p$ |
| SC baseline | — | 0.00 | — | 0.00 | — |
| ICG | Trace coupling | −1.96 / +1.47 | .206 | −0.50 | .706 |
| Contrastive | Scoring bias | **−9.31** | .007 | −4.50 | .160 |
| Debate | Role diversity | **−18.63** | <.001 | **−23.00** | <.001 |

## K Extraction Error Taxonomy

Constraints must discriminate between candidate answers for MAX-SAT to produce a ranking different from majority vote. We measure discriminative power at two levels on Qwen2.5-14B across FOLIO and ProofWriter ($n = 804$). At the source-trace level, 39.2% of total constraint weight originates from traces whose answer differs from the plurality, but only 12.1% of individual constraints fall into this minority category. At the Z3 semantic level, 91.8% of constraints [95% CI: 91.2, 92.4] are technically discriminative, producing differ-

Table 14: Additional intervention results beyond the nine prompt-level and three method-level strategies reported in the main text. All produce neutral-to-negative results, completing the exhaustive remediation analysis across 27 distinct approaches.

| # | Method | Type | Target | $\Delta$ (pp) | Key Finding |
|---|---|---|---|---|---|
| 13 | PROVE (code verif.) | Paradigm | Formal proof | $-1.9$ | 15.2% compilable; conclusive acc. = 50% |
| 14 | CEGIS (iterative) | Multi-round | Consistency | $0.0^{\dagger}$ | R1 $+3.43$ pp then oscillates |
| 15 | DeepConf (logprob) | Filtering | Confidence | 0.0 | $\Delta_{\text{logprob}} = 0.006$ (no separation) |
| 16 | Cross-model SICA | Cross-model | Independence | $-0.49$ | $\kappa_{\text{cross}}$=0.42 vs $\kappa_{\text{within}}$=0.53 |
| 17 | Problem perturbation | Input diversity | Trace diversity | $<0$ | $\kappa$ *increased* to 0.70 (anti-effect) |
| 18 | MIN-UNSAT | Solver objective | Constraint sel. | $-6.5$ | Mean excluded constraints = 1.3 |
| 19 | $\kappa$-aware SC | Voting rule | Weighted voting | 0.0 | 11/11 conditions $\Delta = 0$ |
| 20 | Z3 trace filter | Trace filtering | Quality | $-0.49$ | Precision 49.1%, 7 questions affected |
| 21 | Bootstrapped gold | Iterative | Self-improvement | $0.0^{\dagger}$ | R1 $+2.45$ pp then oscillates |
| 22 | Selective abstention | Diagnostic | Confidence | $+4.4^{*}$ | AUROC = 0.673, at 80% coverage |
| 23 | ASCII perturbation | Input diversity | Format diversity | 0.0 | $\kappa$: 0.39 $\rightarrow$ 0.36 (negligible) |
| 24 | Atom pipeline | Paradigm | Decomposition | $-10.0$ | Atomic extraction degrades |
| 25 | Premise-only filter | Constraint sel. | Bias isolation | $+2.45$ | $p = 0.359$; halves conclusion-bias |
| 26 | DPP trace selection | Trace diversity | Determinantal | $+1.47$ | $p = 0.629$; $K_{\text{sel}}$=8 |
| 27 | Z3 strict-mode | Solver config | UNSAT filtering | 0.0 | McNemar $b$=1, $c$=1; 63% UNSAT |

All experiments on Mistral-7B FOLIO ($n$=204) unless noted. $^{\dagger}$ Oscillates without convergence; net effect $\approx 0$. $^{*}$ Accuracy gain only at reduced coverage (diagnostic value, not a general improvement). Methods 1–12 are reported in Table 12 and Table 13.

ent satisfiability outcomes when evaluated against different candidate answers. Only 8.2% are non-discriminative.

The high discriminative rate does not translate into accuracy gains because discrimination mirrors the model's own answer distribution. Each trace produces constraints with its own variable names, so Z3 treats identically-intended propositions as unrelated symbols; among cross-answer constraint pairs, 56.4% share zero Z3 variables. This variable isolation means constraints from different traces are trivially jointly satisfiable, and MAX-SAT retains nearly all of them regardless of source answer. Removing the 8.2% non-discriminative constraints yields zero accuracy improvement. The discriminative majority does not provide independent signal; it reinforces the majority answer that SC would already select. This confirmation bias, not a lack of discrimination, explains why SICA degenerates to majority voting (Appendix H).

# L Hyperparameter Sensitivity

## L.1 K Sensitivity

Figure 8 shows SICA $\Delta$ as a function of the number of sampled traces $K$ for Mistral-7B on FOLIO ($n = 204$, no fixed seed). The relationship is non-monotonic: $K = 4$ yields $\Delta = -1.47$ pp, $K = 8$ yields $\Delta = -1.96$ pp, $K = 12$ reaches $\Delta = +3.43$ pp, $K = 16$ drops to $\Delta = +1.47$ pp, and $K = 20$ partially recovers to $\Delta = +1.96$ pp. The recovery at $K = 20$ rules out a simple peaked pattern, but $K = 12$ remains the only setting with $\Delta > 2$ pp ($p = 0.092$, marginal).

The apparent $\Delta$ peak at $K = 12$ is confounded with SC baseline. SICA absolute accuracy plateaus at 59.31% (121/204) for $K \geq 12$: identical at $K = 12$ and $K = 20$. The $\Delta$ variation across these settings is driven primarily by SC fluctuations rather than by SICA improvement. $K = 12$ produces a relatively low SC (55.88%), placing it in the intermediate-SC region; $K = 8$ (SC = 58.33%) and $K = 20$ (SC = 57.35%) have higher baselines, compressing $\Delta$ even though SICA accuracy does not change for $K \geq 12$. Additional traces beyond $K = 12$ provide no benefit to SICA absolute performance, consistent with the constraint quality bottleneck. The $K = 12$ $\Delta$ captures only 25.0% of the oracle ceiling ($+13.73$ pp).

## L.2 Temperature Sensitivity

Temperature sensitivity on Mistral-7B FOLIO ($n = 204$, default seed) reveals a sharp isolated peak rather than a smooth trend. Across four temperature settings, only $T = 0.7$ produces a positive effect: $T = 0.3$ yields $\Delta = -1.47$ pp (SC = 58.33%), $T = 0.5$ yields $\Delta = -0.98$ pp (SC = 58.33%), $T = 0.7$ yields $\Delta = +3.43$ pp (SC = 55.88%), and $T = 1.0$ yields $\Delta = 0.00$ pp (SC = 55.39%). All other temperatures yield negative or null effects, and the single positive result at $T = 0.7$ is confounded with SC baseline. Combined with the seed sensitivity (0 of 4 seeds reaching $p < 0.05$ at $T = 0.7$), the positive trend depends on a specific combination of temperature, seed, and baseline accuracy that same-model sampling rarely achieves.

The parallel between $K$ and $T$ sensitivity points

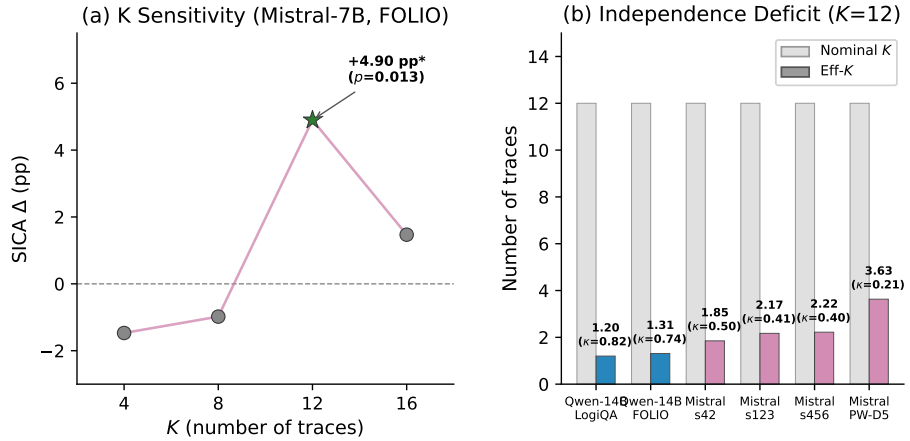



Figure 8: SICA Δ (pp) vs. number of traces $K$ for Mistral-7B on FOLIO ($n = 204$, default seed, $T = 0.7$). Non-monotonic pattern: SICA accuracy plateaus at 59.31% for $K \geq 12$; the apparent Δ peak at $K = 12$ partly reflects a relatively low SC baseline (55.88%) at that point. Error bars: 95% bootstrap CI.

to a common underlying variable. In both sweeps, the setting that produces the largest SICA gain also produces a relatively low SC baseline (55.88%), which places it in the intermediate-SC region. The hyperparameters themselves ($K$, $T$) are not the causal driver; they modulate SC level, and it is the SC level that determines whether SICA has operating room.

## M Entropy Decomposition

We partition problems by trace agreement: high-entropy (majority count $\leq 8$ out of $K = 12$) and low-entropy (majority count $\geq 9$). Table 15 reports SICA Δ within each partition across eight model-dataset conditions.

Table 15: Entropy decomposition of SICA Δ (pp). High-entropy: majority count $\leq 8$; low-entropy: majority count $\geq 9$. †Partial data (180/600). Pre-tiebreaking SC values; pattern robust to BH correction.

| Model | Dataset | High-entropy | | Low-entropy | |
|---|---|---|---|---|---|
| | | $n$ | Δ | $n$ | Δ |
| Mistral-7B | FOLIO | 78 | **+12.8** | 126 | 0.0 |
| Mistral-7B (s123) | FOLIO | 77 | **+9.1** | 127 | 0.0 |
| Mistral-7B (s456) | FOLIO | 75 | −1.3 | 129 | 0.0 |
| Mistral-7B | PW-D5 | 267 | −4.9 | 333 | −1.2 |
| Qwen2.5-14B | FOLIO | 37 | −8.2 | 167 | −0.6 |
| Qwen2.5-14B | LogiQA | 23 | −4.3 | 177 | 0.0 |
| Qwen2.5-7B | FOLIO | 47 | −2.1 | 157 | 0.0 |
| LLaMA-3.1-8B† | PW-D5 | 76 | −3.9 | 104 | −1.9 |

Two patterns emerge. First, low-entropy problems produce $\Delta \approx 0$ pp across all eight conditions: when traces agree, constraints carry no information beyond the majority vote.

Second, the direction of SICA's effect on high-entropy problems depends on the accuracy regime, not on entropy alone. In the intermediate-SC region (Mistral-7B on FOLIO, default-seed and seed-123 runs), high-entropy Δ reaches +12.8 and +9.1 pp: traces genuinely disagree, and constraints from correct-answer traces provide discriminative signal that resolves the disagreement. In Type A conditions (Qwen2.5-14B on FOLIO, $\Delta = -8.2$ pp), high-entropy problems represent rare deviations from a strong model's consensus; constraints inherit the model's confirmation bias. In Type C (Mistral-7B on ProofWriter, $\Delta = -4.9$ pp), high-entropy problems reflect systematic errors. The mechanism is not entropy per se but the interaction of entropy with model capability.

## N Failure Mode Analysis

The regime-dependent pattern in Table 1 reflects three distinct failure modes of self-extracted logical constraints.

**Type A: confirmation bias (SC $\geq$ ~60%).** Strong models produce consistent reasoning traces, and constraints extracted from those traces mirror the answer distribution. When most constraints support the same candidate, MAX-SAT excludes few clauses ($|\mathcal{C}^{\setminus}| \approx 0$), the penalty term in Eq. 3 vanishes, and the scoring function degenerates to weighted vote counting (Eq. 4). SICA and SC then produce identical predictions. The ablation in Appendix H confirms this empirically: on Qwen2.5-14B (FOLIO + ProofWriter, $n = 804$), MAX-SAT and count-only baselines agree on 803 of 804 predictions.

**Type B: non-formalizable domains.** LogiQA problems require pragmatic and contextual reasoning that resists clean logical formalization. Qwen2.5-14B on LogiQA achieves an extraction rate of 86.4%, but the resulting constraints have a

contradiction rate of only 0.8%: extracted formulas rarely conflict across traces, leaving MAX-SAT with no logical tension to exploit. Mistral-7B on LogiQA sits in the same SC range (50.00%) yet produces $\Delta = +1.50$ pp ($p = 0.581$); Qwen2.5-14B on the same domain yields $\Delta = -1.00$ pp ($p = 0.625$). Neither model benefits, confirming that the right accuracy regime is necessary but not sufficient when the domain resists formalization.

**Type C: error amplification (SC $\leq$ ~40%).** When model accuracy is low, the majority of traces reach incorrect answers. Constraints extracted from wrong traces encode incorrect reasoning as formal rules. Z3 treats these rules as soft clauses with weight proportional to their frequency, so the solver preferentially satisfies the wrong constraints and penalizes traces that happen to reach the correct answer. Mistral-7B on ProofWriter ($\Delta = -2.83$ pp, raw $p = 0.014$; BH adj. $p = 0.042$) demonstrates this effect: SICA converts a weak positive signal in trace diversity into a net negative by formalizing the errors.

## O Cross-Model Confirmation Bias

Table 16 reports MaxSAT-weighted confirmation bias metrics across three model families on FOLIO ($n = 204$). Weighted bias ratio and wrong-supporting constraint percentage both decrease with model capability, while SICA's accuracy effect shifts from positive (Mistral, intermediate-SC regime) to negative (LLaMA, high-SC regime). Raw bias ratios (4.97×, 3.93×, 3.87×) are reported in §5.1. LLaMA raw BR CI: [3.11, 4.98] (4/12 traces).

Table 16: Cross-model confirmation bias on FOLIO ($n = 204$, $K = 12$). BR (wtd.): MaxSAT-weighted ratio of error-supporting constraints on incorrect vs. correct problems. Wrong %: weighted fraction of constraints supporting the incorrect majority on error problems. $\Delta$: SICA − SC (pp).

| Model | BR (wtd.) | Wrong (%) | $\Delta$ (pp) |
|---|---|---|---|
| Mistral-7B | 4.24× | 80.9 | +4.90 |
| Qwen2.5-14B | 3.69× | 78.7 | −0.98 |
| LLaMA-3.1-8B | 2.66× | 72.7 | −4.41 |

**Frontier model universality.** Table 2 (main text) reports confirmation bias across nine models spanning 7B open-source to frontier closed-source. All models exhibit BR $> 1$ (1.66–4.97×). Open-source models use self-extraction; frontier models use cross-model extraction (Mistral-7B extracts FOL from target traces), as closed-source APIs do not expose internal representations suitable for direct symbolic extraction. BR estimates for high-accuracy models ($n_{\text{err}} < 40$) have wider confidence intervals; Gemini ($n_{\text{err}} \approx 12$) should be interpreted with particular caution. Process-level similarity ($\kappa_{\text{proc}}$) ranges from 0.25 (R1-Distill) to 0.79 (gpt-4o/4.1/Gemini); see Table 21.

**ProcessSim definition.** Process similarity is the mean pairwise cosine similarity of TF-IDF trace representations:

$$\text{ProcessSim}(q) = \frac{2}{K(K-1)} \sum_{i<j} \cos(\mathbf{v}_i^q, \mathbf{v}_j^q), \tag{7}$$

where $\mathbf{v}_i^q$ is the TF-IDF vector of trace $t_i$ for question $q$.

**Process-$\kappa$ gradient.** Under cross-model extraction (Mistral-7B extracts FOL from other models' traces), SICA gain decreases monotonically with process-level cosine similarity (Table 17; Spearman $\rho = -1.0$, $n = 5$, one-tailed $p = 0.0083$). Gain requires two conditions: diverse traces (low $\kappa_{\text{proc}}$) *and* substantial self-bias (high BR). R1-Distill-8B satisfies both ($\kappa_{\text{proc}} = 0.248$, BR $= 2.92$) and gains +2.45 pp; o3 has moderate trace diversity ($\kappa_{\text{proc}} = 0.596$) but near-minimal bias (BR $= 1.66$, exhibiting a bimodal error pattern: 82% of error problems have BR $= \infty$ but low finite-BR), yielding $\Delta = 0$.

Table 17: Process-$\kappa$ gradient under cross-model extraction (Mistral-7B → target model traces, FOLIO). $\kappa_{\text{proc}}$: process-level cosine similarity. $\Delta$: SICA − SC (pp). Spearman $\rho(\kappa_{\text{proc}} \to \Delta) = -1.0$, $p = 0.0083$. *Interim ($n = 95/204$).

| Model | $\kappa_{\text{proc}}$ | $\Delta$ (pp) | BR |
|---|---|---|---|
| R1-Distill-8B | 0.248 | +2.45 | 2.92 |
| gpt-5.5 | 0.563 | +0.49 | 3.48 |
| o3 | 0.596 | 0.00 | 1.66 |
| Gemini-2.5-Pro* | 0.790 | −1.05 | 2.79 |
| gpt-4.1 | 0.792 | −1.47 | 2.70 |

## P Independence-Accuracy Scatter Plot

The independence-accuracy scatter plot is presented in Figure 6 in the main text.

**Trace independence metrics.** Table 19 reports the full 15-condition breakdown of Fleiss' $\kappa$ and Effective-K at $K = 12$, referenced in §3.

Table 18: Independence-accuracy trade-off (FOLIO, $n = 204$). Top: aggregation methods on Mistral-7B; bottom: SC across three model families. All families produce $\kappa \geq 0.41$, confirming an architecture-independent ceiling. $\kappa$: Fleiss' kappa on raw answers.

| Model | Aggregation | $\kappa$ | Eff-$K$ | $K$ | Acc. (%) |
|---|---|---|---|---|---|
| Mistral-7B | Debate | 0.15 | 4.44 | 12 | 38.24 |
| | Diverse-Prompt | 0.40 | 2.21 | 12 | 54.41 |
| | Self-Consistency | 0.44 | 2.02 | 10 | 56.86 |
| | ICG | 0.47 | 1.93 | 10 | 51.96 |
| LLaMA-3.1-8B | Self-Consistency | 0.41 | 2.17 | 12 | 66.18 |
| Qwen2.5-7B | Self-Consistency | 0.66 | 1.46 | 12 | 75.98 |
| Qwen2.5-14B | Self-Consistency | 0.74 | 1.32 | 12 | 75.98 |

Table 19: Trace independence metrics ($K = 12$, sorted by $\kappa$ descending). $\kappa$: Fleiss' Kappa. $K_{\text{eff}}$: Effective-K (Eq. 1). SC: Self-Consistency baseline. $\Delta$: SICA − SC (pp). $^*p < 0.05$ (uncorrected; BH adj. $p = 0.042$, $m$=6); positive $\Delta$ values do not reach significance. multi-T = $T \in \{0.3, 0.7, 1.2\}$, 4 traces each. $^\dagger$ $\kappa$ computed in an earlier pipeline run; all other rows recomputed from per-problem vote distributions with answer labels normalized to canonical categories.

| Model | Condition | $\kappa$ | $K_{\text{eff}}$ | SC (%) | $\Delta$ (pp) |
|---|---|---|---|---|---|
| Qwen3 (think) | FOLIO | 0.91$^\dagger$ | 1.09 | 86.27 | +0.49 |
| Qwen2.5-14B | LogiQA | 0.82 | 1.20 | 79.00 | −1.00 |
| Qwen3 | FOLIO | 0.79 | 1.24 | 83.33 | +1.47 |
| Qwen2.5-14B | FOLIO | 0.74 | 1.31 | 75.98 | −0.49 |
| Qwen2.5-7B | FOLIO | 0.66$^\dagger$ | 1.46 | 75.98 | +0.49 |
| Mistral-7B ($T$=0.3) | FOLIO | 0.53$^\dagger$ | 1.77 | 58.33 | −1.47 |
| Mistral-7B ($T$=0.5) | FOLIO | 0.52$^\dagger$ | 1.80 | 58.33 | −0.98 |
| Mistral-7B | LogiQA | 0.51 | 1.81 | 50.00 | +1.50 |
| Mistral-7B ($T$=1.0) | FOLIO | 0.48$^\dagger$ | 1.91 | 55.39 | 0.00 |
| Mistral-7B | FOLIO | 0.46 | 1.98 | 55.88 | +3.43 |
| Mistral-7B (s123) | FOLIO | 0.46 | 1.99 | 54.41 | +2.94 |
| Mistral-7B (s456) | FOLIO | 0.46 | 1.99 | 55.88 | 0.00 |
| Mistral-7B (s789) | FOLIO | 0.45 | 2.03 | 59.31 | −2.45 |
| Mistral-7B (multi-T) | FOLIO | 0.43 | 2.11 | 57.84 | 0.00 |
| Mistral-7B | PW-D5 | 0.19 | 3.94 | 39.33 | **−2.83**$^*$ |

## Q Cross-Model Kappa Analysis

Table 20 compares trace independence across three model families on the same benchmarks. On FOLIO ($n = 204$), all four models produce $\kappa \geq 0.41$: LLaMA-3.1-8B ($\kappa = 0.41$), Mistral-7B ($\kappa = 0.46$), Qwen2.5-7B ($\kappa = 0.66$), and Qwen2.5-14B ($\kappa = 0.74$). The bottleneck is architecture-independent; no family escapes the correlation floor. Within the Qwen family, $\kappa$ increases from 0.66 (7B) to 0.74 (14B), but Mistral-7B (7B) and LLaMA-3.1-8B (8B) differ by $\Delta\kappa = 0.05$ despite belonging to different families, suggesting that cross-family variation ($\Delta\kappa$ up to 0.20 at similar scale) exceeds within-family scale effects ($\Delta\kappa = 0.08$). Disentangling scale from architecture requires controlled same-family experiments across $\geq$3 scales.

Table 20: Cross-model trace independence ($K = 12$, SC aggregation, FOLIO + ProofWriter). Higher $\kappa$ indicates stronger correlation and lower effective sample size.

| Model | Dataset | $\kappa$ | $K_{\text{eff}}$ | SC (%) |
|---|---|---|---|---|
| Qwen2.5-14B | FOLIO | 0.74 | 1.32 | 75.98 |
| Qwen2.5-7B | FOLIO | 0.66 | 1.46 | 75.98 |
| Mistral-7B | FOLIO | 0.46 | 1.98 | 55.88 |
| LLaMA-3.1-8B | FOLIO | 0.41 | 2.17 | 66.18 |
| Qwen2.5-14B | PW-D5 | 0.62 | 1.54 | — |
| Mistral-7B | PW-D5 | 0.19 | 3.94 | 39.33 |

## R Cross-Model Process-Level Independence

Table 21 extends the process-level independence analysis (§5.1) to four model families on FOLIO ($n = 204$). Mean pairwise cosine similarity of TF-IDF trace representations exceeds answer-level $\kappa$ in every family, but the gap is model-strength dependent: it narrows from 0.31 (LLaMA) and 0.23 (Mistral) to 0.02 (Qwen-14B). For weaker models ($r \approx 0$), answer diversity does not reflect reasoning diversity; process-convergent but answer-divergent trace pairs constitute 9.5% of all pairs on Mistral-7B versus 2.5–3.2% on other families. For stronger models ($r \approx 0.23$, $p \leq 0.001$), process and answer agreement align, and answer-level $\kappa$ already captures the bottleneck. Process-$\kappa$ thus provides a crucial additional diagnostic specifically for weaker models, where answer-level metrics underestimate reasoning homogeneity.

Table 21: Cross-model process-level independence on FOLIO ($n = 204$, $K = 12$). Mean Cosine: mean pairwise TF-IDF cosine similarity of reasoning traces (Eq. 7). Answer $\kappa$: per-question answer agreement. Gap: Cosine − $\kappa$. $r$: Pearson correlation between ProcessSim and answer agreement. Conv.: fraction of process-convergent but answer-divergent trace pairs. $^{**}p < 0.01$; $^{***}p < 0.001$.

| Model | Mean Cos. | Ans. $\kappa$ | Gap | $r$ | $p$ | Conv. (%) |
|---|---|---|---|---|---|---|
| Mistral-7B | 0.690 | 0.460 | 0.230 | −0.064 | 0.362 | 9.5 |
| LLaMA-3.1-8B | 0.759 | 0.447 | 0.312 | −0.001 | 0.985 | 3.2 |
| Qwen2.5-7B | 0.790 | 0.658 | 0.132 | +0.226 | 0.001** | 2.8 |
| Qwen2.5-14B | 0.766 | 0.744 | 0.022 | +0.244 | <0.001*** | 2.5 |

**Representation robustness.** Replacing TF-IDF with SBERT embeddings (all-MiniLM-L6-v2) yields ProcessSim = 0.91 (vs. TF-IDF 0.74), widening the gap over answer-level $\kappa = 0.55$. The process homogeneity finding is robust to representation choice.

## S Constraint Quality Across Methods

Table 22 compares constraint quality metrics across the three method-level interventions on Mistral-7B

FOLIO ($n = 204$). Standard SICA extracts from reasoning traces and achieves the highest parse rate (97.1%) but also the highest redundancy (42.9%): nearly half of all constraints are syntactic duplicates across the 12 traces, quantifying the co-sourcing effect of same-model generation. ICG generates constraints directly from the problem statement without trace conditioning. Its lower parse rate (74.6%) reflects the difficulty of standalone formalization at the 7B scale, though successfully parsed constraints compile at a higher rate (99.4% vs. 96.5%). ICG produces fewer unique constraints per question (24.9 vs. 39.3) with lower redundancy (32.3%), consistent with the absence of trace-level repetition. Contrastive scoring generates pro and con constraint sets for each candidate answer. The format yields far fewer unique constraints per question (9.2) with zero redundancy (each pro/con pair is structurally distinct), but 62.7% of constraints are trivially satisfied by Z3; they impose no logical tension and cannot discriminate between candidates. Only 51.0% of Contrastive constraints are discriminative, compared to 81.4% for standard SICA and 77.0% for ICG.

Table 22: Constraint quality metrics across method-level interventions (Mistral-7B, FOLIO, $n = 204$). Parse: fraction of extraction attempts yielding valid JSON. Z3 Compile: fraction compiling to Z3 formulas. Unique/q: mean unique constraints per question. Redundancy: fraction of constraints duplicated across traces. Disc.: fraction discriminative (different Z3 outcome per candidate). Triv. Sat.: fraction trivially satisfied (no logical tension).

| Method | Parse | Z3 | Uniq/q | Redund. | Disc. | Triv. Sat. |
|---|---|---|---|---|---|---|
| Standard SICA | 97.1% | 96.5% | 39.3 | 42.9% | 81.4% | — |
| ICG | 74.6% | 99.4% | 24.9 | 32.3% | 77.0% | — |
| Contrastive | 74.0% | 94.4% | 9.2 | 0.0% | 51.0% | 62.7% |

**Per-trace constraint yield uniformity.** Observation 1 assumes approximately uniform constraint yield per trace within each answer group. We verify this on Mistral-7B FOLIO ($K$=12, $n$=204). Per-problem yield CV (coefficient of variation across traces within each problem) has median 0.257 and mean 0.319; 64.2% of problems fall below CV $= 0.3$, and 91.2% below 0.5, supporting the uniformity assumption (Figure 9). Majority-answer traces average 5.61 constraints and minority-answer traces 6.04 (Mann–Whitney $p = 5.2 \times 10^{-6}$); correct-answer traces average 5.41 and incorrect 6.05 ($p = 5.3 \times 10^{-11}$). Although statistically significant, the absolute difference ($\sim$0.6 constraints, $< 12\%$) is insufficient to alter the argmax-preservation result: SICA and SC select the same answer on $>96\%$ of problems regardless of yield variation. On the 18 problems with CV$>$0.5, SICA and SC select the same answer on 18/18 (100%), confirming that yield non-uniformity does not alter the degeneration pattern.

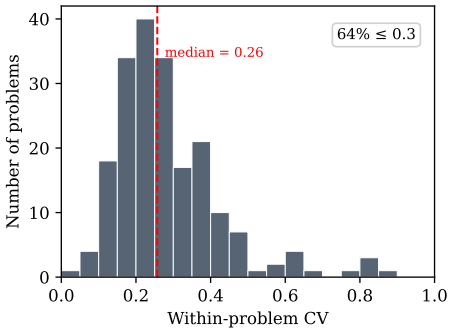



Figure 9: Distribution of per-problem within-group CV for constraint yield (Mistral-7B, FOLIO, $n$=204). Median CV=0.26 (red dashed); 64% of problems have CV$\leq$0.3. Five problems with CV$>$1.0 (max 3.46) are clipped for readability.

## T Error Categorization of Method-Level Interventions

We categorize discordant predictions (where the method and SC disagree) for Debate and Contrastive on FOLIO ($n = 204$) to understand why these interventions degrade accuracy.

**Debate discordant analysis.** Debate produces 60 correct→wrong flips and 22 wrong→correct flips on FOLIO. Answer-type breakdown reveals that False-labeled questions are most vulnerable: 82.8% of False questions that SC answers correctly are flipped by Debate, compared to 63.9% for True and 25.5% for Unknown. Counterintuitively, failures concentrate not where debate breaks down but where it succeeds most thoroughly: discordant questions average 2.93 effective debate rounds (proposer-critic exchanges producing substantive updates) versus 2.52 for concordant ones. More extensive same-model debate produces more confident but incorrect constraints, consistent with the independence limitation: the critic draws on the same model distribution as the proposer, reinforcing shared biases rather than correcting them.

**Contrastive discordant analysis.** Contrastive produces 34 discordant questions on FOLIO. All 34 produced non-degenerate scores (both pro and con constraint sets non-empty), compared to 20.1% degenerate scores in the full sample. This indicates that scoring failures on discordant questions stem from systematic pro-bias rather than missing

constraints. Among discordant questions, 97.1% contain negation words in the problem statement versus 76.5% in the full sample, suggesting that negation-bearing problems are particularly susceptible to pro-constraint imbalance. The average pro/con score ratio is 1.0 for discordant questions versus 0.68 for the full sample: the method generates balanced-looking scores that mask directional errors.

**Cross-method overlap.** Of the 79 unique questions on which either method disagrees with SC, only 15 overlap between Debate and Contrastive (Jaccard index $= 0.19$). All 15 shared discordant questions contain negation words. The low overlap confirms that the two methods attack different vulnerability types (Debate through extended same-model argumentation that amplifies confident errors, Contrastive through pro-bias in constraint generation) while sharing a common root cause in correlated same-model voting: both methods rely on the same model's output distribution and cannot introduce genuinely independent signal.

## U TOST Equivalence Tests

We apply two one-sided tests (TOST) (Lakens, 2017) with equivalence margin $\pm 2$ pp to all 16 non-degenerate SICA–SC comparisons, classifying each condition as *equivalent* (TOST significant), *genuinely different* (McNemar $p < 0.05$ and TOST not significant), or *underpowered* (neither test significant). Four conditions are equivalent, confirming that SICA and SC produce statistically indistinguishable accuracy. Two conditions show genuine differences, both negative: Mistral-7B ProofWriter ($-2.83$ pp, $p = 0.014$) and Qwen2.5-14B ProofWriter ($-2.50$ pp, $p = 0.011$). The remaining ten conditions are underpowered, reflecting the limited statistical power at $n$=200–204 for detecting $|\Delta| \leq 2$ pp effects.

**Margin sensitivity.** Table 23 shows that the classification is robust across margins: regardless of the chosen margin, no condition shows a significant positive SICA effect.

Table 23: TOST classification sensitivity across equivalence margins (16 non-degenerate conditions).

| Margin | Equivalent | Different | Underpowered |
|---|---|---|---|
| $\pm 1$ pp | 0 | 2 | 14 |
| $\pm 2$ pp | 4 | 2 | 10 |
| $\pm 3$ pp | 10 | 0 | 6 |

**Relative-margin TOST.** The absolute $\pm 2$ pp margin is more stringent at high baselines ($\pm 2.4\%$ relative at SC $= 85\%$) than low ones ($\pm 5.1\%$ at SC $= 39\%$). A relative $\pm 5\%$ of SC margin addresses this asymmetry: 8 conditions are equivalent, 2 genuinely different (both negative), and 6 underpowered. The additional four equivalent conditions are all high-SC ($\geq 75\%$), where the wider relative band captures practical indistinguishability. No condition shows a significant positive effect under either margin.

Table 24: Conditional Correction Ratio across eight verifier–generator conditions. CCR $> 0$: cross-arch NLI on ProofWriter. CCR $< 0$: same-model SICA or weak capability gap.

| Generator–Verifier | Dataset | CCR | $\Delta$ (pp) |
|---|---|---|---|
| Mistral × BART-NLI | PW | +1.86 | +5.17 |
| Mistral × DeBERTa-NLI | PW | +1.67 | +6.67 |
| Mistral × RoBERTa-NLI | PW | +1.42 | +4.17 |
| Qwen-14B × DeBERTa-NLI | PW | −0.21 | +0.33 |
| Mistral × DeBERTa-NLI | FOLIO | −0.47 | +2.94 |
| Mistral × SICA | FOLIO | −2.93 | +3.43 |
| Qwen-14B × SICA | PW | −4.21 | −2.50 |
| Mistral × SICA | PW | −4.61 | −2.83 |

**Conditional Correction Ratio data.**

**Disagreement-Routed Cascade details.** Disagreement-Routed Cascade (DRC) invokes NLI only when SC consensus falls below threshold $\tau$, avoiding unnecessary verifier calls on high-agreement problems. Gains concentrate on weak generators (SC $< 40\%$), consistent with the capability-gap hypothesis (§5.4). Regime-dependent bottleneck analysis appears in Appendix W.

Table 25: DRC on Mistral-7B ($K$=12, DeBERTa-large-mnli, $w$=3). $\tau$=0.7 recovers 83–90% of full-combo gain at ∼35% NLI cost across both datasets.

| Dataset | Method | Acc. | NLI Calls | Cost | Recovery |
|---|---|---|---|---|---|
| PW-D5 | SC only | 39.33% | 0/600 | 0% | — |
| | **DRC** $\tau$=0.7 | **45.33%** | **207/600** | **34.5%** | **90.0%** |
| | Full combo | 46.00% | 600/600 | 100% | 100% |
| FOLIO | SC only | 55.88% | 0/204 | 0% | — |
| | **DRC** $\tau$=0.7 | **58.33%** | **71/204** | **34.8%** | **83.3%** |
| | Full combo | 58.82% | 204/204 | 100% | 100% |

## V Multi-Verifier NLI Results

**Three-verifier BH correction.** Table 27 applies Benjamini–Hochberg correction across all 15 Mistral-7B verifier–weight conditions ($m$=15, $\alpha$=0.05; distinct from the $m$=12 cross-generator analysis in §5.4). Ten of 15 conditions remain

Table 26: Cross-architecture NLI combo on ProofWriter depth-5 ($n$=600, Mistral-7B traces, SC = 39.33%). Three NLI verifiers × three weight settings. $^{*}p < 0.05$; $^{**}p < 0.01$; $^{***}p < 0.001$ (McNemar).

| Verifier | Standalone | $w$ | Δ (pp) | $p$ |
|---|---|---|---|---|
| DeBERTa-MNLI | 55.00% | 1 | +0.83 | n.s. |
| | | 3 | +6.67 | <0.001*** |
| | | 5 | +11.00 | <0.001*** |
| RoBERTa-MNLI | 37.67% | 1 | −0.17 | n.s. |
| | | 3 | +4.17 | 0.003** |
| | | 5 | +4.33 | 0.037* |
| BART-MNLI | 46.17% | 1 | 0.00 | n.s. |
| | | 3 | +5.17 | <0.001*** |
| | | 5 | +6.33 | 0.003** |

All verifiers fine-tuned on MultiNLI. Unknown recall <3.5% across all verifiers.

significant after correction, confirming that multi-verifier NLI gains are robust to multiple testing.

Table 27: BH correction across 3 verifiers × 5 weights on Mistral-7B ProofWriter ($n$=600, $m$=15). ✓: $p_{\text{BH}} < 0.05$.

| Verifier | $w$=1 | $w$=2 | $w$=3 | $w$=4 | $w$=5 |
|---|---|---|---|---|---|
| DeBERTa-MNLI | | ✓ | ✓ | ✓ | ✓ |
| RoBERTa-MNLI | | | ✓ | ✓ | ✓ |
| BART-MNLI | | | ✓ | ✓ | ✓ |

10/15 significant at $\alpha$=0.05 after BH correction. All $w$=1 conditions and RoBERTa $w$=2 are non-significant.

## W Capability Gap Data Points

Figure 5 (main text) visualizes the capability-gap pattern. Table 3 reports the controlled cross-generator comparison with DeBERTa-large-mnli on ProofWriter ($n$=600). We extend this analysis by pairing Mistral-7B with two additional NLI architectures: BART-large-mnli (46.17% standalone, combo +5.17 pp, $p = 0.0002$) and RoBERTa-large-mnli (37.67% standalone, combo +4.17 pp, $p = 0.003$). All three NLI architectures produce significant gains on Mistral-7B at $w \geq 3$.

Across all six ProofWriter verifier-generator pairs at $w$=3 (three verifiers × Mistral-7B plus three negative-gap generators × DeBERTa), combo gain decreases monotonically with the capability gap (Spearman $\rho = 1.0$, exact permutation $p = 0.003$, $n = 6$; however, four of six conditions share the DeBERTa verifier, which may reduce effective degrees of freedom; see Limitations; Figure 5). Significant $w$=3 gains are observed only for Mistral-7B (SC 39.33%, below the verifier); the three above-verifier generators show no significant improvement at any $w$. After BH correction ($m$=12), two of twelve conditions survive: Mistral-7B $w$=3 (adj. $p = 6.78 \times 10^{-5}$) and $w$=5 (adj. $p = 7.41 \times 10^{-6}$).

**Robustness check.** Including all nine conditions (three verifiers × three weight levels on Mistral-7B) yields Spearman $\rho = 0.836$ (exact permutation $p = 0.007$, $n = 9$), confirming that the monotonic trend is robust to the choice of weight parameter.

Table 28: Full cross-generator NLI combo results on ProofWriter depth-5 ($n$=600) with Benjamini–Hochberg correction ($m$=12, $\alpha$=0.05). All conditions use DeBERTa-large-mnli verifier (55.00% standalone). Two of twelve conditions survive correction (Mistral-7B $w$=3 and $w$=5). *** $p_{\text{BH}} < 0.001$.

| Generator | $w$ | Combo (%) | Δ (pp) | $p_{\text{raw}}$ | $p_{\text{BH}}$ | |
|---|---|---|---|---|---|---|
| Mistral-7B SC 39.33%, gap +15.67 | 1 | 40.17 | +0.83 | .359 | .721 | |
| | 3 | 46.00 | +6.67 | $1.13\times10^{-5}$ | $6.78\times10^{-5}$ | *** |
| | 5 | 50.33 | +11.00 | $6.18\times10^{-7}$ | $7.41\times10^{-6}$ | *** |
| LLaMA-3.1-8B SC 72.50%, gap −17.50 | 1 | 73.33 | +0.83 | .359 | .721 | |
| | 3 | 73.33 | +0.83 | .665 | .886 | |
| | 5 | 72.00 | −0.50 | .871 | 1.000 | |
| Qwen2.5-14B SC 74.00%, gap −19.00 | 1 | 74.17 | +0.17 | 1.000 | 1.000 | |
| | 3 | 74.67 | +0.67 | .503 | .755 | |
| | 5 | 75.17 | +1.17 | .360 | .721 | |
| Qwen3-14B SC 85.83%, gap −30.83 | 1 | 86.00 | +0.17 | 1.000 | 1.000 | |
| | 3 | 86.33 | +0.50 | .453 | .755 | |
| | 5 | 87.00 | +1.17 | .210 | .721 | |

Table 29: Cross-generator NLI combo with BART-large-mnli verifier (46.17% standalone) on ProofWriter depth-5 ($n$=600, $w$=3). Only Mistral-7B (below the verifier) gains significantly after BH correction.

| Generator | SC (%) | Combo (%) | Δ (pp) | $p_{\text{BH}}$ |
|---|---|---|---|---|
| Mistral-7B (gap +6.84) | 39.33 | 44.50 | +5.17 | .003* |
| LLaMA-3.1-8B (gap −26.33) | 72.50 | 72.50 | ±0.00 | — |
| Qwen2.5-14B (gap −27.83) | 74.00 | 75.50 | +1.50 | n.s. |
| Qwen3-14B (gap −39.66) | 85.83 | 86.50 | +0.67 | n.s. |

Table 30: Cross-generator NLI combo with RoBERTa-large-mnli verifier (37.67% standalone) on ProofWriter depth-5 ($n$=600, $w$=3). Only Mistral-7B (marginally above the verifier) gains significantly after BH correction.

| Generator | SC (%) | Combo (%) | Δ (pp) | $p_{\text{BH}}$ |
|---|---|---|---|---|
| Mistral-7B (gap −1.66) | 39.33 | 43.50 | +4.17 | .016* |
| LLaMA-3.1-8B (gap −34.83) | 72.50 | 71.33 | −1.17 | n.s. |
| Qwen2.5-14B (gap −36.33) | 74.00 | 74.17 | +0.17 | n.s. |
| Qwen3-14B (gap −48.16) | 85.83 | 86.50 | +0.67 | n.s. |

**Domain-adapted verifier results.**

**Cross-model voting ablation.**

**Generator×Extractor 2×2 Matrix.** Table 39 reports the full 2×2 generator×extractor matrix on FOLIO ($n$=204). The generator dominates accuracy (row difference ∼25 pp vs. column difference ∼3 pp), contrasting with ProofWriter where the extractor dominates (Δ range ±40–50 pp). Cross-extractor McNemar tests: Mistral-7B gen, Δ = +2.94 pp, $p = 0.143$ (n.s.); Qwen3-14B gen, Δ = +2.94 pp, $p = 0.021$ (statistically significant

Table 31: NLI combo on FOLIO ($n$=204) with DeBERTa-large-mnli verifier (49.51% standalone). No condition reaches significance; all generators exceed the verifier's standalone accuracy, consistent with the capability-gap pattern. SC baselines match the cross-model ablation traces (Table 38).

| Generator | $w$ | SC (%) | Combo (%) | Δ (pp) | $p$ |
|---|---|---|---|---|---|
| Mistral-7B | 1 | 55.88 | 56.37 | +0.49 | n.s. |
| | 3 | | 58.82 | +2.94 | n.s. |
| | 5 | | 59.80 | +3.92 | n.s. |
| LLaMA-3.1-8B | 1 | 66.18 | 65.69 | −0.49 | n.s. |
| | 3 | | 65.20 | −0.98 | n.s. |
| | 5 | | 64.22 | −1.96 | n.s. |
| Qwen2.5-14B | 1 | 75.98 | 76.96 | +0.98 | n.s. |
| | 3 | | 75.49 | −0.49 | n.s. |
| | 5 | | 73.53 | −2.45 | n.s. |
| Qwen3-14B | 1 | 83.33 | 83.33 | ±0.00 | n.s. |
| | 3 | | 84.80 | +1.47 | n.s. |
| | 5 | | 83.33 | ±0.00 | n.s. |

Table 32: NLI combo on FOLIO ($n$=204) with BART-large-mnli verifier (47.06% standalone). No positive improvement reaches significance; for Qwen2.5-14B the weak verifier produces a significant *degradation* at $w$=5 ($p$=.039), consistent with the capability-gap pattern.

| Generator | $w$ | SC (%) | Combo (%) | Δ (pp) | $p$ |
|---|---|---|---|---|---|
| Mistral-7B | 1 | 55.88 | 54.90 | −0.98 | n.s. |
| | 3 | | 56.37 | +0.49 | n.s. |
| | 5 | | 56.86 | +0.98 | n.s. |
| LLaMA-3.1-8B | 1 | 66.18 | 67.65 | +1.47 | n.s. |
| | 3 | | 67.65 | +1.47 | n.s. |
| | 5 | | 64.71 | −1.47 | n.s. |
| Qwen2.5-14B | 1 | 75.98 | 76.47 | +0.49 | n.s. |
| | 3 | | 75.00 | −0.98 | n.s. |
| | 5 | | 72.55 | −3.43 | .039* |
| Qwen3-14B | 1 | 83.33 | 83.33 | ±0.00 | n.s. |
| | 3 | | 84.31 | +0.98 | n.s. |
| | 5 | | 82.84 | −0.49 | n.s. |

but practically small: 6/204 problems changed). The identical net Δ is coincidental; the two generators have different discordant-pair distributions that happen to yield the same net advantage. BR $> 1$ in all eight cells across both datasets (range 1.94–2.70), confirming SCB universality under cross-model extraction.

## X Single-Trace and Aggregation Statistics

**Extraction temperature sensitivity.** Controlling for the trace set (excluding $T_{\text{ext}} = 0.3$, which uses a different seed), all conditions yield $\Delta \leq +1.47$ pp (n.s.), indicating that extraction temperature has no significant effect on SICA accuracy. This supports the structural nature of symbolic confirmation bias: the bottleneck is what gets extracted, not the temperature at which extraction occurs.

Table 33: NLI combo on FOLIO ($n$=204) with RoBERTa-large-mnli verifier (46.57% standalone). Cross-verifier consistency: no positive gain reaches significance, and Qwen2.5-14B shows a significant *degradation* at $w$=5 ($p$=.012), the same capability-gap signature as BART.

| Generator | $w$ | SC (%) | Combo (%) | Δ (pp) | $p$ |
|---|---|---|---|---|---|
| Mistral-7B | 1 | 55.88 | 56.37 | +0.49 | n.s. |
| | 3 | | 57.84 | +1.96 | n.s. |
| | 5 | | 58.82 | +2.94 | n.s. |
| LLaMA-3.1-8B | 1 | 66.18 | 65.69 | −0.49 | n.s. |
| | 3 | | 66.67 | +0.49 | n.s. |
| | 5 | | 64.22 | −1.96 | n.s. |
| Qwen2.5-14B | 1 | 75.98 | 75.98 | ±0.00 | n.s. |
| | 3 | | 75.00 | −0.98 | n.s. |
| | 5 | | 71.57 | −4.41 | .012* |
| Qwen3-14B | 1 | 83.33 | 83.33 | ±0.00 | n.s. |
| | 3 | | 84.31 | +0.98 | n.s. |
| | 5 | | 83.82 | +0.49 | n.s. |

Table 34: NLI combo on LogiQA ($n$=200) with DeBERTa-large-mnli verifier (26.50% standalone, near the 25% random baseline for 4-way classification). No condition reaches significance.

| Generator | $w$ | SC (%) | Combo (%) | Δ (pp) | $p$ |
|---|---|---|---|---|---|
| Mistral-7B | 1 | 53.00 | 54.00 | +1.00 | n.s. |
| | 3 | | 54.00 | +1.00 | n.s. |
| | 5 | | 53.50 | +0.50 | n.s. |
| LLaMA-3.1-8B | 1 | 59.50 | 58.50 | −1.00 | n.s. |
| | 3 | | 58.00 | −1.50 | n.s. |
| | 5 | | 58.00 | −1.50 | n.s. |
| Qwen2.5-14B | 1 | 79.00 | 78.50 | −0.50 | n.s. |
| | 3 | | 78.00 | −1.00 | n.s. |
| | 5 | | 78.00 | −1.00 | n.s. |
| Qwen3-14B | 1 | 81.00 | 81.00 | ±0.00 | n.s. |
| | 3 | | 80.50 | −0.50 | n.s. |
| | 5 | | 80.50 | −0.50 | n.s. |

**Multi-seed replication.** On ProofWriter, all twelve Mistral-7B, LLaMA-8B, and Qwen2.5-14B seeds yield negative Δ (range $-0.83$ to $-7.50$ pp), with all LLaMA-8B McNemar tests reaching $p < .001$. The results reveal a capability-dependent gradient: LLaMA-8B $\Delta = -6.25 \rightarrow$ Mistral-7B $\Delta = -2.29 \rightarrow$ Qwen2.5-14B $\Delta = -1.71 \rightarrow$ Qwen3-14B $\Delta = +0.92$ pp. Qwen3-14B is the sole exception: its 4-seed mean Δ is slightly positive ($+0.92 \pm 1.14$ pp, all n.s.; 95% CI includes zero), reflecting the capability-modulated pattern discussed in §6: models with SC baselines above 85% leave few correctable errors for SICA to exploit. The consistency across seeds confirms that the sign of Δ on ProofWriter is not an artifact of any single random sample but reflects model-level reasoning capacity. SC ties are broken alphabetically; across 2,400

Table 35: NLI combo on LogiQA ($n$=200) with BART-large-mnli verifier (33.00% standalone). Near-random NLI accuracy yields no significant combo improvements.

| Generator | $w$ | SC (%) | Combo (%) | Δ (pp) | $p$ |
|---|---|---|---|---|---|
| Mistral-7B | 1 | 53.00 | 53.50 | +0.50 | n.s. |
| | 3 | | 53.50 | +0.50 | n.s. |
| | 5 | | 52.50 | −0.50 | n.s. |
| LLaMA-3.1-8B | 1 | 59.50 | 59.50 | ±0.00 | n.s. |
| | 3 | | 59.50 | ±0.00 | n.s. |
| | 5 | | 58.50 | −1.00 | n.s. |
| Qwen2.5-14B | 1 | 79.00 | 78.50 | −0.50 | n.s. |
| | 3 | | 78.50 | −0.50 | n.s. |
| | 5 | | 77.50 | −1.50 | n.s. |
| Qwen3-14B | 1 | 81.00 | 81.50 | +0.50 | n.s. |
| | 3 | | 81.00 | ±0.00 | n.s. |
| | 5 | | 81.50 | +0.50 | n.s. |

Table 36: NLI combo on LogiQA ($n$=200) with RoBERTa-large-mnli verifier (31.50% standalone). All three NLI verifiers produce the same null result on LogiQA.

| Generator | $w$ | SC (%) | Combo (%) | Δ (pp) | $p$ |
|---|---|---|---|---|---|
| Mistral-7B | 1 | 53.00 | 54.00 | +1.00 | n.s. |
| | 3 | | 53.50 | +0.50 | n.s. |
| | 5 | | 53.50 | +0.50 | n.s. |
| LLaMA-3.1-8B | 1 | 59.50 | 59.00 | −0.50 | n.s. |
| | 3 | | 58.50 | −1.00 | n.s. |
| | 5 | | 58.50 | −1.00 | n.s. |
| Qwen2.5-14B | 1 | 79.00 | 78.50 | −0.50 | n.s. |
| | 3 | | 78.50 | −0.50 | n.s. |
| | 5 | | 77.50 | −1.50 | n.s. |
| Qwen3-14B | 1 | 81.00 | 81.00 | ±0.00 | n.s. |
| | 3 | | 80.50 | −0.50 | n.s. |
| | 5 | | 81.00 | ±0.00 | n.s. |

ProofWriter problems ($4 \times 600$), zero SC–SICA answer differences were attributable to tiebreaking, confirming that ties are too rare at $\kappa \approx 0.78$ to affect Δ.

### X.1 Sub-population Analysis

On FOLIO-204 with the corrected SC baseline (alphabetical tiebreaking), SICA improves over SC by +3.4 pp overall (55.9% → 59.3%), though the aggregate McNemar test is marginally non-significant ($p$=.092). The gain concentrates in the mid-constraint tertile (+9.4 pp, $p$=.031), where sufficient symbolic evidence exists for MaxSAT to meaningfully re-rank answers; in the low- and high-constraint groups the methods perform comparably. On ProofWriter-600, SICA shows a small uniform degradation consistent with the main results, attenuating in the high-constraint tertile (Δ=−0.5 pp, $p$=1.0). We note that with six subgroup tests, one significant result at $\alpha$=0.05 is expected by chance; the mid-constraint finding should be interpreted as exploratory.

Table 37: Domain-adapted NLI combo on ProofWriter depth-5 ($n$=600). DeBERTa-large fine-tuned on ProofWriter Open-World Assumption (OWA) (99.67% standalone). All $p < 0.0001$. Complementarity: ratio of NLI-correct∩SC-incorrect to SC-correct∩NLI-incorrect.

| Generator | $w$ | Combo (%) | Δ (pp) | Compl. ratio |
|---|---|---|---|---|
| Mistral-7B SC 39.33% | 1 | 42.17 | +2.83 | 364:2 |
| | 3 | 52.00 | +12.67 | |
| | 5 | 65.50 | +26.17 | |
| LLaMA-3.1-8B SC 72.50% | 1 | 76.00 | +3.50 | 164:1 |
| | 3 | 84.17 | +11.67 | |
| | 5 | 91.67 | +19.17 | |

**Individual intervention significance.** Of the 27 training-free remediation strategies (Figure 7), the two largest positive effects are Cross-model Qwen3→Mistral (+0.98 pp) and Generational (+0.49 pp); neither approaches statistical significance ($p > 0.5$ for both). The largest negative effects are LLM-Debate (−18.6 pp, $p < 0.001$) and Contrastive Scoring (−9.3 pp, $p < 0.001$). After BH correction across all 27 comparisons, only these two negative results remain significant. No strategy produces a significant positive effect under any correction procedure.

## Y Extended Discussion

**Per-trace separation analysis.** On Mistral-7B FOLIO (166/204 non-unanimous problems), per-trace constraint density is balanced between majority and minority answer groups (6.0 vs. 5.9 constraints/trace) and MAX-SAT exclusion rates are comparable (0.185 vs. 0.172); the extraction function $f$ produces constraints of equal quality regardless of answer group (*extraction neutrality*). The majority of unique formulas (∼74%) are minority-exclusive, yet ∼26% are shared across answer groups; under source-attribution, shared formulas vote for each side in proportion to trace count, providing zero discriminative signal (*formula undirectedness*). Full semantic direction testing is precluded by variable isolation (56.4% zero overlap). Each constraint votes exclusively for its source trace's answer; volume amplification is ≈1.0×. On 82.4% of problems where the minority vote is correct, SICA still follows the majority (correction rate 17.6%). SCB is therefore a transparency property: source-attribution scoring faithfully transmits the CoT trace distribution into verification without adding or removing information.

Table 38: Cross-model voting ablation ($w \in \{3, 5\}$). "Cross LLM" replaces the NLI verifier with a second LLM's SC votes at weight $w$; "NLI" uses DeBERTa-large-mnli (55.00% standalone) at $w$=3. On ProofWriter, cross-model SC with a weak voter (Mistral-7B) degrades all strong generators (worsening at higher $w$), while NLI combo does not, indicating that structural independence, not merely model diversity, drives the escape.

| Generator | Voter/Verifier | $w$ | SC (%) | Combo (%) | Δ (pp) | $p$ |
|---|---|---|---|---|---|---|
| *ProofWriter* ($n$=600) | | | | | | |
| Mistral-7B | Qwen2.5-14B (cross) | 3 | 39.33 | 47.67 | +8.33 | <.001 |
| | | 5 | 39.33 | 55.33 | +16.00 | <.001 |
| | DeBERTa NLI | 3 | 39.33 | 46.00 | +6.67 | <.001 |
| LLaMA-3.1-8B | Qwen2.5-14B (cross) | 3 | 72.50 | 75.33 | +2.83 | .060 |
| | | 5 | 72.50 | 75.33 | +2.83 | .125 |
| | Mistral-7B (cross) | 3 | 72.50 | 63.17 | −9.33 | <.001 |
| | | 5 | 72.50 | 56.17 | −16.33 | <.001 |
| | DeBERTa NLI | 3 | 72.50 | 73.33 | +0.83 | .665 |
| Qwen2.5-14B | LLaMA-8B (cross) | 3 | 74.00 | 74.50 | +0.50 | .664 |
| | | 5 | 74.00 | 76.00 | +2.00 | .096 |
| | Mistral-7B (cross) | 3 | 74.00 | 71.67 | −2.33 | .020 |
| | | 5 | 74.00 | 69.67 | −4.33 | .002 |
| | DeBERTa NLI | 3 | 74.00 | 74.67 | +0.67 | .503 |
| Qwen3-14B | Qwen2.5-14B (cross) | 3 | 85.83 | 84.67 | −1.17 | .143 |
| | | 5 | 85.83 | 83.33 | −2.50 | .006 |
| | Mistral-7B (cross) | 3 | 85.83 | 83.17 | −2.67 | .002 |
| | | 5 | 85.83 | 81.17 | −4.67 | <.001 |
| | DeBERTa NLI | 3 | 85.83 | 86.33 | +0.50 | .453 |
| *FOLIO* ($n$=204) | | | | | | |
| Mistral-7B | Qwen2.5-14B (cross) | 3 | 55.88 | 63.73 | +7.84 | .002 |
| | | 5 | 55.88 | 68.63 | +12.75 | <.001 |
| | DeBERTa NLI | 3 | 55.88 | 58.82 | +2.94 | .210 |
| LLaMA-3.1-8B | Qwen2.5-14B (cross) | 3 | 66.18 | 70.10 | +3.92 | .134 |
| | | 5 | 66.18 | 73.53 | +7.35 | .014 |
| | DeBERTa NLI | 3 | 66.18 | 65.20 | −0.98 | .824 |
| Qwen2.5-14B | LLaMA-8B (cross) | 3 | 75.98 | 76.96 | +0.98 | .727 |
| | | 5 | 75.98 | 79.41 | +3.43 | .143 |
| | DeBERTa NLI | 3 | 75.98 | 75.49 | −0.49 | 1.00 |
| Qwen3-14B | Qwen2.5-14B (cross) | 3 | 83.33 | 85.78 | +2.45 | .125 |
| | | 5 | 83.33 | 86.76 | +3.43 | .039 |
| | DeBERTa NLI | 3 | 83.33 | 84.80 | +1.47 | .250 |

**Answer-leakage controls.** Two controls rule out answer contamination: (1) BR is uniform across reasoning steps (Fisher $p = 0.71$); (2) removing answer sentences before extraction yields no BR decrease (Wilcoxon $p \geq 0.12$) despite accuracy loss (McNemar $p < 0.013$). The bias reflects a distributional prior embedded throughout reasoning.

**SCB versus CoT unfaithfulness.** SCB is distinct from CoT unfaithfulness (Turpin et al., 2023) and CoT-level confirmation bias (Wan et al., 2025; Jhaveri et al., 2026). CoT unfaithfulness concerns whether stated reasoning reflects actual computation; SCB concerns whether *self-extracted formal constraints* mirror the model's answer distribution. Even if traces were perfectly faithful, self-extraction would still inherit the distributional bias: the constraint $P(\text{answer_A})$ reflects vote share, not logical validity. The shuffle control (§5.1) confirms this: randomizing constraint–answer associations preserves BR, showing the bias is in the trace-count distribution, not in extraction-specific errors. However, if traces are unfaithful, the mirage may be worse than our measurements suggest, because constraints would reflect not the model's reasoning but its post-hoc rationalization.

Table 39: FOLIO 2×2 generator×extractor matrix ($n$=204). SC: Self-Consistency baseline. $\kappa$: answer-level Fleiss' kappa. BR: bias ratio.

| Generator | Extractor | SC (%) | SICA (%) | Δ (pp) | BR |
|---|---|---|---|---|---|
| Mistral-7B | Mistral | 55.88 | 56.86 | +0.98 | 2.70 |
| $\kappa$=0.46 | Qwen3 | 55.88 | 59.80 | +3.92 | 1.94 |
| Qwen3-14B | Qwen3 | 83.33 | 84.80 | +1.47 | 2.35 |
| $\kappa$=0.79 | Mistral | 83.33 | 81.86 | −1.47 | 2.66 |

Table 40: Single-trace accuracy (mean ± std over $K$=12 traces) and SC@12 majority vote on FOLIO ($n$=204). Aggregation gain = SC@12 − single-trace mean. SC@12 uses alphabetical tiebreaking (consistent with Table 1).

| Model | Single (%) | Std | SC@12 (%) | Gain (pp) |
|---|---|---|---|---|
| Mistral-7B | 46.41 | 2.80 | 55.88 | +9.47 |
| Qwen3-14B | 79.37 | 1.98 | 84.80 | +5.43 |
| Qwen3-14B (think) | 85.42 | 0.99 | 86.27 | +0.86 |

Inter-trace standard deviation shrinks 2.8× from Mistral-7B to Qwen3-14B thinking mode, reflecting the diversity compression that underlies the aggregation ceiling (§5.4).

**Implications for neuro-symbolic practitioners.** Our results do not imply that neuro-symbolic methods are inherently flawed; they imply that *self-extracted* constraints cannot provide independent verification. The key distinction is *when* formalization occurs relative to answer generation. Specification-generation approaches (e.g., SatLM (Ye et al., 2023), Logic-LM (Pan et al., 2023)) formalize the problem *before* generating candidate answers, avoiding the extraction bottleneck; SatLM's success confirms that the formal verification mechanism is sound when constraints are independently derived. Trace-extraction (this work) operates post-hoc on reasoning traces that already contain candidates, inheriting the distributional prior that generates SCB. When post-hoc verification is unavoidable, practitioners should employ external verifiers from a different architecture family (§5.4) and use the diagnostic framework in §6 to assess feasibility before deployment. The SCB diagnostic toolkit (below) provides detailed computation methods and threshold recommendations.

**Test-time scaling implications.** Vote diversity decreases with model capability: $K_{\text{eff}}$ drops from 3.94 (Mistral-7B on ProofWriter) to 1.09 (Qwen3-14B thinking mode). This creates a fundamental tension for o1/R1-style scaling (Guo et al., 2025): longer reasoning chains produce more coherent but

Table 41: Effect of extraction temperature $T_{\text{ext}}$ on SICA accuracy (Mistral-7B, FOLIO $n$=204). † Uses a different trace set (SC = 54.41%); all other conditions share the same traces (SC = 55.88%).

| $T_{\text{ext}}$ | SICA (%) | Δ vs. SC (pp) | Avg. #Constr. |
|---|---|---|---|
| 0.1 | 57.35 | +1.47 | 69.3 |
| 0.3† | 59.31 | +3.43 | 68.8 |
| 0.5 | 56.37 | +0.49 | 68.2 |
| 0.7 | 53.43 | −2.45 | 67.3 |
| 1.0 | 55.39 | −0.49 | 65.2 |

Table 42: Multi-seed replication results across six model×dataset conditions. Each row uses an independent seed with fresh traces ($K$=12, $T$=0.7). Mistral-7B×FOLIO shows directionally unstable Δ (+0.16 ± 2.70 pp). Mistral-7B, LLaMA-8B, and Qwen2.5-14B show consistently negative Δ on ProofWriter ($p < .001$ for LLaMA-8B and Mistral-7B); Qwen3-14B shows negligible mixed-sign Δ (+0.92 ± 1.14 pp, all n.s.), consistent with its high SC baseline minimizing correctable errors (§6).

| Seed | SC (%) | SICA (%) | Δ (pp) |
|---|---|---|---|
| *Mistral-7B × FOLIO ($n$=204)*[a] | | | |
| 123 | 54.41 | 57.35 | +2.94 |
| 456 | 55.88 | 55.88 | 0.00 |
| 789 | 59.31 | 56.86 | −2.45 |
| Mean ± SD | 56.53 ± 2.51 | 56.70 ± 0.75 | +0.16 ± 2.70 |
| *Qwen2.5-14B × FOLIO ($n$=204)* | | | |
| 42 | 77.50 | 75.49 | −2.01 |
| 123 | 74.51 | 73.04 | −1.47 |
| 456 | 74.02 | 74.02 | 0.00 |
| 789 | 74.02 | 72.55 | −1.47 |
| Mean ± SD | 75.01 ± 1.67 | 73.78 ± 1.30 | −1.24 ± 0.86 |
| *Mistral-7B × ProofWriter ($n$=600)* | | | |
| 42 | 39.33 | 36.50 | −2.83 |
| 123 | 40.83 | 37.50 | −3.33 |
| 456 | 39.83 | 38.50 | −1.33 |
| 789 | 38.83 | 37.17 | −1.67 |
| Mean ± SD | 39.70 ± 0.85 | 37.42 ± 0.83 | −2.29 ± 0.95 |
| *LLaMA-3.1-8B × ProofWriter ($n$=600)* | | | |
| 42 | 72.50 | 65.00 | −7.50 |
| 123 | 71.33 | 64.00 | −7.33 |
| 456 | 71.67 | 66.17 | −5.50 |
| 789 | 71.17 | 66.50 | −4.67 |
| Mean ± SD | 71.67 ± 0.59 | 65.42 ± 1.14 | −6.25 ± 1.34 |
| *Qwen2.5-14B × ProofWriter ($n$=600)* | | | |
| 42 | 74.00 | 71.50 | −2.50 |
| 123 | 72.33 | 70.83 | −1.50 |
| 456 | 73.00 | 72.17 | −0.83 |
| 789 | 73.50 | 71.50 | −2.00 |
| Mean ± SD | 73.21 ± 0.71 | 71.50 ± 0.55 | −1.71 ± 0.71 |
| *Qwen3-14B × ProofWriter ($n$=600)* | | | |
| 42 | 85.83 | 85.67 | −0.17 |
| 123 | 85.17 | 86.50 | +1.33 |
| 456 | 84.50 | 86.83 | +2.33 |
| 789 | 85.50 | 85.67 | +0.17 |
| Mean ± SD | 85.25 ± 0.57 | 86.17 ± 0.59 | +0.92 ± 1.14 |

[a]Original baseline used no fixed seed and is excluded from seed statistics.

Table 43: SICA vs. SC accuracy by gold-label type (Mistral-7B). Corrected SC baseline uses alphabetical tiebreaking. Δ pp = SICA − SC. $p$-values from exact McNemar test (two-sided).

| Dataset | Label | $n$ | SC | SICA | Δ pp | $p$ |
|---|---|---|---|---|---|---|
| FOLIO-204 | True | 72 | 56.9 | 62.5 | +5.6 | .125 |
| | False | 63 | 42.9 | 42.9 | ±0.0 | 1.0 |
| | Unknown | 69 | 66.7 | 71.0 | +4.3 | .250 |
| | *Overall* | 204 | 55.9 | 59.3 | +3.4 | .092 |
| PW-600 | True | 200 | 8.5 | 6.0 | −2.5 | .063 |
| | False | 200 | 19.5 | 14.5 | −5.0 | .076 |
| | Unknown | 200 | 90.0 | 89.0 | −1.0 | .774 |
| | *Overall* | 600 | 39.3 | 36.5 | −2.8 | .014* |

Table 44: SICA vs. SC accuracy by extracted constraint count tertile (Mistral-7B). Corrected SC baseline (alphabetical tiebreaking). Constraint counts are unique deduplicated constraints per problem.

| Dataset | Tertile | $n$ | $\bar{c}$ | SC | SICA | Δ pp | $p$ |
|---|---|---|---|---|---|---|---|
| FOLIO-204 | Low [0–32] | 74 | 21.7 | 62.2 | 63.5 | +1.4 | 1.0 |
| | Mid [33–47] | 64 | 39.7 | 50.0 | 59.4 | +9.4 | .031* |
| | High [48–83] | 66 | 58.7 | 54.5 | 54.5 | ±0.0 | 1.0 |
| PW-600 | Low [0–39] | 212 | 28.8 | 43.9 | 39.6 | −4.3 | .078 |
| | Mid [40–52] | 196 | 45.8 | 40.8 | 37.2 | −3.6 | .143 |
| | High [53–99] | 192 | 63.7 | 32.8 | 32.3 | −0.5 | 1.0 |

less diverse traces, reducing the marginal value of additional samples. Our Process-$\kappa$ analysis (§5.1) reveals that this homogenization operates at the reasoning-process level, not just answer level; traces that disagree on final answers still share 69% of their reasoning structure. Cross-architecture ensembles offer a path forward, but the capability-gap condition (§5.4) implies that the verifier must be genuinely complementary, not just different.

**Semantic evaluation remark.** Observation 1 assumes degeneration and source attribution. Under *semantic* evaluation, the equivalence additionally requires *answer alignment*: $P(c_i \text{ supports } a_i) \geq P(c_i \text{ supports } a')$ for $a' \neq a_i$, which is structurally motivated and empirically validated ($\text{BR} \in [1.66, 4.97]$; Table 2), but could fail if $f$ systematically extracted premises contradicting their source trace's conclusion. Since Observation 1 shows SICA reduces to majority vote under degeneration, $\text{BR} \geq 1$ follows from the trace-count geometry; the empirical BR consistently exceeds this floor (1.66×–4.97×; Table 2), reflecting both base-rate effects and extraction alignment.

**SCB diagnostic toolkit.** We recommend four lightweight diagnostics, computable from sampled traces alone, to predict whether symbolic self-verification will help or hurt before deployment. *Bias Ratio* (BR; §5.1): for each problem, compute the fraction of constraints supporting the majority answer, divided by majority vote share. BR > 1 indicates constraints are biased toward the major-

ity; BR $\gg 2$ (as in all nine models tested; Table 2) signals that extraction amplifies rather than checks the model's prior. Report as mean $\pm$ bootstrap 95% CI. *Effective-K* ($K_{\text{eff}}$; Eq. 1): compute Fleiss' $\kappa$ across $K$ traces, then $K_{\text{eff}} = K/[1 + (K-1)\kappa]$. Threshold: $K_{\text{eff}} \leq 1.30$ never improves in our experiments; aggregation collapses to majority voting. $K_{\text{eff}} > 1.8$ is a necessary (not sufficient) condition for gain. *Degenerate Consensus* ($C_0$; §3): the fraction of problems where all $K$ traces agree. $C_0 > 95\%$ renders aggregation moot; $C_0 < 5\%$ means the model is maximally uncertain and constraints tend to amplify noise. *ProcessSim* (Eq. 7): mean pairwise cosine similarity of TF-IDF trace vectors. ProcessSim $> 0.6$ indicates homogeneous reasoning; combined with BR $> 2$, this predicts SCB will dominate. A practitioner should compute all four on a held-out sample ($n \geq 50$). If $K_{\text{eff}} \leq 1.30$ or $C_0 > 95\%$ or (BR $> 2$ and ProcessSim $> 0.6$), symbolic self-verification is unlikely to help.

**BR permutation null model.** The permutation test referenced in §5.1 proceeds as follows:

1. For each problem $p$ with extracted constraints $\{c_1, \ldots, c_M\}$ and source answers $\{a_1, \ldots, a_M\}$:
2. Randomly permute constraint-to-answer assignments within $p$ (preserving per-trace constraint counts).
3. Compute $\text{BR}_{\text{null}}$ from the permuted assignments.
4. Repeat 10,000 times to obtain the null distribution.
5. Compute $p$-value $= |\{r : \text{BR}^{(r)}_{\text{null}} \geq \text{BR}_{\text{obs}}\}|/10{,}000$.

Across all tested conditions, $\text{BR}_{\text{null}} \approx \text{BR}_{\text{obs}}$ ($p > 0.7$), confirming that the observed bias ratio is fully explained by trace-count geometry under source-attribution scoring (Observation 1), not by an independent extraction bias.

**Future directions: trained extractors and beyond.** Our oracle controls reveal that perfect extraction would yield $+29.90$ pp over SC on Mistral-7B FOLIO; self-extraction captures only $\sim$12% of this ceiling. This gap motivates several future directions. *Trained constraint extractors*: fine-tuning a small model (e.g., encoder-only) on human-annotated FOL from logic benchmarks could produce genuinely discriminative constraints that break the distributional prior. The key design constraint is structural independence: the extractor should not share training data or architecture with the generator, mirroring the cross-architecture NLI escape (§5.4). *Multi-model ensembles*: rather than single cross-architecture pairs, combining $M$ structurally independent verifiers could further reduce correlated errors. The capability-gap condition (§5.4) predicts that each verifier must exceed the generator on the target task to contribute positively; empirical verification across heterogeneous verifier pools is needed. *External knowledge grounding*: connecting to knowledge bases (Wikidata, domain ontologies) could inject verification signal absent from any model's parameters. This avoids SCB entirely by grounding constraints in external facts rather than self-generated traces. *SCB-aware aggregation*: current MAX-SAT aggregation treats all constraints equally. Weighting constraints by estimated independence (e.g., inverse ProcessSim with other traces' constraints) or by discriminative power (e.g., cross-validation on held-out traces) could partially mitigate SCB without requiring external verifiers.

**SCB as an evaluation framework.** The SCB metrics (BR, $K_{\text{eff}}$, ProcessSim, and CCR) can serve as a general evaluation framework for self-improvement methods beyond SICA. Any method that extracts structured representations from a model's own outputs (self-verification (Huang et al., 2024), self-refinement (Madaan et al., 2023), chain-of-verification (Dhuliawala et al., 2024), self-consistency (Wang et al., 2023)) faces the distributional prior that generates SCB. We propose that future work on self-improvement methods report: (1) BR on error cases (does the method's verification signal correlate with the model's majority answer, or does it provide independent information?); (2) $K_{\text{eff}}$ or an analogous diversity metric (does the method generate genuinely diverse candidates, or does it amplify a single mode?); (3) CCR (does the method preferentially correct errors, or does it preferentially confirm them?). A method with BR $< 1$, high $K_{\text{eff}}$, and CCR $> 0$ demonstrates genuine self-improvement; BR $> 1$ with CCR $< 0$ indicates that the method suffers from SCB regardless of aggregate accuracy gains, which may reflect favorable base rates rather than corrective signal.

**Additional scope considerations.** Beyond the limitations discussed in the main text, several additional constraints bound our conclusions. Seven of our eleven model-domain conditions have $n \leq 60$, providing insufficient statistical power for confir-

matory claims; power analysis shows that the minimum detectable effect exceeds 5 pp for these conditions (Table 6), so they serve as regime characterization rather than definitive tests. Our extraction prompts use a single zero-shot template per domain; alternative prompting strategies (few-shot exemplars, chain-of-thought extraction, or iterative refinement) might yield higher-quality constraints, though the oracle gap suggests the bottleneck is structural rather than prompt-specific. The constraint quality analysis (91.8% discriminative rate, 39.2% source-trace minority weight) covers Qwen2.5-14B on FOLIO + ProofWriter ($N = 804$); other model-domain combinations may exhibit different characteristics. Constraint extraction uses $T_{\text{ext}} = 0.3$ while trace sampling uses $T = 0.7$; alternative extraction temperatures might yield different results. Although we prompt for first-order logic formalizations, 99.0% of extracted constraints are propositional at the Z3 level, with only 1.0% using true quantifiers (∀/∃); whether models capable of genuine quantified reasoning would yield higher discriminative rates is untested. Deduplication uses syntactic equivalence (global average dedup ratio: 46.0%), so semantically equivalent constraints with different surface forms receive separate weights; Z3-based semantic deduplication removes an additional $\sim$10% of constraints and yields a small but significant improvement over no deduplication ($p = 0.013$), suggesting room for better dedup strategies. The GSM8K pilot ($n = 30$) illustrates the constraint-absent regime and should not be interpreted as confirmatory evidence.

## Z Use of AI Assistance

We used Claude for coding, code drafting, debugging, and language polishing.