


Components

Over a dozen reusable components built to provide iconography, dropdowns, input groups, navigation, alerts, and much more.



Beautiful online graphing. Collaborative. APIs for Python, R, and MATLAB.

ads via **Carbon**

































































































Glyphicons

Available glyphs

Includes 200 glyphs in font format from the Glyphicon Halflings set. [Glyphicons](#) Halflings are normally not available for free, but their creator has made them available for Bootstrap free of cost. As a thank you, we only ask that you include a link back to [Glyphicons](#) whenever possible.

<div>*</div> <div>glyphicon glyphicon-asterisk</div>	<div>+</div> <div>glyphicon glyphicon-plus</div>	<div>€</div> <div>glyphicon glyphicon-euro</div>	<div></div> <div>glyphicon glyphicon-minus</div>	<div></div> <div>glyphicon glyphicon-cloud</div>	<div></div> <div>glyphicon glyphicon-envelope</div>	<div></div> <div>glyphicon glyphicon-pencil</div>	<div></div> <div>glyphicon glyphicon-glass</div>
<div></div> <div>glyphicon glyphicon-music</div>	<div></div> <div>glyphicon glyphicon-search</div>	<div></div> <div>glyphicon glyphicon-heart</div>	<div></div> <div>glyphicon glyphicon-star</div>	<div></div> <div>glyphicon glyphicon-star-empty</div>	<div></div> <div>glyphicon glyphicon-user</div>	<div></div> <div>glyphicon glyphicon-film</div>	<div></div> <div>glyphicon glyphicon-th-large</div>
<div></div> <div>glyphicon glyphicon-th</div>	<div></div> <div>glyphicon glyphicon-th-list</div>	<div></div> <div>glyphicon glyphicon-ok</div>	<div></div> <div>glyphicon glyphicon-remove</div>	<div></div> <div>glyphicon glyphicon-zoom-in</div>	<div></div> <div>glyphicon glyphicon-zoom-out</div>	<div></div> <div>glyphicon glyphicon-off</div>	<div></div> <div>glyphicon glyphicon-signal</div>
<div></div> <div>glyphicon glyphicon-cog</div>	<div></div> <div>glyphicon glyphicon-trash</div>	<div></div> <div>glyphicon glyphicon-home</div>	<div></div> <div>glyphicon glyphicon-file</div>	<div></div> <div>glyphicon glyphicon-time</div>	<div></div> <div>glyphicon glyphicon-road</div>	<div></div> <div>glyphicon glyphicon-download-alt</div>	<div></div> <div>glyphicon glyphicon-download</div>
<div></div> <div>glyphicon glyphicon-upload</div>	<div></div> <div>glyphicon glyphicon-inbox</div>	<div></div> <div>glyphicon glyphicon-play-circle</div>	<div></div> <div>glyphicon glyphicon-repeat</div>	<div></div> <div>glyphicon glyphicon-refresh</div>	<div></div> <div>glyphicon glyphicon-list-alt</div>	<div></div> <div>glyphicon glyphicon-lock</div>	<div></div> <div>glyphicon glyphicon-flag</div>
<div></div> <div>glyphicon glyphicon-headphones</div>	<div></div> <div>glyphicon glyphicon-volume-off</div>	<div></div> <div>glyphicon glyphicon-volume-down</div>	<div></div> <div>glyphicon glyphicon-volume-up</div>	<div></div> <div>glyphicon glyphicon-qrcode</div>	<div></div> <div>glyphicon glyphicon-barcode</div>	<div></div> <div>glyphicon glyphicon-tag</div>	<div></div> <div>glyphicon glyphicon-tags</div>
<div></div> <div>glyphicon glyphicon-book</div>	<div></div> <div>glyphicon glyphicon-bookmark</div>	<div></div> <div>glyphicon glyphicon-print</div>	<div></div> <div>glyphicon glyphicon-camera</div>	<div></div> <div>glyphicon glyphicon-font</div>	<div></div> <div>glyphicon glyphicon-bold</div>	<div></div> <div>glyphicon glyphicon-italic</div>	<div></div> <div>glyphicon glyphicon-text-height</div>

- Glyphicons
- Dropdowns
- Button groups
- Button dropdowns
- Input groups
- Navs
- Navbar
- Breadcrumbs
- Pagination
- Labels
- Badges
- Jumbotron
- Page header
- Thumbnails
- Alerts
- Progress bars
- Media object
- List group
- Panels
- Responsive embed
- Wells
- Back to top
- Preview theme

 glyphicon-glyphicon-text-width	 glyphicon-glyphicon-align-left	 glyphicon-glyphicon-align-center	 glyphicon-glyphicon-align-right	 glyphicon-glyphicon-align-justify	 glyphicon-glyphicon-list	 glyphicon-glyphicon-indent-left	 glyphicon-glyphicon-indent-right
 glyphicon-glyphicon-facetime-video	 glyphicon-glyphicon-picture	 glyphicon-glyphicon-map-marker	 glyphicon-glyphicon-adjust	 glyphicon-glyphicon-tint	 glyphicon-glyphicon-edit	 glyphicon-glyphicon-share	 glyphicon-glyphicon-check
 glyphicon-glyphicon-move	 glyphicon-glyphicon-step-backward	 glyphicon-glyphicon-fast-backward	 glyphicon-glyphicon-backward	 glyphicon-glyphicon-play	 glyphicon-glyphicon-pause	 glyphicon-glyphicon-stop	 glyphicon-glyphicon-forward
 glyphicon-glyphicon-fast-forward	 glyphicon-glyphicon-step-forward	 glyphicon-glyphicon-eject	 glyphicon-glyphicon-chevron-left	 glyphicon-glyphicon-chevron-right	 glyphicon-glyphicon-plus-sign	 glyphicon-glyphicon-minus-sign	 glyphicon-glyphicon-remove-sign
 glyphicon-glyphicon-ok-sign	 glyphicon-glyphicon-question-sign	 glyphicon-glyphicon-info-sign	 glyphicon-glyphicon-screenshot	 glyphicon-glyphicon-remove-circle	 glyphicon-glyphicon-ok-circle	 glyphicon-glyphicon-ban-circle	 glyphicon-glyphicon-arrow-left
 glyphicon-glyphicon-arrow-right	 glyphicon-glyphicon-arrow-up	 glyphicon-glyphicon-arrow-down	 glyphicon-glyphicon-share-alt	 glyphicon-glyphicon-resize-full	 glyphicon-glyphicon-resize-small	 glyphicon-glyphicon-exclamation-sign	 glyphicon-glyphicon-gift
 glyphicon-glyphicon-leaf	 glyphicon-glyphicon-fire	 glyphicon-glyphicon-eye-open	 glyphicon-glyphicon-eye-close	 glyphicon-glyphicon-warning-sign	 glyphicon-glyphicon-plane	 glyphicon-glyphicon-calendar	 glyphicon-glyphicon-random
 glyphicon-glyphicon-comment	 glyphicon-glyphicon-magnet	 glyphicon-glyphicon-chevron-up	 glyphicon-glyphicon-chevron-down	 glyphicon-glyphicon-retweet	 glyphicon-glyphicon-shopping-cart	 glyphicon-glyphicon-folder-close	 glyphicon-glyphicon-folder-open
 glyphicon-glyphicon-resize-vertical	 glyphicon-glyphicon-resize-horizontal	 glyphicon-glyphicon-hdd	 glyphicon-glyphicon-bullhorn	 glyphicon-glyphicon-bell	 glyphicon-glyphicon-certificate	 glyphicon-glyphicon-thumbs-up	 glyphicon-glyphicon-thumbs-down
 glyphicon-glyphicon-hand-right	 glyphicon-glyphicon-hand-left	 glyphicon-glyphicon-hand-up	 glyphicon-glyphicon-hand-down	 glyphicon-glyphicon-circle-arrow-right	 glyphicon-glyphicon-circle-arrow-left	 glyphicon-glyphicon-circle-arrow-up	 glyphicon-glyphicon-circle-arrow-down
 glyphicon-glyphicon-globe	 glyphicon-glyphicon-wrench	 glyphicon-glyphicon-tasks	 glyphicon-glyphicon-filter	 glyphicon-glyphicon-briefcase	 glyphicon-glyphicon-fullscreen	 glyphicon-glyphicon-dashboard	 glyphicon-glyphicon-paperclip
 glyphicon-glyphicon-heart-empty	 glyphicon-glyphicon-link	 glyphicon-glyphicon-phone	 glyphicon-glyphicon-pushpin	 glyphicon-glyphicon-usd	 glyphicon-glyphicon-gbp	 glyphicon-glyphicon-sort	 glyphicon-glyphicon-sort-by-alphabet

How to use

For performance reasons, all icons require a base class and individual icon class. To use, place the following code just about anywhere. Be sure to leave a space between the icon and text for proper padding.

Don't mix with other components

Icon classes cannot be directly combined with other components. They should not be used along with other classes on the same element. Instead, add a nested `` and apply the icon classes to the ``.

Only for use on empty elements

Icon classes should only be used on elements that contain no text content and have no child elements.

Changing the icon font location

Bootstrap assumes icon font files will be located in the `../fonts/` directory, relative to the compiled CSS files. Moving or renaming those font files means updating the CSS in one of three ways:

- Change the `@icon-font-path` and/or `@icon-font-name` variables in the source Less files.
- Utilize the [relative URLs option](#) provided by the Less compiler.
- Change the `url()` paths in the compiled CSS.

Use whatever option best suits your specific development setup.

``

Copy

Examples

Use them in buttons, button groups for a toolbar, navigation, or prepended form inputs.

EXAMPLE

Copy

Star

Star

Star

Star

```
<button type="button" class="btn btn-default btn-lg">
  <span class="glyphicon glyphicon-star"></span> Star
</button>
```

Dropdowns

Toggleable, contextual menu for displaying lists of links. Made interactive with the [dropdown JavaScript plugin](#).

Example

Wrap the dropdown's trigger and the dropdown menu within `.dropdown`, or another element that declares `position: relative`. Then add the menu's HTML.

EXAMPLE

Copy

Dropdown ▾

Action

Another action

Something else here

Separated link

```
<div class="dropdown">
  <button class="btn btn-default dropdown-toggle" type="button" id="dropdownMenu1" data-
  toggle="dropdown">
    Dropdown
    <span class="caret"></span>
  </button>
  <ul class="dropdown-menu" role="menu" aria-labelledby="dropdownMenu1">
    <li role="presentation"><a role="menuitem" tabindex="-1" href="#">Action</a></li>
    <li role="presentation"><a role="menuitem" tabindex="-1" href="#">Another action</a>
  </li>
    <li role="presentation"><a role="menuitem" tabindex="-1" href="#">Something else
  here</a></li>
    <li role="presentation" class="divider"></li>
    <li role="presentation"><a role="menuitem" tabindex="-1" href="#">Separated link</a>
  </li>
  </ul>
</div>
```

Alignment

By default, a dropdown menu is automatically positioned 100% from the top and along the left side of its parent. Add `.dropdown-menu-right` to a `.dropdown-menu` to right align the dropdown menu.

May require additional positioning

Dropdowns are automatically positioned via CSS within the normal flow of the document. This means dropdowns may be cropped by parents with certain `overflow` properties or appear out of bounds of the viewport. Address these issues on your own as they arise.

Deprecated `.pull-right` alignment

As of v3.1.0, we've deprecated `.pull-right` on dropdown menus. To right-align a menu, use `.dropdown-menu-right`. Right-aligned nav components in the navbar use a mixin version of this class to automatically align the menu. To override it, use `.dropdown-menu-left`.

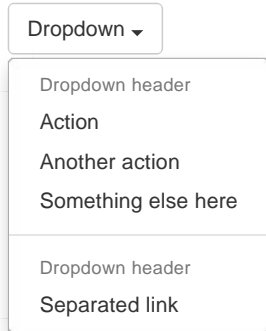
```
<ul class="dropdown-menu dropdown-menu-right" role="menu" aria-labelledby="dLabel">
  ...
</ul>
```

[Copy](#)

Headers

Add a header to label sections of actions in any dropdown menu.

EXAMPLE


[Copy](#)

```
<ul class="dropdown-menu" role="menu" aria-labelledby="dropdownMenu2">
  <li role="presentation" class="dropdown-header">Dropdown header</li>
  ...
  <li role="presentation" class="divider"></li>
  <li role="presentation" class="dropdown-header">Dropdown header</li>
  ...
</ul>
```

Disabled menu items

Add `.disabled` to a `` in the dropdown to disable the link.

EXAMPLE

[Copy](#)

```
<ul class="dropdown-menu" role="menu" aria-labelledby="dropdownMenu3">
  <li role="presentation"><a role="menuitem" tabindex="-1" href="#">Regular link</a>
</li>
  <li role="presentation" class="disabled"><a role="menuitem" tabindex="-1"
href="#">Disabled link</a></li>
  <li role="presentation"><a role="menuitem" tabindex="-1" href="#">Another link</a>
</li>
</ul>
```

Button groups

Group a series of buttons together on a single line with the button group. Add on optional JavaScript radio and checkbox style behavior with [our](#)

Tooltips & popovers in button groups require special setting

When using tooltips or popovers on elements within a `.btn-group`, you'll have to specify the option `container: 'body'` to avoid unwanted side effects (such as the element growing wider and/or losing its rounded corners when the tooltip or popover is triggered).

Basic example

Wrap a series of buttons with `.btn` in `.btn-group`.

EXAMPLE

Copy

Left

Middle

Right

```

<div class="btn-group">
  <button type="button" class="btn btn-default">Left</button>
  <button type="button" class="btn btn-default">Middle</button>
  <button type="button" class="btn btn-default">Right</button>
</div>

```

Button toolbar

Combine sets of `<div class="btn-group">` into a `<div class="btn-toolbar">` for more complex components.

EXAMPLE

Copy

1

2

3

4

5

6

7

8

```

<div class="btn-toolbar" role="toolbar">
  <div class="btn-group">...</div>
  <div class="btn-group">...</div>
  <div class="btn-group">...</div>
</div>

```

Sizing

Instead of applying button sizing classes to every button in a group, just add `.btn-group-*` to the `.btn-group`.

EXAMPLE

Copy

Left

Middle

Right

Left

Middle

Right

Left

Middle

Right

Left

Middle

Right

```

<div class="btn-group btn-group-lg">...</div>
<div class="btn-group">...</div>
<div class="btn-group btn-group-sm">...</div>
<div class="btn-group btn-group-xs">...</div>

```

Nesting

Place a `.btn-group` within another `.btn-group` when you want dropdown menus mixed with a series of buttons.

EXAMPLE

Copy

12Dropdown

<div class="btn-group">
 <button type="button" class="btn btn-default">1</button>
 <button type="button" class="btn btn-default">2</button>

 <div class="btn-group">
 <button type="button" class="btn btn-default dropdown-toggle" data-
toggle="dropdown">
 Dropdown

 </button>
 <ul class="dropdown-menu" role="menu">
 Dropdown link
 Dropdown link

</div>
</div>

Vertical variation

Make a set of buttons appear vertically stacked rather than horizontally. **Split button dropdowns are not supported here.**

EXAMPLECopy

Button

Button

Dropdown

Button

Button

Dropdown

Dropdown

Dropdown

<div class="btn-group-vertical">
 ...
</div>

Justified button groups

Make a group of buttons stretch at equal sizes to span the entire width of its parent. Also works with button dropdowns within the button group.

Handling borders

Due to the specific HTML and CSS used to justify buttons (namely `display: table-cell`), the borders between them are doubled. In regular button groups, `margin-left: -1px` is used to stack the borders instead of removing them. However, `margin` doesn't work with `display: table-cell`. As a result, depending on your customizations to Bootstrap, you may wish to remove or re-color the borders.

IE8 and borders

Internet Explorer 8 doesn't render borders on buttons in a justified button group, whether it's on `<a>` or `<button>` elements. To get around that, wrap each button in another `.btn-group`.
See [#12476](#) for more information.

With `<a>` elements

Just wrap a series of `.btn`s in `.btn-group.btn-group-justified`.

EXAMPLECopy

Generated with [www.html-to-pdf.net](#)

Page 7 / 38

Left	Middle	Right
------	--------	-------

Left	Middle	Dropdown ▼
------	--------	------------

```
<div class="btn-group btn-group-justified">
  ...
</div>
```

With `<button>` elements

To use justified button groups with `<button>` elements, **you must wrap each button in a button group**. Most browsers don't properly apply our CSS for justification to `<button>` elements, but since we support button dropdowns, we can work around that.

EXAMPLE

[Copy](#)

Left	Middle	Right
------	--------	-------

```
<div class="btn-group btn-group-justified">
  <div class="btn-group">
    <button type="button" class="btn btn-default">Left</button>
  </div>
  <div class="btn-group">
    <button type="button" class="btn btn-default">Middle</button>
  </div>
  <div class="btn-group">
    <button type="button" class="btn btn-default">Right</button>
  </div>
</div>
```

Button dropdowns

Use any button to trigger a dropdown menu by placing it within a `.btn-group` and providing the proper menu markup.

Plugin dependency

Button dropdowns require the [dropdown plugin](#) to be included in your version of Bootstrap.

Single button dropdowns

Turn a button into a dropdown toggle with some basic markup changes.

EXAMPLE

[Copy](#)

Default ▼	Primary ▼	Success ▼	Info ▼	Warning ▼	Danger ▼
-----------	-----------	-----------	--------	-----------	----------

```
<!-- Single button -->
<div class="btn-group">
  <button type="button" class="btn btn-default dropdown-toggle" data-toggle="dropdown">
    Action <span class="caret"></span>
  </button>
  <ul class="dropdown-menu" role="menu">
    <li><a href="#">Action</a></li>
    <li><a href="#">Another action</a></li>
    <li><a href="#">Something else here</a></li>
    <li class="divider"></li>
    <li><a href="#">Separated link</a></li>
  </ul>
```


</div>

Split button dropdowns

Similarly, create split button dropdowns with the same markup changes, only with a separate button.

EXAMPLE

Copy



```
<!-- Split button -->
<div class="btn-group">
  <button type="button" class="btn btn-danger">Action</button>
  <button type="button" class="btn btn-danger dropdown-toggle" data-toggle="dropdown">
    <span class="caret"></span>
    <span class="sr-only">Toggle Dropdown</span>
  </button>
  <ul class="dropdown-menu" role="menu">
    <li><a href="#">Action</a></li>
    <li><a href="#">Another action</a></li>
    <li><a href="#">Something else here</a></li>
    <li class="divider"></li>
    <li><a href="#">Separated link</a></li>
  </ul>
</div>
```

Sizing

Button dropdowns work with buttons of all sizes.

EXAMPLE

Copy



```
<!-- Large button group -->
<div class="btn-group">
  <button class="btn btn-default btn-lg dropdown-toggle" type="button" data-
toggle="dropdown">
    Large button <span class="caret"></span>
  </button>
  <ul class="dropdown-menu" role="menu">
    ...
  </ul>
</div>

<!-- Small button group -->
<div class="btn-group">
  <button class="btn btn-default btn-sm dropdown-toggle" type="button" data-
toggle="dropdown">
    Small button <span class="caret"></span>
  </button>
  <ul class="dropdown-menu" role="menu">
    ...
  </ul>
</div>

<!-- Extra small button group -->
<div class="btn-group">
  <button class="btn btn-default btn-xs dropdown-toggle" type="button" data-
toggle="dropdown">
    Extra small button <span class="caret"></span>
  </button>
  <ul class="dropdown-menu" role="menu">
    ...
  </ul>
</div>
```

Dropup variation

Trigger dropdown menus above elements by adding `.dropup` to the parent.

EXAMPLE

Copy

Dropup

Right dropup

```
<div class="btn-group dropup">
  <button type="button" class="btn btn-default">Dropup</button>
  <button type="button" class="btn btn-default dropdown-toggle" data-toggle="dropdown">
    <span class="caret"></span>
    <span class="sr-only">Toggle Dropdown</span>
  </button>
  <ul class="dropdown-menu" role="menu">
    <!-- Dropdown menu links -->
  </ul>
</div>
```

Input groups

Extend form controls by adding text or buttons before, after, or on both sides of any text-based input. Use `.input-group` with an `.input-group-addon` to prepend or append elements to a single `.form-control`.

Cross-browser compatibility

Avoid using `<select>` elements here as they cannot be fully styled in WebKit browsers.

Tooltips & popovers in input groups require special setting

When using tooltips or popovers on elements within an `.input-group`, you'll have to specify the option `container: 'body'` to avoid unwanted side effects (such as the element growing wider and/or losing its rounded corners when the tooltip or popover is triggered).

Don't mix with other components

Do not mix form groups or grid column classes directly with input groups. Instead, nest the input group inside of the form group or grid-related element.

Basic example

Place one add-on or button on either side of an input. You may also place one on both sides of an input.

We do not support multiple add-ons on a single side.

We do not support multiple form-controls in a single input group.

EXAMPLE

Copy

@

Username

.00

\$

.00

```
<div class="input-group">
```

```

<span class="input-group-addon">@</span>
<input type="text" class="form-control" placeholder="Username">
</div>

<div class="input-group">
  <input type="text" class="form-control">
  <span class="input-group-addon">.00</span>
</div>

<div class="input-group">
  <span class="input-group-addon">$</span>
  <input type="text" class="form-control">
  <span class="input-group-addon">.00</span>
</div>

```

Sizing

Add the relative form sizing classes to the `.input-group` itself and contents within will automatically resize—no need for repeating the form control size classes on each element.

EXAMPLE

Copy

```

<div class="input-group input-group-lg">
  <span class="input-group-addon">@</span>
  <input type="text" class="form-control" placeholder="Username">
</div>

<div class="input-group">
  <span class="input-group-addon">@</span>
  <input type="text" class="form-control" placeholder="Username">
</div>

<div class="input-group input-group-sm">
  <span class="input-group-addon">@</span>
  <input type="text" class="form-control" placeholder="Username">
</div>

```

Checkboxes and radio addons

Place any checkbox or radio option within an input group's addon instead of text.

EXAMPLE

Copy

☐

☐

```

<div class="row">
  <div class="col-lg-6">
    <div class="input-group">
      <span class="input-group-addon">
        <input type="checkbox">
      </span>
      <input type="text" class="form-control">
    </div><!-- /input-group -->
  </div><!-- /.col-lg-6 -->
  <div class="col-lg-6">
    <div class="input-group">
      <span class="input-group-addon">
        <input type="radio">
      </span>
      <input type="text" class="form-control">
    </div>
  </div>
</div>

```

```

</span>
<input type="text" class="form-control">
</div><!-- /input-group -->
</div><!-- /.col-lg-6 -->
</div><!-- /.row -->

```

Button addons

Buttons in input groups are a bit different and require one extra level of nesting. Instead of `.input-group-addon`, you'll need to use `.input-group-btn` to wrap the buttons. This is required due to default browser styles that cannot be overridden.

EXAMPLE

Copy

Go!

Go!

```

<div class="row">
  <div class="col-lg-6">
    <div class="input-group">
      <span class="input-group-btn">
        <button class="btn btn-default" type="button">Go! </button>
      </span>
      <input type="text" class="form-control">
    </div><!-- /input-group -->
  </div><!-- /.col-lg-6 -->
  <div class="col-lg-6">
    <div class="input-group">
      <input type="text" class="form-control">
      <span class="input-group-btn">
        <button class="btn btn-default" type="button">Go! </button>
      </span>
    </div><!-- /input-group -->
  </div><!-- /.col-lg-6 -->
</div><!-- /.row -->

```

Buttons with dropdowns

EXAMPLE

Copy

Action ▼

Action ▼

```

<div class="row">
  <div class="col-lg-6">
    <div class="input-group">
      <div class="input-group-btn">
        <button type="button" class="btn btn-default dropdown-toggle" data-
toggle="dropdown">Action <span class="caret"></span></button>
        <ul class="dropdown-menu" role="menu">
          <li><a href="#">Action</a></li>
          <li><a href="#">Another action</a></li>
          <li><a href="#">Something else here</a></li>
          <li class="divider"></li>
          <li><a href="#">Separated link</a></li>
        </ul>
      </div><!-- /btn-group -->
      <input type="text" class="form-control">
    </div><!-- /input-group -->
  </div><!-- /.col-lg-6 -->
  <div class="col-lg-6">
    <div class="input-group">
      <input type="text" class="form-control">
      <div class="input-group-btn">
        <button type="button" class="btn btn-default dropdown-toggle" data-
toggle="dropdown">Action <span class="caret"></span></button>
        <ul class="dropdown-menu dropdown-menu-right" role="menu">

```

```

<li><a href="#">Action</a></li>
<li><a href="#">Another action</a></li>
<li><a href="#">Something else here</a></li>
<li class="divider"></li>
<li><a href="#">Separated link</a></li>
</ul>
</div><!-- /btn-group -->
</div><!-- /input-group -->
</div><!-- /.col-lg-6 -->
</div><!-- /.row -->

```

Segmented buttons

EXAMPLE

Copy

Action

Action

```

<div class="input-group">
  <div class="input-group-btn">
    <!-- Button and dropdown menu -->
  </div>
  <input type="text" class="form-control">
</div>

<div class="input-group">
  <input type="text" class="form-control">
  <div class="input-group-btn">
    <!-- Button and dropdown menu -->
  </div>
</div>

```

Navs

Navs available in Bootstrap have shared markup, starting with the base `.nav` class, as well as shared states. Swap modifier classes to switch between each style.

Tabs

Note the `.nav-tabs` class requires the `.nav` base class.

EXAMPLE

Copy

Home

Profile

Messages

```

<ul class="nav nav-tabs" role="tablist">
  <li class="active"><a href="#">Home</a></li>
  <li><a href="#">Profile</a></li>
  <li><a href="#">Messages</a></li>
</ul>

```

Requires JavaScript tabs plugin

For tabs with tabbable areas, you must use the [tabs JavaScript plugin](#).

Pills

Take that same HTML, but use `.nav-pills` instead:

EXAMPLE

Copy

[Home](#) [Profile](#) [Messages](#)

```
<ul class="nav nav-pills">
  <li class="active"><a href="#">Home</a></li>
  <li><a href="#">Profile</a></li>
  <li><a href="#">Messages</a></li>
</ul>
```

Pills are also vertically stackable. Just add `.nav-stacked`.

EXAMPLE

Copy

[Home](#)
[Profile](#)
[Messages](#)

```
<ul class="nav nav-pills nav-stacked">
  ...
</ul>
```

Justified

Easily make tabs or pills equal widths of their parent at screens wider than 768px with `.nav-justified`. On smaller screens, the nav links are stacked.

Safari and responsive justified navs

As of v7.0.1, Safari exhibits a bug in which resizing your browser horizontally causes rendering errors in the justified nav that are cleared upon refreshing. This bug is also shown in the [justified nav example](#).

EXAMPLE

Copy

[Home](#)[Profile](#)[Messages](#)[Home](#)[Profile](#)[Messages](#)

```
<ul class="nav nav-tabs nav-justified" role="tablist">
  ...
</ul>
<ul class="nav nav-pills nav-justified">
  ...
</ul>
```

Disabled links

For any nav component (tabs or pills), add `.disabled` for **gray links and no hover effects**.

Link functionality not impacted

This class will only change the `<a>`'s appearance, not its functionality. Use custom JavaScript to disable links here.

EXAMPLE

Copy

[Clickable link](#) [Clickable link](#) [Disabled link](#)

```
<ul class="nav nav-pills">
  ...
  <li class="disabled"><a href="#">Disabled link</a></li>
  ...
</ul>
```

Using dropdowns

Add dropdown menus with a little extra HTML and the [dropdowns JavaScript plugin](#).

Tabs with dropdowns

EXAMPLE

Copy

Home Help Dropdown ▾

```
<ul class="nav nav-tabs" role="tablist">
  ...
  <li class="dropdown">
    <a class="dropdown-toggle" data-toggle="dropdown" href="#">
      Dropdown <span class="caret"></span>
    </a>
    <ul class="dropdown-menu" role="menu">
      ...
    </ul>
  </li>
  ...
</ul>
```

Pills with dropdowns

EXAMPLE

Copy

Home Help Dropdown ▾

```
<ul class="nav nav-pills">
  ...
  <li class="dropdown">
    <a class="dropdown-toggle" data-toggle="dropdown" href="#">
      Dropdown <span class="caret"></span>
    </a>
    <ul class="dropdown-menu" role="menu">
      ...
    </ul>
  </li>
  ...
</ul>
```

Navbar

Default navbar

Navbars are responsive meta components that serve as navigation headers for your application or site. They begin collapsed (and are toggleable) in mobile views and become horizontal as the available viewport width increases.

Overflowing content

Since Bootstrap doesn't know how much space the content in your navbar needs, you might run into issues with content wrapping into a second row. To resolve this, you can:

- Reduce the amount or width of navbar items.

- b. Hide certain navbar items at certain screen sizes using [responsive utility classes](#).
- c. Change the point at which your navbar switches between collapsed and horizontal mode.
Customize the `@grid-float-breakpoint` variable or add your own media query.

Requires JavaScript

If JavaScript is disabled and the viewport is narrow enough that the navbar collapses, it will be impossible to expand the navbar and view the content within the `.navbar-collapse`.

Changing the collapsed mobile navbar breakpoint

The navbar collapses into its vertical mobile view when the viewport is narrower than `@grid-float-breakpoint`, and expands into its horizontal non-mobile view when the viewport is at least `@grid-float-breakpoint` in width. Adjust this variable in the Less source to control when the navbar collapses/expands. The default value is `768px` (the smallest "small" or "tablet" screen).

EXAMPLE

[Copy](#)

Brand

Link

Link

Dropdown ▾

Link

Dropdown ▾

```
<nav class="navbar navbar-default" role="navigation">
  <div class="container-fluid">
    <!-- Brand and toggle get grouped for better mobile display -->
    <div class="navbar-header">
      <button type="button" class="navbar-toggle" data-toggle="collapse" data-
target="#bs-example-navbar-collapse-1">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="#">Brand</a>
    </div>

    <!-- Collect the nav links, forms, and other content for toggling -->
    <div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
      <ul class="nav navbar-nav">
        <li class="active"><a href="#">Link</a></li>
        <li><a href="#">Link</a></li>
        <li class="dropdown">
          <a href="#" class="dropdown-toggle" data-toggle="dropdown">Dropdown <span
class="caret"></span></a>
          <ul class="dropdown-menu" role="menu">
            <li><a href="#">Action</a></li>
            <li><a href="#">Another action</a></li>
            <li><a href="#">Something else here</a></li>
            <li class="divider"></li>
            <li><a href="#">Separated link</a></li>
            <li class="divider"></li>
            <li><a href="#">One more separated link</a></li>
          </ul>
        </li>
      </ul>

      <form class="navbar-form navbar-left" role="search">
        <div class="form-group">
          <input type="text" class="form-control" placeholder="Search">
        </div>
        <button type="submit" class="btn btn-default">Submit</button>
      </form>

      <ul class="nav navbar-nav navbar-right">
        <li><a href="#">Link</a></li>
        <li class="dropdown">
          <a href="#" class="dropdown-toggle" data-toggle="dropdown">Dropdown <span
class="caret"></span></a>
          <ul class="dropdown-menu" role="menu">
```



```

<li><a href="#">Action</a></li>
<li><a href="#">Another action</a></li>
<li><a href="#">Something else here</a></li>
<li class="divider"></li>
<li><a href="#">Separated link</a></li>
</ul>
</li>
</ul>
</div><!-- /.navbar-collapse -->
</div><!-- /.container-fluid -->
</nav>

```

Plugin dependency

The responsive navbar requires the [collapse plugin](#) to be included in your version of Bootstrap.

Make navbars accessible

Be sure to add a `role="navigation"` to every navbar to help with accessibility.

Forms

Place form content within `.navbar-form` for proper vertical alignment and collapsed behavior in narrow viewports. Use the alignment options to decide where it resides within the navbar content.

As a heads up, `.navbar-form` shares much of its code with `.form-inline` via mixin. **Some form controls, like input groups, may require fixed widths to be show up properly within a navbar.**

EXAMPLE

[Copy](#)

Brand

```

<form class="navbar-form navbar-left" role="search">
  <div class="form-group">
    <input type="text" class="form-control" placeholder="Search">
  </div>
  <button type="submit" class="btn btn-default">Submit</button>
</form>

```

Mobile device caveats

There are some caveats regarding using form controls within fixed elements on mobile devices. [See our browser support docs](#) for details.

Always add labels

Screen readers will have trouble with your forms if you don't include a label for every input. For these inline navbar forms, you can hide the labels using the `.sr-only` class.

Buttons

Add the `.navbar-btn` class to `<button>` elements not residing in a `<form>` to vertically center them in the navbar.

EXAMPLE

[Copy](#)

Brand

```

<button type="button" class="btn btn-default navbar-btn">Sign in</button>

```

Context-specific usage

Like the standard `button` classes, `.navbar-btn` can be used on `<a>` and `<input>` elements. However, neither `.navbar-btn` nor the standard button classes should be used on `<a>` elements within `.navbar-nav`.

Text

Wrap strings of text in an element with `.navbar-text`, usually on a `<p>` tag for proper leading and color.

EXAMPLE

Copy

Brand Signed in as Mark Otto

```
<p class="navbar-text">Signed in as Mark Otto</p>
```

Non-nav links

For folks using standard links that are not within the regular navbar navigation component, use the `.navbar-link` class to add the proper colors for the default and inverse navbar options.

EXAMPLE

Copy

Brand Signed in as Mark Otto

```
<p class="navbar-text navbar-right">Signed in as <a href="#" class="navbar-link">Mark  
Otto</a></p>
```

Component alignment

Align nav links, forms, buttons, or text, using the `.navbar-left` or `.navbar-right` utility classes. Both classes will add a CSS float in the specified direction. For example, to align nav links, put them in a separate `` with the respective utility class applied.

These classes are mixin-ed versions of `.pull-left` and `.pull-right`, but they're scoped to media queries for easier handling of navbar components across device sizes.

Right aligning multiple components

Navbars currently have a limitation with multiple `.navbar-right` classes. To properly space content, we use negative margin on the last `.navbar-right` element. When there are multiple elements using that class, these margins don't work as intended.

We'll revisit this when we can rewrite that component in v4.

Fixed to top

Add `.navbar-fixed-top` and include a `.container` or `.container-fluid` to center and pad navbar content.

Brand Home Link Link

Copy

```
<nav class="navbar navbar-default navbar-fixed-top" role="navigation">  
  <div class="container">  
    ...  
  </div>  
</nav>
```

Body padding required

The fixed navbar will overlay your other content, unless you add `padding` to the top of the `<body>`. Try out your own values or use our snippet below. Tip: By default, the navbar is 50px high.

```
body { padding-top: 70px; }
```

Copy

Make sure to include this **after** the core Bootstrap CSS.

Fixed to bottom

Add `.navbar-fixed-bottom` and include a `.container` or `.container-fluid` to center and pad navbar content.

Brand Home Link Link Copy

```
<nav class="navbar navbar-default navbar-fixed-bottom" role="navigation">
  <div class="container">
    ...
  </div>
</nav>
```

Body padding required

The fixed navbar will overlay your other content, unless you add `padding` to the bottom of the `<body>`. Try out your own values or use our snippet below. Tip: By default, the navbar is 50px high.

```
body { padding-bottom: 70px; }
```

Copy

Make sure to include this **after** the core Bootstrap CSS.

Static top

Create a full-width navbar that scrolls away with the page by adding `.navbar-static-top` and include a `.container` or `.container-fluid` to center and pad navbar content.

Unlike the `.navbar-fixed-*` classes, you do not need to change any padding on the `body`.

Brand Home Link Link Copy

EXAMPLE

```
<nav class="navbar navbar-default navbar-static-top" role="navigation">
  <div class="container">
    ...
  </div>
</nav>
```

Inverted navbar

Modify the look of the navbar by adding `.navbar-inverse`.

EXAMPLE Copy

Brand Home Link Link

```
<nav class="navbar navbar-inverse" role="navigation">
  ...
</nav>
```

Breadcrumbs

Indicate the current page's location within a navigational hierarchy.

Separators are automatically added in CSS through `:before` and `content`.

EXAMPLECopy

Home

Home / Library

Home / Library / Data

```
<ol class="breadcrumb">
  <li><a href="#">Home</a></li>
  <li><a href="#">Library</a></li>
  <li class="active">Data</li>
</ol>
```

Pagination

Provide pagination links for your site or app with the multi-page pagination component, or the simpler [pager alternative](#).

Default pagination

Simple pagination inspired by Rdio, great for apps and search results. The large block is hard to miss, easily scalable, and provides large click areas.

EXAMPLECopy

«

1

2

3

4

5

»

```
<ul class="pagination">
  <li><a href="#">&l aquo; </a></li>
  <li><a href="#">1</a></li>
  <li><a href="#">2</a></li>
  <li><a href="#">3</a></li>
  <li><a href="#">4</a></li>
  <li><a href="#">5</a></li>
  <li><a href="#">&ra quo; </a></li>
</ul>
```

Disabled and active states

Links are customizable for different circumstances. Use `.disabled` for unclickable links and `.active` to indicate the current page.

EXAMPLECopy

«

1

2

3

4

5

»

```
<ul class="pagination">
  <li class="disabled"><a href="#">&l aquo; </a></li>
  <li class="active"><a href="#">1 <span class="sr-only">(current)</span></a></li>
  ...
</ul>
```

You can optionally swap out active or disabled anchors for `` to remove click functionality while retaining intended styles.

```
<ul class="pagination">
  <li class="disabled"><span>&l aquo; </span></li>
```

Copy

```
<li class="active"><span>1 <span class="sr-only">(current)</span></span></li>
...
</ul>
```

Sizing

Fancy larger or smaller pagination? Add `.pagination-lg` or `.pagination-sm` for additional sizes.

EXAMPLE Copy

« 1 2 3 4 5 »

« 1 2 3 4 5 »

« 1 2 3 4 5 »

```
<ul class="pagination pagination-lg">...</ul>
<ul class="pagination">...</ul>
<ul class="pagination pagination-sm">...</ul>
```

Pager

Quick previous and next links for simple pagination implementations with light markup and styles. It's great for simple sites like blogs or magazines.

Default example

By default, the pager centers links.

EXAMPLE Copy

Previous Next

```
<ul class="pager">
  <li><a href="#">Previous</a></li>
  <li><a href="#">Next</a></li>
</ul>
```

Aligned links

Alternatively, you can align each link to the sides:

EXAMPLE Copy

← Older Newer →

```
<ul class="pager">
  <li class="previous"><a href="#">&larr; Older</a></li>
  <li class="next"><a href="#">Newer &rarr;</a></li>
</ul>
```

Optional disabled state

Pager links also use the general `.disabled` utility class from the pagination.

EXAMPLE Copy

← Older Newer →

```
<ul class="pager">
  <li class="previous disabled"><a href="#">&larr; Older</a></li>
  <li class="next"><a href="#">Newer &rarr;</a></li>
</ul>
```

Labels

Example

EXAMPLE

Copy

Example heading

New

Example heading

New

Example heading

New

Example heading

New

Example heading

New

Example heading

New

```
<h3>Example heading <span class="label label-default">New</span></h3>
```

Available variations

Add any of the below mentioned modifier classes to change the appearance of a label.

EXAMPLE

Copy

Default

Primary

Success

Info

Warning

Danger

```
<span class="label label-default">Default</span>
<span class="label label-primary">Primary</span>
<span class="label label-success">Success</span>
<span class="label label-info">Info</span>
<span class="label label-warning">Warning</span>
<span class="label label-danger">Danger</span>
```

Have tons of labels?

Rendering problems can arise when you have dozens of inline labels within a narrow container, each containing its own `inline-block` element (like an icon). The way around this is setting `display: inline-block`. For context and an example, [see #13219](#).

Badges

Easily highlight new or unread items by adding a `` to links, Bootstrap navs, and more.

EXAMPLE

Copy

Inbox

42

```
<a href="#">Inbox <span class="badge">42</span></a>
```

Self collapsing

When there are no new or unread items, badges will simply collapse (via CSS's `:empty` selector) provided no

content exists within.

Cross-browser compatibility

Badges won't self collapse in Internet Explorer 8 because it lacks support for the `:empty` selector.

Adapts to active nav states

Built-in styles are included for placing badges in active states in pill navigations.

EXAMPLE

Copy

Home42

Profile

Messages3

Home42

Profile

Messages3

Messages4

```
<ul class="nav nav-pills nav-stacked">
  <li class="active">
    <a href="#">
      <span class="badge pull-right">42</span>
      Home
    </a>
  </li>
  ...
</ul>
```

Jumbotron

A lightweight, flexible component that can optionally extend the entire viewport to showcase key content on your site.

EXAMPLE

Copy

Hello, world!

This is a simple hero unit, a simple jumbotron-style component for calling extra attention to featured content or information.

Learn more

```
<div class="jumbotron">
  <h1>Hello, world! </h1>
  <p>... </p>
```

```
<p><a class="btn btn-primary btn-lg" role="button">Learn more</a></p>
</div>
```

To make the jumbotron full width, and without rounded corners, place it outside all `.container` s and instead add a `.container` within.

```
<div class="jumbotron">
  <div class="container">
    ...
  </div>
</div>
```

Copy

Page header

A simple shell for an `h1` to appropriately space out and segment sections of content on a page. It can utilize the `h1` 's default `small` element, as well as most other components (with additional styles).

EXAMPLE

Copy

Example page header Subtext for header

```
<div class="page-header">
  <h1>Example page header <small>Subtext for header</small></h1>
</div>
```

Thumbnails

Extend Bootstrap's [grid system](#) with the thumbnail component to easily display grids of images, videos, text, and more.

Default example

By default, Bootstrap's thumbnails are designed to showcase linked images with minimal required markup.

EXAMPLE

Copy



```
<div class="row">
  <div class="col-xs-6 col-md-3">
    <a href="#" class="thumbnail">
      
    </a>
  </div>
  ...
</div>
```


</div>

Custom content

With a bit of extra markup, it's possible to add any kind of HTML content like headings, paragraphs, or buttons into thumbnails.

EXAMPLE

Copy

191x200

Thumbnail label

Cras justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.

Button

Button

191x200

Thumbnail label

Cras justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.

Button

Button

191x200

Thumbnail label

Cras justo odio, dapibus ac facilisis in, egestas eget quam. Donec id elit non mi porta gravida at eget metus. Nullam id dolor id nibh ultricies vehicula ut id elit.

Button

Button

```
<div class="row">
  <div class="col-sm-6 col-md-4">
    <div class="thumbnail">
      
      <div class="caption">
        <h3>Thumbnail label</h3>
        <p>...</p>
        <p><a href="#" class="btn btn-primary" role="button">Button</a> <a href="#"
class="btn btn-default" role="button">Button</a></p>
      </div>
    </div>
  </div>
</div>
```

Alerts

Provide contextual feedback messages for typical user actions with the handful of available and flexible alert messages. For inline dismissal, use the [alerts jQuery plugin](#).

Examples

Wrap any text and an optional dismiss button in `.alert` and one of the four contextual classes (e.g., `.alert-success`) for basic alert messages.

No default class

Alerts don't have default classes, only base and modifier classes. A default gray alert doesn't make too

much sense, so you're required to specify a type via contextual class. Choose from success, info, warning, or danger.

EXAMPLE

[Copy](#)

Well done! You successfully read this important alert message.

Heads up! This alert needs your attention, but it's not super important.

Warning! Better check yourself, you're not looking too good.

Oh snap! Change a few things up and try submitting again.


```
<div class="alert alert-success" role="alert">...</div>
<div class="alert alert-info" role="alert">...</div>
<div class="alert alert-warning" role="alert">...</div>
<div class="alert alert-danger" role="alert">...</div>
```

Dismissible alerts

Build on any alert by adding an optional `.alert-dismissible` and close button.

EXAMPLE

[Copy](#)

Warning! Better check yourself, you're not looking too good. 

```
<div class="alert alert-warning alert-dismissible" role="alert">
  <button type="button" class="close" data-dismiss="alert"><span aria-
hidden="true">&times;</span><span class="sr-only">Close</span></button>
  <strong>Warning!</strong> Better check yourself, you're not looking too good.
</div>
```

Ensure proper behavior across all devices

Be sure to use the `<button>` element with the `data-dismiss="alert"` data attribute.

Links in alerts

Use the `.alert-link` utility class to quickly provide matching colored links within any alert.

EXAMPLE

[Copy](#)

Well done! You successfully read **this important alert message**.

Heads up! This **alert** needs **your attention**, but it's not super important.

Warning! Better check yourself, you're **not looking too good**.

Oh snap! **Change a few things up** and try submitting again.

```
<div class="alert alert-success" role="alert">
```

```

<a href="#" class="alert-link">...</a>
</div>
<div class="alert alert-info" role="alert">
  <a href="#" class="alert-link">...</a>
</div>
<div class="alert alert-warning" role="alert">
  <a href="#" class="alert-link">...</a>
</div>
<div class="alert alert-danger" role="alert">
  <a href="#" class="alert-link">...</a>
</div>

```

Progress bars

Provide up-to-date feedback on the progress of a workflow or action with simple yet flexible progress bars.

Cross-browser compatibility

Progress bars use CSS3 transitions and animations to achieve some of their effects. These features are not supported in Internet Explorer 9 and below or older versions of Firefox. Opera 12 does not support animations.

Basic example

Default progress bar.

EXAMPLE

Copy



```

<div class="progress">
  <div class="progress-bar" role="progressbar" aria-valuenow="60" aria-valuemin="0"
aria-valuemax="100" style="width: 60%; ">
    <span class="sr-only">60% Complete</span>
  </div>
</div>

```

With label

Remove the `.sr-only` class from within the progress bar to show a visible percentage. For low percentages, consider adding a `min-width` to ensure the label's text is fully visible.

EXAMPLE

Copy



```

<div class="progress">
  <div class="progress-bar" role="progressbar" aria-valuenow="60" aria-valuemin="0"
aria-valuemax="100" style="width: 60%; ">
    60%
  </div>
</div>


```

Low percentages

Progress bars representing low single digit percentages, as well as 0%, include a `min-width: 20px;` for legibility.

EXAMPLE

Copy

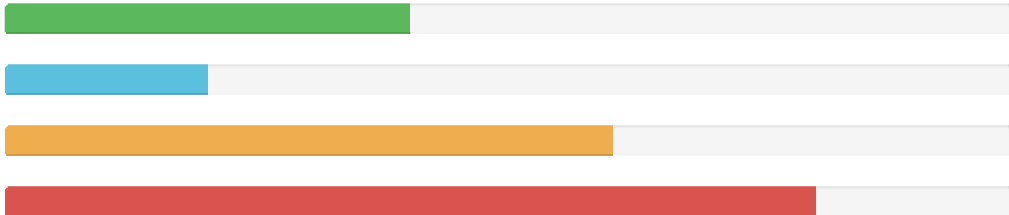


```
<div class="progress">
  <div class="progress-bar" role="progressbar" aria-valuenow="0" aria-valuemin="0" aria-
valuetmax="100">
    0%
  </div>
</div>
<div class="progress">
  <div class="progress-bar" role="progressbar" aria-valuenow="2" aria-valuemin="0" aria-
valuetmax="100" style="width: 2%; ">
    2%
  </div>
</div>
```

Contextual alternatives

Progress bars use some of the same button and alert classes for consistent styles.

EXAMPLE

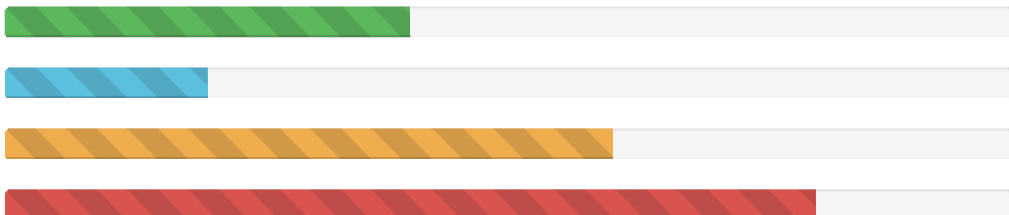
[Copy](#)

```
<div class="progress">
  <div class="progress-bar progress-bar-success" role="progressbar" aria-valuenow="40"
aria-valuemin="0" aria-valuetmax="100" style="width: 40%">
    <span class="sr-only">40% Complete (success)</span>
  </div>
</div>
<div class="progress">
  <div class="progress-bar progress-bar-info" role="progressbar" aria-valuenow="20"
aria-valuemin="0" aria-valuetmax="100" style="width: 20%">
    <span class="sr-only">20% Complete</span>
  </div>
</div>
<div class="progress">
  <div class="progress-bar progress-bar-warning" role="progressbar" aria-valuenow="60"
aria-valuemin="0" aria-valuetmax="100" style="width: 60%">
    <span class="sr-only">60% Complete (warning)</span>
  </div>
</div>
<div class="progress">
  <div class="progress-bar progress-bar-danger" role="progressbar" aria-valuenow="80"
aria-valuemin="0" aria-valuetmax="100" style="width: 80%">
    <span class="sr-only">80% Complete</span>
  </div>
</div>
```

Striped

Uses a gradient to create a striped effect. Not available in IE8.

EXAMPLE

[Copy](#)

```
<div class="progress">
  <div class="progress-bar progress-bar-success progress-bar-striped" role="progressbar"
aria-valuenow="40" aria-valuemin="0" aria-valuetmax="100" style="width: 40%">
    <span class="sr-only">40% Complete (success)</span>
  </div>
```

```

</div>
<div class="progress">
  <div class="progress-bar progress-bar-info progress-bar-striped" role="progressbar"
aria-valuenow="20" aria-valuemin="0" aria-valuemax="100" style="width: 20%">
    <span class="sr-only">20% Complete</span>
  </div>
</div>
<div class="progress">
  <div class="progress-bar progress-bar-warning progress-bar-striped" role="progressbar"
aria-valuenow="60" aria-valuemin="0" aria-valuemax="100" style="width: 60%">
    <span class="sr-only">60% Complete (warning)</span>
  </div>
</div>
<div class="progress">
  <div class="progress-bar progress-bar-danger progress-bar-striped" role="progressbar"
aria-valuenow="80" aria-valuemin="0" aria-valuemax="100" style="width: 80%">
    <span class="sr-only">80% Complete (danger)</span>
  </div>
</div>

```

Animated

Add `.active` to `.progress-bar-striped` to animate the stripes right to left. Not available in IE9 and below.

EXAMPLE Copy



```

<div class="progress">
  <div class="progress-bar progress-bar-striped active" role="progressbar" aria-
valuenow="45" aria-valuemin="0" aria-valuemax="100" style="width: 45%">
    <span class="sr-only">45% Complete</span>
  </div>
</div>

```

Stacked

Place multiple bars into the same `.progress` to stack them.

EXAMPLE Copy



```

<div class="progress">
  <div class="progress-bar progress-bar-success" style="width: 35%">
    <span class="sr-only">35% Complete (success)</span>
  </div>
  <div class="progress-bar progress-bar-warning progress-bar-striped" style="width:
20%">
    <span class="sr-only">20% Complete (warning)</span>
  </div>
  <div class="progress-bar progress-bar-danger" style="width: 10%">
    <span class="sr-only">10% Complete (danger)</span>
  </div>
</div>

```

Media object

Abstract object styles for building various types of components (like blog comments, Tweets, etc) that feature a left- or right-aligned image alongside textual content.

Default media

The default media allow to float a media object (images, video, audio) to the left or right of a content block.

EXAMPLE

64x64

Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis. Fusce condimentum nunc ac nisi vulputate fringilla. Donec lacinia congue felis in faucibus.

64x64

Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis. Fusce condimentum nunc ac nisi vulputate fringilla. Donec lacinia congue felis in faucibus.

64x64

Nested media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis. Fusce condimentum nunc ac nisi vulputate fringilla. Donec lacinia congue felis in faucibus.

```
<di v class="medi a">
  <a class="pul l -l eft" href="#">
    <i mg class="medi a-obj ect" src="..." al t="...">
  </a>
  <di v class="medi a-body">
    <h4 class="medi a-headi ng">Medi a headi ng</h4>
    ...
  </di v>
</di v>
```

Media list

With a bit of extra markup, you can use media inside list (useful for comment threads or articles lists).

EXAMPLE

64x64

Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

64x64

Nested media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

64x64

Nested media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

64x64

Nested media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

Media heading

Cras sit amet nibh libero, in gravida nulla. Nulla vel metus scelerisque ante sollicitudin commodo. Cras purus odio, vestibulum in vulputate at, tempus viverra turpis.

64x64

```
<ul class="medi a-l i st">
  <li class="medi a">
    <a class="pul l -l eft" href="#">
      <i mg class="medi a-obj ect" src="..." al t="...">
    </a>
    <di v class="medi a-body">
      <h4 class="medi a-headi ng">Medi a headi ng</h4>
      ...
    </di v>
  </li>
</ul>
```

List group

List groups are a flexible and powerful component for displaying not only simple lists of elements, but complex ones with custom content.

Basic example

The most basic list group is simply an unordered list with list items, and the proper classes. Build upon it with the options that follow, or your own CSS as needed.

EXAMPLE

Copy

Cras justo odio
Dapibus ac facilisis in
Morbi leo risus
Porta ac consectetur ac
Vestibulum at eros

```
<ul class="list-group">
  <li class="list-group-item">Cras justo odio</li>
  <li class="list-group-item">Dapibus ac facilisis in</li>
  <li class="list-group-item">Morbi leo risus</li>
  <li class="list-group-item">Porta ac consectetur ac</li>
  <li class="list-group-item">Vestibulum at eros</li>
</ul>
```

Badges

Add the badges component to any list group item and it will automatically be positioned on the right.

EXAMPLE

Copy

Cras justo odio	14
Dapibus ac facilisis in	2
Morbi leo risus	1

```
<ul class="list-group">
  <li class="list-group-item">
    <span class="badge">14</span>
    Cras justo odio
  </li>
</ul>
```

Linked items

Linkify list group items by using anchor tags instead of list items (that also means a parent `<div>` instead of an ``). No need for individual parents around each element.

EXAMPLE

Copy

Cras justo odio
Dapibus ac facilisis in
Morbi leo risus
Porta ac consectetur ac

Vestibulum at eros

```
<div class="list-group">
  <a href="#" class="list-group-item active">
    Cras justo odio
  </a>
  <a href="#" class="list-group-item">Dapibus ac facilisis in</a>
  <a href="#" class="list-group-item">Morbi leo risus</a>
  <a href="#" class="list-group-item">Porta ac consectetur ac</a>
  <a href="#" class="list-group-item">Vestibulum at eros</a>
</div>
```

Disabled items

Add `.disabled` to a `.list-group-item` to gray it out to appear disabled.

EXAMPLE

Copy

Cras justo odio

Dapibus ac facilisis in

Morbi leo risus

Porta ac consectetur ac

Vestibulum at eros

```
<div class="list-group">
  <a href="#" class="list-group-item disabled">
    Cras justo odio
  </a>
  <a href="#" class="list-group-item">Dapibus ac facilisis in</a>
  <a href="#" class="list-group-item">Morbi leo risus</a>
  <a href="#" class="list-group-item">Porta ac consectetur ac</a>
  <a href="#" class="list-group-item">Vestibulum at eros</a>
</div>
```

Contextual classes

Use contextual classes to style list items, default or linked. Also includes `.active` state.

EXAMPLE

Copy

Dapibus ac facilisis in

Cras sit amet nibh libero

Porta ac consectetur ac

Vestibulum at eros

Dapibus ac facilisis in

Cras sit amet nibh libero

Porta ac consectetur ac

Vestibulum at eros

```
<ul class="list-group">
  <li class="list-group-item list-group-item-success">Dapibus ac facilisis in</li>
  <li class="list-group-item list-group-item-info">Cras sit amet nibh libero</li>
  <li class="list-group-item list-group-item-warning">Porta ac consectetur ac</li>
  <li class="list-group-item list-group-item-danger">Vestibulum at eros</li>
</ul>
<div class="list-group">
  <a href="#" class="list-group-item list-group-item-success">Dapibus ac facilisis in</a>
  <a href="#" class="list-group-item list-group-item-info">Cras sit amet nibh libero</a>
  <a href="#" class="list-group-item list-group-item-warning">Porta ac consectetur ac</a>
  <a href="#" class="list-group-item list-group-item-danger">Vestibulum at eros</a>
</div>
```


Custom content

Add nearly any HTML within, even for linked list groups like the one below.

EXAMPLE

List group item heading
Donec id elit non mi porta gravida at eget metus.
Maecenas sed diam eget risus varius blandit.

List group item heading
Donec id elit non mi porta gravida at eget metus.
Maecenas sed diam eget risus varius blandit.

List group item heading
Donec id elit non mi porta gravida at eget metus.
Maecenas sed diam eget risus varius blandit.

```
<div class="list-group">  
  <a href="#" class="list-group-item active">  
    <h4 class="list-group-item-heading">List group item heading</h4>  
    <p class="list-group-item-text">...</p>  
  </a>  
</div>
```

Panels

While not always necessary, sometimes you need to put your DOM in a box. For those situations, try the panel component.

Basic example

By default, all the `.panel` does is apply some basic border and padding to contain some content.

EXAMPLE

Basic panel example

```
<div class="panel panel-default">  
  <div class="panel-body">  
    Basic panel example  
  </div>  
</div>
```

Panel with heading

Easily add a heading container to your panel with `.panel-heading`. You may also include any `<h1>` - `<h6>` with a `.panel-title` class to add a pre-styled heading.

For proper link coloring, be sure to place links in headings within `.panel-title`.

EXAMPLE

Panel heading without title

Panel content

Panel title

Panel content

```
<div class="panel panel-default">
  <div class="panel-heading">Panel heading without title</div>
  <div class="panel-body">
    Panel content
  </div>
</div>

<div class="panel panel-default">
  <div class="panel-heading">
    <h3 class="panel-title">Panel title</h3>
  </div>
  <div class="panel-body">
    Panel content
  </div>
</div>
```

Panel with footer

Wrap buttons or secondary text in `.panel-footer`. Note that panel footers **do not** inherit colors and borders when using contextual variations as they are not meant to be in the foreground.

EXAMPLE

Copy

Panel content

Panel footer

```
<div class="panel panel-default">
  <div class="panel-body">
    Panel content
  </div>
  <div class="panel-footer">Panel footer</div>
</div>
```

Contextual alternatives

Like other components, easily make a panel more meaningful to a particular context by adding any of the contextual state classes.

EXAMPLE

Copy

Panel title

Panel content

Panel title

Panel content

Panel title

Panel content

Panel title

Panel content

Panel title

Panel content

```
<div class="panel panel-primary">...</div>
<div class="panel panel-success">...</div>
<div class="panel panel-info">...</div>
<div class="panel panel-warning">...</div>
<div class="panel panel-danger">...</div>
```

With tables

Add any non-bordered `.table` within a panel for a seamless design. If there is a `.panel-body` , we add an extra border to the top of the table for separation.

EXAMPLE

Copy

Panel heading

Some default panel content here. Nulla vitae elit libero, a pharetra augue. Aenean lacinia bibendum nulla sed consectetur. Aenean eu leo quam. Pellentesque ornare sem lacinia quam venenatis vestibulum. Nullam id dolor id nibh ultricies vehicula ut id elit.

#	First Name	Last Name	Username
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry	the Bird	@twitter

```
<div class="panel panel-default">
  <!-- Default panel contents -->
  <div class="panel-heading">Panel heading</div>
  <div class="panel-body">
    <p>...</p>
  </div>

  <!-- Table -->
  <table class="table">
    ...
  </table>
</div>
```

If there is no panel body, the component moves from panel header to table without interruption.

EXAMPLE

Copy

Panel heading

#	First Name	Last Name	Username
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry	the Bird	@twitter

```
<div class="panel panel-default">
  <!-- Default panel contents -->
  <div class="panel-heading">Panel heading</div>

  <!-- Table -->
  <table class="table">
    ...
  </table>
</div>
```

With list groups

Easily include full-width [list groups](#) within any panel.

EXAMPLE

Panel heading

Some default panel content here. Nulla vitae elit libero, a pharetra augue. Aenean lacinia bibendum nulla sed consectetur. Aenean eu leo quam. Pellentesque ornare sem lacinia quam venenatis vestibulum. Nullam id dolor id nibh ultricies vehicula ut id elit.

Cras justo odio

Dapibus ac facilisis in

Morbi leo risus

Porta ac consectetur ac

Vestibulum at eros

```
<div class="panel panel-default">
  <!-- Default panel contents -->
  <div class="panel-heading">Panel heading</div>
  <div class="panel-body">
    <p>... </p>
  </div>

  <!-- List group -->
  <ul class="list-group">
    <li class="list-group-item">Cras justo odio</li>
    <li class="list-group-item">Dapibus ac facilisis in</li>
    <li class="list-group-item">Morbi leo risus</li>
    <li class="list-group-item">Porta ac consectetur ac</li>
    <li class="list-group-item">Vestibulum at eros</li>
  </ul>
</div>
```

Responsive embed

Allow browsers to determine video or slideshow dimensions based on the width of their containing block by creating an intrinsic ratio that will properly scale on any device.

Rules are directly applied to `<i frame>` , `<embed>` , and `<object>` elements; optionally use an explicit descendant class `.embed-responsive-item` when you want to match the styling for other attributes.

Pro-Tip! You don't need to include `frameborder="0"` in your `<i frame>` s as we override that for you.

EXAMPLE

The Adobe Flash Player or an HTML5 supported browser is required for video playback.
[Get the latest Flash Player](#)
[Learn more about upgrading to an HTML5 browser](#)

```
<!-- 16:9 aspect ratio -->
<div class="embed-responsive embed-responsive-16by9">
  <i frame class="embed-responsive-item" src="..."></i frame>
</div>

<!-- 4:3 aspect ratio -->
<div class="embed-responsive embed-responsive-4by3">
  <i frame class="embed-responsive-item" src="..."></i frame>
</div>
```

Wells

Default well

Use the well as a simple effect on an element to give it an inset effect.

EXAMPLE

Copy

Look, I'm in a well!

<div class="well">...</div>

Optional classes

Control padding and rounded corners with two optional modifier classes.

EXAMPLE

Copy

Look, I'm in a large well!

<div class="well well-lg">...</div>

EXAMPLE

Copy

Look, I'm in a small well!

<div class="well well-sm">...</div>

