

LLDD BE - API Lookup RBAC and Email Template

SBP Mall - ระบบประกันรายได้ | Low Level Design Document

แนวทางการใช้เอกสาร

หัวข้อ	คำอธิบาย
วัตถุประสงค์	ใช้เป็นรายละเอียดระดับพัฒนาสำหรับออกแบบ ลงมือพัฒนา ตรวจสอบ และทดสอบขอบเขตที่ระบุในฉบับนี้
ลำดับการอ่าน	เริ่มจาก Overview และ Scope จากนั้นตรวจ Field/Validation, Implementation, Contract, Processing Flow, Acceptance Criteria และ Test Checklist ตามลำดับ
ผลลัพธ์ที่คาดหวัง	ผู้อ่านสามารถระบุ input, ขั้นตอนประมวลผล, output, เงื่อนไขผิดพลาด และหลักฐานการทดสอบได้จากเนื้อหาในฉบับเดียว

คำว่า Input, Progress และ Output ในเอกสารนี้หมายถึงข้อมูลตั้งต้น ลำดับการทำงาน และผลลัพธ์ที่ตรวจสอบได้ของขอบเขตที่กำลังพัฒนา

1. Overview

รายการ	รายละเอียด
Track	BE
Estimate	30 ชั่วโมง
Owner	Tunyatorn <Vava> Kiatkongphongsa
Objective	ออกแบบ APIs ที่ดึงข้อมูลจาก shared lookup, RBAC/menu permission, audit log และ email template ของ SBP Mall


Common contract reference: ทุกหัวข้อ API/FE ต้องยึด LLDD-BE-API-Common-Contracts.pdf และ LLDD-FE-Integration-Contracts.pdf สำหรับ error/auth/format/pagination/action/RBAC ก่อนลงรายละเอียดเฉพาะหน้าหรือเฉพาะ endpoint

2. Screen / Functional Scope

- Lookup APIs
- Employee search
- Role/menu/menu-permission CRUD
- Audit log search
- Email template CRUD/reset
- Auth endpoints are platform reference only

4. Implementation Flow Diagram (Reference)

LLDD BE - API Lookup RBAC and Email Template

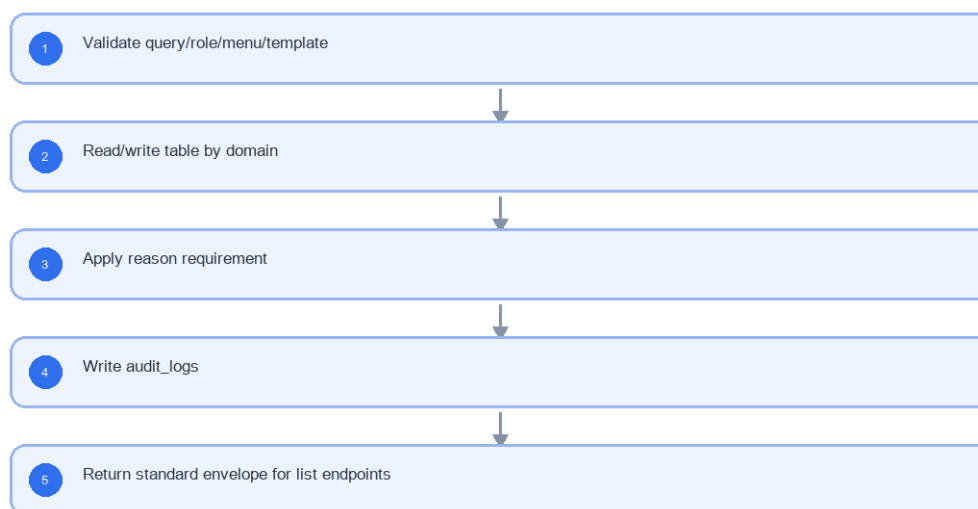

รูปที่ 1: Implementation flow reference: LLDD BE - API Lookup RBAC and Email Template

5. Field, Format, and Validation

Field / UI	Format	Validation	Behavior
q	string	optional	ใช้ค้นหา stores/employees/competitors
type	impacted new	required for /store/search (ระบบ SBP เดิม)	เลือกแหล่งร้านถูกระทบ/ร้านเปิดใหม่
roleCode	00-10	required for permission	อ้าง roles
menuCode	string	required for permission	อ้าง menus
templateCode	EM-01..EM-08	required	email template key
reason	text	required mutation	บันทึก audit_logs

5.1 Input / Progress / Output Contract

Stage	Contract for implementation
Input	GET /store/search (ระบบ SBP เดิม); GET /api/v1/document-statuses; GET /api/v1/workflow-sections
Progress	Validate query/role/menu/template; Read/write table by domain; Apply reason requirement; Write audit_logs
Output	roles / menus / menu_permissions; email_template (SBP) / status_email_rules; audit_logs

5.90 Endpoint Implementation Contract

Endpoint	Use-case owner	Service/repository behavior	Definition of done
GET /store/search (ระบบ SBP เดิม)	ค้นหาร้านสำหรับ popup	Validate query/role/menu/template	status label ต้องเป็น verbatim
GET /api/v1/document-statuses	รายการสถานะเอกสาร verbatim	Read/write table by domain	permission mutation ต้อง audit
GET /api/v1/workflow-sections	รายการ section 5 ชั้น	Apply reason requirement	email recipient From/To/Cc ลือกจาก status_email_rules
GET /api/v1/employees/search	ค้นหาพนักงานสำหรับ master/operator	Write audit_logs	Auth Group 1 เป็น platform/external reference ไม่ใช้งาน implement ใน LLDD นี้
GET /api/v1/menu-permissions	อ่าน matrix สิทธิ์เมนูทุก role	Return standard envelope for list endpoints	status label ต้องเป็น verbatim
PUT /api/v1/menu-permissions/{menuCode}	บันทึกสิทธิ์เมนูรายเมนู	Validate query/role/menu/template	permission mutation ต้อง audit
GET /api/v1/roles	อ่านรายการ role	Read/write table by domain	email recipient From/To/Cc ลือกจาก status_email_rules
POST /api/v1/roles	สร้าง role	Apply reason requirement	Auth Group 1 เป็น platform/external reference ไม่ใช้งาน implement ใน LLDD นี้
PUT /api/v1/roles/{roleCode}	แก้ role ที่ไม่ใช่ system role	Write audit_logs	status label ต้องเป็น verbatim
DELETE /api/v1/roles/{roleCode}	ลบ role ที่ไม่ถูกใช้งาน	Return standard envelope for list endpoints	permission mutation ต้อง audit
POST /api/v1/menus	สร้างเมนูและสิทธิ์เริ่มต้นทุก role	Validate query/role/menu/template	email recipient From/To/Cc ลือกจาก status_email_rules
PUT /api/v1/menus/{menuCode}	แก้เมนู	Read/write table by domain	Auth Group 1 เป็น platform/external reference ไม่ใช้งาน implement ใน LLDD นี้
DELETE /api/v1/menus/{menuCode}	ลบเมนูพร้อมสิทธิ์ที่เกี่ยวข้อง	Apply reason requirement	status label ต้องเป็น verbatim

Endpoint	Use-case owner	Service/repository behavior	Definition of done
GET /api/v1/audit-logs	ค้นประวัติการแก้ master	Write audit_logs	permission mutation ต้อง audit
GET /api/v1/email-templates	อ่านรายการ email template	Return standard envelope for list endpoints	email recipient From/To/Cc ลือกจาก status_email_rules
GET /api/v1/email-templates/{code}	อ่าน email template รายตัว	Validate query/role/menu/template	Auth Group 1 เป็น platform/external reference ไม่ใช้งาน implement ใน LLDD นี้
PUT /api/v1/email-templates/{code}	แก้ subject/body โดย recipient rule คงเดิม	Read/write table by domain	status label ต้องเป็น verbatim
POST /api/v1/email-templates/{code}/reset	รีเซ็ต template รายตัว	Apply reason requirement	permission mutation ต้อง audit
POST /api/v1/email-templates/reset-all	รีเซ็ต template ทั้งหมด	Write audit_logs	email recipient From/To/Cc ลือกจาก status_email_rules

5.91 Backend Execution Sequence

Step	Behavior specific to this LLDD	Failure/test evidence
1	Validate query/role/menu/template	store lookup
2	Read/write table by domain	status lookup
3	Apply reason requirement	permission save without reason
4	Write audit_logs	email template reset
5	Return standard envelope for list endpoints	audit log search

6. Button / User Action Mapping

Action	Trigger	API / Service	Expected Result
Store lookup	GET	lookup.service.searchStores	return impacted/new stores
Employee lookup	GET	employee.service.search	return employees for operator popup
Permission save	PUT	rbac.service.saveMenuPermission	update can_access and audit
Email template save/reset	PUT/POST	notificationTemplate.service	update/reset template and audit

7. API Contract

GET /store/search (ระบบ SBP เดิม)

ค้นหาร้านสำหรับ popup

Query Params
<pre>{ "q": "00788", "type": "impacted" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
q	string	No	UTF-8; use value domain described by endpoint purpose

Field	Type	Required	Constraint / Meaning
type	string	No	UTF-8; use value domain described by endpoint purpose

Response

```
{
  "items": [
    {
      "storeCode": "00788",
      "storeName": "รัตนอุทิศ ช.13"
    }
  ]
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
items	array<object>	Yes	JSON array; element type shown in Type column
items[].storeCode	string	Yes	exactly 5 digits; preserve leading zero
items[].storeName	string	Yes	UTF-8; use value domain described by endpoint purpose

GET /api/v1/document-statuses

รายการสถานะเอกสาร verbatim

Query Params

```
{}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
-	none	No	No fields

Response

```
{
  "items": [
    {
      "statusCode": "06",
      "statusName": "รอฝ่าย SBP DSA ดำเนินการ"
    }
  ]
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
items	array<object>	Yes	JSON array; element type shown in Type column
items[].statusCode	string	Yes	canonical code; do not replace with display label
items[].statusName	string	Yes	UTF-8; use value domain described by endpoint purpose

GET /api/v1/workflow-sections

รายการ section 5 ชั้น

Query Params

```
{}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
-	none	No	No fields

Response

```
{
  "items": [
    {
      "sectionCode": "06",
      "sectionName": "ฝ่าย SBP DSA"
    }
  ]
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
items	array<object>	Yes	JSON array; element type shown in Type column
items[].sectionCode	string	Yes	canonical code; do not replace with display label
items[].sectionName	string	Yes	UTF-8; use value domain described by endpoint purpose

GET /api/v1/employees/search

ค้นหาพนักงานสำหรับ master/operator

Query Params

```
{
  "q": "สมชาย"
}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
q	string	No	UTF-8; use value domain described by endpoint purpose

Response

```
{
  "items": [
    {
      "employeeId": "E001",
      "employeeName": "สมชาย ใจดี"
    }
  ]
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
items	array<object>	Yes	JSON array; element type shown in Type column
items[].employeeId	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].employeeName	string	Yes	UTF-8; use value domain described by endpoint purpose

GET /api/v1/menu-permissions

อ่าน matrix สิทธิเมนูทุก role

Query Params
<pre>{ "roleCode": "04" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
roleCode	string	No	canonical code; do not replace with display label

Response
<pre>{ "items": [{ "menuCode": "k2-report", "roleCode": "04", "canAccess": true }] }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
items	array<object>	Yes	JSON array; element type shown in Type column
items[].menuCode	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].roleCode	string	Yes	canonical code; do not replace with display label
items[].canAccess	boolean	Yes	UTF-8; use value domain described by endpoint purpose

PUT /api/v1/menu-permissions/{menuCode}

บันทึกสิทธิเมนูรายเมนู

Request
<pre>{ "roleCode": "04", "canAccess": true, "reason": "ปรับสิทธิรายงาน" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
roleCode	string	Yes	canonical code; do not replace with display label
canAccess	boolean	Yes	UTF-8; use value domain described by endpoint purpose
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response

```
{
  "message": "saved"
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
message	string	Yes	UTF-8; use value domain described by endpoint purpose

GET /api/v1/roles

อ่านรายการ role

Query Params

```
{
  "page": 1,
  "size": 20
}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
page	integer	No	>= 1; default 1
size	integer	No	1..100; default 20

Response

```
{
  "page": 1,
  "size": 20,
  "total": 11,
  "items": [
    {
      "roleCode": "04",
      "roleName": "ผู้ดูแลระบบ",
      "system": true,
      "active": true
    }
  ]
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
page	integer	Yes	>= 1; default 1
size	integer	Yes	1..100; default 20

Field	Type	Required	Constraint / Meaning
total	integer	Yes	UTF-8; use value domain described by endpoint purpose
items	array<object>	Yes	JSON array; element type shown in Type column
items[].roleCode	string	Yes	canonical code; do not replace with display label
items[].roleName	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].system	boolean	Yes	UTF-8; use value domain described by endpoint purpose
items[].active	boolean	Yes	UTF-8; use value domain described by endpoint purpose

POST /api/v1/roles

สร้าง role

Request
<pre>{ "roleCode": "11", "roleName": "ผู้ตรวจสอบ", "active": true, "reason": "เพิ่มบทบาทผู้ตรวจสอบ" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
roleCode	string	Yes	canonical code; do not replace with display label
roleName	string	Yes	UTF-8; use value domain described by endpoint purpose
active	boolean	Yes	UTF-8; use value domain described by endpoint purpose
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response
<pre>{ "roleCode": "11", "roleName": "ผู้ตรวจสอบ", "system": false, "active": true }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
roleCode	string	Yes	canonical code; do not replace with display label
roleName	string	Yes	UTF-8; use value domain described by endpoint purpose
system	boolean	Yes	UTF-8; use value domain described by endpoint purpose

Field	Type	Required	Constraint / Meaning
active	boolean	Yes	UTF-8; use value domain described by endpoint purpose

PUT /api/v1/roles/{roleCode}

แก้ role ที่ไม่ใช่ system role

Request
<pre>{ "roleName": "ผู้ตรวจสอบอาวุโส", "active": true, "reason": "ปรับชื่อบทบาท" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
roleName	string	Yes	UTF-8; use value domain described by endpoint purpose
active	boolean	Yes	UTF-8; use value domain described by endpoint purpose
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response
<pre>{ "roleCode": "11", "roleName": "ผู้ตรวจสอบอาวุโส", "system": false, "active": true }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
roleCode	string	Yes	canonical code; do not replace with display label
roleName	string	Yes	UTF-8; use value domain described by endpoint purpose
system	boolean	Yes	UTF-8; use value domain described by endpoint purpose
active	boolean	Yes	UTF-8; use value domain described by endpoint purpose

DELETE /api/v1/roles/{roleCode}

ลบ role ที่ไม่ถูกใช้งาน

Request
<pre>{ "reason": "ยกเลิกบทบาททดสอบ" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response

```
{
  "roleCode": "11",
  "deleted": true
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
roleCode	string	Yes	canonical code; do not replace with display label
deleted	boolean	Yes	UTF-8; use value domain described by endpoint purpose

POST /api/v1/menus

สร้างเมนูและสิทธิ์เริ่มต้นทุก role

Request

```
{
  "menuCode": "k2-audit",
  "menuName": "ประวัติการแก้ไข",
  "route": "/audit",
  "sortOrder": 90,
  "active": true,
  "reason": "เพิ่มเมนูตรวจสอบ"
}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
menuCode	string	Yes	UTF-8; use value domain described by endpoint purpose
menuName	string	Yes	UTF-8; use value domain described by endpoint purpose
route	string	Yes	UTF-8; use value domain described by endpoint purpose
sortOrder	integer	Yes	UTF-8; use value domain described by endpoint purpose
active	boolean	Yes	UTF-8; use value domain described by endpoint purpose
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response

```
{
  "menuCode": "k2-audit",
  "created": true
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
menuCode	string	Yes	UTF-8; use value domain described by endpoint purpose
created	boolean	Yes	UTF-8; use value domain described by endpoint purpose

PUT /api/v1/menus/{menuCode}

แก้ไขเมนู

Request
<pre>{ "menuName": "ประวัติการแก้ไขข้อมูล", "route": "/audit", "sortOrder": 90, "active": true, "reason": "ปรับชื่อเมนู" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
menuName	string	Yes	UTF-8; use value domain described by endpoint purpose
route	string	Yes	UTF-8; use value domain described by endpoint purpose
sortOrder	integer	Yes	UTF-8; use value domain described by endpoint purpose
active	boolean	Yes	UTF-8; use value domain described by endpoint purpose
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response
<pre>{ "menuCode": "k2-audit", "updated": true }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
menuCode	string	Yes	UTF-8; use value domain described by endpoint purpose
updated	boolean	Yes	UTF-8; use value domain described by endpoint purpose

DELETE /api/v1/menus/{menuCode}

ลบเมนูพร้อมสิทธิ์ที่เกี่ยวข้อง

Request
<pre>{ "reason": "ยกเลิกเมนูทดสอบ" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response
<pre>{ "menuCode": "k2-audit", "deleted": true }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
menuCode	string	Yes	UTF-8; use value domain described by endpoint purpose
deleted	boolean	Yes	UTF-8; use value domain described by endpoint purpose

GET /api/v1/audit-logs

ค้นประวัติการแก้ไข master

Query Params
<pre>{ "tableName": "roles", "refKey": "11", "action": "UPDATE", "page": 1, "size": 20 }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
tableName	string	No	UTF-8; use value domain described by endpoint purpose
refKey	string	No	UTF-8; use value domain described by endpoint purpose
action	string	No	UTF-8; use value domain described by endpoint purpose
page	integer	No	>= 1; default 1
size	integer	No	1..100; default 20

Response

```
{
  "page": 1,
  "size": 20,
  "total": 1,
  "items": [
    {
      "auditId": 9901,
      "tableName": "roles",
      "refKey": "11",
      "action": "UPDATE",
      "reason": "ปรับชื่อบทบาท",
      "changedBy": "E001",
      "changedAt": "2026-07-22T10:15:00+07:00"
    }
  ]
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
page	integer	Yes	>= 1; default 1
size	integer	Yes	1..100; default 20
total	integer	Yes	UTF-8; use value domain described by endpoint purpose
items	array<object>	Yes	JSON array; element type shown in Type column
items[].auditId	integer	Yes	UTF-8; use value domain described by endpoint purpose
items[].tableName	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].refKey	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].action	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule
items[].changedBy	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].changedAt	string	Yes	ISO-8601 ค.ศ.; nullable only when type includes null

GET /api/v1/email-templates

อ่านรายการ email template

Query Params

```
{
  "page": 1,
  "size": 20
}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
page	integer	No	>= 1; default 1
size	integer	No	1..100; default 20

Response

```
{
  "page": 1,
  "size": 20,
  "total": 8,
  "items": [
    {
      "code": "EM-01",
      "name": "แจ้งสร้างเอกสาร",
      "subject": "เอกสาร {{docNo}}",
      "updatedAt": "2026-07-22T09:00:00+07:00"
    }
  ]
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
page	integer	Yes	>= 1; default 1
size	integer	Yes	1..100; default 20
total	integer	Yes	UTF-8; use value domain described by endpoint purpose
items	array<object>	Yes	JSON array; element type shown in Type column
items[].code	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].name	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].subject	string	Yes	UTF-8; use value domain described by endpoint purpose
items[].updatedAt	string	Yes	ISO-8601 ค.ศ.; nullable only when type includes null

GET /api/v1/email-templates/{code}

อ่าน email template รายตัว

Query Params

```
{
  "code": "EM-01"
}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
code	string	No	UTF-8; use value domain described by endpoint purpose

Response

```
{
  "code": "EM-01",
  "name": "แจ้งสร้างเอกสาร",
  "subject": "เอกสาร {{docNo}}",
  "body": "กรุณาตรวจสอบเอกสาร {{docNo}}",
  "variables": [
    "docNo"
  ],
  "fromRule": "SYSTEM",
  "toRule": "NEXT_SECTION",
  "ccRule": "NONE"
}
```

Response Field Schema

Field	Type	Required	Constraint / Meaning
code	string	Yes	UTF-8; use value domain described by endpoint purpose
name	string	Yes	UTF-8; use value domain described by endpoint purpose
subject	string	Yes	UTF-8; use value domain described by endpoint purpose
body	string	Yes	UTF-8; use value domain described by endpoint purpose
variables	array<string>	Yes	JSON array; element type shown in Type column
fromRule	string	Yes	UTF-8; use value domain described by endpoint purpose
toRule	string	Yes	UTF-8; use value domain described by endpoint purpose
ccRule	string	Yes	UTF-8; use value domain described by endpoint purpose

PUT /api/v1/email-templates/{code}

แก้ subject/body โดย recipient rule คงเดิม

Request

```
{
  "subject": "แจ้งเอกสาร {{docNo}}",
  "body": "กรุณาตรวจสอบเอกสาร {{docNo}}",
  "reason": "ปรับถ้อยคำ"
}
```

Request Field Schema

Field	Type	Required	Constraint / Meaning
subject	string	Yes	UTF-8; use value domain described by endpoint purpose
body	string	Yes	UTF-8; use value domain described by endpoint purpose
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response
<pre>{ "code": "EM-01", "subject": "แจ้งเอกสาร {{docNo}}", "body": "กรุณาดูตรวจสอบเอกสาร {{docNo}}", "updatedAt": "2026-07-22T10:20:00+07:00" }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
code	string	Yes	UTF-8; use value domain described by endpoint purpose
subject	string	Yes	UTF-8; use value domain described by endpoint purpose
body	string	Yes	UTF-8; use value domain described by endpoint purpose
updatedAt	string	Yes	ISO-8601 ค.ศ.; nullable only when type includes null

POST /api/v1/email-templates/{code}/reset

รีเซ็ต template รายตัว

Request
<pre>{ "reason": "สินค้าเริ่มต้น" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response
<pre>{ "code": "EM-01", "reset": true }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
code	string	Yes	UTF-8; use value domain described by endpoint purpose
reset	boolean	Yes	UTF-8; use value domain described by endpoint purpose

POST /api/v1/email-templates/reset-all

รีเซ็ต template ทั้งหมด

Request
<pre>{ "reason": "สินค้าเริ่มต้นก่อน UAT" }</pre>

Request Field Schema

Field	Type	Required	Constraint / Meaning
reason	string	Yes	trimmed UTF-8 Thai text; required by operation/business rule

Response
<pre>{ "resetCount": 8 }</pre>

Response Field Schema

Field	Type	Required	Constraint / Meaning
resetCount	integer	Yes	UTF-8; use value domain described by endpoint purpose

8. Reference DB Mapping (No Database Page Work)

ส่วนนี้เป็นข้อมูลอ้างอิงสำหรับการ implement API/Job เท่านั้น ไม่ใช้งานสร้างหน้า Database, ไม่ใช้งานออกแบบ DB page และไม่ถูกนับเป็น deliverable แยกของ FE/BE

Table / Object	R/W	Usage
stores / impacted_stores	R	store picker สำหรับร้านถูกกระทบ/ร้านเปิดใหม่
document_statuses / workflow_sections	R	lookup สถานะ verbatim และ section 5 ชั้น
employees	R	popup ค้นหาพนักงาน
roles / menus / menu_permissions	R/W	RBAC/menu matrix
email_template (SBP) / status_email_rules	R/W	เนื้อหา template ในตารางของระบบ SBP เดิม และผู้รับที่เลือกตามสถานะ
audit_logs	R/W	ประวัติ mutation ของ RBAC/email/master

9. Processing Flow

Step	Description
1	Validate query/role/menu/template
2	Read/write table by domain
3	Apply reason requirement
4	Write audit_logs
5	Return standard envelope for list endpoints

10. Acceptance Criteria

- status label ต้องเป็น verbatim
- permission mutation ต้อง audit
- email recipient From/To/Cc ลีอกจาก status_email_rules
- Auth Group 1 เป็น platform/external reference ไม่ใช้งาน implement ใน LLDD นี้

11. Developer Test Checklist

No	Test
1	store lookup
2	status lookup
3	permission save without reason
4	email template reset
5	audit log search