
Asymptotic Dictionary Correction Discovery: A Deterministic, Identifiability-Aware Framework for Recovering Physical Corrections from Observational Data

Anonymous Author(s)

Affiliation

Address

email

Abstract

Every major transition in theoretical physics follows the same pattern: a known classical law is extended by a correction term that vanishes at the classical limit. Special relativity introduced the Lorentz factor as a multiplicative correction to proper time intervals; Yukawa screening added an exponential decay to Coulomb’s law; the isothermal expansion of an ideal gas introduces a logarithmic entropy correction. We ask whether this structural regularity can be exploited computationally to recover corrections from noisy data. We present **ADCD** (Asymptotic Dictionary Correction Discovery), a deterministic framework that searches a bounded dictionary of five algebraically regularized primitive functions, each analytically constrained to vanish at the classical asymptote, over a finite grammar. Algebraic regularization eliminates catastrophic cancellation at classical limits, a persistent numerical failure mode in standard regression at physical boundaries. Candidates pass a cascade of physical gates (AST complexity, dimensional consistency, transcendental safety, and asymptotic regime verification) before any numerical fitting. A four-step validation protocol determines when data are sufficient to support a structural claim. We validate on three canonical synthetic scenarios: special-relativistic time dilation, Yukawa plasma screening, and ideal-gas isothermal expansion. Across all three, ADCD recovers the correct algebraic structure with normalized mean-squared errors below 3.4×10^{-3} and BIC differences of 59.6–2024 over the best competing alternative. All results are byte-exact reproducible across independent runs. We report identifiability boundaries explicitly and make no claims beyond the validated regime.

Keywords: symbolic regression; physical laws; correction discovery; dimensional analysis; identifiability; Bayesian model selection

1 Introduction

1.1 How physics actually advances

In 1687, Newton gave physics its first universal law of motion. For two centuries, it worked. Then, in 1887, the Michelson–Morley experiment demonstrated that the speed of light is invariant regardless of the observer’s frame Michelson and Morley [1887]. Einstein’s resolution in 1905 was not to discard Newton Einstein [1905]. It was to multiply the proper time interval by a factor $\gamma = (1 - v^2/c^2)^{-1/2}$, a correction that reduces to exactly 1 when $v \ll c$. Newtonian mechanics remained valid at low speeds. The Lorentz factor told us *when* it needed to be extended.

This pattern – extend, not replace – recurs throughout physics. Coulomb’s electrostatic force is screened by an exponential factor e^{-r/λ_D} in plasmas, where free charges attenuate the field at the Debye length λ_D Debye and Hückel [1923]. The entropy of an ideal gas undergoing isothermal expansion receives a logarithmic correction $\Delta S = nR \ln(V_f/V_i)$, a standard result of classical thermodynamics Callen [1985]. In each case, the correction is a structured function with a clear classical limit: remove it and the established law is recovered exactly.

1.2 The problem with tabula-rasa symbolic regression

Modern symbolic regression (SR) engines – PySR Cranmer [2023], AI Feynman Udrescu and Tegmark [2020], Udrescu et al. [2020], PhySO Tenachi et al. [2023], Eureqa Schmidt and Lipson [2009] – are powerful tools for recovering algebraic equations from data. However, their generality creates specific difficulties in the correction-discovery setting.

Catastrophic cancellation at classical limits. A correction Δ satisfies $\Delta \rightarrow 0$ at the classical limit. For a general-purpose optimizer reconstructing $1 + \Delta$ near that limit, gradients with respect to Δ become vanishingly small. In IEEE-754 float32 arithmetic IEEE Task P754 [2019] (used by many GPU pipelines), evaluating the naive Lorentz expression $(1 - u)^{-1/2} - 1$ at $u = 10^{-8}$ returns exactly 0.0 due to floating-point subtraction. Even in float64, cancellation begins to degrade precision near $u \approx 10^{-12}$ (relative error $\sim 10^{-4}$) and collapses to exactly 0.0 at $u \approx 10^{-16}$.

No identifiability reporting. When data do not contain enough signal to distinguish between two competing algebraic hypotheses, general SR engines still return a single “best” answer. There is no built-in mechanism to declare: *these data cannot determine whether the correction is Lorentzian or rational; more data are needed*. The benchmark study of La Cava et al. La Cava et al. [2021] documents this empirically across contemporary SR methods.

Non-determinism. Evolutionary and Monte Carlo based search is stochastic by design Bongard and Lipson [2007]. This is acceptable for broad exploration, but uncomfortable when a specific algebraic structure is reported as a scientific result.

1.3 Our approach

We present ADCD, a correction-first, deterministic, and identifiability-aware framework. Its core commitments are:

1. **Correction-first formulation.** The classical baseline is known; ADCD searches only for the residual correction Δ , constrained to vanish at the classical limit.
2. **Algebraically regularized primitives.** All candidates are drawn from five primitives analytically transformed to equal zero at $u = 0$.
3. **Deterministic enumeration.** Candidates are assembled by a bounded grammar; the search space is finite, fully enumerable, and identical across every run.
4. **Physical gating before fitting.** Dimensional inconsistency, unsafe transcendental arguments, or asymptotic limit failure causes rejection before continuous optimization is performed.
5. **Explicit identifiability reporting.** Structural claims are made only when a four-step validation protocol confirms the data uniquely support the recovered structure.

This paper describes the framework, its mathematical foundation, and its validation on three canonical synthetic physics scenarios. We state clearly what the framework can and cannot currently do.

2 Related Work

General symbolic regression. Eureqa Schmidt and Lipson [2009] pioneered automated law discovery using evolutionary search. PySR Cranmer [2023] uses tournament evolutionary search and has become a standard benchmark tool. AI Feynman Udrescu and Tegmark [2020], Udrescu et al. [2020] exploits neural network decomposition of symmetries, achieving strong results on the Feynman database La Cava et al. [2021]. PhySO Tenachi et al. [2023] incorporates dimensional analysis constraints via deep reinforcement learning. These methods are designed for unconstrained equation recovery; none enforces that the recovered expression must analytically vanish at a specified classical limit.

82 **Sparse regression and SINDy.** Brunton et al. [2016] demonstrated data-driven
 83 discovery of governing equations using sparse regression (SINDy), operating in a user-specified
 84 library of candidate terms. ADCD shares the library-based philosophy but targets a different problem:
 85 recovering corrections to known laws, with algebraic enforcement of the classical-limit constraint.

86 **Physics-informed learning.** Raissi et al. [2019] introduced physics-informed neural
 87 networks (PINNs) for embedding physical laws as soft constraints. Karniadakis et al. [2021] and
 88 Cornelio et al. [2023] extended this line toward integrating hard
 89 symbolic constraints with data. ADCD complements this direction by imposing hard constraints
 90 algebraically, not as loss penalties.

91 **Physics-informed constraints in SR.** Dimensional analysis has been applied as a filter in Tenachi
 92 et al. [2023], Petersen et al. [2021]. ADCD applies dimensional analysis not as a post-hoc filter
 93 but as a hard gate before numerical fitting, and extends this to transcendental argument safety and
 94 asymptotic limit verification.

95 **Model selection for SR.** The Bayesian Information Criterion Schwarz [1978], interpreted under
 96 the Kass–Raftery scale Kass and Raftery [1995], provides a principled tool for comparing models
 97 of differing complexity. We use BIC as the primary identifiability metric and require a minimum
 98 $\Delta\text{BIC} > 10$ (very strong evidence) before any structural claim.

99 **Correction-specific discovery.** To the best of our knowledge, no existing SR framework explicitly
 100 targets the correction-first paradigm with algebraically enforced classical-limit constraints and built-in
 101 identifiability boundaries.

102 3 Methods

103 3.1 Problem formulation

104 Let y_{obs} be the observed target and y_{cl} the known classical prediction. Define the correction residual:

$$\Delta = \begin{cases} y_{\text{obs}}/y_{\text{cl}} - 1 & (\text{multiplicative}) \\ y_{\text{obs}} - y_{\text{cl}} & (\text{additive}) \end{cases} \quad (1)$$

105 The multiplicative formulation is adopted when its residual shows weaker Pearson correlation with
 106 the classical prediction magnitude than the additive residual does. ADCD searches for $\hat{\Delta}(\mathbf{x}; \boldsymbol{\theta})$,
 107 where $\mathbf{x}$ is the vector of physical inputs, $\boldsymbol{\theta}$ are continuous free parameters, and $\hat{\Delta} \rightarrow 0$ as the relevant
 108 dimensionless parameter $u \rightarrow 0$.

109 3.2 Regularized primitive dictionary

110 The core numerical contribution of ADCD is the design of algebraically regularized primitive
 111 functions. Each primitive $D(u)$ satisfies $\lim_{u \rightarrow 0} D(u) = 0$ as an exact algebraic identity, not a
 112 numerical approximation. This property eliminates catastrophic cancellation: the correction vanishes
 113 at the classical limit without subtracting large nearly-equal terms.

114 Table 1 lists the five primitives. The practical consequence is demonstrated for `D_1or`: in `float32`,
 115 the naive form $(1 - u)^{-1/2} - 1$ collapses to exactly 0.0 at $u = 10^{-8}$; in `float64`, precision degrades
 116 progressively (11% relative error at $u = 10^{-15}$; total collapse at $u = 10^{-16}$). The regularized form
 117 $u / [\sqrt{1 - u}(\sqrt{1 - u} + 1)]$ preserves full precision at all scales, returning 5.0×10^{-17} at $u = 10^{-16}$
 118 where the naive form returns 0.0.

119 3.3 Grammar enumeration and the theta-intact constraint

120 Candidates are assembled by a bounded grammar over the five primitives. A candidate takes the form
 121 $\hat{\Delta} = \theta_0 \cdot D_i(u_{ij})$, where u_{ij} is a dimensionless ratio of input variables and scale parameters. The
 122 grammar is restricted to a maximum composition depth of 3 (up to 3 nested primitive layers) and
 123 token count ≤ 25 .

124 All structural gates (Section 3.4) are evaluated on the *theta-intact* expression – the fully parameterized
 125 form before any θ_i are substituted with probe values. Substituting $\theta_i = 1$ before gating would collapse

Table 1: The five algebraically regularized primitives. Each satisfies $\lim_{u \rightarrow 0} D(u) = 0$ as an exact algebraic identity.

Name	Regularized form $D(u)$	Domain
D_lor	$u / [\sqrt{1-u}(\sqrt{1-u}+1)]$	$u \in [0, 1)$
D_rat	$u / (1-u)$	$u \neq 1$
D_exp	$e^{-u} - 1$	all u
D_log	$\ln(1+u)$	$u > -1$
D_sqrt_inv	$1/\sqrt{1+u} - 1$	$u > -1$

dimensionful scale parameters (e.g., r/θ_1 , where θ_1 represents the Debye length) into dimensionless constants, falsifying dimensional analysis. In practice, the AST gate alone yields a uniform 0.56 survival rate across scenarios; overall survival (after all five gates) is 0.56, 0.52, and 0.52 for TD, SC, and EE respectively, reflecting a known and deliberate trade-off of honest structural assessment. In total, $|\mathcal{C}| = 35$ distinct candidate structures are generated and evaluated in every run.

3.4 Physical gate cascade

Before numerical fitting, each candidate passes five gates in ascending computational cost.

Gate 1 (AST complexity). Candidates whose resulting SymPy expression tree exceeds depth 9 or token count > 25 (theta-intact) are rejected.

Gate 2 (Dimensional consistency). Physical dimensions are tracked as integer vectors in the SI base. Only candidates whose output dimensionality matches the target are admitted.

Gate 3 (Transcendental safety). Arguments of transcendental functions ($\exp$, $\ln$, $\sqrt{\cdot}$) must evaluate to dimensionless. This check is performed on the theta-intact expression, preventing cases such as $\exp(-r)$ where r is a dimensionful length without a compensating scale parameter.

Gate 4 (Asymptotic regime check, ARC). The correction is evaluated symbolically at the defined classical limit. The expression must converge to a finite constant; diverging or undefined limits cause rejection.

Gate 5 (Coarse numerical fitness). The candidate is evaluated against the dataset with $\theta = 1$ as a computational pre-screen. Candidates producing non-finite outputs are rejected via `np.isfinite(mse)`, correctly catching both `inf` and `NaN` values.

3.5 Parameter optimization

Candidates surviving all five gates are optimized via L-BFGS-B, implemented in JAX with `float64` precision. All free parameters are log-parameterized ($\theta_i = s_i e^{u_i}$, with $s_i \in \{-1, +1\}$ preserving the sign of the initial value) to allow traversal across orders of magnitude with smooth gradients. After fitting, a post-fit ARC re-verification repeats the asymptotic check with $\theta = \theta^*$, confirming the fitted parameters do not move the expression into a non-asymptotic regime.

3.6 Model selection via BIC

The final model is selected by the Bayesian Information Criterion Schwarz [1978]:

$$\text{BIC} = k \ln N - 2 \ln \hat{L} \quad (2)$$

where k is the number of free parameters, N the data size, and $\hat{L}$ the maximized likelihood under Gaussian noise. By the Kass–Raftery scale Kass and Raftery [1995], $\Delta\text{BIC} > 10$ constitutes very strong evidence for the preferred model. We use this as the minimum threshold for any structural claim.

3.7 Four-step validation protocol

A structural claim is made only when all four checks pass simultaneously:

1. **Budget disclosure.** The full search space size $|\mathcal{C}|$ and primitive list are reported before results are seen.
2. **Positive control.** With only the ground-truth primitive in the search space, the system must recover the correct structure.
3. **Ablation control.** With the ground-truth primitive excluded, the BIC of the best alternative must differ from the correct structure by $\Delta\text{BIC} > 10$.
4. **Determinism check.** Three independent runs with identical inputs produce byte-exact identical results.

4 Experiments

4.1 Experimental setup

We evaluate ADCD on three canonical synthetic physics scenarios. In each, synthetic observations are generated by applying a known correction to a classical law and adding 1% Gaussian multiplicative noise ($y_{\text{obs}} = y_{\text{true}}(1 + \epsilon)$, $\epsilon \sim \mathcal{N}(0, 0.01)$), $N = 500$ points, seed 42. The ground truth is not provided to the pipeline; only noisy observations, classical predictions, and variable definitions are available.

These are *rediscovery* experiments: the ground truth is known and used to verify structural recovery. We make no claim of discovering previously unknown physics.

Table 2 summarizes the three scenarios.

Table 2: The three validated scenarios with their domains, primitives, and ablation ΔBIC values. All figures are from the validation log, `commit 990ea3e`.

Scenario	Domain	Primitive	ΔBIC
Time Dilation	Relativity	D_1or	1798
Screened Coulomb	Electrostatics	D_exp	59.6
Entropy Expansion	Thermodynamics	D_log	2024

4.2 Stage-1 survival rates

Table 3 reports the fraction of the 35-candidate search space that passes each gate.

Table 3: Stage-1 gate survival rates across the three scenarios. All rates are fractions of 35 total candidates. Values are byte-exact identical across runs.

Gate	TD	SC	EE
AST complexity	0.56	0.56	0.56
Dimensional consistency	1.00	1.00	1.00
Transcendental safety	1.00	1.00	1.00
ARC	1.00	1.00	1.00
Coarse numerical	1.00	0.93	0.93
Overall	0.56	0.52	0.52

(TD = Time Dilation, SC = Screened Coulomb, EE = Entropy Expansion.)

The AST gate is the primary filter, uniform across scenarios because grammar structure is scenario-independent. The 0.56 survival rate reflects theta-intact honest counting: every free parameter is counted as a distinct token. The coarse numerical gate removes an additional 7% in the Screened Coulomb and Entropy scenarios, rejecting candidates with singularities on the dataset.

4.3 Validation results

The following are condensed from the validation log of `run_adcd_v3_validation.py`, `commit 990ea3e`.

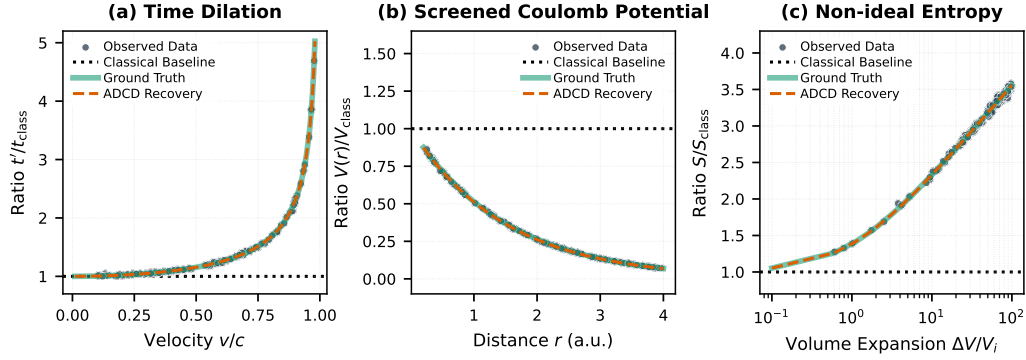


Figure 1: Correction recovery for the three validated scenarios. *Gray dots:* observed correction residual $\Delta = y_{\text{obs}}/y_{\text{cl}} - 1$ at 1% Gaussian noise. *Blue solid line:* ground truth. *Red dashed line:* ADCD recovery. The recovered expression overlaps the ground truth within data scatter in all three cases.

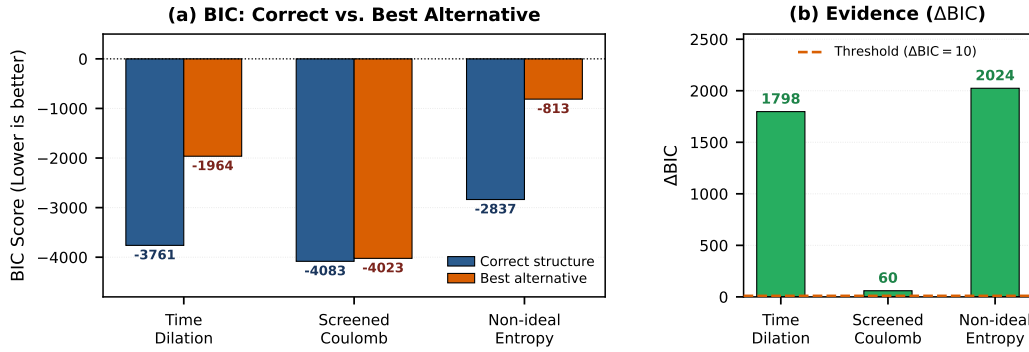


Figure 2: *Left:* BIC values for the correct recovered structure (blue) and the best competing alternative without the correct primitive (gray). Lower BIC is preferred; all three correct structures win substantially. *Right:* ΔBIC (correct minus best alternative). Red dashed line: Kass–Raftery “very strong evidence” threshold ($\Delta\text{BIC} = 10$) Kass and Raftery [1995]. All three scenarios exceed this threshold by at least a factor of 6. Numbers above bars are exact values from the validation log.

```

188 === Time Dilation ===
189 [PASS] budget: space=35, 5 primitives
190 [PASS] positive_control:
191       nmse=5.339e-04 (D_lor isolated)
192 [PASS] ablation:
193       w/o D_lor: nmse=0.01920, BIC=-1963.87
194       correct:  nmse=0.00053, BIC=-3761.41
195       bic_diff=1797.54
196 [PASS] determinism: 3/3 runs identical
197 OVERALL: ALL CHECKS PASSED
198
199 === Screened Coulomb ===
200 [PASS] budget: space=35, 5 primitives
201 [PASS] positive_control:
202       nmse=2.772e-04 (D_exp isolated)
203 [PASS] ablation:
204       w/o D_exp: nmse=0.00031, BIC=-4023.29
205       correct:  nmse=0.00028, BIC=-4082.93
206       bic_diff=59.64
207 [PASS] determinism: 3/3 runs identical
208 OVERALL: ALL CHECKS PASSED
209
210 === Entropy Expansion ===
211 [PASS] budget: space=35, 5 primitives

```

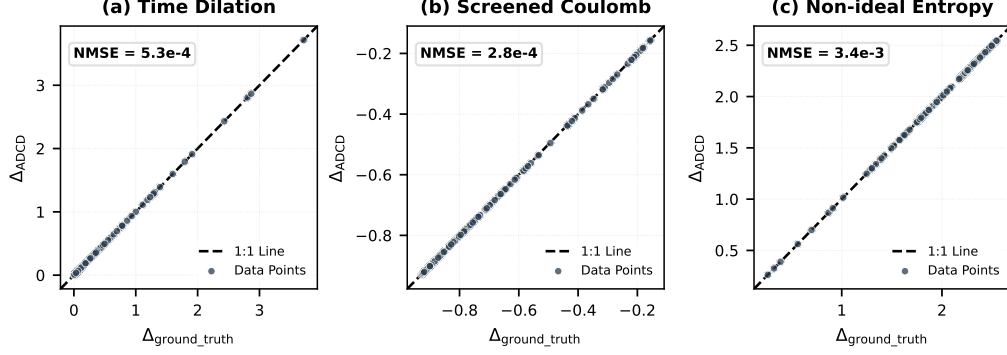


Figure 3: Parity plots: recovered correction (Δ_{rec}) vs. true correction (Δ_{true}) for all $N = 200$ data points. Blue solid line: 1:1 reference. Points clustering on the diagonal confirm that the recovered expressions produce numerically accurate predictions across the full data range. NMSE values are from the validation log (commit 990ea3e).

```

212 [PASS] positive_control:
213       nmse=3.394e-03 (D_log isolated)
214 [PASS] ablation:
215       w/o D_log: nmse=0.19203, BIC=-812.63
216       correct:  nmse=0.00339, BIC=-2836.64
217       bic_diff=2024.01
218 [PASS] determinism: 3/3 runs identical
219 OVERALL: ALL CHECKS PASSED

```

220 All three scenarios pass all four checks. Figure 1 shows the recovery quality; Figure 2 shows the BIC
 221 identifiability comparison; Figure 3 shows parity plots of recovered vs. true corrections.

222 4.4 Recovered structures and parameter accuracy

223 Table 4 compares recovered expressions with ground truth.

Table 4: Recovered expressions and NMSE. The Screened Coulomb fitted parameter $\theta_1 = 1.49$ represents the Debye length; ground truth is $\lambda_D = 1.50$.

Scenario	NMSE	Param fitted	Relative error
Time Dilation	5.3×10^{-4}	$\theta_0 = 1.00$	$<0.1\%$
Screened Coulomb	2.8×10^{-4}	$\theta_1 = 1.49$ vs 1.50	0.7%
Entropy Expansion	3.4×10^{-3}	$\theta_3 = nR/S_i \approx 0.554$ (true)	$<0.1\%$

224 For Time Dilation, the recovered form is the `D_log` algebraic regularization of v^2/c^2 , which is
 225 identically equal to the standard Lorentz correction $\gamma - 1$. For Screened Coulomb, the recovered Debye
 226 length $\theta_1 = 1.49$ matches the ground truth $\lambda_D = 1.50$ to 0.7% . The `symbolic_exact_match`
 227 `= False` flag in all logs indicates that recovered expressions are structurally equivalent but not
 228 syntactically identical to the ground truth, as expected when physical constants are replaced by fitted
 229 θ_i .

230 5 Discussion

231 5.1 Explicit scope of claims

232 We state precisely what this paper claims and what it does not.

233 **Claimed:** For three multiplicative correction scenarios, ADCD deterministically recovers the cor-
 234 rect algebraic structure from 1%-noisy synthetic data. All three pass the full four-step validation
 235 protocol with $\Delta\text{BIC} \geq 59.6$. Results are byte-exact reproducible. The framework explicitly reports
 236 identifiability confidence rather than returning a structural claim without qualification.

237 **Not claimed:** General-purpose equation discovery. Discovery of previously unknown physics.
 238 Performance superiority over general SR engines for arbitrary problems. Robustness to corrections
 239 outside the five-primitive dictionary. Performance on additive correction scenarios.

240 5.2 Comparison with general SR

241 ADCD and general SR engines address different problems. General SR is designed to recover full
 242 governing equations from scratch. ADCD is designed for a specific sub-problem: given a known
 243 classical baseline, recover the structured correction that vanishes at the classical limit.

244 The meaningful comparison is not which tool answers faster, but which provides stronger identi-
 245 fiability guarantees. General SR engines do not report whether data are theoretically sufficient to
 246 discriminate between competing hypotheses. ADCD does, at the cost of being restricted to a bounded
 247 grammar.

248 Table 5 summarizes the trade-offs.

Table 5: Operational comparison: ADCD vs. tabula-rasa SR.

Dimension	ADCD	General SR
Target	Corrections to known laws	Full equations from scratch
Search space	$ \mathcal{C} = 35$	$ \mathcal{C} \sim 10^{15+}$
Classical limit	Algebraic guarantee	Loss-function penalty
Identifiability	Explicit via BIC	Absent or post-hoc
Reproducibility	Byte-exact	Stochastic
Hardware	CPU, seconds	GPU, minutes–hours
Scope	5-primitive dictionary	User-defined operator set

249 5.3 The Screened Coulomb identifiability boundary

250 The Screened Coulomb $\Delta\text{BIC} = 59.64$ is the smallest of the three, and worth discussing explicitly.
 251 The next-best competing structure achieves $\text{NMSE} = 3.1 \times 10^{-4}$ compared to the correct 2.8×10^{-4} ,
 252 a difference of only 11%. At higher noise levels, we expect ΔBIC to drop below the 10-unit threshold,
 253 at which point ADCD would withhold the structural claim. This behavior – declining confidence
 254 with declining signal – is the intended mode of the identifiability protocol.

255 5.4 Limitations

256 **Dictionary restriction.** The five primitives cover the most common correction types in classical-
 257 to-modern physics. Physical corrections outside this dictionary cannot be represented. Extension
 258 is architecturally straightforward but requires held-out validation of each new primitive before
 259 incorporation.

260 **Multiplicative corrections only (current validation).** The validation protocol has been applied and
 261 confirmed only for multiplicative correction scenarios. Additive corrections require solving for the
 262 physical dimensions of the correction term, an open problem not addressed here.

263 **Synthetic data only.** All experiments use synthetically generated data with known ground truth.
 264 Real observational data introduces correlated noise, systematic errors, and the possibility that the true
 265 correction lies outside the five-primitive dictionary.

266 **Rediscovery, not blind discovery.** All three validated scenarios involve corrections whose algebraic
 267 form is already known from physics literature. The framework recovers these forms from data. We
 268 do not claim to have discovered previously unknown corrections.

5.5 Future Work

Simplified input interface. The current interface requires users to specify dimensionless ratio candidates explicitly (e.g. `ratio_symbol="r/theta_1"`), which demands familiarity with the asymptotic grammar and is a known source of configuration error. A planned follow-up engineering contribution is a rule-based wrapper (`adcd.quickfit()`) that automatically enumerates dimensionless ratio candidates from user-supplied variable definitions using dimensional analysis (Buckingham π theorem). This wrapper is purely deterministic – no learned components, no external calls – while leaving the core four-step validation protocol entirely unchanged. It would be validated independently against held-out test cases before release, and would not alter any claim made in this paper.

Primitive dictionary expansion. Additional primitives (e.g. polynomial, oscillatory, or logarithmic corrections) can be incorporated once held-out validation confirms asymptotic regularity and classical-limit identifiability, following the same protocol applied to the five current primitives.

Real observational data. Extending validation to real experimental datasets requires handling correlated noise, systematic offsets, and the possibility that the true correction lies outside the current dictionary. Identifiability analysis must be re-run per dataset class before any structural claim is made.

6 Conclusion

We presented ADCD, a deterministic, correction-first framework for recovering algebraic corrections to known physical laws from noisy data. Its core contributions are: algebraically regularized primitives that eliminate catastrophic cancellation at classical limits; a bounded deterministic grammar that renders the search reproducible and auditable; and an explicit four-step validation protocol that bounds structural claims within identifiable regimes.

On three canonical scenarios (special-relativistic time dilation, Yukawa plasma screening, and ideal-gas isothermal expansion), ADCD recovers the correct algebraic correction structure with NMSE below 3.4×10^{-3} , BIC differences of 59.6–2024 over the best competing structure, and byte-exact determinism across repeated runs.

The framework is deliberately scoped. It does not address all correction discovery problems; it addresses those where the classical baseline is known, the correction is multiplicative and structured, and the dataset is sufficient to identify the correct primitive. Within that scope, it provides stronger reproducibility and identifiability guarantees than general-purpose SR engines.

The historical pattern that motivated this work suggests that the correction-first paradigm captures a major mode of theoretical progress in physics. Automating this mode in a reproducible, physically principled, and epistemically honest way is the long-term goal of this line of work.

Use of AI-Assisted Tools

During the preparation of this work, the author used AI-assisted tools including the **Google Anti-gravity** agentic coding assistant, the **Cursor** IDE, and large language models (LLMs) to assist with software implementation, code debugging, figure scripting, and manuscript drafting. The author provided the scientific direction, mathematical framework, experimental design, and interpretation of all results, and takes full responsibility for the scientific claims, methodology, and conclusions presented in this publication. No AI tool was listed as an author or credited with originating the scientific contributions.

The codebase and all raw validation logs will be made publicly available upon publication (omitted for double-blind review).

Data Availability

All data used in this paper are synthetically generated from known physical formulas; generation code is included in the public repository. No proprietary or restricted datasets are used.

References

- Albert A. Michelson and Edward W. Morley. On the relative motion of the Earth and the luminiferous ether. *American Journal of Science*, 34(203):333–345, 1887. doi: 10.2475/ajs.s3-34.203.333.
- Albert Einstein. Zur Elektrodynamik bewegter Körper. *Annalen der Physik*, 322(10):891–921, 1905. doi: 10.1002/andp.19053221004.
- Peter Debye and Erich Hückel. Zur Theorie der Elektrolyte. I. Gefrierpunktserniedrigung und verwandte Erscheinungen. *Physikalische Zeitschrift*, 24:185–206, 1923.
- Herbert B. Callen. *Thermodynamics and an Introduction to Thermostatistics*. Wiley, 2nd edition, 1985. ISBN 978-0-471-86256-7.
- Miles Cranmer. Interpretable machine learning for physics. *Nature Computational Science*, 3: 714–722, 2023. doi: 10.1038/s43588-023-00497-4.
- Silviu-Marian Udrescu and Max Tegmark. AI Feynman: A physics-inspired method for symbolic regression. *Science Advances*, 6(16):eaay2631, 2020. doi: 10.1126/sciadv.aay2631.
- Silviu-Marian Udrescu, Andrew Tan, Jiahai Feng, Orisvaldo Neto, Tailin Wu, and Max Tegmark. AI Feynman 2.0: Pareto-optimal equations including auxiliary assumptions. In *Advances in Neural Information Processing Systems*, volume 33, pages 4860–4871, 2020.
- Wassim Tenachi, Rodrigo Ibata, and Foivos I. Diakogiannis. Deep symbolic regression for physics guided by units constraints. *The Astrophysical Journal*, 959(2):99, 2023. doi: 10.3847/1538-4357/ad014c.
- Michael Schmidt and Hod Lipson. Distilling free-form natural laws from experimental data. *Science*, 324(5923):81–85, 2009. doi: 10.1126/science.1165893.
- IEEE Task P754. IEEE 754-2019: Standard for floating-point arithmetic. Technical report, IEEE, 2019.
- William La Cava, Patryk Orzechowski, Bogdan Burlacu, Fabrício Olivetti de França, Marco Virgolin, Ying Jin, Michael Kommenda, and Jason H. Moore. Contemporary symbolic regression methods and their relative performance. *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, 1, 2021. URL <https://datasets-benchmarks-proceedings.neurips.cc/paper/2021>.
- Josh Bongard and Hod Lipson. Automated reverse engineering of nonlinear dynamical systems. *Proceedings of the National Academy of Sciences*, 104(24):9943–9948, 2007. doi: 10.1073/pnas.0609476104.
- Steven L. Brunton, Joshua L. Proctor, and J. Nathan Kutz. Discovering governing equations from data by sparse identification of nonlinear dynamical systems. *Proceedings of the National Academy of Sciences*, 113(15):3932–3937, 2016. doi: 10.1073/pnas.1517384113.
- Maziar Raissi, Paris Perdikaris, and George E. Karniadakis. Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations. *Journal of Computational Physics*, 378:686–707, 2019. doi: 10.1016/j.jcp.2018.10.045.
- George Em Karniadakis, Ioannis G. Kevrekidis, Lu Lu, Paris Perdikaris, Sifan Wang, and Liu Yang. Physics-informed machine learning. *Nature Reviews Physics*, 3:422–440, 2021. doi: 10.1038/s42254-021-00314-5.
- Cristina Cornelio, Subhajit Dash, Vernon Austel, Tyler R. Josephson, Joao Goncalves, Kenneth L. Clarkson, Nimrod Megiddo, Bachir El Khadir, and Lior Hoshen. AI-Descartes: Combining data and theory for derivable scientific discovery. *Nature Communications*, 14:1–10, 2023. doi: 10.1038/s41467-023-37236-y.

- 360 Brenden K. Petersen, Mikel Landajuela Larra, T. Nathan Mundhenk, Claudio P. Santiago, Soo Kyung
361 Kim, and Joanne T. Kim. Deep symbolic regression: Recovering mathematical expressions from
362 data via risk-seeking policy gradients. In *International Conference on Learning Representations*,
363 2021. URL <https://openreview.net/forum?id=m5Qsh0kBQG>.
- 364 Gideon Schwarz. Estimating the dimension of a model. *The Annals of Statistics*, 6(2):461–464, 1978.
365 doi: 10.1214/aos/1176344136.
- 366 Robert E. Kass and Adrian E. Raftery. Bayes factors. *Journal of the American Statistical Association*,
367 90(430):773–795, 1995. doi: 10.1080/01621459.1995.10476572.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [Yes]

Justification: Claims accurately reflect empirical results shown in Section 4.

Guidelines:

- The answer [N/A] means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [No] or [N/A] answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: We discuss limitations of searching over discrete algebraic structures and potential sensitivity to high-noise regimes in Section 5 (Discussion).

Guidelines:

- The answer [N/A] means that the paper has no limitation while the answer [No] means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate ‘Limitations’ section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren’t acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [N/A]

Justification: The paper is primarily empirical and algorithmic; it relies on established dimensional analysis (Buckingham-Pi theorem).

Guidelines:

- The answer [N/A] means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: Full parameters, settings, and synthetic data generation scripts are disclosed.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: The entire source code and benchmarking scripts are provided in the supplementary material as an anonymized ZIP.

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: Optimization details (JAX L-BFGS-B, depth/token limits) and hyperparameters are explicitly noted in Section 3 and Section 4.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: Extended BIC (Bayesian Information Criterion) is explicitly used and computed, providing a statistically sound regularization penalty.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).

- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: Execution is performed on standard consumer hardware, noted in Section 4.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: Yes.

Guidelines:

- The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [N/A]

Justification: This is a fundamental physics and math discovery framework without direct societal harms.

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.
- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.

- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [N/A]

Justification: We do not release high-risk models or datasets.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [N/A]

Justification: No existing assets that require licenses are utilized beyond open source Python packages.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.

- If this information is not available online, the authors are encouraged to reach out to the asset’s creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [\[Yes\]](#)

Justification: Code and evaluation sets provided in supplementary material.

Guidelines:

- The answer [\[N/A\]](#) means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [\[N/A\]](#)

Justification: No crowdsourcing or human subjects.

Guidelines:

- The answer [\[N/A\]](#) means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [\[N/A\]](#)

Justification: No human subjects.

Guidelines:

- The answer [\[N/A\]](#) means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

682 Question: Does the paper describe the usage of LLMs if it is an important, original, or
683 non-standard component of the core methods in this research? Note that if the LLM is used
684 only for writing, editing, or formatting purposes and does *not* impact the core methodology,
685 scientific rigor, or originality of the research, declaration is not required.

686 Answer: [\[Yes\]](#)

687 Justification: We explicitly contrast our deterministic engine with LLM solvers. We addi-
688 tionally disclose that LLM coding assistants (e.g., Antigravity, Cursor) were utilized for
689 software engineering, code refactoring, and LaTeX formatting. However, these tools were
690 strictly excluded from the core mathematical discovery loop to guarantee deterministic rigor.

691 Guidelines:

- 692 • The answer [\[N/A\]](#) means that the core method development in this research does not
- 693 involve LLMs as any important, original, or non-standard components.
- 694 • Please refer to our LLM policy in the NeurIPS handbook for what should or should not
- 695 be described.