



# AdSense Clicker

## • Getting Started

Firstly, as the program contains the default settings navigate to Tools -> Settings where you will get this window.

### User Agent Settings

**What is a User Agent?**

This contains a list of user agent details. The percentage column is editable. This is where you can assign percentages for each browser. The default list contains around 3300 entries.

Browser Name	Version	UserAgentString	Percentage
Firefox		Gecko/2...	0.02914602156
Firefox		1101 Fir...	0.02914602156
Firefox		0.1	0.02914602156
Firefox	9.0	Mozilla/5.0 (Macintosh; Intel Mac OS X 10.6; rv:9.0) Gecko/20100101 Firef...	0.02914602156
Firefox	6.0a2	Mozilla/5.0 (Windows NT 6.1; WOW64; rv:6.0a2) Gecko/20110613 Firefox/...	0.02914602156
Firefox	6.0a2	Mozilla/5.0 (Windows NT 6.1; WOW64; rv:6.0a2) Gecko/20110612 Firefox/...	0.02914602156
Firefox	6.0	Mozilla/5.0 (X11; Linux i686; rv:6.0) Gecko/20100101 Firefox/6.0	0.02914602156
Firefox	6.0	Mozilla/5.0 (Windows NT 6.1; rv:6.0) Gecko/20110814 Firefox/6.0	0.02914602156
Firefox	6.0	Mozilla/5.0 (Windows NT 5.1; rv:6.0) Gecko/20100101 Firefox/6.0 FirePHP...	0.02914602156
Firefox	6.0	Mozilla/5.0 (Windows NT 5.0; WOW64; rv:6.0) Gecko/20100101 Firefox/6.0	0.02914602156

**Add User Agent**

**Clear List** Use this to clear the user agent list.

**Load Default Settings** Clicking this will immediately revert the program back to its default setting.

When clicked, you will presented three options,

- Add a user agent manually, where you will get the dialog displayed below.
- Get user agents from a file and append it to the list
- Or Get user agents from a file and replace the content.

**Add User Agent**

Browser Name


Browser Version

UserAgentString

Percentage

OK Cancel

## Proxy Settings

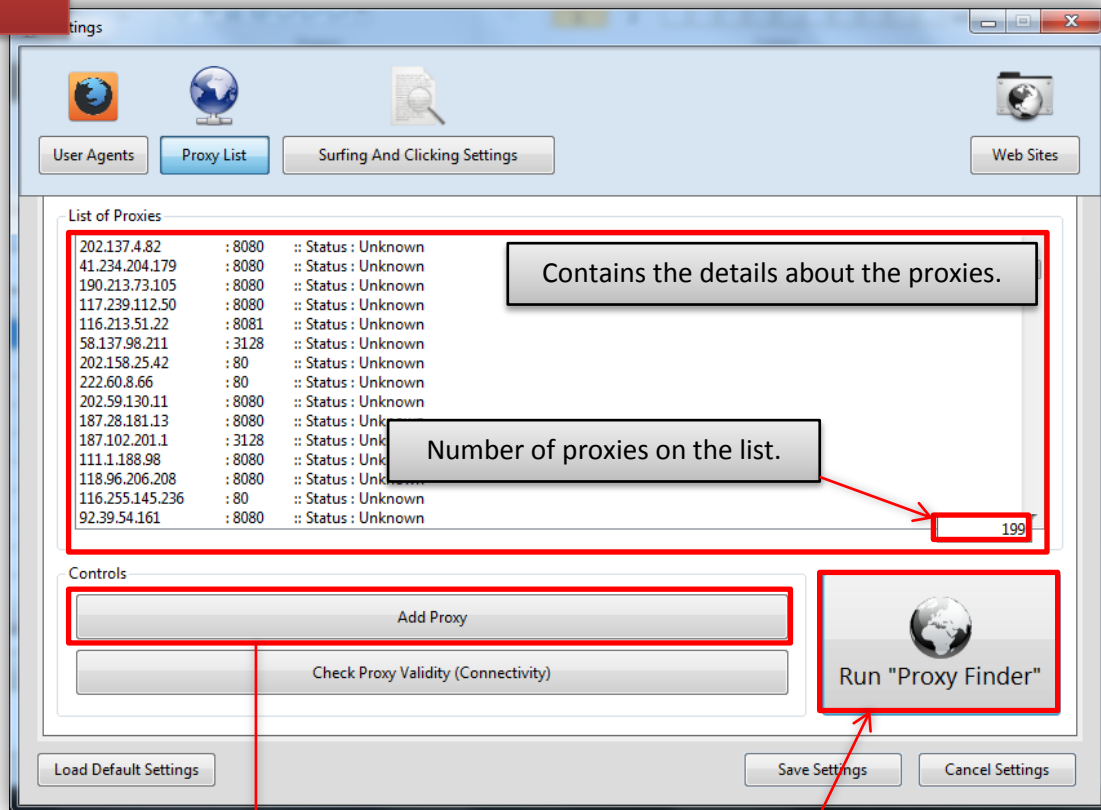


When clicked, you will presented three options,

- Add a proxy manually, where you will get the dialog displayed below.
- Get proxy details from a file and append it to the list
- Or Get proxy details from a file and replace the content.

Clicking this will run the  
"Proxy Finder"

The 'Add Proxy' dialog box has two input fields: 'I.P. Address' and 'Port Number'. Below these fields are three buttons: 'Check', 'OK', and 'Cancel'.

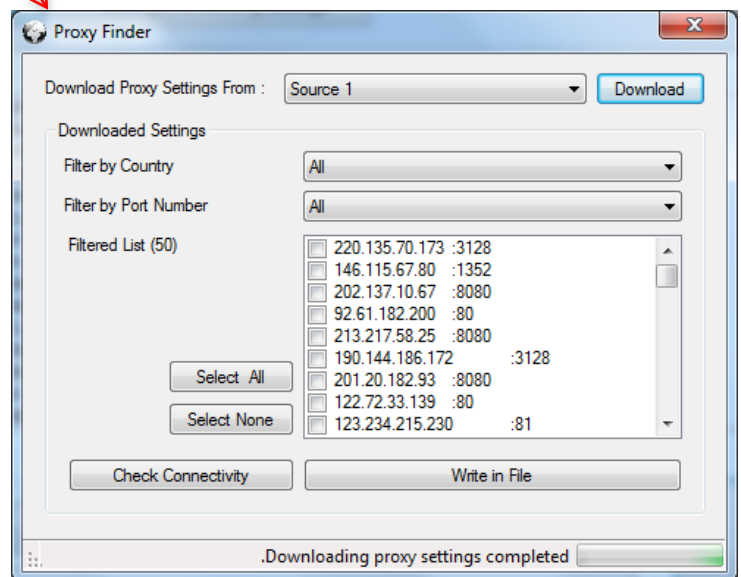




## Surfing & Clicking Settings




The screenshot shows the 'Surfing And Clicking Settings' window. It features a top navigation bar with icons and tabs: 'User Agents', 'Proxy List', 'Surfing And Clicking Settings' (active), and 'Web Sites'. The main content area is divided into two columns: 'Minimum Values' and 'Maximum Values'. Below these columns are two sections: 'Search Engine Settings' and 'Visiting Method Settings'. A red box highlights the 'Search Engine Settings' and 'Visiting Method Settings' sections. Callout boxes explain the 'Search Engine Settings' and 'Visiting Method Settings' sections.

	Minimum Values	Maximum Values
Number of Times to be Visited	0	0
Percentage of Adds to be Clicked	0	0 %
Waiting Time ( Time Spent in the Parent Site )	0	0 s
Waiting Time ( Time Spent in the Ad Web Site )	0	0 s
Number of Clicks to Made on Site	0	0
Interval Between Each Click	0	0 s

Search Engine Settings	
 Percentage of Visits (Google)	100
 Percentage of Visits (Yahoo)	0
 Percentage of Visits (Bing)	0


  

Visiting Method Settings	
 Visit Directly	100
 Visit Via Referral Sites	0
 Visit Via Search Engine Results	0

Contains the percentages of the search engines, which will be used to visit sites.


Contains the percentages of methods, in which the site will be visited.

## Web Site Details

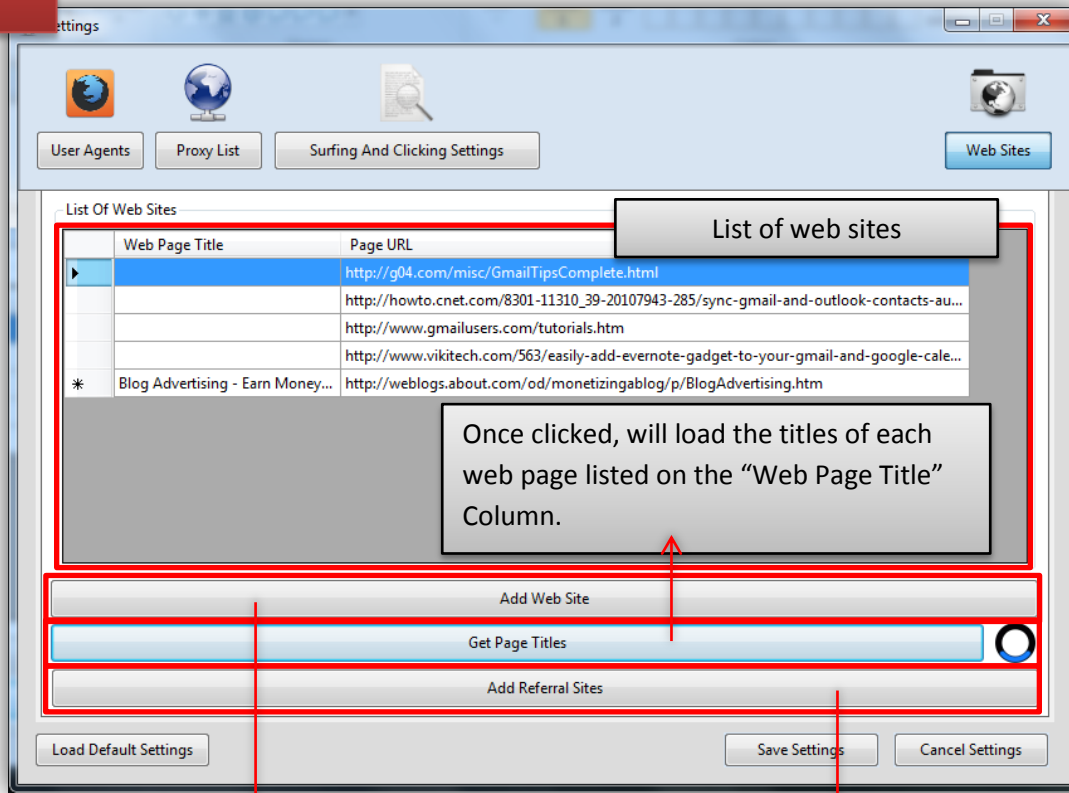


When clicked, you will presented three options,


- Add a web site manually, where you will get the dialog displayed below.
- Get urls from a file and append it to the list
- Or Get urls from a file and replace the content.




When clicked will present you with this dialog, where you can add referral web site urls to a selected web page.

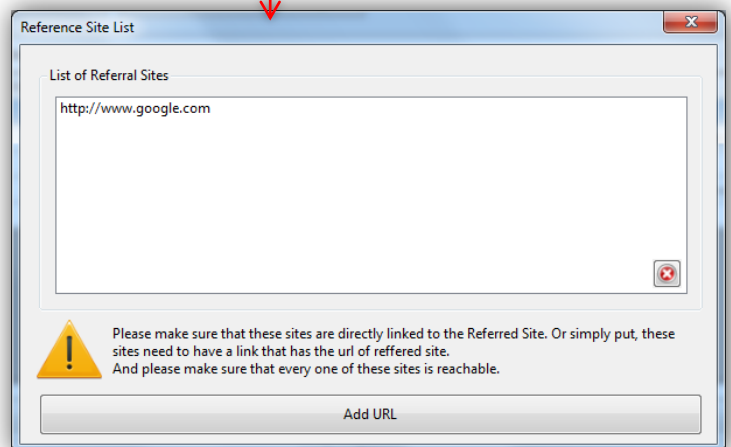

## Starting the Process

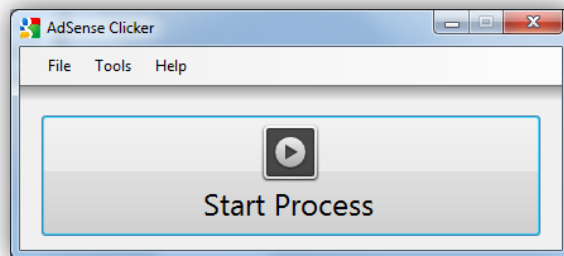

- If you entered all the details correctly you will be able to start the process by clicking the "Start Process" button. Once the process has started the "Start Process" button and the Settings menu button will be disabled to keep the settings intact.
- Also as the process starts the window will be expanded into the window shown below.

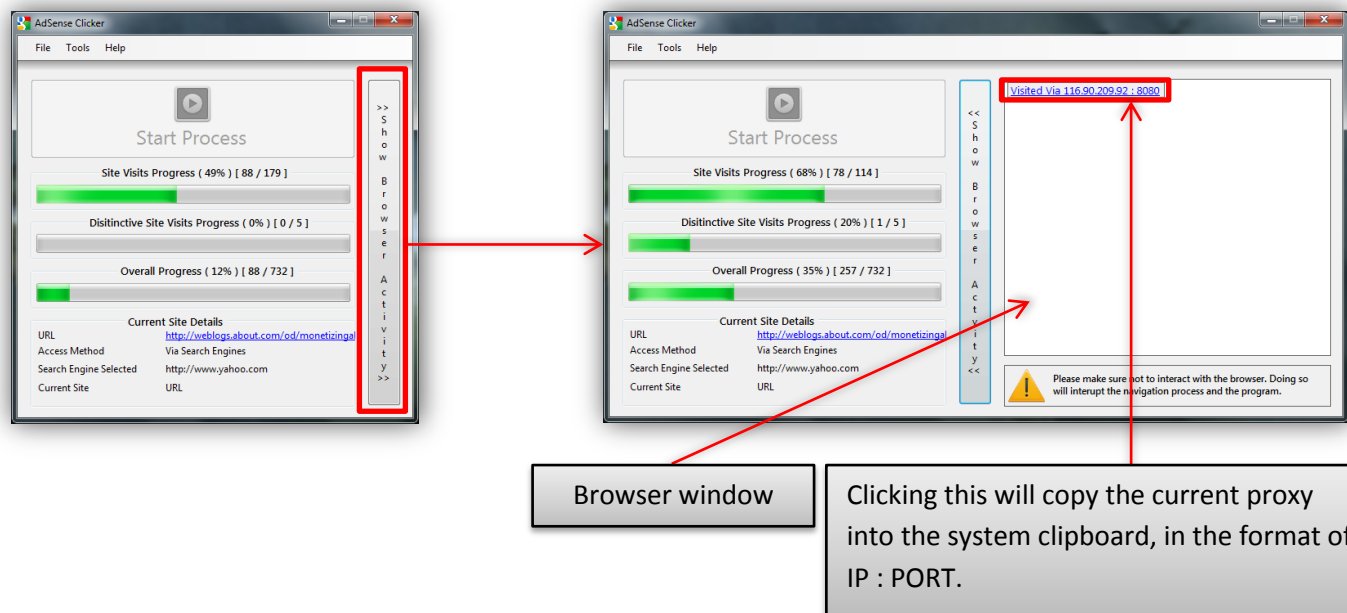

- Once the process has complete the window and the button states will revert back to normal.

## File Structure

- Each file that you might use to insert values (user agent strings, proxies and web sites) should have certain structures. Also you can make the program automatically load these details when it starts, if you place them under the program folder, where,
  - Proxies should be put under a file called "ProxySettings.txt".
  - Web Sites inside a file by the name of "AdSenseSiteList.txt".
  - And, User agent strings inside a file called "UserAgents.txt".gt

### The Structure for the File Containing the User Agent Strings

- Each line should represent a new browser (as in, a browser represents a unique user agent string).
- And each line should be of the following structure.

Structure :-

<Browser Name>[UADIVIDER]<Browser Version>[UADIVIDER]<User Agent String>[UADIVIDER]<Percentage>  
Or

<Browser Name>[UADIVIDER]<Browser Version>[UADIVIDER]<User Agent String>


- Example line :-

Firefox[UADIVIDER]10.0a4[UADIVIDER]Mozilla/6.0 (Macintosh; I; Intel Mac OS X 11\_7\_9; de-LI; rv:1.9b4) Gecko/2012010317 Firefox/10.0a4[UADIVIDER]5

Or

Firefox[UADIVIDER]10.0a4[UADIVIDER]Mozilla/6.0 (Macintosh; I; Intel Mac OS X 11\_7\_9; de-LI; rv:1.9b4) Gecko/2012010317 Firefox/10.0a4


- Example File :-

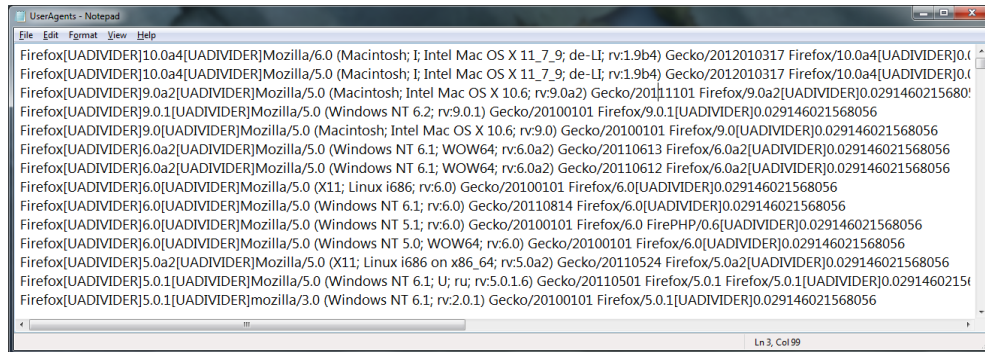

### The Structure for the File Containing Proxy List

- Each line should represent a single proxy, which is in the format of <IP Address> :<Port>.
- Example File :-


## File Structure

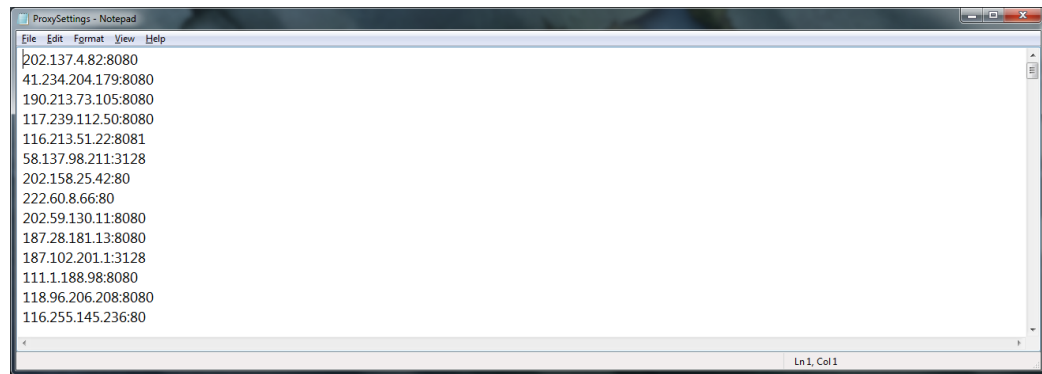

```
202.137.4.82:8080
41.234.204.179:8080
190.213.73.105:8080
117.239.112.50:8080
116.213.51.22:8081
58.137.98.211:3128
202.158.25.42:80
222.60.8.66:80
202.59.130.11:8080
187.28.181.13:8080
187.102.201.1:3128
111.1.188.98:8080
118.96.206.208:8080
116.255.145.236:80
```

## The Structure for the File Containing Web Site List.

- Each line should represent a unique url.
- And a certain line should be in the format of <Web Site URL>
- Example File :-

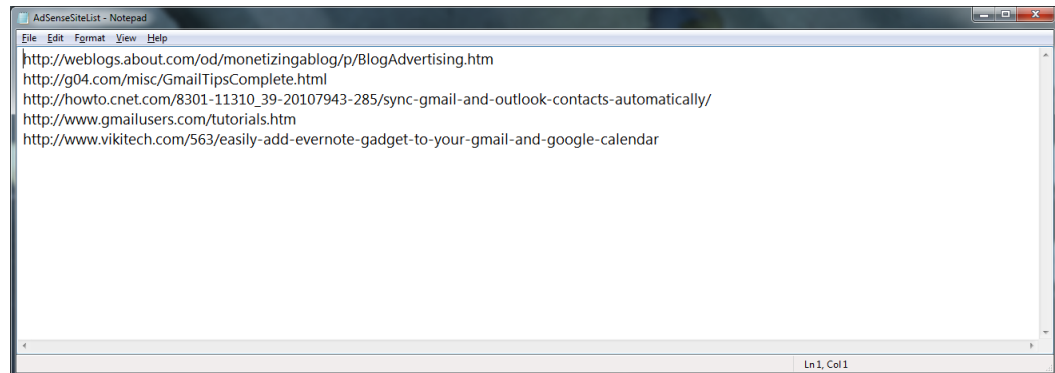

```
http://weblogs.about.com/od/monetizingablog/p/BlogAdvertising.htm
http://g04.com/misc/GmailTipsComplete.html
http://howto.cnet.com/8301-11310_39-20107943-285/sync-gmail-and-outlook-contacts-automatically/
http://www.gmailusers.com/tutorials.htm
http://www.vikitech.com/563/easily-add-evernote-gadget-to-your-gmail-and-google-calendar
```

