

RESTFul Services In Java Using Jersey

HTTP DELETE Request

Bryan Hansen
twitter: bh5k

<http://www.linkedin.com/in/hansenbryan>



pluralsight 
hardcore developer training

DELETE




DELETE

- Like PUT, early browsers didn't support DELETE
- Deletes are to a specific URL
 - <http://localhost:8080/exercise-services/webapi/activities/1234>
- Deletes can be recursive too
 - <http://localhost:8080/exercise-services/webapi/activities>
 - Careful! This would delete all activities
- Also like PUT, DELETE is idempotent
 - Calling delete multiple times on a url shouldn't matter



Delete Client

- Unit Test
- Client Code
- Server
- Repository/Stub

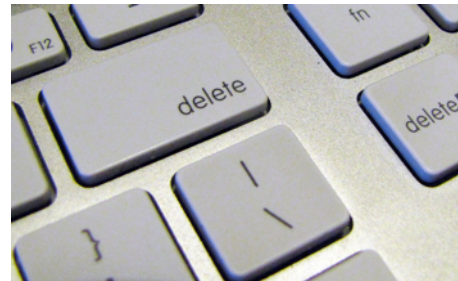

Summary

- Client delete
- Client service
- Unit Testing