



Certified Kubernetes Application Developer (CKAD) Crash Course

Kubernetes 1.21 Edition



About the trainer



bmuschko




bmuschko



bmuschko.com



automatedascent.com

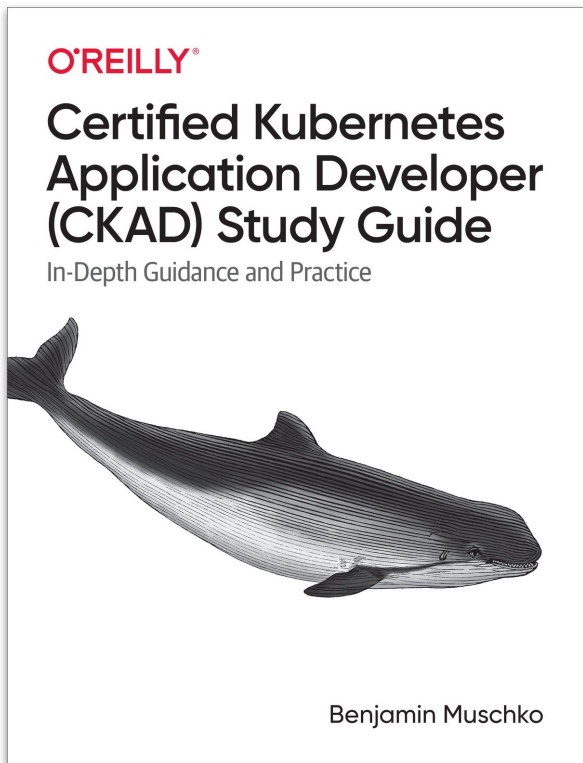

*Companion study guide with
practice questions*

Released in February 2021

Online access on O'Reilly
learning platform:

<https://learning.oreilly.com/library/view/certified-kubernetes-application/9781492083726/>

Exam Details and Resources

Objectives, Environment, Time Management

Exam Objectives

“Design, build, configure, and expose cloud native applications for Kubernetes”



The certification program allows users to demonstrate their competence in a hands-on, command-line environment.

<https://www.cncf.io/certification/ckad/>



The Curriculum

13% - Core Concepts

- Understand Kubernetes API primitives
- Create and configure basic Pods

10% Multi-Container Pods

- Understand Multi-Container Pod design patterns (e.g. ambassador, adapter, sidecar)

13% - Services & Networking

- Understand Services
- Demonstrate basic understanding of NetworkPolicies

20% - Pod Design

- Understand how to use Labels, Selectors, and Annotations
- Understand Deployments and how to perform rolling updates
- Understand Deployments and how to perform rollbacks
- Understand Jobs and CronJobs

18% - Configuration

- Understand ConfigMaps
- Understand SecurityContexts
- Define an application's resource requirements
- Create & consume Secrets
- Understand ServiceAccounts

18% - Observability

- Understand LivenessProbes and ReadinessProbes
- Understand container logging
- Understand how to monitor applications in Kubernetes
- Understand debugging in Kubernetes

8% - State Persistence

- Understand PersistentVolumeClaims for storage



Candidate Skills



kubernetes

Architecture & Concepts



`kubectl`

Running Commands



container runtime

Underlying Concepts



Exam Environment

Online and proctored exam



YAML




The trinity of tooling you need to be familiar with



Using Documentation

Know where and how to find relevant documentation

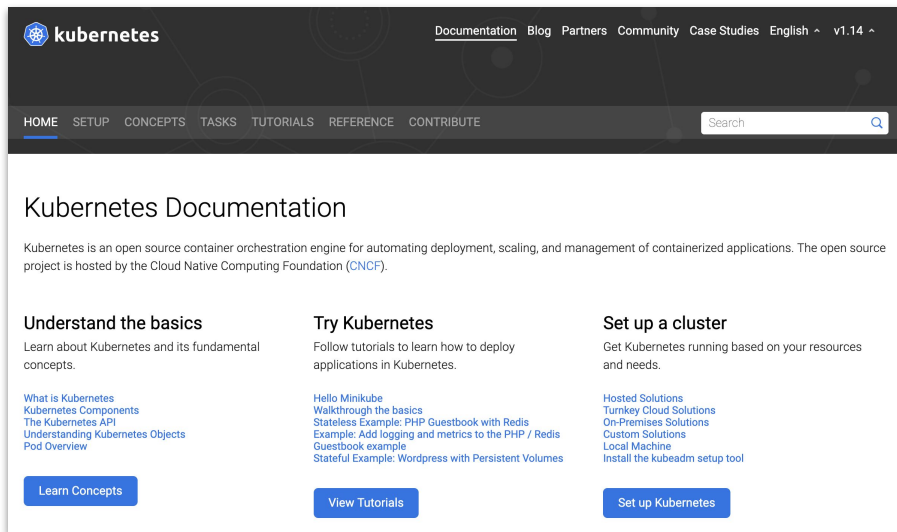

The screenshot shows the Kubernetes Documentation website. The header is dark with the Kubernetes logo and navigation links: Documentation, Blog, Partners, Community, Case Studies, English, and v1.14. Below the header is a navigation bar with links: HOME, SETUP, CONCEPTS, TASKS, TUTORIALS, REFERENCE, and CONTRIBUTE. A search bar is also present. The main content area is titled 'Kubernetes Documentation' and includes a brief description of Kubernetes. Below this, there are three columns of content: 'Understand the basics', 'Try Kubernetes', and 'Set up a cluster'. Each column has a sub-header, a brief description, a list of links, and a button.

Kubernetes Documentation

Kubernetes is an open source container orchestration engine for automating deployment, scaling, and management of containerized applications. The open source project is hosted by the Cloud Native Computing Foundation (CNCF).

| | | |
|---|---|--|
| Understand the basics Learn about Kubernetes and its fundamental concepts. What is Kubernetes Kubernetes Components The Kubernetes API Understanding Kubernetes Objects Pod Overview Learn Concepts | Try Kubernetes Follow tutorials to learn how to deploy applications in Kubernetes. Hello Minikube Walkthrough the basics Stateless Example: PHP Guestbook with Redis Example: Add logging and metrics to the PHP / Redis Guestbook example Stateful Example: Wordpress with Persistent Volumes View Tutorials | Set up a cluster Get Kubernetes running based on your resources and needs. Hosted Solutions Turnkey Cloud Solutions On-Premises Solutions Custom Solutions Local Machine Install the kubeadm setup tool Set up Kubernetes |
|---|---|--|

<https://kubernetes.io/docs>



Getting Help on a Command

Render subcommands and options with `--help`

```
$ kubectl create --help
Create a resource from a file or from stdin.

JSON and YAML formats are accepted.

...
Available Commands:
...
  configmap          Create a configmap from a local file, directory or literal
value
  deployment         Create a deployment with the specified name.
...

Options:
...
```



Zeroing in on Command Details

Drill into object details with the `explain` command

```
$ kubectl explain pods.spec  
KIND:      Pod  
VERSION:   v1  
  
RESOURCE:  spec <Object>  
  
DESCRIPTION:  
...  
  
FIELDS:    ←  
...
```

Most relevant information



Time Management

19 problems in 2 hours, use your time wisely!



| | | | | |
|---|---|---|---|---|
| ? | ✗ | 👉 | ✗ | ✓ |
| ✓ | ✓ | ? | ? | ? |
| ? | ? | ? | ? | ? |
| ? | ? | ? | ? | |



Configuring Auto-Completion

Allowed during exam, configurable on-demand

```
$ kubectl cre<tab>
```

```
$ kubectl create
```



<https://kubernetes.io/docs/tasks/tools/included/optional-kubectl-configs-bash-linux/>



Using an Alias for kubectl

Your first action at the beginning of the exam

```
$ alias k=kubectl  
$ k version  
...
```



Setting a Context & Namespace

Questions will ask you to run a command on a specific cluster - Make sure to execute it!

```
$ kubectl config set-context <context-of-question>␣  
--namespace=<namespace-of-question>
```



Internalize Resource Short Names

Some API resources provide a shortcut

```
$ kubectl get ns
```

Usage of `ns` instead
of namespaces

```
$ kubectl describe pvc claim
```

Usage of `pvc` instead of
persistentvolumeclaim

```
$ kubectl api-resources
```

Lists all API resources including
their short names



Deleting Kubernetes Objects

Don't wait for a graceful deletion of objects...

```
$ kubectl delete pod nginx --grace-period=0 --force
```



Understand and Practice bash

Practice relevant syntax and language constructs

```
$ if [ ! -d ~/tmp ]; then mkdir -p ~/tmp; fi; while true; do  
do echo $(date) >> ~/tmp/date.txt; sleep 5; done;
```



Finding Object Information

Filter configuration with context from a set of objects

```
$ kubectl describe pods | grep -C 10 "author=John Doe"  
$ kubectl get pods -o yaml | grep -C 5 labels:
```

grep is your friend!




How to Prepare

Practice, practice, practice!

The key to cracking the exam



Q & A

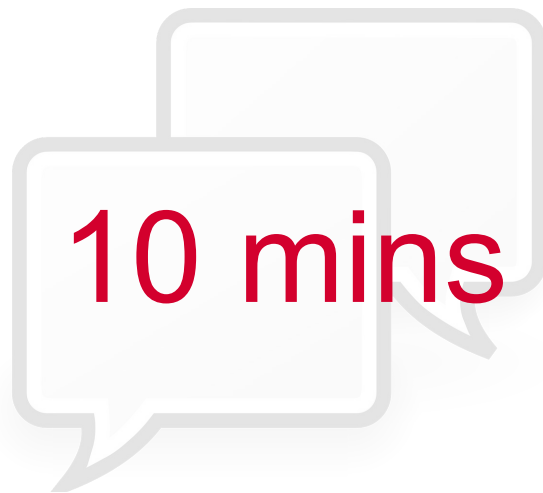



BREAK



Core Concepts

Kubernetes API Primitives and Pod Management

Kubernetes Object Structure

Kubernetes Object

API Version *v1, apps/v1, ...*

Kind *Pod, Deployment, Quota, ...*

Metadata

Name, Namespace, Labels, ...

Spec

Desired state

Status

Actual state

Object representation in YAML

```
apiVersion: v1
kind: Pod
metadata:
  creationTimestamp: null
  labels:
    run: nginx
  name: nginx
spec:
  containers:
  - image: nginx
    name: nginx
    resources: {}
  dnsPolicy: ClusterFirst
  restartPolicy: Never
status: {}
```



Object Management

Different approaches for different use cases



vs.



Imperative Object Management

Fast but requires detailed knowledge, no track record

```
$ kubectl create namespace ckad  
$ kubectl run nginx --image=nginx -n ckad  
$ kubectl edit pod/nginx -n ckad
```



Declarative Object Management

Suitable for more elaborate changes, tracks changes

```
$ vim nginx-pod.yaml  
$ kubectl create -f nginx-pod.yaml  
$ kubectl delete pod/nginx
```



Hybrid Approach

Generate YAML file with `kubectl` but make further edits

```
$ kubectl run nginx --image=nginx --dry-run=client  
-o yaml > nginx-pod.yaml  
$ vim nginx-pod.yaml  
$ kubectl create -f nginx-pod.yaml
```




Understanding Pods

Wrapper around one or many containers


Single-container Pod



Multi-container Pod



Pod Creation Flow

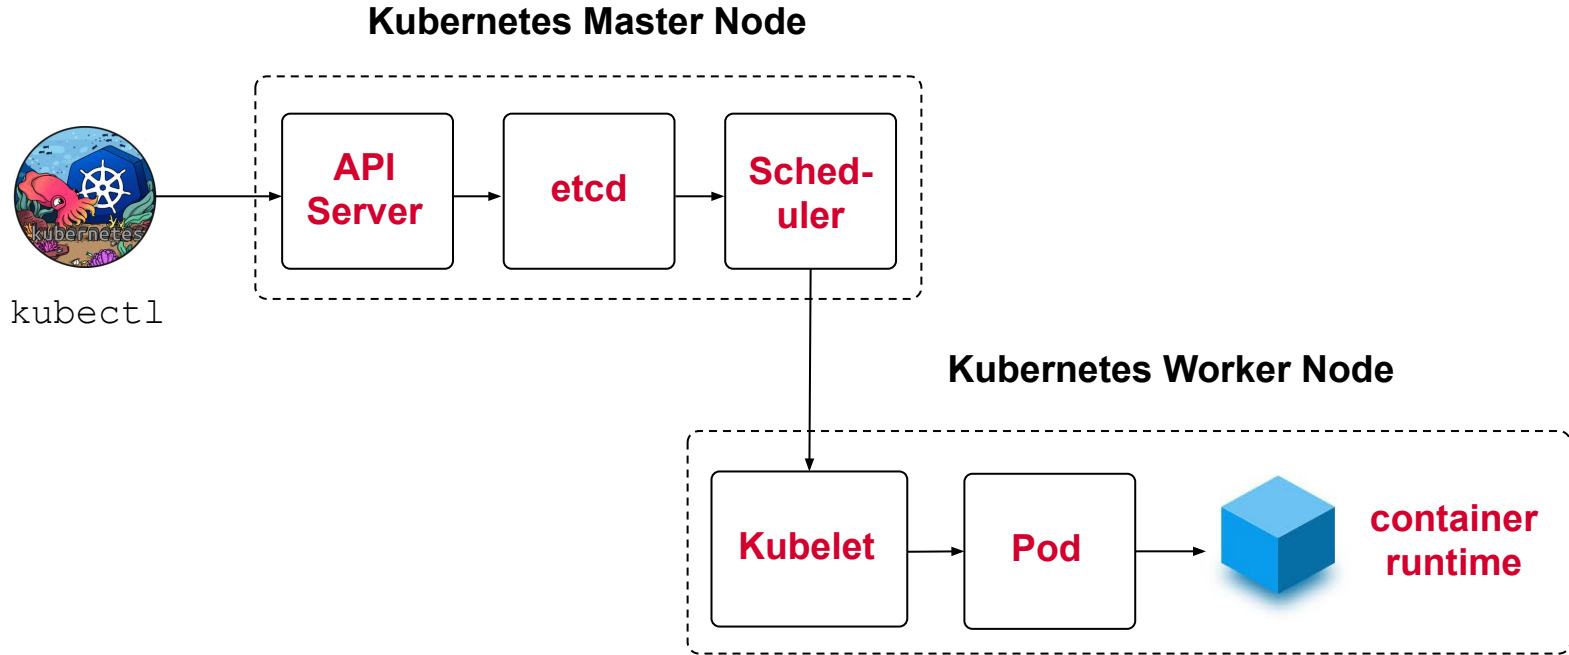

Pod Lifecycle Phases

| Phases and their meaning | |
|--------------------------|---|
| Pending | The Pod has been accepted by the Kubernetes system, but one or more of the container images has not been created. |
| Running | At least one container is still running, or is in the process of starting or restarting. |
| Succeeded | All containers in Pod terminated successfully. |
| Failed | Containers in Pod terminated, at least one failed with an error. |
| Unknown | State of the Pod could not be obtained. |



Inspecting a Pod's Status

```
$ kubectl describe pods nginx | grep Status:  
Status:          Running
```

Get current status
and event logs

```
$ kubectl get pods nginx -o yaml  
...  
status:  
  conditions:  
    ...  
  containerStatuses:  
    ...  
    state:  
      running:  
        startedAt: 2019-04-24T16:56:55Z  
    ...  
phase: Running
```

Get current
lifecycle phase



Configuring Env. Variables

Injecting runtime behavior

```
apiVersion: v1
kind: Pod
metadata:
  name: spring-boot-app
spec:
  containers:
    - image: bmuschko/spring-boot-app:1.5.3
      name: spring-boot-app
      env:
        - name: SPRING_PROFILES_ACTIVE
          value: production
```



Commands and Arguments

Running a command inside of a container

```
apiVersion: v1
kind: Pod
metadata:
  name: nginx
spec:
  containers:
  - image: nginx:1.15.12
    name: nginx
    args:
    - /bin/sh
    - -c
    - echo hello world
```



Other Useful kubectl Commands

```
$ kubectl logs busybox  
hello world
```

Dump the
Pod's logs

```
$ kubectl exec nginx -it -- /bin/sh  
# pwd
```

Connecting to
a running Pod



EXERCISE

Creating a Pod
and Inspecting it



Q & A



5 mins





BREAK




Configuration

ConfigMaps, Secrets, Security Contexts, Resource Requirements and Service Accounts

Centralized Configuration Data

Injects runtime configuration through object references

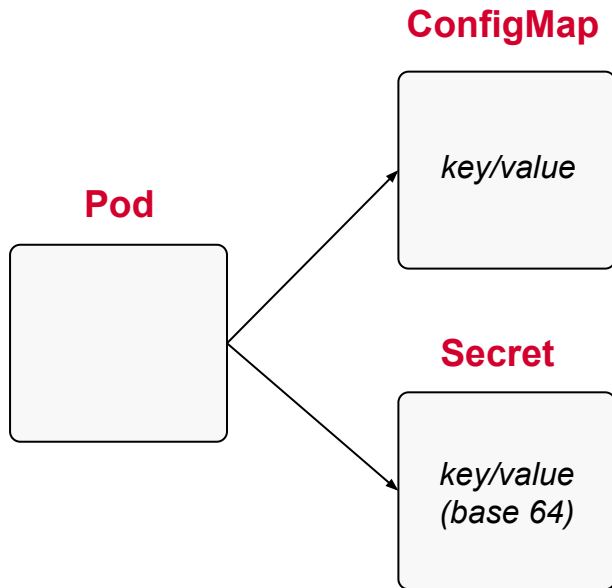

Creating ConfigMaps (imperative)

Fast, easy and flexible, can point to different sources

```
# Literal values
$ kubectl create configmap db-config --from-literal=db=staging

# Single file with environment variables
$ kubectl create configmap db-config --from-env-file=config.env

# File or directory
$ kubectl create configmap db-config --from-file=config.txt
```



Creating ConfigMaps (declarative)


Definition of a ConfigMap is fairly short and on point

```
apiVersion: v1
data:
  db: staging
  username: jdoe
kind: ConfigMap
metadata:
  name: db-config
```




Mounting a ConfigMap

Two options for consuming data

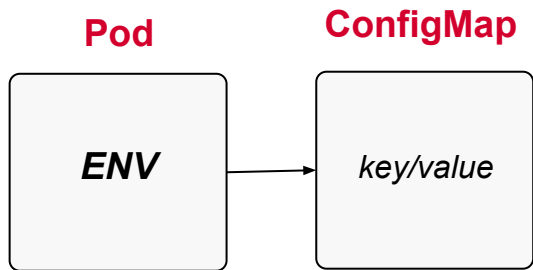

Injected as environment variables

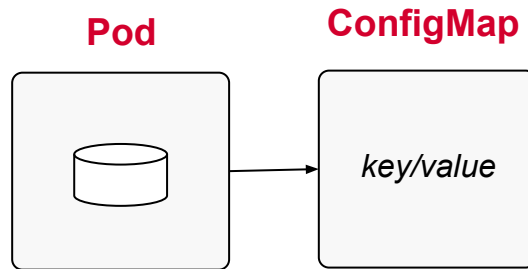

Mounted as volume



ConfigMap Env. Variables in Pod

Convenient if ConfigMap reflects the desired syntax

```
apiVersion: v1
kind: Pod
metadata:
  name: backend
spec:
  containers:
  - image: nginx
    name: backend
    envFrom:
    - configMapRef:
      name: db-config
```

```
$ kubectl exec -it nginx -- env
DB=staging
USERNAME=jdoe
...
```



ConfigMap in Pod as Volume

Each key becomes file in mounted directory

```
apiVersion: v1
kind: Pod
metadata:
  name: backend
spec:
  containers:
    - name: backend
      image: nginx
      volumeMounts:
        - name: config-volume
          mountPath: /etc/config
  volumes:
    - name: config-volume
      configMap:
        name: db-config
```

```
$ kubectl exec -it backend -- /bin/sh
# ls /etc/config
db
username
# cat /etc/config/db
staging
```





EXERCISE

Configuring a Pod
to Use a ConfigMap



Creating Secrets (imperative)

Similar usage to creation of ConfigMap

```
# Literal values
$ kubectl create secret generic db-creds <
  --from-literal=pwd=s3cre!

# File containing environment variables
$ kubectl create secret generic db-creds <
  --from-env-file=secret.env

# SSH key file
$ kubectl create secret generic db-creds <
  --from-file=ssh-privatekey=~/.ssh/id_rsa
```



Creating Secrets (declarative)

Value has to be base64-encoded manually

```
$ echo -n 's3cre!' | base64  
czNjcmUh
```

```
apiVersion: v1  
kind: Secret  
metadata:  
  name: mysecret  
type: Opaque  
data:  
  pwd: czNjcmUh
```



Secret in Pod as Volume

Value has to be base64-encoded manually

```
apiVersion: v1
kind: Pod
metadata:
  name: backend
spec:
  containers:
    - name: backend
      image: nginx
      volumeMounts:
        - name: secret-volume
          mountPath: /etc/secret
  volumes:
    - name: secret-volume
      secret:
        secretName: mysecret
```

```
$ kubectl exec -it backend -- /bin/sh
# ls /etc/secret
pwd
# cat /etc/secret/pwd
s3cre!
```






EXERCISE

Configuring a Pod
to Use a Secret



Understanding Security Contexts

Privilege and access control settings for a Pod or container

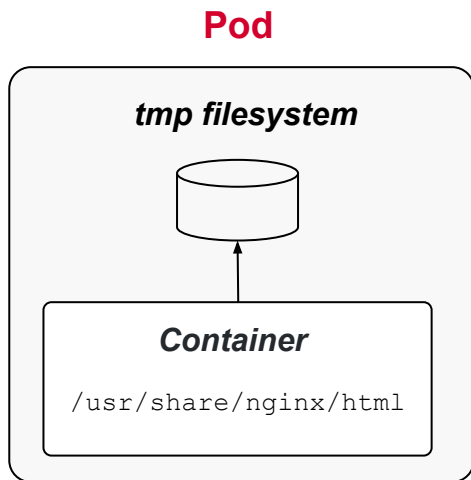

“Create files with a specific Unix group ID”

“Run this container with a specific Unix user ID”



Defining a Security Context

Pod- vs. container-level definition

```
apiVersion: v1
kind: Pod
metadata:
  name: secured-pod
spec:
  securityContext:
    runAsUser: 1000
  containers:
    - image: nginx:1.18.0
      name: secured-container
      securityContext:
        runAsGroup: 3000
```

Defined on the Pod-level

Defined on the container-level



Security Context API

Only partial overlap for Pod- and container attributes

| API | Description |
|---|--|
| <u>PodSecurityContext</u> | Defines Pod-level security attributes. |
| <u>SecurityContext</u> | Defines container-level security attributes. |




EXERCISE

Creating a Security
Context for a Pod



Defining Resource Boundaries

Defines # of Pods, CPU and memory usage per Namespace

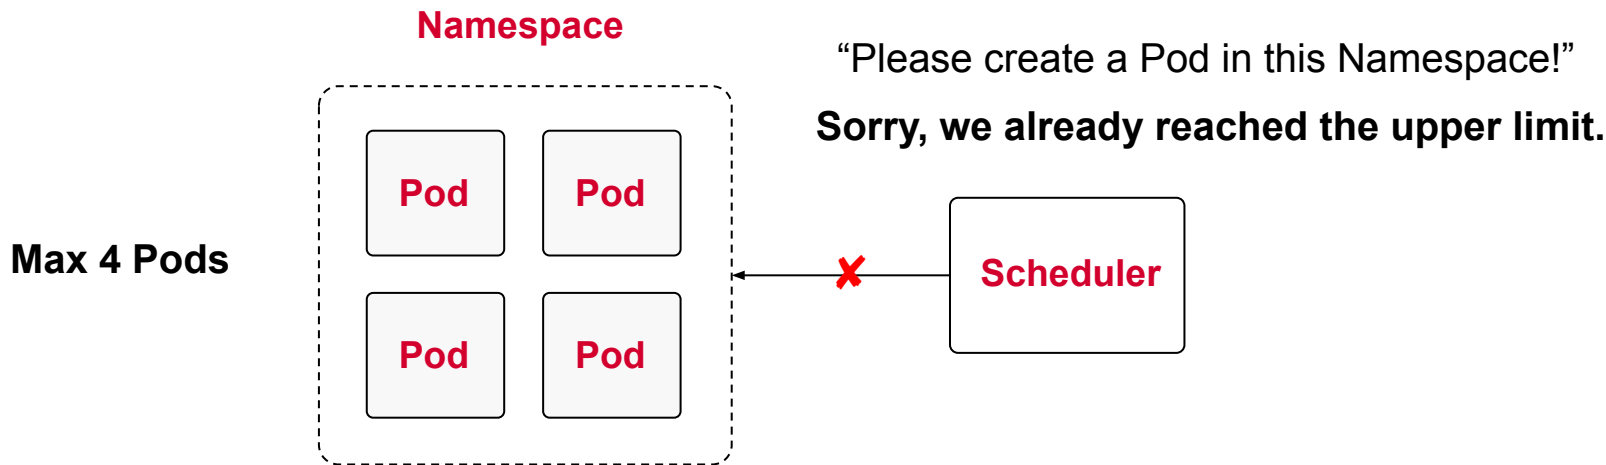

Resource Units in Kubernetes

CPU units and memory as fixed-point number or power-of-two equivalents

Kubernetes measures CPU resources in millicores and memory resources in bytes. That's why you might see resources defined as 600m or 100Mib.

For a deep dive on those resource units, it's worth cross-referencing the section ["Resource units in Kubernetes"](#) in the official documentation.



Creating a Resource Quota

Definition on the Namespace-level

```
apiVersion: v1
kind: ResourceQuota
metadata:
  name: app
spec:
  hard:
    pods: 2
    requests.cpu: "1"
    requests.memory: 1024m
    limits.cpu: "4"
    limits.memory: 4096m
```

```
$ kubectl create namespace rq-demo
$ kubectl create -f rq.yaml
--namespace=rq-demo
resourcequota/app created
$ kubectl describe quota --namespace=rq-demo
```

| | | |
|-----------------|---------|-------|
| Name: | app | |
| Namespace: | rq-demo | |
| Resource | Used | Hard |
| ----- | ---- | ---- |
| limits.cpu | 0 | 4 |
| limits.memory | 0 | 4096m |
| pods | 0 | 2 |
| requests.cpu | 0 | 1 |
| requests.memory | 0 | 1024m |



Defining Container Constraints

Required if Namespace defines Resource Quota

```
apiVersion: v1
kind: Pod
metadata:
  name: mypod
spec:
  containers:
  - image: nginx
    name: mypod
    resources:
      requests:
        cpu: "0.5"
        memory: "512m"
      limits:
        cpu: "1"
        memory: "1024m"
```

Requires at least 0.5 CPU resources
and 200m of memory

Limits resources to 1 CPU and
1024m of memory





EXERCISE

Defining a Pod's
Resource
Requirements



Declaring Service Accounts

Provides identity for processes running in a Pod

```
apiVersion: v1
kind: Pod
metadata:
  name: app
spec:
  serviceAccountName: myserviceaccount
```





EXERCISE

Using a Service
Account



Q & A



5 mins





BREAK




Multi-Container Pods

Common Design Patterns

Init Container

Initialization logic before main application containers

Multi-container Pod

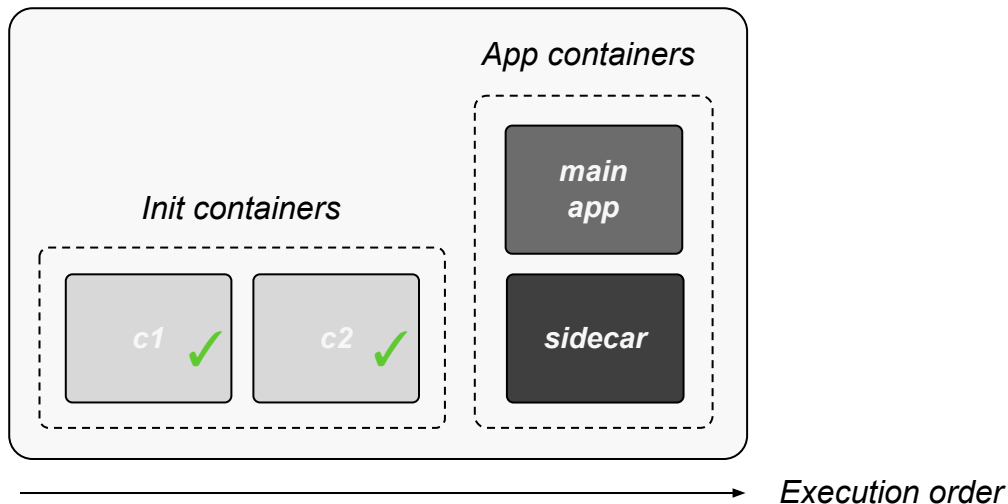

Defining an Init Container

initContainers adjacent to containers

```
apiVersion: v1
kind: Pod
metadata:
  name: multi-container
spec:
  initContainers:
  - image: init:3.2.1
    name: app-initializer
  containers:
  - image: nginx
    name: web-server
```



EXERCISE


Creating an Init
Container



Defining Multiple Containers

Shared container lifecycle and resources

Multi-container Pod



```
apiVersion: v1
kind: Pod
metadata:
  name: multi-container
spec:
  containers:
    - image: nginx
      name: container1
    - image: alpine
      name: container2
```



Targeting Different Containers


```
$ kubectl logs busybox --container=c1
```

Dump logs of
container 1

```
$ kubectl exec busybox -it --container=c2 -- /bin/sh
```


Log into
container 2

Multi-container Pod

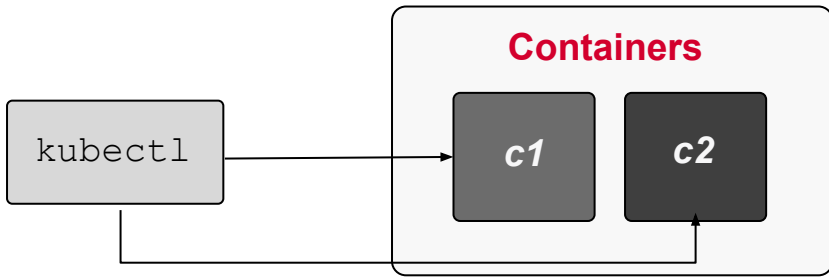

Multi-Container Patterns

Understand patterns on a high-level

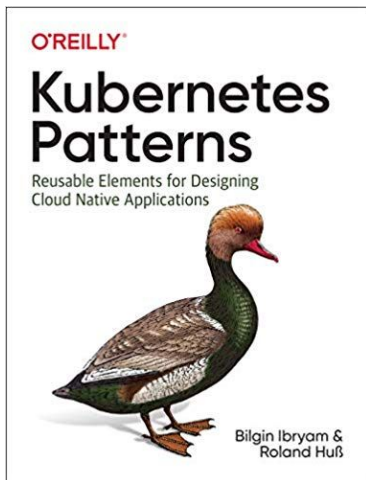


- Init container
- Sidecar
- Adapter
- Ambassador



Sidecar Pattern


Enhance logic of main application container

Multi-container Pod

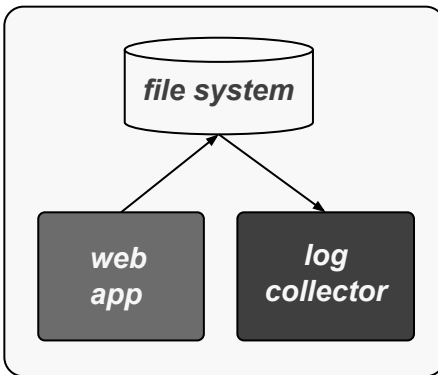

Adapter Pattern


Standardizes and normalizes application output read by external monitoring service

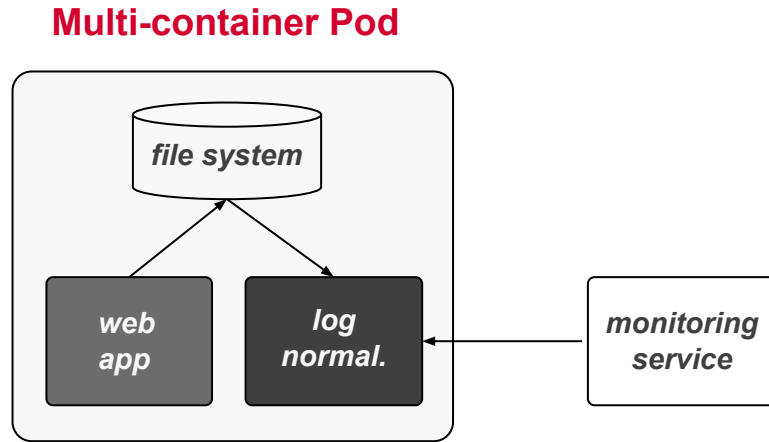

Ambassador Pattern

Proxy for main application container

Multi-container Pod

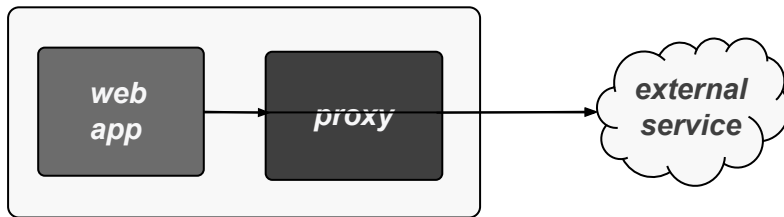



EXERCISE

Implementing the
Adapter Pattern



Q & A



5 mins



Observability

Probes, Logging, Monitoring and Debugging

Container Health

“How does Kubernetes know if a container is up and running?”

Probes can detect
and correct failures



Health Verification Methods

| Method | Option | Description |
|-----------------------|---------------------------|--|
| Custom Command | <code>exec.command</code> | Executes a command inside of the container e.g. a <code>cat</code> command and checks its exit code. Kubernetes considers an zero exit code to be successful. A non-zero exit code indicates an error. |
| HTTP GET Request | <code>httpGet</code> | Sends an HTTP GET request to an endpoint exposed by the application. A HTTP response code in the range of 200 and 399 indicates success. Any other response code is regarded as an error. |
| TCP socket connection | <code>tcpSocket</code> | Tries to open a TCP socket connection to a port. If the connection could be established, the probing attempt was successful. The inability to connect is accounted for as an error. |





Health Check Attributes

| Attribute | Default Value | Description |
|----------------------------------|---------------|---|
| <code>initialDelaySeconds</code> | 0 | Delay in seconds until first check is executed. |
| <code>periodSeconds</code> | 10 | Interval for executing a check (e.g., every 20 seconds). |
| <code>timeoutSeconds</code> | 1 | Maximum number of seconds until check operation times out. |
| <code>successThreshold</code> | 1 | Number of successful check attempts until probe is considered successful after a failure. |
| <code>failureThreshold</code> | 3 | Number of failures for check attempts before probe is marked failed and takes action. |



Understanding Readiness Probes

“Is application ready to serve requests?”

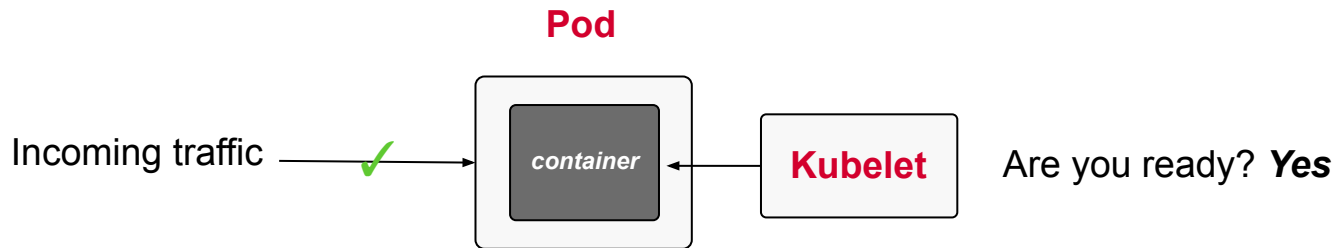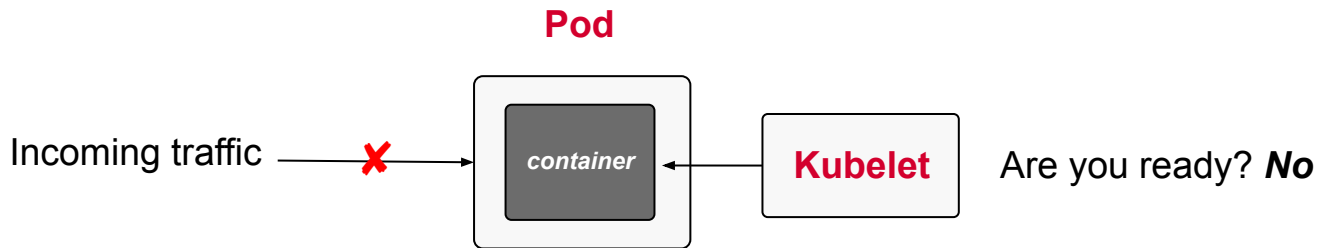

Defining a Readiness Probe

HTTP probes are very helpful for web applications


```
apiVersion: v1
kind: Pod
metadata:
  name: web-app
spec:
  containers:
  - name: web-app
    image: eshop:4.6.3
    readinessProbe:
      httpGet:
        path: /
        port: 8080
      initialDelaySeconds: 5
      periodSeconds: 2
```

Successful if HTTP status code is
between 200 and 399



Understanding Liveness Probes

“Does the application still function without errors?”

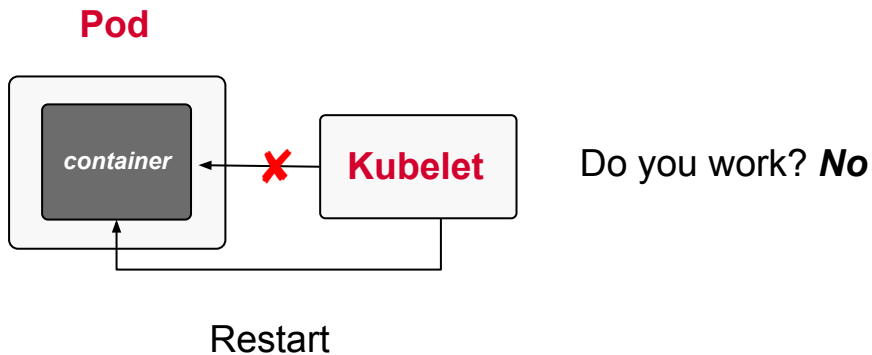

Defining a Liveness Probe

An event log can be queried with a custom command



```
apiVersion: v1
kind: Pod
metadata:
  name: web-app
spec:
  containers:
  - name: web-app
    image: eshop:4.6.3
    livenessProbe:
      exec:
        command:
        - cat
        - /tmp/healthy
      initialDelaySeconds: 10
      periodSeconds: 5
```

It makes sense to delay the initial check as the application to fully start up first



Understanding Startup Probes

“Legacy application may need longer to start. Hold off on probing.”

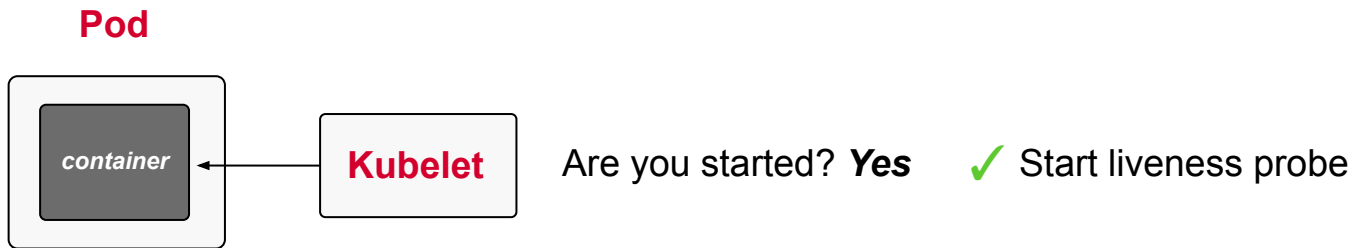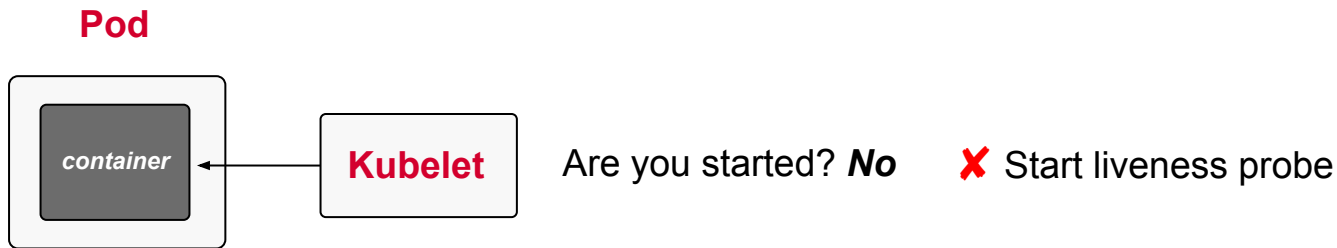

Defining a Startup Probe

TCP socket connection if exposed by application

```
apiVersion: v1
kind: Pod
metadata:
  name: startup-pod
spec:
  containers:
  - image: httpd:2.4.46
    name: http-server
    startupProbe:
      tcpSocket:
        port: 80
      initialDelaySeconds: 3
      periodSeconds: 15
```

Tries to open a TCP socket
connection to a port







EXERCISE

Defining a Pod's
Readiness and
Liveness Probe



Debugging YAML Manifests

Not available during exam but helpful for practice

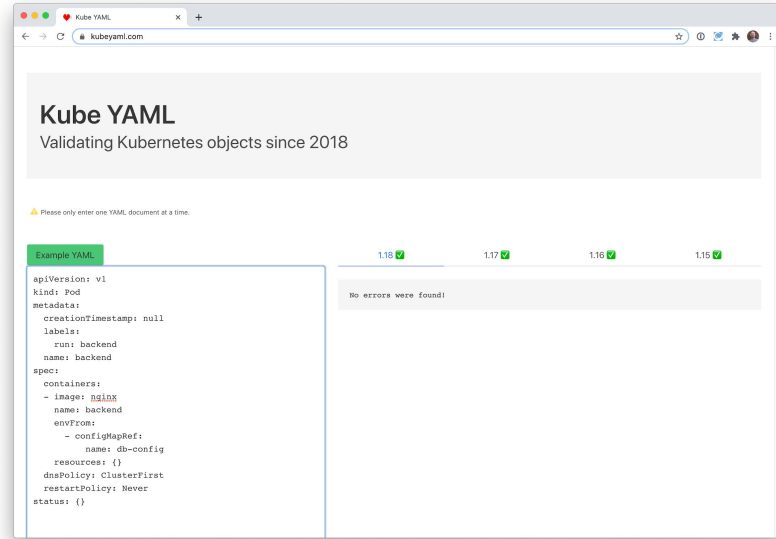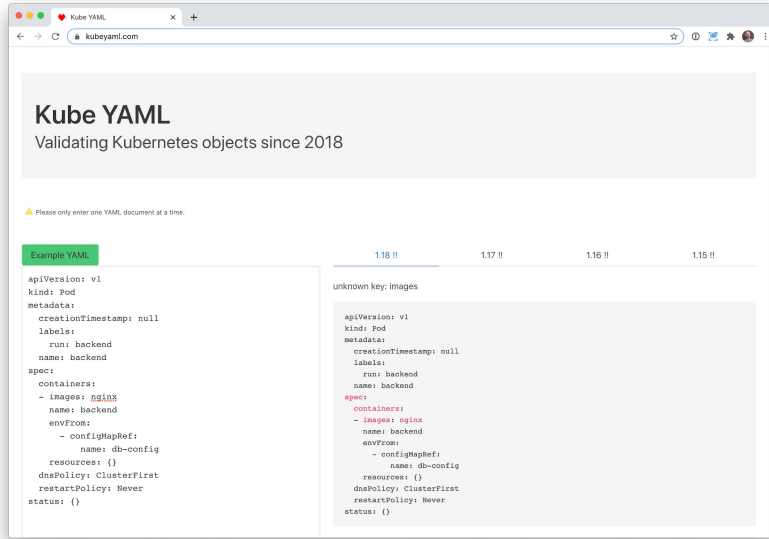

Common Pod Error Statuses

| Status | Root cause | Potential fix |
|--|---|--|
| <code>ImagePullBackOff</code> or <code>ErrImagePull</code> | Image could not be pulled from registry | Check correct image name, check that image name exists in registry, verify network access from node to registry, ensure proper |
| <code>CrashLoopBackOff</code> | Application or command run in container crashes | Check command executed in container, ensure that image can properly execute (e.g. by creating a container with Docker) |
| <code>CreateContainerConfigError</code> | ConfigMap or Secret references by container cannot be found | Check correct name of the configuration object, verify the existence of the configuration object in the namespace |



Debugging Existing Pods

It's crucial to know how to debug and fix errors

```
$ kubectl get all
```

“What’s running on a high-level?” *Pod xyz shows failure.*

```
$ kubectl describe pod xyz
```

“What exactly is the issue?” *Event shows CrashLoopBackOff.*

```
$ kubectl logs xyz
```

“Does an output indicate root cause?” *Misconfiguration in image.*

```
$ kubectl exec xyz -it --  
/bin/sh
```

“Does config look correct?” *Directory is missing.*



EXERCISE

Fixing a
Misconfigured Pod



Q & A



5 mins





BREAK



Pod Design

Labels & Annotations, Deployments, Jobs and CronJobs


Purpose of Labels

Essential to querying, filtering and sorting Kubernetes objects


Pod 1



Pod 2

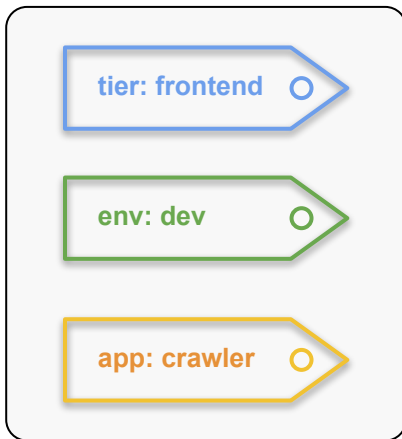

Pod 3

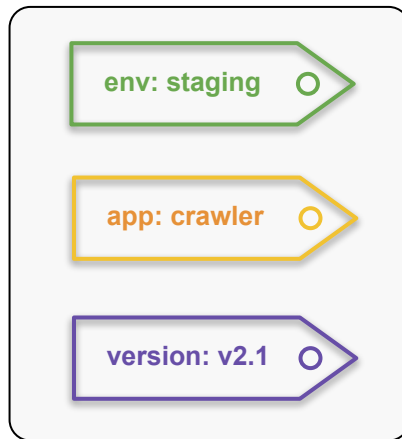

Assigning Labels

Defined in the `metadata` section of a Kubernetes object definition

```
apiVersion: v1
kind: Pod
metadata:
  name: pod1
  labels:
    tier: backend
    env: prod
    app: miracle
spec:
  ...
```

```
$ kubectl label pod nginx tier=backend
env=prod app=miracle
$ kubectl get pods --show-labels
NAME    ... LABELS
pod1    ... tier=backend,env=prod,app=miracle
```




Selecting Labels

Querying objects from the CLI or via `spec.selector`


Pod 1



Pod 2

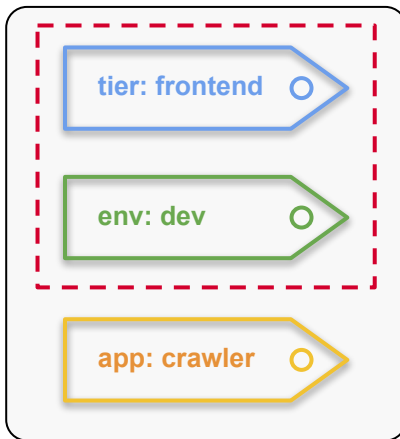

Pod 3

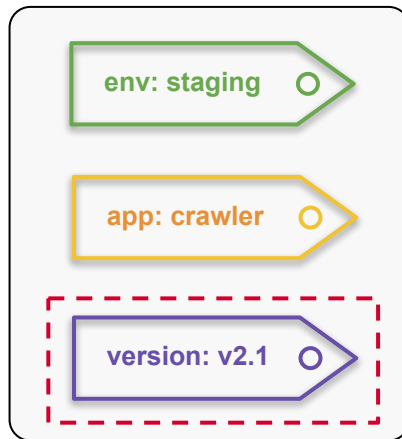

Querying by CLI

You can specify equality-based and set-based requirements

```
# Tier is "frontend" AND is "development" environment
$ kubectl get pods -l tier=frontend,env=dev --show-labels
NAME    ... LABELS
pod2    ... app=crawler,env=dev,tier=frontend

# Has the label with key "version"
$ kubectl get pods -l version --show-labels
NAME    ... LABELS
pod3    ... app=crawler,env=staging,version=v2.1

# Tier is in set "frontend" or "backend" AND is "development" environment
$ kubectl get pods -l 'tier in (frontend,backend),env=dev' --show-labels
NAME    ... LABELS
pod2    ... app=crawler,env=dev,tier=frontend
```



Selecting Resources in YAML

Grouping resources by label selectors

Equality-based

```
apiVersion: v1
kind: Service
metadata:
  name: app-service
  ...
spec:
  ...
  selector:
    tier: frontend
    env: dev
```

Equality- and set-based

```
apiVersion: batch/v1
kind: Job
metadata:
  name: my-job
spec:
  ...
  selector:
    matchLabels:
      version: v2.1
    matchExpressions:
      - {key: tier, operator: In,
        values: [frontend,backend]}
```



Purpose of Annotations

Descriptive metadata without the ability to be queryable

Pod



Assigning Annotations

Defined in the `metadata` section of a Kubernetes object definition

```
apiVersion: v1
kind: Pod
metadata:
  name: my-pod
  annotations:
    commit: 866a8dc
    author: 'Benjamin Muschko'
    branch: 'bm/bugfix'
spec:
  ...
```

```
$ kubectl annotate pod nginx
commit='866a8dc' author='Benjamin Muschko'
branch='bm/bugfix'
$ kubectl describe pods my-pod
Name:          my-pod
Namespace:     default
...
Annotations:   author: Benjamin Muschko
               branch: bm/bugfix
               commit: 866a8dc
...
```




EXERCISE

Defining and
Querying Labels
and Annotations



Understanding Deployments

Scaling and replication features for a set of Pods

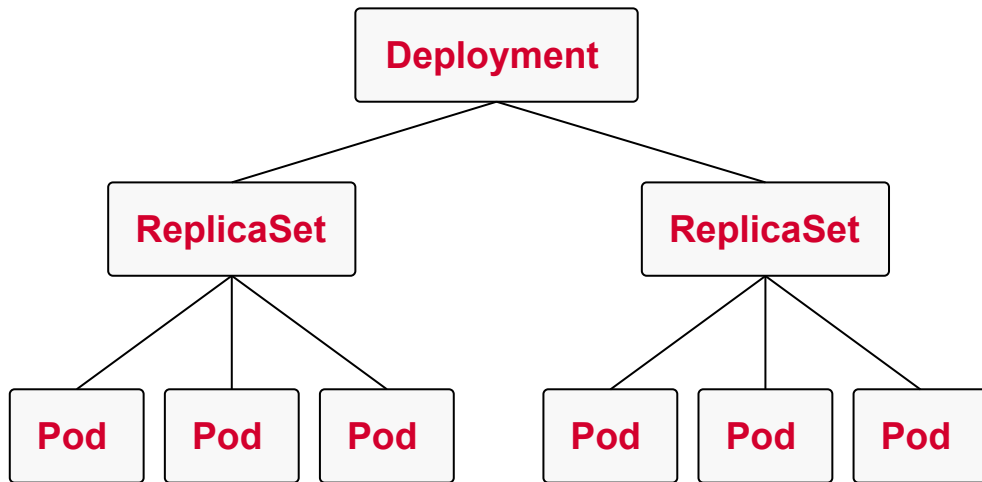

Creating a Deployment

The create command supports replicas option with 1.19+

```
$ kubectl create deployment my-deploy --image=nginx --replicas=3  
--dry-run=client -o yaml > deploy.yaml  
$ vim deploy.yaml  
$ kubectl create -f deploy.yaml  
deployment.apps/my-deploy created
```



Creating a Deployment

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: my-deploy
    name: my-deploy
```

```
spec:
```

```
  replicas: 3
```

```
  selector:
```

```
    matchLabels:
```

```
      app: my-deploy
```

```
  template:
```

```
    metadata:
```

```
      labels:
```

```
        app: my-deploy
```

```
    spec:
```

```
      containers:
```

```
      - image: nginx
        name: nginx
```

The number of Pods running a specific set of containers

Selects the Pods for this deployment

The labels of the Pods



Inspecting Deployment State

Indicator between desired state and actual state

```
$ kubectl get deployments
```

| NAME | READY | UP-TO-DATE | AVAILABLE | AGE |
|---------------------------|-------|------------|-----------|-----|
| deployment.apps/my-deploy | 3 | 3 | 3 | 25m |



Underlying Replication Feature

Automatically created by Deployment, not meant to be modified

```
$ kubectl get replicaset
NAME                                DESIRED    CURRENT    READY    AGE
my-deploy-7786f96d67              3          3          3        6h


$ kubectl describe deploy my-deploy
...
OldReplicaSets:    <none>
NewReplicaSet:     my-deploy-7786f96d67 (3/3 replicas created)
...

$ kubectl describe replicaset my-deploy-7786f96d67
...
Controlled By:     Deployment/my-deploy
...
```



Rolling Updates

“Look ma, shiny new features. Let’s deploy them to production!”

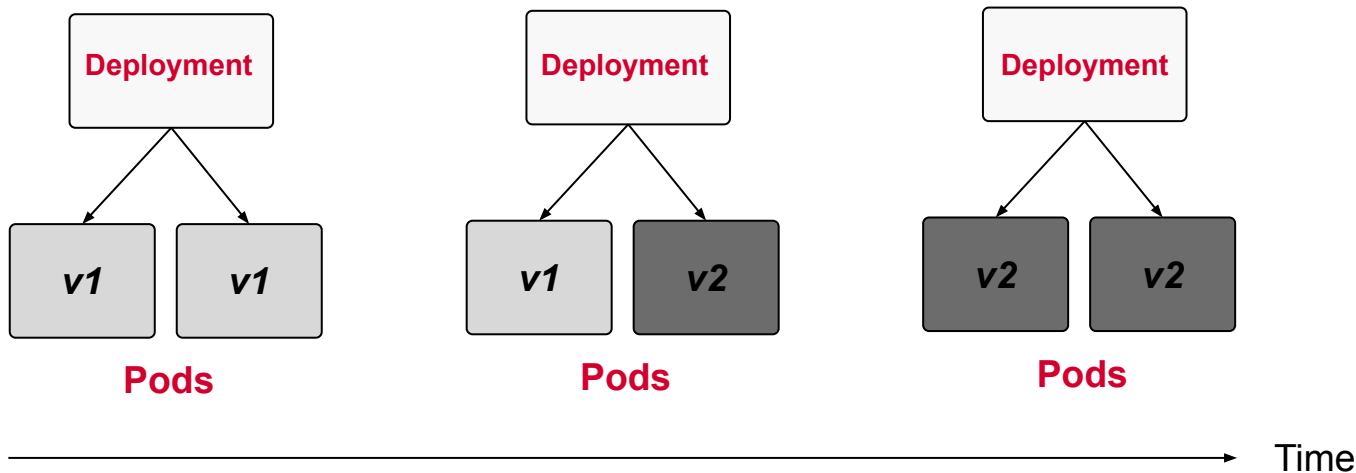

Rollout Revision Log

```
# Check initial deployment revisions
$ kubectl rollout history deployments my-deploy
deployment.extensions/my-deploy
REVISION  CHANGE-CAUSE
1          <none>
```

```
# Make a change to the deployment
$ kubectl edit deployments my-deploy
```

```
# Revision history indicates changed version
$ kubectl rollout history deployments my-deploy
deployment.extensions/my-deploy
REVISION  CHANGE-CAUSE
1          <none>
2          <none>
```



Rendering Revision Details

```
$ kubectl rollout history deployments my-deploy --revision=2  
deployment.extensions/my-deploy with revision #2
```

Pod Template:

Labels: app=my-deploy
 pod-template-hash=1365642048

Containers:

 nginx:

Image: **nginx:latest**

 Port: <none>

 Host Port: <none>

 Environment: <none>


 Mounts: <none>

Volumes: <none>



Rolling Back

“Bug in the application. Let’s revert to the previous version!”

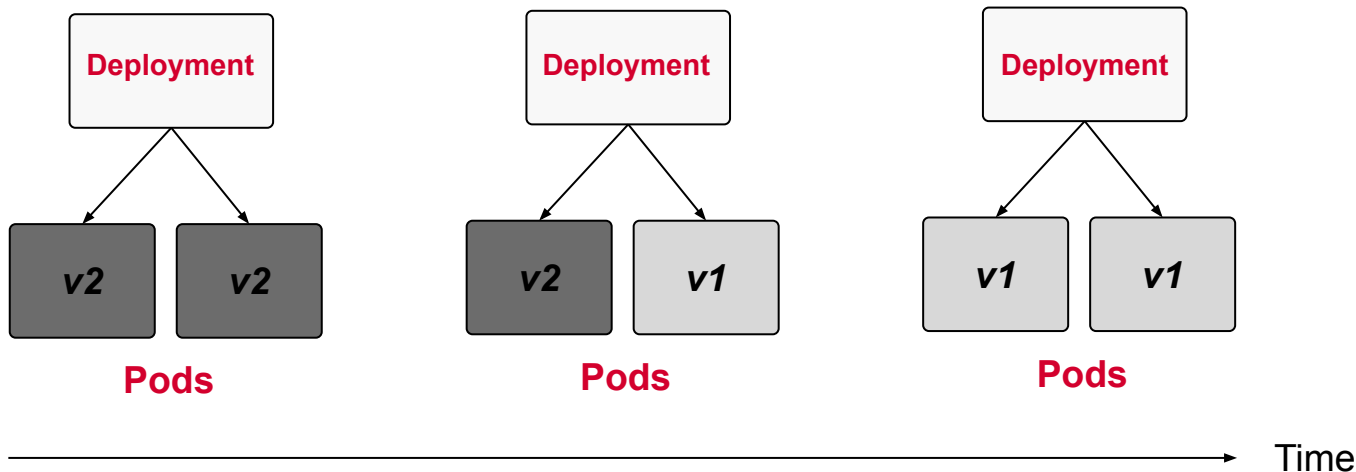

Rolling Back to a Revision

```
# Roll back to previous revision
$ kubectl rollout undo deployments my-deploy
deployment.extensions/my-deploy



# Check rollout status
$ kubectl rollout status deployments my-deploy
deployment "my-deploy" successfully rolled out

# Revision history indicates changed version
$ kubectl rollout history deployments my-deploy
deployment.extensions/my-deploy
REVISION  CHANGE-CAUSE
2          <none>
3          <none>
```



Manually Scaling a Deployment

“Load is increasing. We need to scale up the application.”

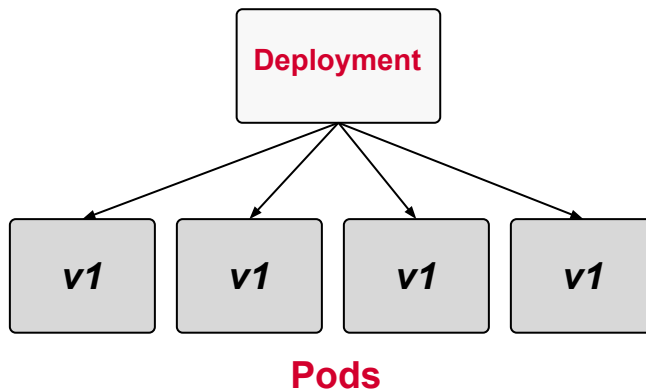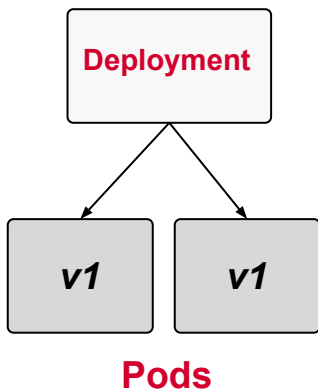

Providing a Specific # of Replicas

```
# Check current deployment replicas
$ kubectl get deployments my-deploy
```

| NAME | READY | UP-TO-DATE | AVAILABLE | AGE |
|-----------|-------|------------|-----------|-----|
| my-deploy | 2 | 2 | 2 | 9h |

```
# Scaling from 2 to 4 replicas
$ kubectl scale deployment my-deploy --replicas=4
deployment.extensions/my-deploy scaled

# Check the changed deployment replicas
$ kubectl get deployment my-deploy
```


| NAME | READY | UP-TO-DATE | AVAILABLE | AGE |
|-----------|-------|------------|-----------|-----|
| my-deploy | 4 | 4 | 4 | 9h |



Autoscaling a Deployment

“Don’t make me think. Autoscale based on CPU utilization.”

maximum, average CPU utilization: 70%

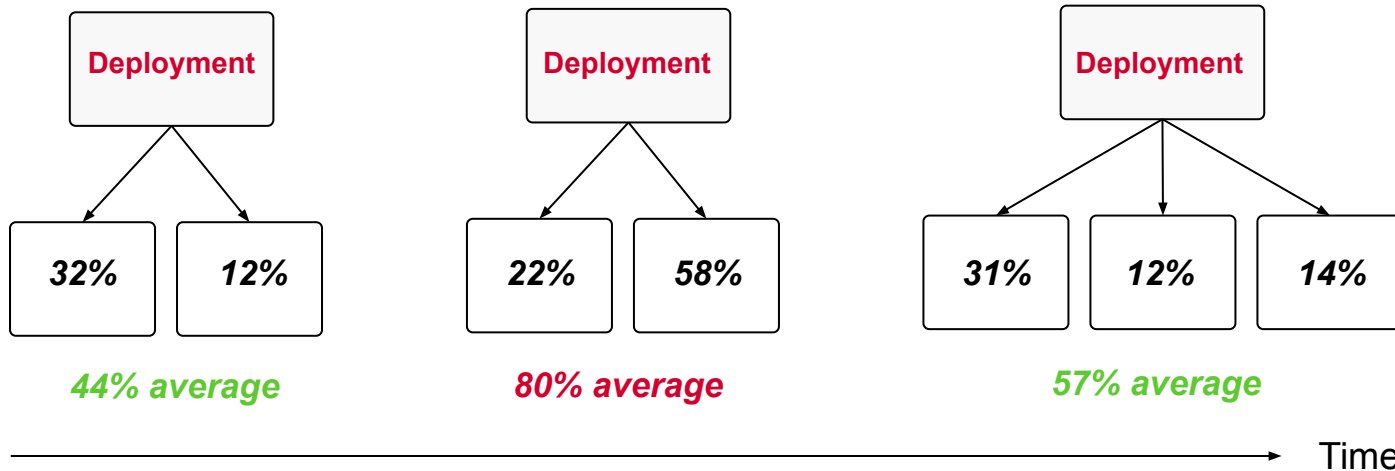

Create Horizontal Pod Autoscaler

```
# Maintain average CPU utilization across all Pods of 70%
$ kubectl autoscale deployments my-deploy --cpu-percent=70 ↵
  --min=1 --max=10
horizontalpodautoscaler.autoscaling/my-deploy autoscaled
```

```
# Check the current status of autoscaler
```

```
$ kubectl get hpa my-deploy
```

| NAME | REFERENCE | TARGETS | MINPODS ↵ |
|-----------|----------------------|---------|-----------|
| MAXPODS | REPLICAS | AGE | |
| my-deploy | Deployment/my-deploy | 0%/70% | 1 ↵ |
| 10 | 4 | 23s | |



EXERCISE

Performing Rolling
Updates and Scaling
a Deployment



Pods vs. Jobs vs. CronJobs

Infinite vs. one-time vs. periodic processes

Pod

***Infinite
process***

vs.

Job

***One-time
process***

vs.


CronJob

***Periodic
process***



Understanding Jobs

Job is complete when specific number of completions is reached

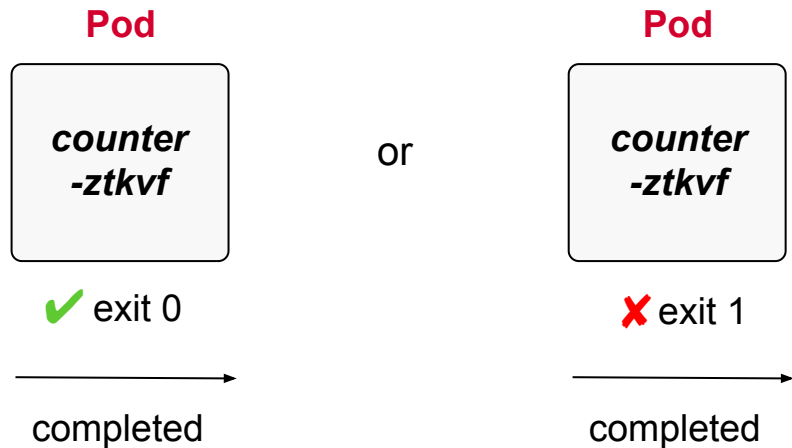

Creating a Job (imperative)

"Increment a counter and render its value on the terminal"

```
$ kubectl create job counter --image=nginx -- /bin/sh -c\  
'counter=0; while [ $counter -lt 3 ]; do\  
  counter=$((counter+1)); echo "$counter"; sleep 3; done;'  
job.batch/counter created
```



Creating a Job (declarative)

```
apiVersion: batch/v1
kind: Job
metadata:
  name: counter
spec:
  completions: 1
  parallelism: 1
  backoffLimit: 6
  template:
    spec:
      restartPolicy: OnFailure
      containers:
      - args:
        - /bin/sh
        - -c
        - ...
        image: nginx
        name: counter
```

Define # of successful completions and whether task should be run in parallel

How many times do we try before Job is marked failed?

Restart Pod upon failure or start a new Pod



Creating a Job (mixed approach)

The create command does not provide parameters yet

```
$ kubectl create job counter --image=nginx --dry-run=client -o yam
  -o yam -- /bin/sh -c 'counter=0; while [ $counter -lt 3 ]; do counter=$((counter+1)); echo "$counter"; sleep 3; done;' > job.yaml
$ vim job.yaml
$ kubectl create -f job.yaml
job.batch/counter created
```



Different Types of Jobs

```
spec.completions: x  
spec.parallelism: y
```

| Type | Completion criteria |
|--------------------------------------|---|
| Non-parallel | Complete as soon as its Pod terminates successfully |
| Parallel with fixed completion count | Complete when specified number of tasks finish successfully |
| Parallel with a work queue | Once at least one Pod has terminated with success and all Pods are terminated |



Inspecting Jobs

```
# List all jobs
```

```
$ kubectl get jobs
```

| NAME | DESIRED | SUCCESSFUL | AGE |
|---------|---------|------------|-----|
| counter | 1 | 1 | 3m |

```
# Identify correlating Pods
```

```
$ kubectl get pods
```

| NAME | READY | STATUS | RESTARTS | AGE |
|---------------|-------|-----------|----------|-----|
| counter-9241c | 0/1 | Completed | 0 | 22m |

```
# Get the logs of the Pod
```

```
$ kubectl logs counter-9241c
```

```
1
```


```
2
```

```
3
```




Restarting a Container on Failure

```
spec.template.spec.restartPolicy: OnFailure
```

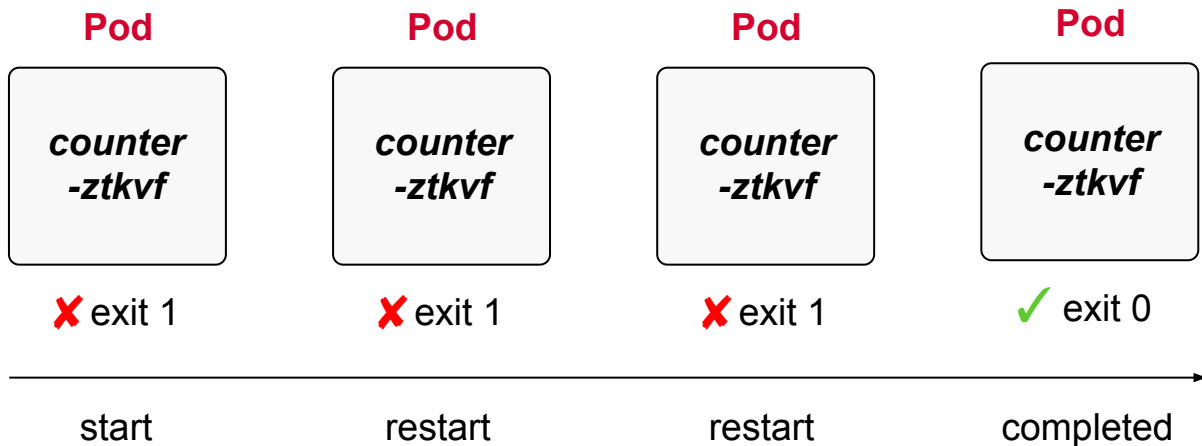

New Pod on Failure


`spec.template.spec.restartPolicy: Never`

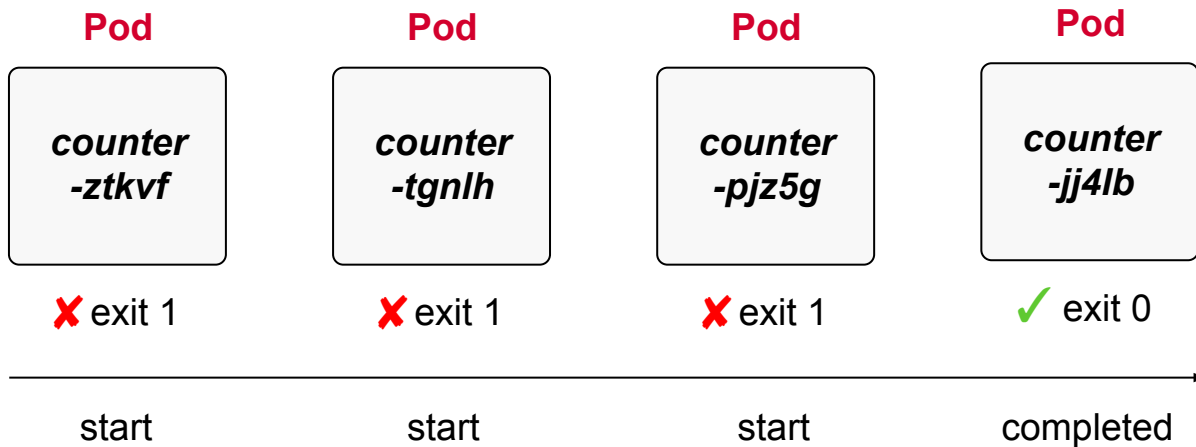

Understanding CronJobs

Similar to Job but task is run on a predefined schedule

```
spec.schedule: "0 * * * *"
```

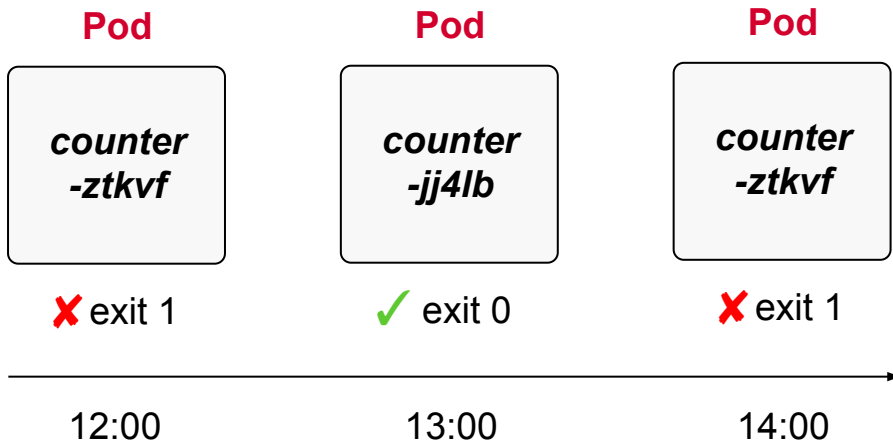

Creating a CronJob (imperative)

"Every hour increment a counter and render its value on the terminal"

```
$ kubectl create cronjob counter --image=nginx␣  
  --schedule="*/1 * * * *" -- /bin/sh -c 'counter=0;␣  
  while [ $counter -lt 3 ]; do counter=$((counter+1));␣  
  echo "$counter"; sleep 3; done;'  
job.batch/counter created
```



Creating a CronJob (declarative)

```
apiVersion: batch/v1beta1
kind: CronJob
metadata:
  name: counter
spec:
  schedule: "*/1 * * * *"
  jobTemplate:
    spec:
      template:
        spec:
          restartPolicy: Never
          containers:
            - args:
              - /bin/sh
              - -c
              - ...
              image: nginx
              name: counter
```

The crontab expression used
to run CronJob periodically

Run in a new Pod



Inspecting CronJobs

```
# List all cron jobs
```

```
$ kubectl get cronjobs
```

| NAME | SCHEDULE | SUSPEND | ACTIVE | LAST SCHEDULE | AGE |
|---------|-------------|---------|--------|---------------|-----|
| counter | */* * * * * | False | 0 | 26s | 1h |

```
# Watch Pods executing the scheduled command
```

```
$ kubectl get jobs --watch
```

| NAME | COMPLETIONS | DURATION | AGE |
|--------------------|-------------|----------|-------|
| counter-1557334380 | 1/1 | 3s | 2m24s |
| counter-1557334440 | 1/1 | 3s | 84s |
| counter-1557334500 | 1/1 | 3s | 24s |
| counter-1557334560 | 0/1 | 0s | 0s |
| counter-1557334560 | 0/1 | 0s | 0s |
| counter-1557334560 | 1/1 | 4s | 4s |
| counter-1557334380 | 1/1 | 3s | 3m10s |



EXERCISE

Creating a
Scheduled
Container Operation



Q & A



5 mins





BREAK




Services & Networking

Services and Network Policies


Understanding Services

Enables network access for a set of Pods

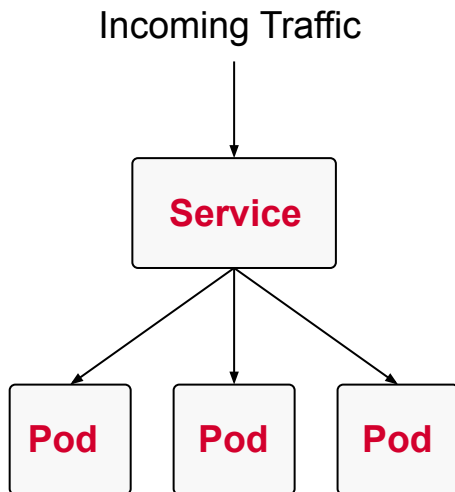

Request Routing

“How does a service decide which Pod to forward the request to?”

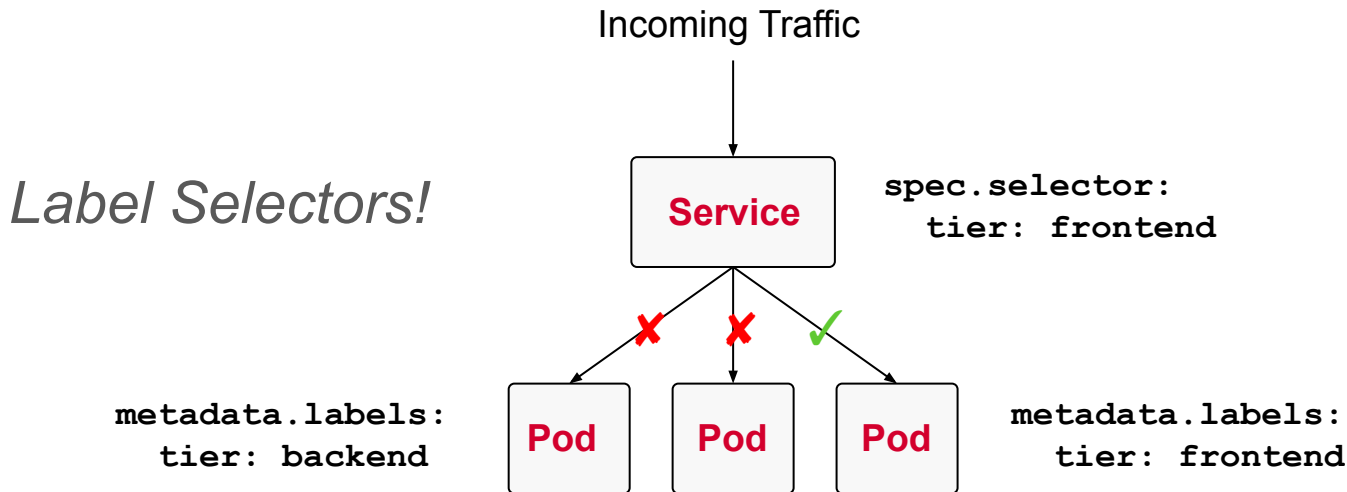

Creating a Service (imperative)

“Create a Service with explicit type”

```
$ kubectl create service clusterip nginx --tcp=80:80  
service/nginx created
```



Creating a Service (imperative)

“Create a Pod and expose it with a Service”

```
$ kubectl run nginx --image=nginx --port=80 --expose  
service/nginx created  
pod/nginx created
```



Creating a Service (declarative)

```
apiVersion: v1
kind: Service
metadata:
  name: nginx
spec:
  selector:
    tier: frontend
  ports:
  - port: 3000
    protocol: TCP
    targetPort: 80
  type: ClusterIP
```

Determines the Pod(s) for routing traffic


Maps incoming port to port of the Pod

Specifies how to expose the Service (inside/outside of cluster or LoadBalancer)



Port Mapping

“How to map the service port to the container port in Pod?”

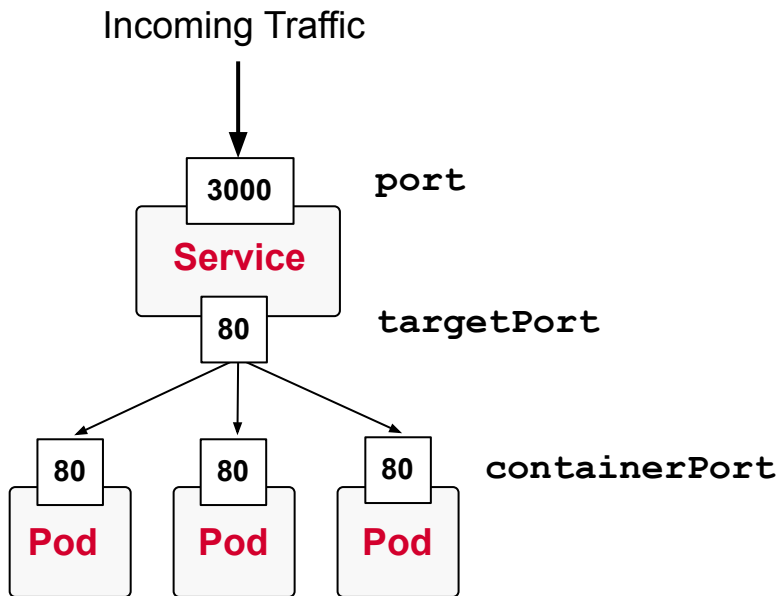

Different Types of Services


| Type | Behavior |
|--------------|---|
| ClusterIP | Exposes the service on a cluster-internal IP. Only reachable from within the cluster. |
| NodePort | Exposes the service on each node's IP at a static port. Accessible from outside of the cluster. |
| LoadBalancer | Exposes the service externally using a cloud provider's load balancer. |
| ExternalName | Map a Service to a DNS name. |

`spec.type: xyz`



ClusterIP Service Type

Only reachable from within the cluster or API service via proxy

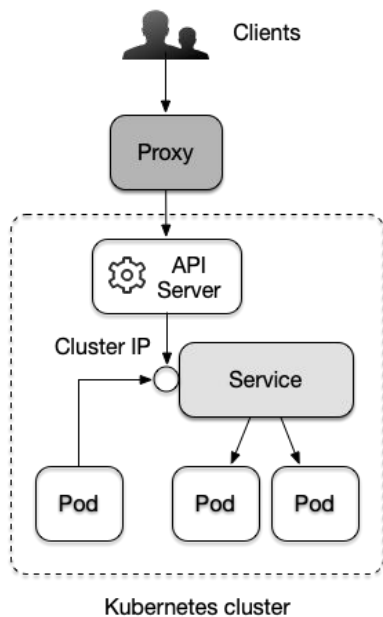


Exposes the Service on a cluster-internal IP address.

Can also be reached by proxy from outside of the cluster using the `kubectl proxy` command.



NodePort Service Type

Accessible from outside of the cluster

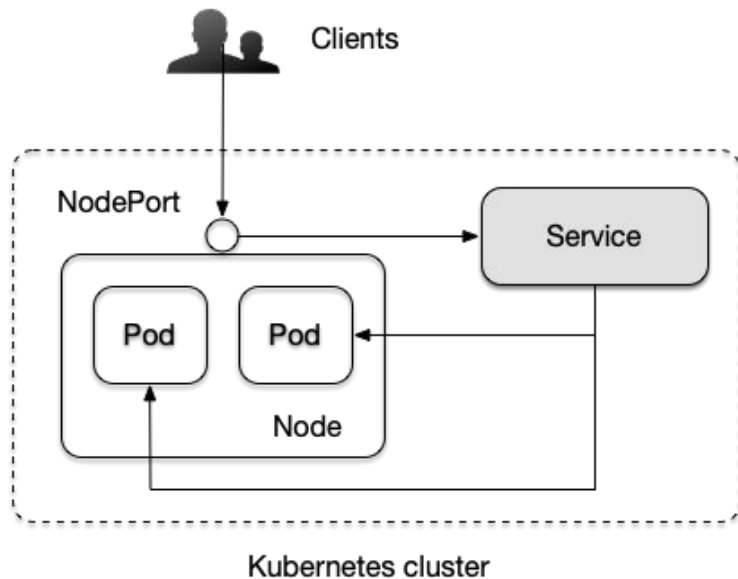

Node's IP address + port number in the range of 30000 and 32767, assigned automatically upon the creation of the Service.



Inspecting a Service

```
# Only reachable from within the cluster
```

```
$ kubectl get service nginx
```

| NAME | TYPE | CLUSTER-IP | EXTERNAL-IP | PORT(S) | AGE |
|-------|-----------|---------------|-------------|---------|-----|
| nginx | ClusterIP | 10.105.201.83 | <none> | 80/TCP | 3h |


```
# Accessible from outside of the cluster
```

```
$ kubectl get service nginx
```

| NAME | TYPE | CLUSTER-IP | EXTERNAL-IP | PORT(S) | AGE |
|-------|----------|---------------|-------------|--------------|-----|
| nginx | NodePort | 10.105.201.83 | <none> | 80:30184/TCP | 3h |



Deployments and Services

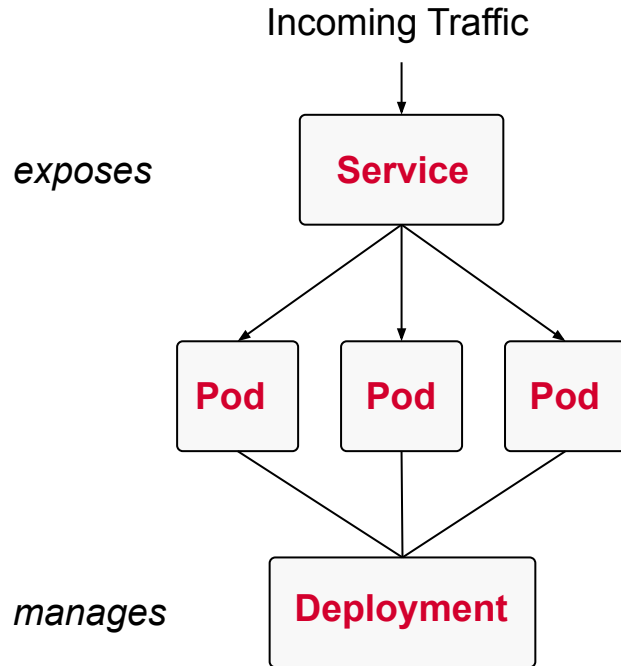

Two distinct concepts that complement each other




EXERCISE

Routing Traffic to
Pods from Inside
and Outside of a
Cluster



Understanding Network Policies

“Network Policies control traffic from and to the Pod”

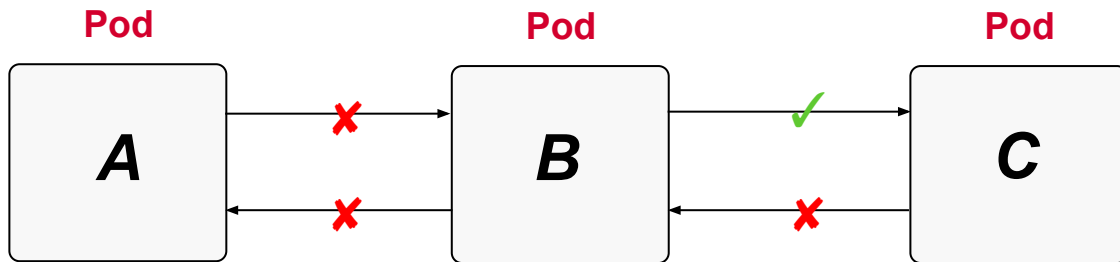

Network Policy Rules

Pod



`tier: frontend`

Which Pod does the rule apply to? ✓

Pod



*Which direction of traffic?
Who is allowed?*



Creating a Network Policy

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: my-network-policy
spec:
  podSelector:
    matchLabels:
      tier: frontend
  policyTypes:
  - Ingress
  - Egress
  ingress:
  - from:
    ...
  egress:
  - to:
    ...
```

Label selection for Pods

Inbound/outbound traffic

*Who can connect to Pod?
Where can Pod connect to?*



General Rule of Thumb

Start by denying all access and allowing access as needed

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: default-deny
spec:
  podSelector: {}
  policyTypes:
    - Ingress
    - Egress
```

Applies to all Pods

*Inbound/outbound
traffic is blocked*



Behavior of from/to Selectors


Select by Namespace, Pod and IP address

```
...  
ingress:  
- from:  
  - podSelector:  
    matchLabels:  
      tier: backend  
...
```

*Allow incoming traffic from
Pod that matches the
label tier=backend*



Restricting Access to Ports

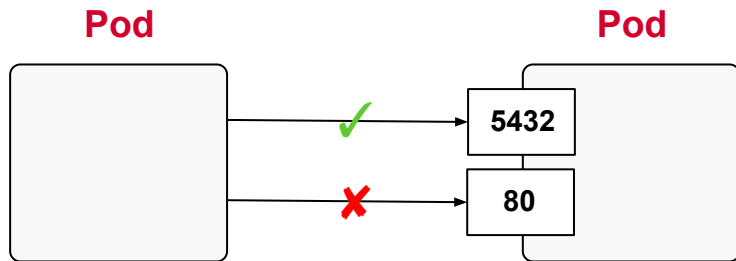


By default all ports are open

```
...  
ingress:  
- from:  
  - podSelector:  
      matchLabels:  
        tier: backend  
ports:  
- protocol: TCP  
  port: 5432  
...
```




Representative Use Case

“Application makes request to database but database cannot make any outgoing requests.”

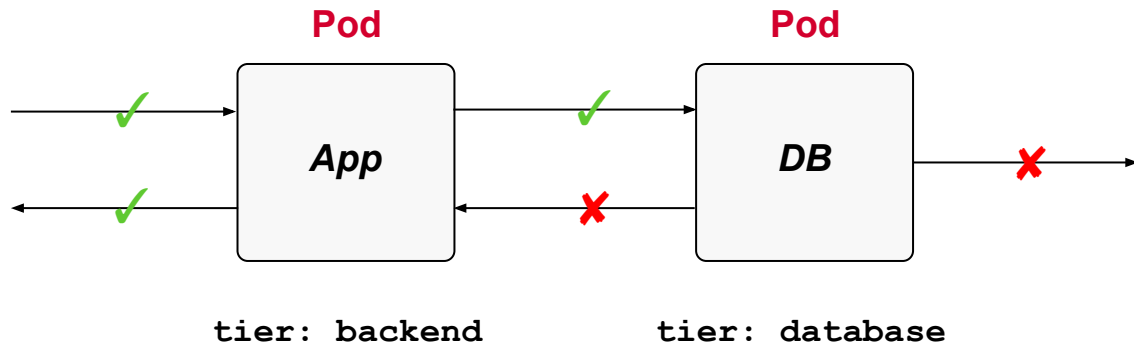

Additional Learning Resource

Network Policies explained by use case and visualization

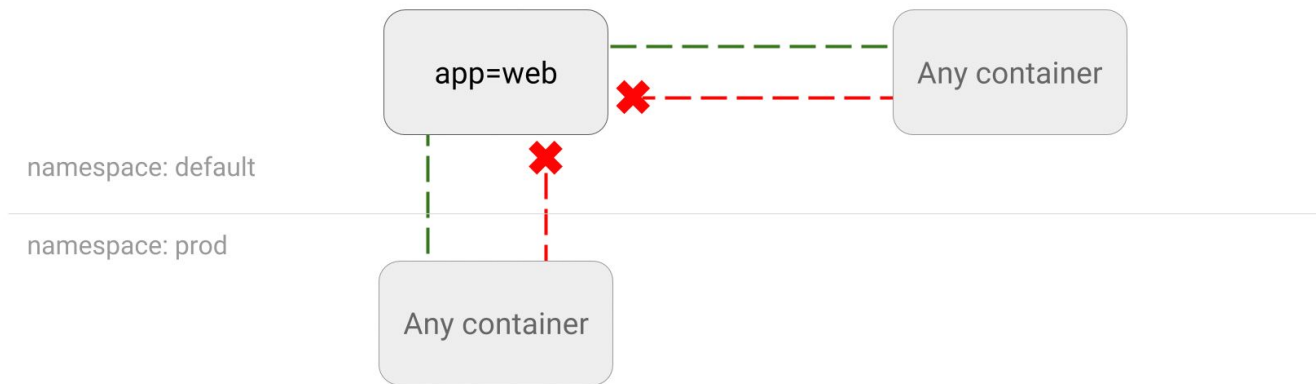

<https://github.com/ahmetb/kubernetes-network-policy-recipes>



EXERCISE

Restricting Access
to and from a Pod



Q & A



5 mins





BREAK




State Persistence


Persistent Volumes and Claims

Understanding Volumes

Persist data that outlives a Pod restart

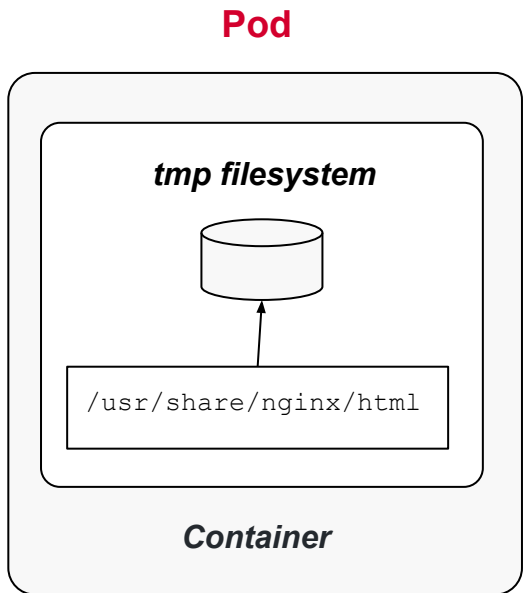

vs.

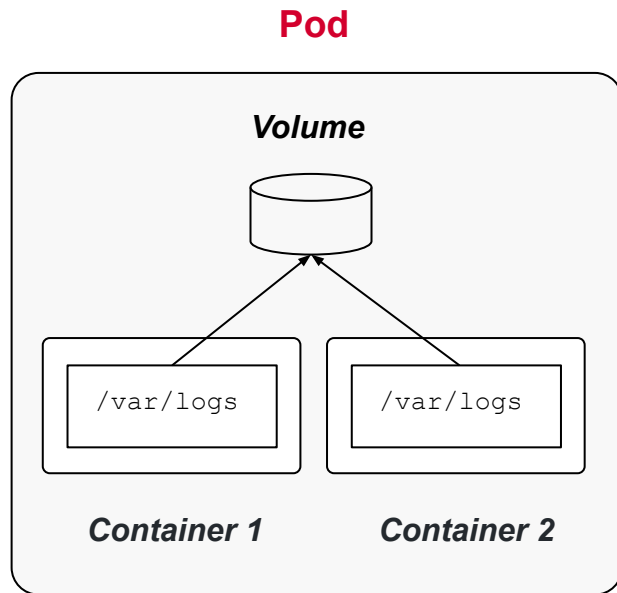

Types of Volumes

| Type | Description |
|--|--|
| <code>emptyDir</code> | Empty directory in Pod. Only persisted for the lifespan of a Pod. |
| <code>hostPath</code> | File or directory from the host node's filesystem into your Pod. |
| <code>configMap</code> , <code>secret</code> | Provides a way to inject configuration data and secrets into Pods. |
| <code>nfs</code> | An existing NFS (Network File System) share to be mounted into your Pod. Preserves data after Pod restart. |
| Cloud provider solutions | Provider-specific implementation for AWS, GCE or Azure. |



Creating a Volume

```
apiVersion: v1
kind: Pod
metadata:
  name: my-container
spec:
  volumes:
  - name: logs-volume
    emptyDir: {}
  containers:
  - image: nginx
    name: my-container
    volumeMounts:
    - mountPath: /var/logs
      name: logs-volume
```

Define Volume with a type

Mount Volume to a path



Using a Volume


```
# Create Pod with mounted Volume
$ kubectl create -f pod-with-vol.yaml
pod/my-container created

# Shell into container and use Volume
$ kubectl exec -it my-container -- /bin/sh
# cd /var/logs
# pwd
/var/logs
# touch app-logs.txt
# ls
app-logs.txt
```




Understanding PersistentVolumes

Persist data that outlives a Pod, node, or cluster restart

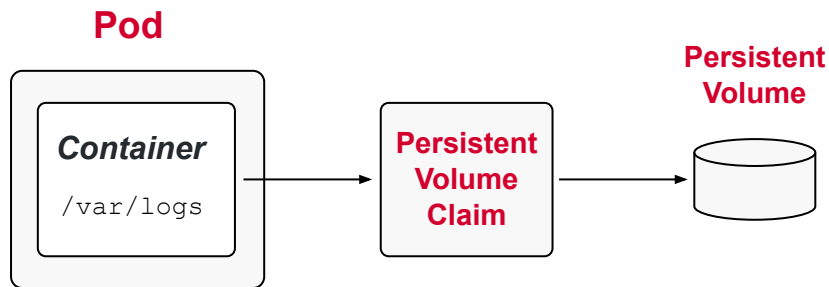

Creating a PersistentVolume

```
apiVersion: v1
kind: PersistentVolume
metadata:
  name: pv
spec:
  capacity:
    storage: 512m
  accessModes:
    - ReadWriteOnce
  hostPath:
    path: /data/config
```

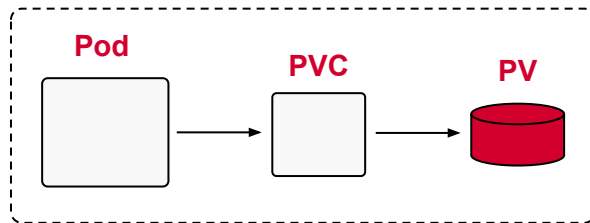

Defines a specific storage capacity

Read and/or write access

How many nodes can access volume?



Access Mode & Reclaim Policy

Configuration options for PersistentVolume

Access Mode

| Type | Description |
|---------------|-------------------------------------|
| ReadWriteOnce | Read-write access by a single node. |
| ReadOnlyMany | Read-only access by many nodes. |
| ReadWriteMany | Read-write access by many nodes. |


Reclaim Policy

| Type | Description |
|---------|--|
| Retain | Default. When PVC is deleted, PV is “released” and can be reclaimed. |
| Delete | Deletion removes PV and associated storage. |
| Recycle | Deprecated. Use dynamic binding instead. |



Creating a Claim

```
kind: PersistentVolumeClaim
apiVersion: v1
metadata:
  name: pvc
spec:
  accessModes:
    - ReadWriteMany
  resources:
    requests:
      storage: 256m
```

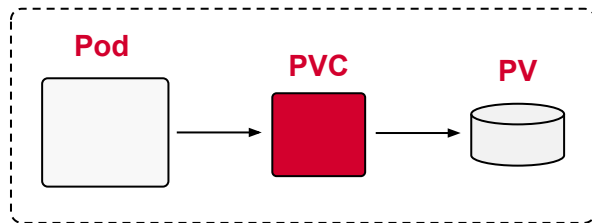


*Read and/or write access
How many nodes can access volume?*

Defines a specific storage capacity



Mounting a Claim

```
apiVersion: v1
kind: Pod
metadata:
  creationTimestamp: null
  name: app
spec:
  volumes:
    - name: configpvc
      persistentVolumeClaim:
        claimName: pvc
  containers:
    - image: nginx
      name: app
      volumeMounts:
        - mountPath: "/data/app/config"
          name: configpvc
```

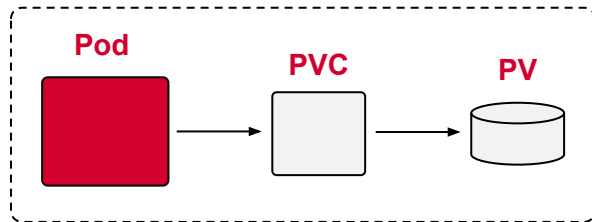

References the Volume with the claim name


Mounts Volume to path



Static Provisioning

Requires the physical storage to exist before PersistentVolume

```
apiVersion: v1
kind: PersistentVolume
metadata:
  name: pv
spec:
  capacity:
    storage: 512m
  accessModes:
    - ReadWriteOnce
  storageClassName: shared
  hostPath:
    path: /data/config
```

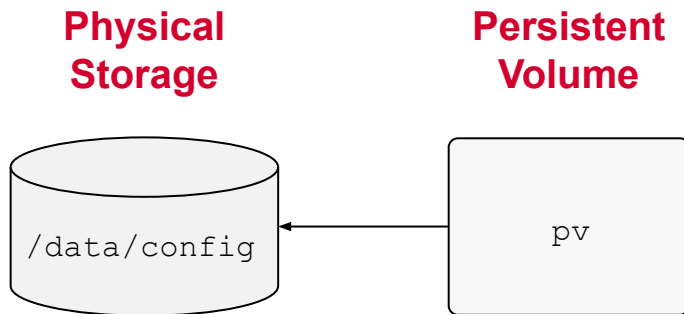

Dynamic Provisioning

Creates PersistentVolume object automatically via storage class

```
apiVersion: storage.k8s.io/v1
kind: StorageClass
metadata:
  name: standard
provisioner: kubernetes.io/aws-ebs
```

```
kind: PersistentVolumeClaim
apiVersion: v1
metadata:
  name: pvc
spec:
  accessModes:
    - ReadWriteMany
  resources:
    requests:
      storage: 256m
  storageClassName: standard
```



EXERCISE

Creating a
Persistent Volume
with Static Binding



Q & A



5 mins



Summary & Wrap Up

Last words of advice...

Gaining confidence

- Run through practice exams as often as you can
- Read through online documentation start to end
- Know your tools (especially vim, bash, YAML)
- Pick time you are most comfortable, get enough sleep
- Take your first attempt easy but give it your best



Q & A



5 mins



O'REILLY®

Thank you

