


MY Github URL

Vercel URL

Video: W14-P1: show first welcome page

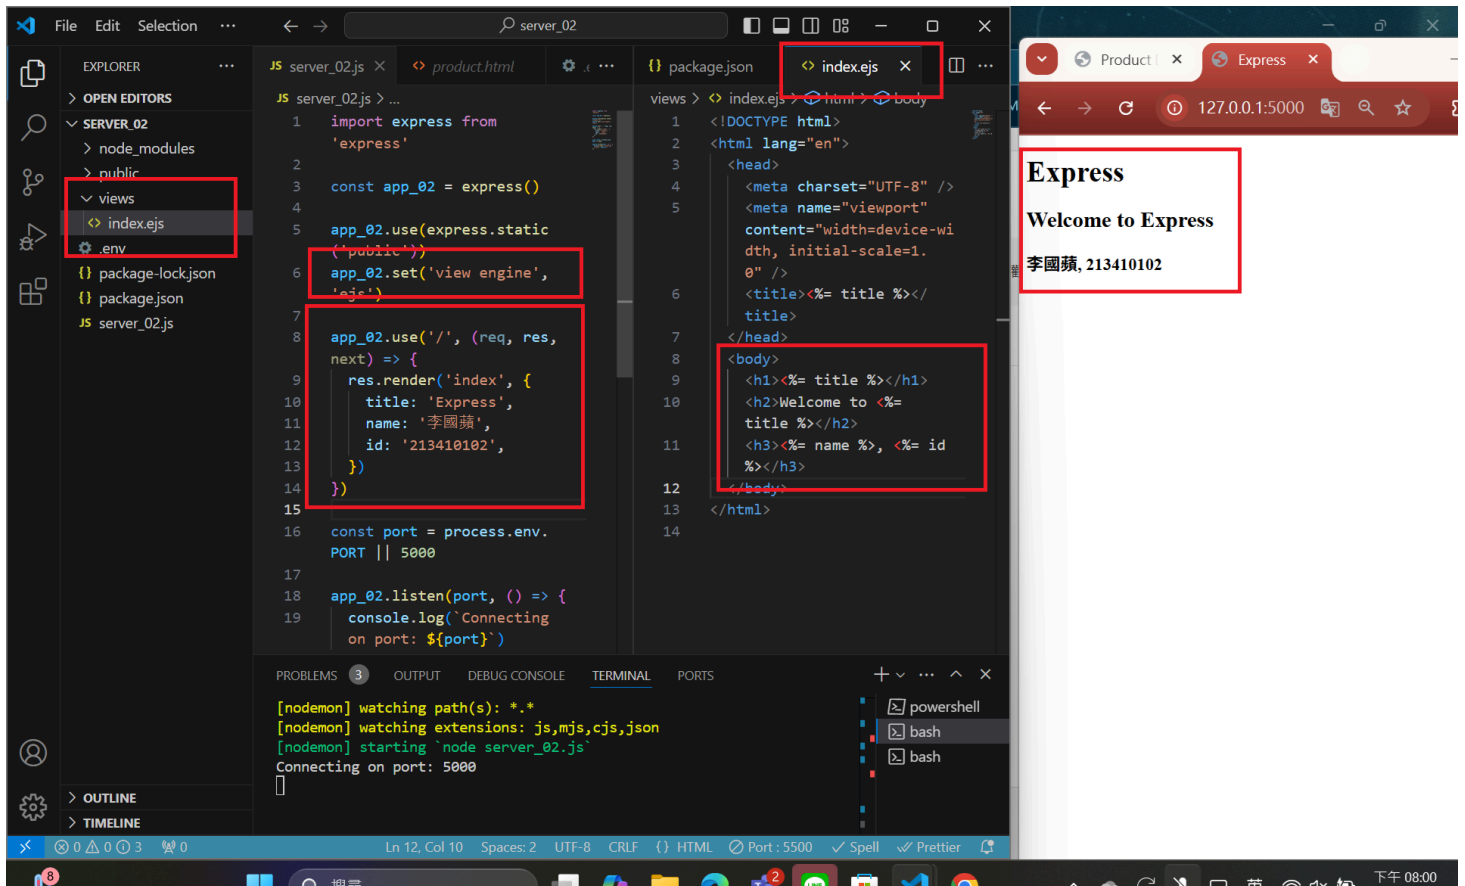

b13ba7b apple550678

Thu May 22 20:04:38 2025 +0800 Video: W14-P1: show first welcome page

Video: W14-P2: Show static products page

=> show render page with data passed into ejs page

The image shows a development environment with VS Code on the left and a web browser on the right. In VS Code, the Explorer sidebar shows a project structure with 'product_02' and 'static_02.ejs' highlighted. The main editor displays the code for 'static_02.ejs', which uses the EJS templating engine to render a product list. The code includes imports for 'express', app configuration, and a route handler for '/product_02/static' that renders the 'static_02.ejs' template with data: { title: 'Get Products - Static', name: '李國蘋', id: '213410102' }. The terminal at the bottom shows the command 'node server_02.js' being executed. The web browser on the right displays the rendered page at '127.0.0.1:5000/product_02/static'. The page has a red header bar and a title 'Get Products - Static' with the name '李國蘋, 213410102'. It features four product cards: '1-Emperor Bed' for \$21.99, '2-Accent Chair' for \$25.99, and two other items with images but no text labels.


```
1 import express from 'express'
2
3 const app_02 = express()
4
5 app_02.use(express.static
6   ('public'))
7
8 app_02.set('view engine', 'ejs')
9
10 app_02.use('/product_02/
11   static', (req, res, next) => {
12     res.render('product_02/
13       static_02', {
14         title: 'Get Products -
15           Static',
16         name: '李國蘋',
17         id: '213410102',
18       })
19   })
20
21 app_02.use('/', (req, res,
22   next) => {
23     res.render('index', {
24       title: 'Express',
25       name: '李國蘋',
26       id: '213410102',
27     })
28   })
```

les\send\index.js:315:12)
[nodemon] restarting due to c
hanges...
[nodemon] starting `node serv
er_02.js`
Connecting on port: 5000

Product Demo x Product Demo x
127.0.0.1:5000/product_02/static
Get Products - Static
李國蘋, 213410102
1-Emperor Bed \$21.99
2-Accent Chair \$25.99

下午 08:22 2025/5/22

=> show how the product-1.jpg can be accessed fro public directory as root directory

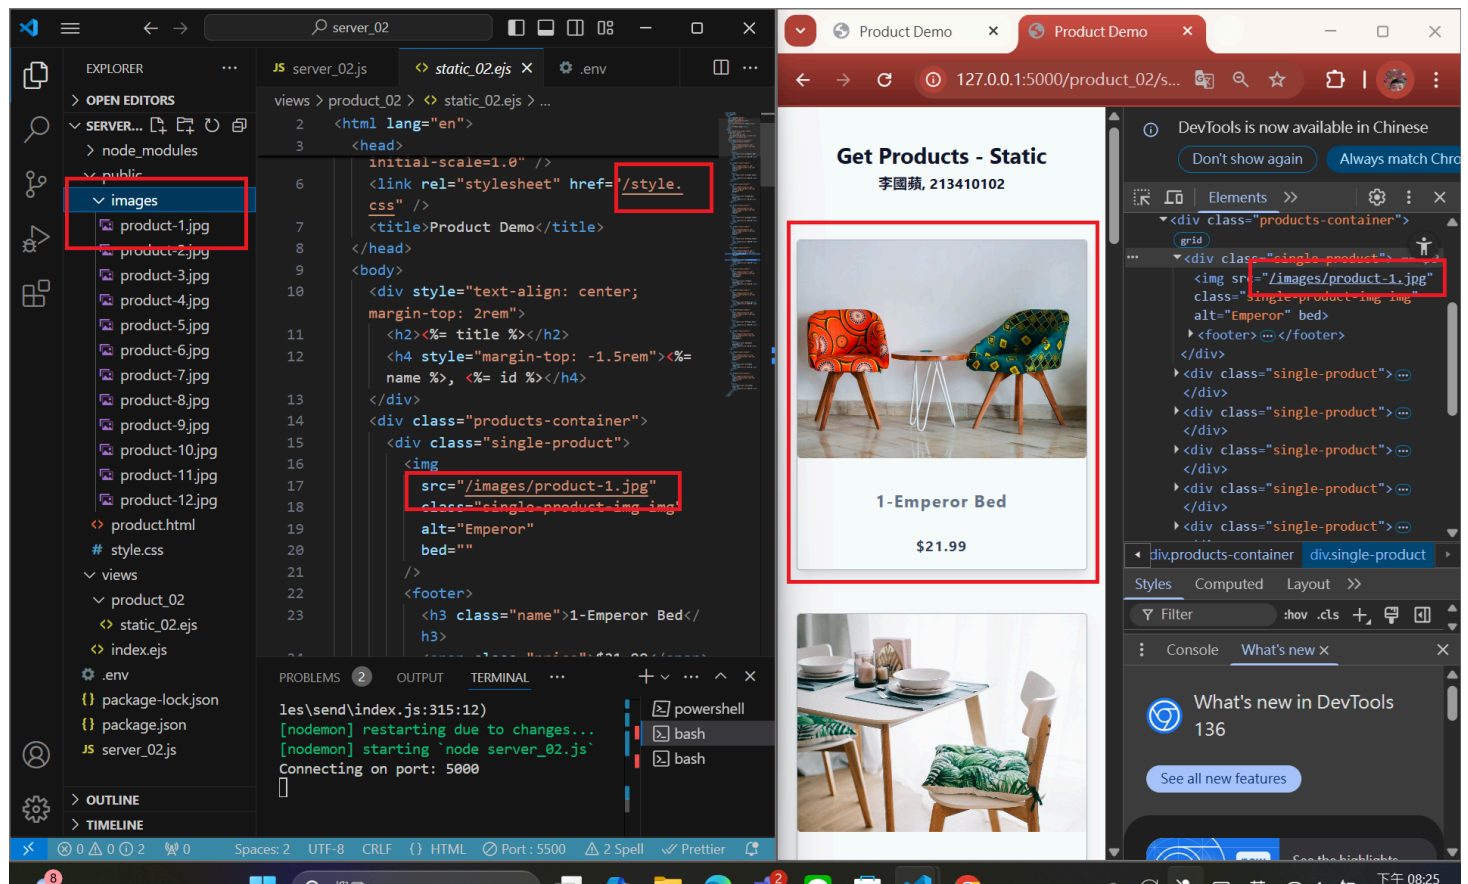

2af7bf6 apple550678

Thu May 22 20:28:34 2025 +0800 Video: W14-P2: Show static products page

Video: W14-P3: Create database js_demo_xx, table product_xx, and insert 12 data, write test code to get all products

=> Create database js_demo_xx, table product_xx, and insert 12 data

The screenshot shows the pgAdmin 4 interface. In the left-hand Object Explorer, the database 'js_demo_02' is selected, and the table 'product_02' is highlighted under the 'public' schema. The main query editor displays the following SQL query:

```
1 SELECT * FROM public.product_02
2 ORDER BY id ASC
```

The 'Data Output' tab shows the results of the query, displaying 12 rows of product data. The columns are: id, title, price, category, img, and remote_img. The data is as follows:

id	title	price	category	img	remote_img
1	Emperor Bed	21.99	Liddy	./images/product-1.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
2	Accent Chair	5.99	Caressa	./images/product-2.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
3	High-Back Bench	9.99	Ikea	./images/product-3.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
4	Wooden Table	19.99	Ikea	./images/product-4.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
5	Dining Table	6.99	Caressa	./images/product-5.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
6	Entertainment Center	69.99	Liddy	./images/product-6.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
7	Albany Sectional	10.99	Ikea	./images/product-7.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
8	Sofa Set	69.99	Liddy	./images/product-8.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
9	Utopia Sofa	69.99	Liddy	./images/product-9.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
10	Modern Bookshelf	8.99	Marcos	./images/product-10.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
11	Albany Table	79.99	Marcos	./images/product-11.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v
12	Leather Sofa	39.95	Liddy	./images/product-12.jpg	https://szkizgkwbtwhcdfrijhba.supabase.co/storage/v

The status bar at the bottom indicates 'Total rows: 12' and 'Query complete 00:00:00.120'.

=> connect js_demo_xx database

The image shows a development environment with VS Code on the left and pgAdmin 4 on the right.

VS Code:

- EXPLORER:** Shows a project structure with `server_02.js`, `products.sql`, and `JS database.js`.
- EDITOR:** Displays `JS database.js` with the following code (lines 1-16):

```
1 import pkg from 'pg'
2
3 const { Pool } = pkg
4
5 let pool = new Pool({
6   host: 'localhost',
7   port: '5432',
8   user: 'postgres',
9   password: '071535',
10  database: 'js_demo_02',
11 })
12
13 console.log('connect database', pool.
14 options)
15
16 export default pool
```

Lines 5-11 are highlighted with a red box.
- TERMINAL:** Shows the command `$ node database` and its output:

```
connect database {
  host: 'localhost',
  port: '5432',
  user: 'postgres',
  database: 'js_demo_02',
  max: 10,
  min: 0,
  maxUses: Infinity,
  allowExitOnIdle: false,
  maxLifetimeSeconds: 0,
```

The output is highlighted with a red box.


pgAdmin 4:

- Object Explorer:** Shows the PostgreSQL 16 database structure. The `js_demo_02` database is highlighted with a red box.
- Query Editor:** Shows a query: `SELECT * FROM pub`. The results are displayed in a table with 12 rows.

id	[PK] integer	title	character varying (255)	price	real
1	1	Emperor Bed		21	
2	2	Accent Chair		5	
3	3	High-Back Bench		9	
4	4	Wooden Table		19	
5	5	Dining Table		6	
6	6	Entertainment Center		69	
7	7	Albany Sectional		10	
8	8	Sofa Set		69	
9	9	Utopia Sofa		69	


Total rows: 12. Query complete 00:00:00.120. CRLF. Ln 1, Col 1.

=> get all product data

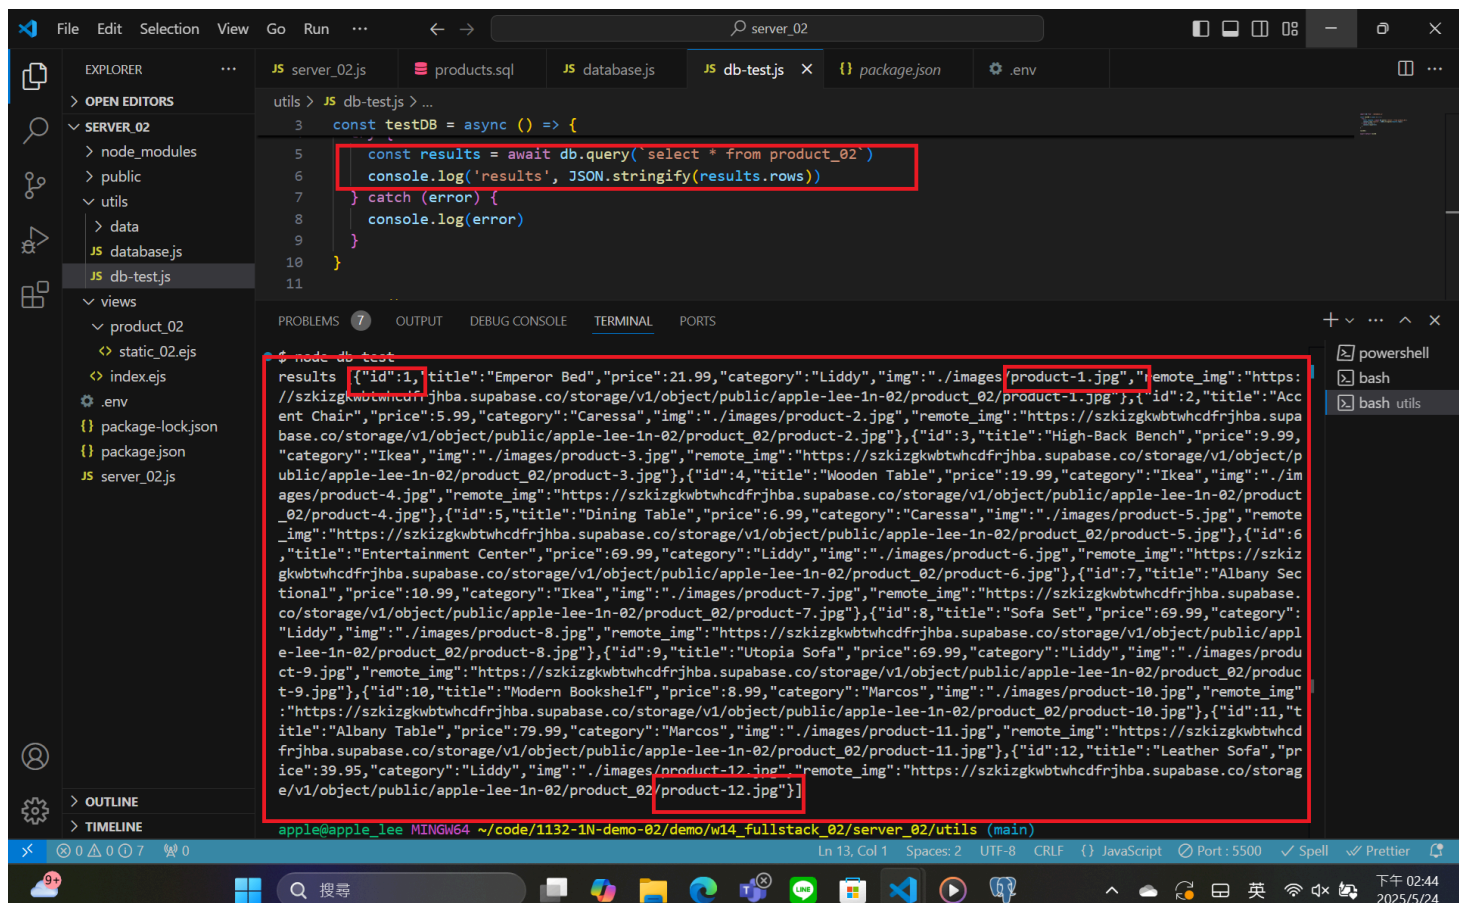

4904d91 apple550678 Sat May 24 14:48:39 2025 +0800 W14-P3: Create database js_demo_xx, tab:

Video: W14-P4: implement route /api/product_xx to return json data

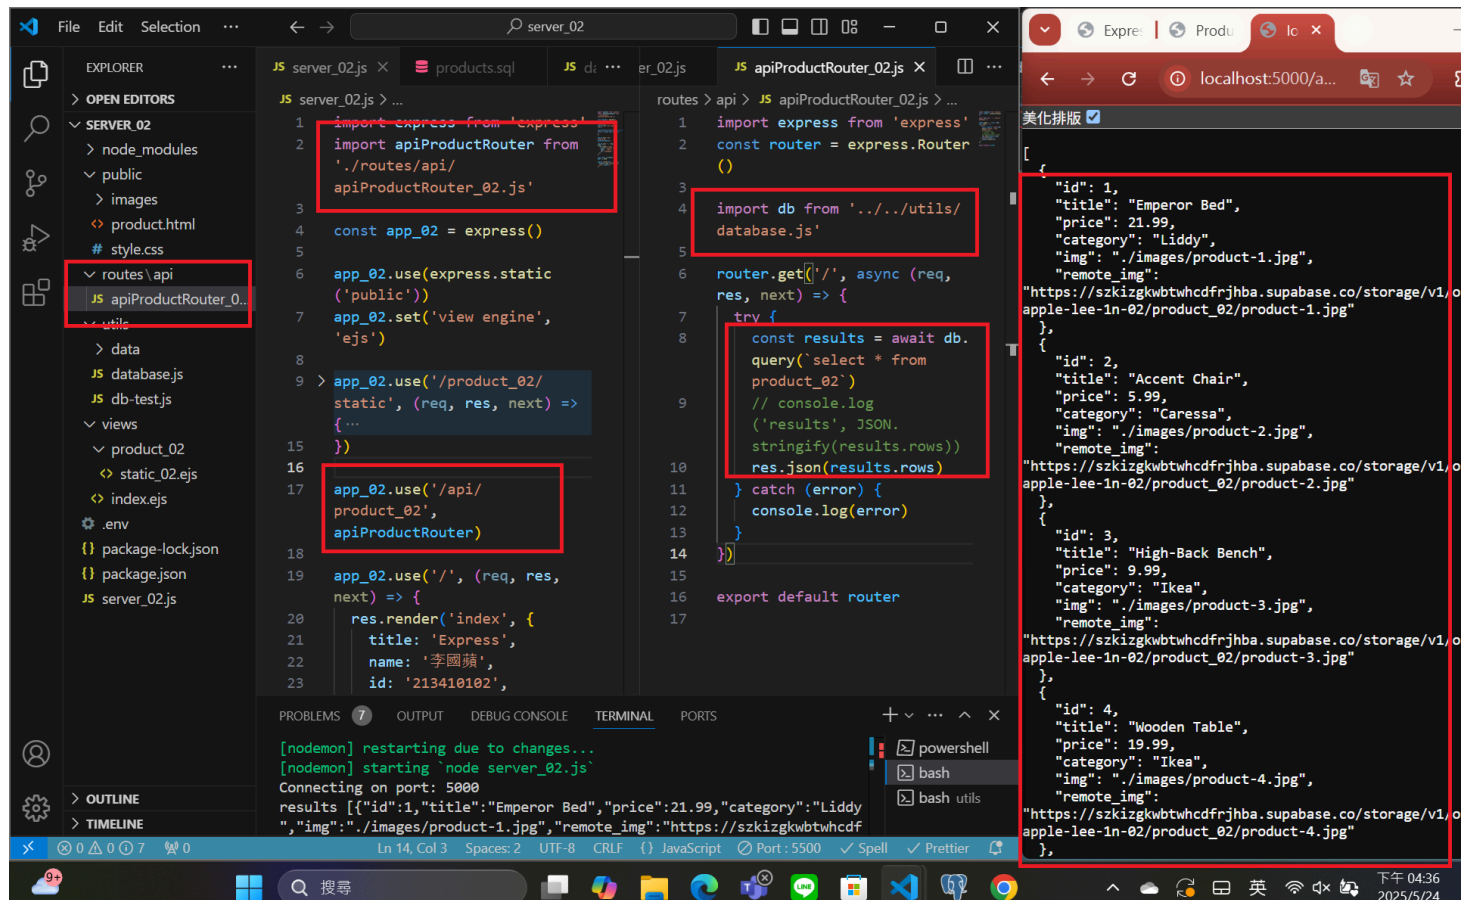

=>